

Micic, T. (2013). Risk perception vs. risk reality. Paper presented at the 11th International Conference on Structural Safety and Reliability for Integrating Structural Analysis, Risk and Reliability, 16 - 20 June 2013, New York, USA.



**CITY UNIVERSITY
LONDON**

[City Research Online](#)

Original citation: Micic, T. (2013). Risk perception vs. risk reality. Paper presented at the 11th International Conference on Structural Safety and Reliability for Integrating Structural Analysis, Risk and Reliability, 16 - 20 June 2013, New York, USA.

Permanent City Research Online URL: <http://openaccess.city.ac.uk/8001/>

Copyright & reuse

City University London has developed City Research Online so that its users may access the research outputs of City University London's staff. Copyright © and Moral Rights for this paper are retained by the individual author(s) and/ or other copyright holders. All material in City Research Online is checked for eligibility for copyright before being made available in the live archive. URLs from City Research Online may be freely distributed and linked to from other web pages.

Versions of research

The version in City Research Online may differ from the final published version. Users are advised to check the Permanent City Research Online URL above for the status of the paper.

Enquiries

If you have any enquiries about any aspect of City Research Online, or if you wish to make contact with the author(s) of this paper, please email the team at publications@city.ac.uk.

RISK PERCEPTION vs. RISK REALITY

T. Micic
City University London, UK

ABSTRACT: Here we explore the feasibility of a rationalized approach to risk within construction procurement by considering explicit engineering risk and perceived risk that selective group of stakeholders share. In particular, the perceived risk is assumed to be dependent on motivational values that individuals identify with. The motivational values are evaluated using 40 questions Swartz Portrait Value Questionnaires. 10 selected hazards are considered in a survey to identify measure of fear and unknown that stakeholders recognize and data analysed. From the outcomes it was identified that by using the alternative approach to establish risk perception the priorities for the stakeholder group in terms of risk can be recognized. Furthermore, the outcomes could be used to target information to stakeholders or intervene to ensure that infrastructure performs according to expectation. As a result, it could become possible to revise what are currently inconsistent acceptable risk levels that have been embedded in active regulatory documentation.

1 INTRODUCTION

In recent years the public policy in developed economies is striving to create a risk free society on many levels. This is clearly impossible and very expensive objective when built infrastructure is concerned. Slovic (1998) has pointed out that risk controversies (arising between value judgement and technical analysis) require comprehensive approach that includes participation from a large number of interested parties. Once many interested parties are involved the problem of accounting in an objective manner for their priorities and perceptions has to be addressed. With the pressure for adaptation to changing climate, for sustainability and cost efficiencies there will be inevitable effects on risk perceptions for those participating in infrastructure procurement and the public so developing sound methodologies that can address the relationship between perceived and engineering risk is of interest to us.

Both as a noun or a verb 'risk' is one of those frequently used words that can be easily misunderstood. It is often understood as a measure of the individual's exposure to danger (without being specific on what the danger in question might be). Engineering risk formulation however is rather explicit and a function of the likelihood of adverse event and its consequences.

Already in 1998 Pidgeon has pointed out to social science research that identifies importance of social, cultural and institutional processes to peo-

ple's evaluation of risk as well as fundamental value commitments that particular groups identify. He also pointed to differences between 'public' and 'professionals' in respect to risk assessment criteria have not been addressed in a consistent manner.

It is easy to identify how confusion in understanding of risk as a concept can arise. As a 'public' scenario we consider a simple action such as crossing a river bridge that is a standard infrastructure component. A member of the public walking along the banks has several options, not to cross, swim, take a boat, use the bridge, etc. Surely, his decision will depend on environmental factors but it will include risk recognition for each of the options. There might be some intuitive risk quantification in this decision process. Without specific numerical information the member of the public is making the decision following their perception of risk associated with options and subsequently deciding on the level that is acceptable to them. We really don't know all parameters that will influence this decision, utility, fear for life, lust, etc. Establishing a mathematical model that can capture this processing of information on risk would be most beneficial.

On the other hand considering an alternative scenario, the engineer who is designing the bridge will also consider risks associated with the structure. He will quantify the risk in respect to certain states that the bridge can take by considering the likelihood of the state being reached and associated consequences. This approach is laden with assumptions about quantities but all other considerations that a

part of the ‘public’ scenario will not feature in the design process.

Here we try to explore if there is a form to establish the functional dependence between the two scenarios. This is a crucial issue as in developed countries the stakeholders can have diverse priorities (profit, speed of delivery, green agenda, etc.). Furthermore, for existing infrastructure that has been in use for some time there are increasing sources of data through monitoring, use of sensors, etc. that lend themselves to quantitative analysis. Finally, the availability of ever more sophisticated analytical tools, enables engineers to generate constantly increasing quantitative information. It is difficult to identify if the ‘public’ is accepting this quantitative information.

2 BUILT INFRASTRUCTURE RISK

Built infrastructure could sometimes refer to power supply systems, telecommunication systems but we will only consider, a more traditional, form such as bridges, roads, railways, etc. These infrastructure components (systems in themselves) are often taken for granted by the wider public. It is only when faced with consequences of major disruption caused by rare events such as earthquake, or in UK sudden flooding that questions arise how are we accounting for risks associated with built infrastructure and what are acceptable levels of risk for the public. While rare events attract attention of the public establishing acceptable risk levels in respect to normal operation is not talked about too much but is possibly more critical and has greater impact on day-to-day management of infrastructure. In some extreme cases where there is pressure for cost efficiencies there will be inevitable effect on risk that public might become exposed to from the built infrastructure. Significantly when there is the need to consider the effect that future climate scenarios might have on risks associated with infrastructure there is a very strong case to make sure that the true risk is identified.

2.1 *Uncertainties associated with existing infrastructure*

Many issues that have been identified above are implying uncertainty and it is evident that decision making in the near future will require a novel approach that reconciles uncertainty, perceptions, physical models, data availability and technology. Rule based expert systems have been widely implemented in many engineering applications to aid decision-making. Unfortunately, they have significant limitations due to the lack of flexibility in respect to evidence introduction and fixed output information. In addition, when a new rule is

introduced careful analysis is needed to establish its effect. A more modern alternative, neural networks, has significant disadvantage that a new network is needed if any new variable is introduced therefore limiting their practical application.

For most existing infrastructure components the uncertainty in available design stage information, data for the interim period such as records of construction, inspections, abnormal load processing, etc. will be very high. There also exists a distinct difference in the quality of data for say loading variables such as the traffic volume and composition and infrastructure condition (strength of steel in the bridge girder). Furthermore, decision making has to reconcile that the future exposure conditions are highly uncertain. If we focus on a highway bridge future environmental conditions, maintenance and repair schedules will be highly uncertain. The current practice is often to account for uncertainty using standard probabilistic analysis to establish quantitative measure of likelihood of certain limit states. Then the engineering risk is evaluated as a function of this likelihood and the consequence of the limit state. An easy to understand consequence is loss of life but not all critical conditions are associated with loss of life and acceptability of consequences is evidently more complex problem where public perception of risk needs to be accounted for.

2.2 *Engineering risk evaluation*

If we consider traditional infrastructure the uncertainty has to be addressed on many levels, such as accuracy of behaviour models, physical variability, life cycle influences, etc. In particular, when the engineering risk is evaluated it still remains to be established what is an acceptable risk to different stakeholders that are associated with infrastructure. For built infrastructure when engineers refer to performance they often think of the ultimate and serviceability limit states as the expected target performance. However, the risk levels associated with these limit states are notional due to the nature of probabilistic analysis and variety of consequences that can arise from limit state realization. There is no significant evidence of consistent drive to establish the acceptable risk levels, considering fundamentally different nature of limit states. For example it is likely that the ultimate limit state would be associated with likelihood of fatality as opposed to the serviceability limit states that are far less critical in terms of fatality but more visible due to discomfort.

It has been a practice in the past to establish acceptable performance for built environment in respect to past performance. This has been the case with design codes where any new features were included with partial safety factors that ensure that certain levels of past performance are maintained. In

the same manner public regulatory bodies, such as UK's Health and Safety Executive have implemented ALARP principles across industries irrespective to the experience that they are more suitable for process industries. Recent revisions to the Flood and Water Management Act 2010 has altered traditional approach to embankment dam assessment so that the driving principle has become that the failures are low probability high consequence events and therefore the risk associated with their failure is entirely the function of consequences. Inevitably, as a result of such simplified approach while on one hand fatalities are unlikely to occur through failure of such infrastructure, significant costs can arise due to disruption of services, flooding, loss of transport links, etc.

It is difficult to find evidence that acceptable engineering risk levels have been co-ordinated between professionals or modified to account for public perception. Due to diversity of built infrastructure components decision making in the near future will require a more comprehensive approach that reconciles uncertainty, physical models, data availability and technology and expected target performance. In addition, when the government is seeking to transfer responsibility as has been the case in Public-private-partnership contracts those who take it on board would need to have in place sensible target performance. This is highly relevant for built infrastructure where stakeholders are a particularly diverse group. Engineers have, so far, not engaged with the field preferring to rely on quantification despite reality that all quantities are only notional.

3 RISK PERCEPTION

Risk perception can be seen as a generic term but we will accept that it relates to individual's beliefs, attitudes, judgements and feelings in addition to their cultural and social disposition, Schwartz (1992). It has been recognized for some time in psychological research that risk perception is a complex phenomena and different techniques have been established to identify main drivers when risk perception is concerned. For us it is of interest to apply a technique that can capture the risk perceptions from different stakeholders within the construction processes. It is only recently that there have been attempts to address the effect that intuitive judgement, attitudes towards natural disasters and man made ones can have on risk perception, Nordensted & Ivanisevic (2010).

3.1 Motivational Values

Long established research, Schwartz (1992) has shown in the past that demographic variables (gender, age, etc.) as well as educational background are

reflected in motivational values and could have some influence on risk perceptions. If we follow more recent evidence from Nordenstedt & Ivanisevic, (2010) we can further accept that motivational values (benevolence, universalism, self-direction, stimulation, hedonism, achievement, power, security, conformity and tradition) are useful for estimates of risk perception as they transcend demographic boundaries.

Relatively simple and widely accepted approach to evaluation of motivational values can be carried out using Schwartz Portrait Value Questionnaire. There are several forms of this questionnaire but here the 40 question format is implemented as the respondents tend to engage irrespective of their background. The questions are of the form that requires the respondents to express how much they are like a fictitious person. For each of the motivational values there are from 3 to 5 questions arranged in a random order to avoid the inertia in responses. Thus for the question:

“He thinks it is important that every person in the world be treated equally. He believes everyone should have equal opportunities in life”

one is offered a question:

How much like you is this person?

and respondents have an option to select one of 6 levels of agreement from:

Not like me at all up to
Very much like me

Motivational values can be considered using alternative formats and a usual approach is to identify 4 higher order value types as defined in Table 1.

Table 1 Motivational values and higher order value types

Self Transcendence	Conservation
Universalism	Conformity
Benevolence	Tradition
	Security
Self Enhancement	Openness to change
Achievement	Self Direction
Power	Stimulation
Hedonism	Hedonism

Koivula & Verkasalo (2006) have implemented Schwartz Portrait Value Questionnaires to consider differences in motivational values between individuals of the same demographics but different educational level. They have established that when students, white collar workers and manual workers

have been considered students responses had significant similarity with other historic survey results for students and that there was little difference between responses of white collar and manual workers. They also report on motivational values contribution to Self-transcendence in particular. The implication of these findings is that Schwartz Portrait Value Questionnaires do represent a viable tool to establish motivational values for the case of diverse stakeholder groups as we have in construction procurement.

3.2 Psychometric paradigm

It has been a widely used practice to implement a form of questionnaire that asks individuals to rate a number of hazards in order to establish risk perceptions. Furthermore, there has been evidence that dimensions of ‘dread’ and ‘unknown’ most significantly affect the perception of risk. To capture the risk perception between several countries for example, Nordensted & Ivanisevic (2010) implemented a 20 questions format, 10 for each dimension of ‘dread’ and ‘unknown’ respectively. Sample hazards implemented by Nordensted & Ivanisevic (2010) were AIDS, drinking alcohol, climate change, terrorism, fire in the home, motor vehicles, commercial airplanes, cancer, nuclear power plants and stress. The analysis by Nordensted & Ivanisevic (2010) provides evidence that the link between motivational values and risk perceptions is in evidence and that it can lend itself to further improvement in understanding risk perceptions for diverse groups. This is seen as a rather appealing feature for consideration of risk perceptions within construction industry.

4 METHOD APPLICATION FOR SAMPLE STAKEHOLDER GROUP

For example we have considered a small sample group that represents stakeholders in the civil engineering procurement, graduate civil engineers. The aim is to capture stakeholder’s motivational values and subsequently risk perceptions. As our sample included different demographics with comparable educational base, we are able to identify relative importance between motivational values and relate our findings to earlier studies such as the one by Koivula & Verkasalo (2006).

Starting with the implementation of the 40 questions Schwartz Portrait Value Questionnaire to identify expressed motivational values using a sample of 36 participants that represent a distinct group of stakeholders. From the analysis of questionnaire outcomes we have confirmed that the profile in terms of motivational values is close to the previous

study carried out by Koivoula & Verkasalo (2006). In particular, as we have considered a group of individuals who share several demographic characteristics we have found that:


- The highest number of respondents identified with traits associated with universalism. Thus, universalism can be identified as the most important motivational value for this stakeholder group.
- Power was not identified as highly relevant motivational value for our group.

However considering the cumulative, higher motivational value, self-transcendence was clearly established as dominant, in a sense that it is the strongest driver for the group. This is in line with our expectations.

The psychometric paradigm is implemented asking individuals to rate hazards to explain the risk perception. Following Nordensted & Ivanisevic (2010) two dimensions are considered, dread and unknown and 10 hazards identified as above. The respondents were asked to rate their fear (dread) within 7-point scale from ‘no fear’ to ‘very great fear’ (fear is sometimes considered as more acceptable form of words).

Sample outcome of our survey is provided in Table 2. As we are dealing with a homogenous group with a distinct higher order motivational value self-transcendence so the processing is limited and outcomes are simply scored between 1 and 7.

Figure 1 Sample outcome of the risk perception survey for the stakeholder group

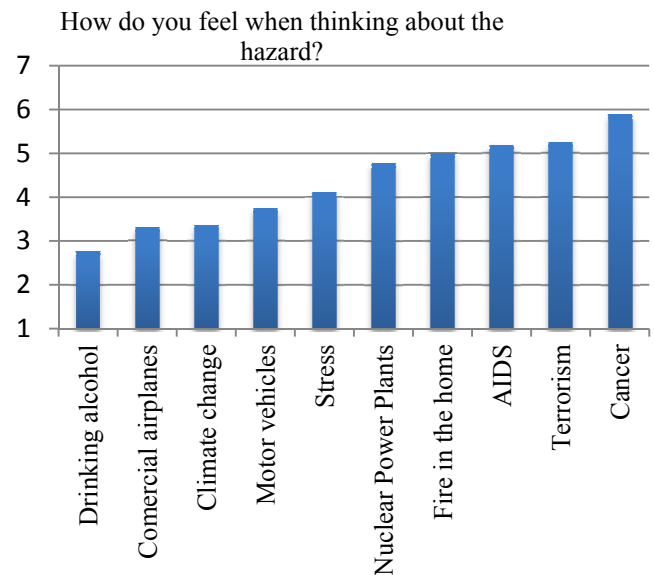

We have selected a couple of relevant risks that could be of interest to construction industry to follow the relationship between the ‘fear’ and ‘unknown’. Sample outcomes are presented in Table 2.

It is possible to identify that climate change is associated with less fear despite lesser 'knowledge' about the hazard than for nuclear power plants. For general sample with more diverse demographics, considered across several nations and shown in Nordensted & Ivanisevic, (2010), differentials between the two hazards perceptions were more pronounced. This can have implications both in design and assessment when decisions are made on significant limit states. Furthermore if decisions are being made in respect to future climate scenarios perceived risks should indicate particular consideration of the effects of the projected climate change that need to be addressed.

Table 2 Sample scores from risk perception survey

	How do you feel when thinking about the Hazard	How informed are you about the risk and seriousness of the Hazard
	1=no fear ; 7=very great fear	1=not well informed 7 very well informed
Commercial airplanes	3.31	4.39
Climate change	3.36	5.31
Motor vehicles	3.75	4.86
Nuclear Power Plants	4.78	4.53

The sample group identified nuclear power plants as representing significantly higher fear (dread) than climate change, motor vehicles or commercial aeroplanes but also revealing that their understanding of risks associated with climate change is much higher than about nuclear power plants. For a group of specialists stakeholders this is surprising, as they would have been familiar with the concept of safety factors and possibly have some knowledge about specific safety factors implemented for different types of structures. Intuitively one would expect that the group is aware of high levels of uncertainty associated with climate scenarios and the very cautious approach to design and operation of nuclear power plants. These contradictions are a signal that investigating risk perceptions for distinct stakeholder groups would be very beneficial. It is possible that, as a consequence, the infrastructure target risk levels in design, construction and in service will inevitably have to be reviewed and in particular the communication to wider public about them would need to be more sophisticated. This very much confirms what Pidgeon (1998) indicated a while ago.

Furthermore, we consider for us of most interest nuclear power plants and climate change and relate those two hazards to familiar and well used transportation means, i.e. commercial airplanes and mo-

tor vehicles. What is striking is that for constrained sample such as ours there is no visible functional dependence between how well informed the individual is and their fear associated with the hazard. Some other fundamental information processing is in place here. It might be the utility that modifies one's perception of risk. In our case there is no evidence that knowledge about the hazard is only important parameter.

4.1 Regulator's view

The relevance of our enquiry is most significant for those trying to regulate processes integral to delivery of built infrastructure. Complexities of stakeholders approach to risk have always been evident but here they are in some limited way quantified, however when regulation is applied in form of codes etc. regulators aim to erase the risk or at least reduce it to a very low level. On one hand that is a positive aim but, in reality and on evidence presented here, an impossible not to mention very expensive endeavour.

We can relate regulatory situations and challenges to the already mentioned revised Flood and Water Management Act 2010 to demonstrate the need for explicit approach to definition of acceptable risk. As a consequence of the Act a rather large number of very old structures with mostly sparse records about their condition, maintenance etc. will need to be assessed in terms of risk that they pose to the vicinity. It has been demonstrated by Preziosi & Micic (2012) that if in addition to current status, future climate scenarios are considered relatively harmless weather events could increase significantly the engineering risk associated with small homogeneous embankment dams. Simply including the increase in notional likelihood of failure will affect the engineering risk. However, there is at present no guidance on establishing site specific relevant acceptable engineering risk levels. If there is no differentiation between sites and modes of failure strictly defined probabilities of limit states occurring could mean enormous programme of strengthening that is most likely unnecessary.

5 FURTHER DEVELOPMENTS

It is inevitable that only through further development this cross-discipline approach can bring significant benefits.

- The methodology in place, mainly Schwartz Portrait Value Questionnaire and psychometric experiment should be applied to establish motivational values and perceptions of risk for further relevant stakeholder groups.
- Further research is needed to establish the explicit link between perceived risk and acceptabil-

ity of risk. We might find that motivational values have a major role in establishing the latter.

- Investigate further quantitative measure that would reflect the risk perception but also quantified engineering risk in regulatory documentation such as recommendations for code development.

The major breakthrough from furthering this research would be in identifying the methodology that will enable delivery of structures that are less expensive with risk levels proportional to the purpose rather than arbitrary, historical, levels. Subsequently, significant improvements in consistency and efficiency in infrastructure procurement can be expected through application of updated regulatory instruments. The main issue remains to find appropriate forms of mapping between quantitative and descriptive outcomes. While for a small scale problem (such as homogenous earthfill embankment dam) this might appear feasible to achieve for diverse systems such built infrastructure this will represent an area where significant contributions are expected.

For existing infrastructure, owners often pursue a predetermined sequence of well defined inspection, maintenance and repair activities. However, there is increasing evidence that such processes are inefficient and new management strategies for changing priorities in respect to the infrastructure could emerge on the basis of the current work.

6 CONCLUSIONS

We have ventured away from standard engineering practice and implement alternative methodology that integrates psychology associated with risk perception. The motivational values for sample group of construction associated stakeholders were established using 40 question Schwartz Portrait Value Questionnaire (PVQ). The risk perceptions were established using conventional survey method where 10 hazards were considered. While limited in scale our current work has confirmed that:

- It is possible to rank the fear in respect to diverse hazards using proposed methodology.
- Risk perceptions of specific stakeholder group can be identified.
- Differences in risk perceptions between stakeholder groups could be identified.
- Even for low probability events such as failure of nuclear power plant it is possible to identify the scale of risk perception of the specific stakeholder group.
- By considering multiple stakeholder groups it will be possible to identify if risk perception differentiation is present.
- It has been identified that availability of quantitative measure for risk perception infrastructure

related processes such as design, assessment, inspection, could be reviewed.

- Ultimately an explicit methodology to establish site specific performance requirements that reflect the expectations of stakeholders might be feasible.

Despite the limited scale of the surveys it is identified that there could be the case that the approach to risk in general in construction industry is sometimes too conservative and as a consequence too expensive and not sustainable. If the approach to risk perception characterization is implemented across different disciplines design and, by extension, assessment can be significantly less conservative. We expect that as a result of this research structures would be safe and fit for purpose.

7 REFERENCES:

- Koivula, N & M. Verkasalo; 2006; Value structure among students and steelworkers; *Journal of applied Social Psychology*, Vol 36, 5, pp. 1263-1273
- Nordenstedt, H. and J. Ivanisevic; 2010, Values in risk perception-Studying relationship between values and risk perception in three countries; *J. of Disaster Risk Studies*, Vol. 3, No.1.; pp. 335-345.
- Pidgeon, N.; 1998, Risk assessment, risk values and the social science programme: why do we need risk perception research; *Reliability Engineering. and System Safety*; Vol. 59, pp. 5-15.
- Preziosi, M-C. & Micic, T. 2012. Methodology for the probabilistic assessment of embankment dams for predicted climate scenarios. In: *Proceedings of the Institute of Civil Engineers: Geotechnical Engineering*, Issue GE3, 165(3): 179-193.
- Schwartz, S.H; *Universals in the Content and structure of Values: Theoretical Advances and Empirical Tests in 20 Countries*; *Advances in Experimental Social Psychology*, Vol.25; pp. 1-65.
- Slovic, P.; 1998, The risk game; *Reliability Engineering and System Safety*; Vol. 59, pp. 73-77.
- The UK Statute Law Database. 2010, *Flood and Water Management Act 2010* (c.29).