

OpenDrop: Open-source software for pendant drop tensiometry & contact angle measurements

Eugene Huang¹, Adam Skoufis², Terence Denning³, Jianzhong Qi³, Raymond R. Dagastine¹, Rico F. Tabor², and Joseph D. Berry¹

¹ Department of Chemical Engineering, University of Melbourne, Parkville 3010, Australia ² School of Chemistry, Monash University, Clayton 3800, Australia ³ Computing and Information Systems, University of Melbourne, Parkville 3010, Australia

DOI: [10.21105/joss.02604](https://doi.org/10.21105/joss.02604)

Software

- [Review](#) ↗
- [Repository](#) ↗
- [Archive](#) ↗

Editor: [Kyle Niemeyer](#) ↗

Reviewers:

- [@rajeshrinet](#)
- [@FelixKratz](#)

Submitted: 28 February 2020

Published: 23 February 2021

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

Systems where two or more fluids exist in discrete phases are ubiquitous in nature and in many manufacturing processes. The common surface (or interface) between two fluids that do not mix exists in a state of tension, an intrinsic property known as interfacial tension. The contact angle is another fundamental property of interest when the interface between two fluids is also in contact with a surface, for example a water drop resting on a leaf. The contact angle is dependent on the surface energy of the solid and describes how liquids spread on a surface – vital information for dynamic liquid-solid processes such as coating and painting.

Accurate measurements of interfacial tension allow researchers in industry and academia to make deductions regarding the chemical composition and crucially, the behavior of the interfaces, enabling optimal design of devices and processes. In many real formulations or applied systems, this basic but critical parameter can be quite challenging to accurately measure. In addition, precise measurements of the contact angle between a fluid-fluid interface and a solid surface are critical in order to deduce wetting and spreading characteristics of liquids on surfaces, and to calculate the surface energy of a solid by measuring the contact angle of a series of liquids on one type of surface. These surface properties are important when considering, to name two examples, the application of paints to surfaces and pesticides to plants. It is therefore clear that accurate, rapid and reproducible measurements of interfacial tension and contact angle are imperative for effective design, implementation and optimization of processes involving multiphase systems.

The experimental apparatus required for measurements of interfacial tension and contact angle is conceptually extremely simple, requiring only a needle, a camera, and a light source. The complexity (and associated cost of commercial instruments) comes from the image processing and the complicated numerical algorithm required to calculate these quantities from the acquired experimental image. In 2015, we released OpenDrop, which enables interfacial tension measurements more rapidly, cheaply and accurately than commercial options ([Berry et al., 2015](#)). The only cost to the user is the camera required (approx. \$20 - \$1K depending upon application), whereas commercial instruments are much more expensive (~\$50K).

Here we present the latest version of OpenDrop. The new version, Barracuda, is able to measure interfacial tension and also contact angle in a variety of configurations with field-leading accuracy and reproducibility. The performance of OpenDrop compared to currently available commercial instrumentation is shown in [Figure 1](#) and [Figure 2](#). The contact angle measurement capability is new for this release, but has been used successfully in previous studies ([Prathapan et al., 2017](#)). OpenDrop has been written in Python because it is open-source, free, runs on multiple operating systems (including Linux, Mac OSX and Windows), and is easily integrable with a large number of mature, 3rd party open source libraries. In

particular, OpenDrop utilises the sophisticated image processing capabilities of the OpenCV library in order to extract drop profiles from experimental images for input into the requisite numerical algorithm. Further, the ease of readability and modular nature of Python encourages and supports collaboration, and gives OpenDrop significant pedagogic value. Python can also be easily integrated with other languages, of particular importance to pendant drop tensiometry and contact angle measurements where integration of code needed to control cameras and associated software is a critical requirement. The previous version is in use in many research groups around the world, and is also used in teaching laboratories including Monash University.

The availability of the software allows the interested user to effectively implement, explore and further develop the techniques for both research and teaching at a small fraction of the cost of commercial options.

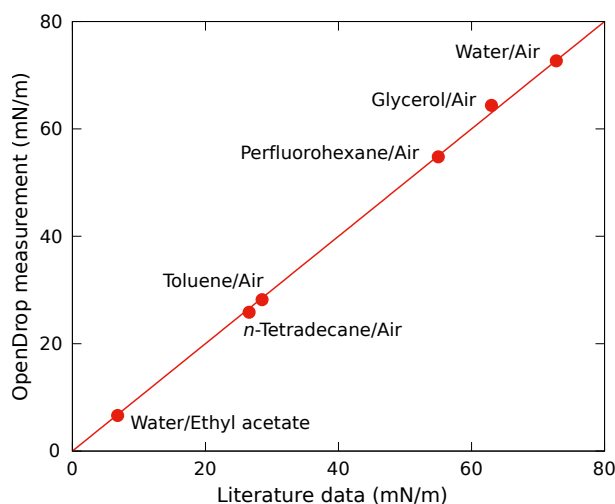


Figure 1: Comparison of the surface or interfacial tension of different systems calculated with OpenDrop against values reported in the literature.

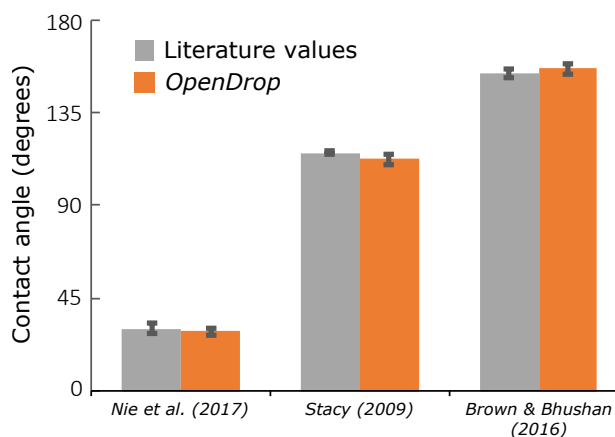


Figure 2: Comparison of contact angles calculated in OpenDrop from experimental images in the literature against values calculated with commercial instrumentation. The images used are taken from (Nie et al., 2017), (Stacy, 2009) and (Brown & Bhushan, 2016).

Acknowledgements

References

- Berry, J. D., Neeson, M. J., Dagastine, R. R., Chan, D. Y. C., & Tabor, R. F. (2015). Measurement of surface and interfacial tension using pendant drop tensiometry. *Journal of Colloid and Interface Science*, 454, 226–237. <https://doi.org/10.1016/j.jcis.2015.05.012>
- Brown, P. S., & Bhushan, B. (2016). Durable, superoleophobic polymer – nanoparticle composite surfaces with re-entrant geometry via solvent-induced phase transformation. *Scientific Reports*, 6, 21048. <https://doi.org/10.1038/srep21048>
- Nie, B., Long, T., Li, H., Wang, X., & Yue, B. (2017). A comparative analysis of antibacterial properties and inflammatory responses for the KR-12 peptide on titanium and PEGylated titanium surfaces. *RSC Advances*, 7, 34321–34330. <https://doi.org/10.1039/C7RA05538B>
- Prathapan, R., Berry, J. D., Fery, A., Garnier, G., & Tabor, R. F. (2017). Decreasing the Wettability of Cellulose Nanocrystal Surfaces Using Wrinkle-Based Alignment. *ACS Applied Materials & Interfaces*, 15202–15211. <https://doi.org/10.1021/acsami.7b03094>
- Stacy, R. (2009). *Contact Angle Measurement Technique for Rough Surfaces* (pp. 83 pp) [PhD thesis].



Minerva Access is the Institutional Repository of The University of Melbourne

Author/s:

Huang, E; Skoufis, A; Denning, T; Qi, J; Dagastine, R; Tabor, R; Berry, J

Title:

OpenDrop: Open-source software for pendant drop tensiometry contact angle measurements

Date:

2021-02-23

Citation:

Huang, E., Skoufis, A., Denning, T., Qi, J., Dagastine, R., Tabor, R. & Berry, J. (2021). OpenDrop: Open-source software for pendant drop tensiometry contact angle measurements. *Journal of Open Source Software*, 6 (58), pp.2604-2604. <https://doi.org/10.21105/joss.02604>.

Persistent Link:

<http://hdl.handle.net/11343/273977>

File Description:

Published version

License:

CC BY