



Fractal characteristics of reservoir structural fracture: a case study of Xujiahe Formation in central Yuanba area, Sichuan Basin

Cunhui Fan^{1,2}, Qirong Qin^{1,2*}, Dongfeng Hu⁴, Xiaolei Wang^{1,2}, MengYue Zhu^{1,2}, Wei Huang^{1,2}, Yuxi Li^{1,2} Muhammad Aqeel Ashraf³

¹School of Geoscience and Technology; Southwest Petroleum University; Chengdu 610500; China

²State Key Laboratory of Oil and Gas Reservoir Geology and Exploitation, Southwest Petroleum University, Chengdu, 610050, China

³International Water, Air & Soil Conservation Society IWASCON 59200 Kuala Lumpur, Malaysia

⁴Exploration Company SINOPEC Chengdu 610041, China

Corresponding author: 986336692@qq.com

ABSTRACT

The reservoir structural fractures have excellent fractal characteristics, as well as self-similarities. Based on the fractal theory, the surface fractal characteristics of faults and the fractal characteristic of fractures in the core of the Xujiahe Formation in the Fault-Fold Belt of the central Yuanba area were studied, and a quantitative relationship was set up between them. Based on the fractal characteristics of faults, predictions were made of the favorable fracture zone, which provides a new idea for the research of fracture, as well as offers theoretical references for exploring the fracture development zone during oil-gas exploration. The results show the following: the seismic value of reflection fault fractal dimension of the Xujiahe Formation is 1.5284; the correlation coefficient R^2 is bigger than 0.9901; the capacity dimension linear regression correlation coefficient of the fracture in core of the Xujiahe Formation is bigger than 0.98; the fractal dimension D can well reflect the fault and fracture development degree, as well as the complexity of the fracture system; it can quantitatively calculate the density of the fracture of the reservoir in the area; the areas of capacity dimension bigger than 1.45 are the fracture development zones in the Fault-Fold Belt of the central Yuanba area; the oil and gas enrichment degree is high; the areas with the fractal dimension value between 0.95 and 1.45 are the fracture relatively-developed zones; the fractal dimension with values smaller than 0.95 are the lack of fracture areas.

Keywords: Fractal characteristics, structural fracture, Xujiahe, Formation, central Yuanba

Características fractales de fracturas estructurales de yacimientos: caso de estudio de la Formación Xujiahe en el área central de Yuanba, cuenca de Sichuan

RESUMEN

Las fracturas estructurales de yacimientos tienen excelentes características fractales y autosimilares. Basados en la teoría fractal, se estudiaron las características fractales superficiales de las fallas y las características fractales de las fracturas en el núcleo del Cinturón Falla-Plegue de la Formación Xujiahe, área central de Yuanba (China). Luego se estableció una relación cuantitativa para estas relaciones. Según las características fractales de las fallas, se predijo la zona favorable de fractura, lo que ofrece una nueva idea para el conocimiento de esta y a la vez brinda referencias teóricas para la exploración de la zona de desarrollo de la fractura durante la exploración de petróleo y gas. Los resultados muestran lo siguiente: el valor sísmico de la dimensión fractal de la falla en la Formación Xujiahe es de 1.5284; el coeficiente de correlación R^2 es mayor a 0.9901; la dimensión del coeficiente de correlación de regresión lineal en el núcleo de la fractura de la Formación Xujiahe es mayor a 0.98; la dimensión fractal D puede reflejar la falla y el grado de desarrollo de la fractura, al igual que la complejidad del sistema de fractura; también puede calcular cuantitativamente la densidad de la fractura del yacimiento en el área; las áreas con capacidad mayor a 1.45 son las zonas de desarrollo de la fractura en el Cinturón Falla-Plegue del área central de Yuanba; el grado de enriquecimiento de petróleo y gas es alta; las áreas con valor de dimensión fractal entre 0.95 y 1.45 son las zonas de fractura de desarrollo relativo; la dimensión fractal con valores menos a 0.95 son las áreas que carecen de fracturas.

Palabras clave: características fractales; fracturas estructurales; Formación Xujiahe, Yuanba central.

Record

Manuscript received: 14/11/2017

Accepted for publication: 27/06/2018

How to cite item

Fan, C. H., Qin, Q. R., Hu, D. F., Wang, X. L., Zhu, M. Y., Huang, W., Li, Y. X., & Ashraf, M. A. (2018). Fractal characteristics of reservoir structural fracture: a case study of Xujiahe Formation in central Yuanba area, Sichuan Basin. *Earth Sciences Research Journal*, 22(2), 113-118.

DOI: <http://dx.doi.org/10.15446/esrj.v22n2.72250>

1. Introduction

Oil and gas explorations concentrate on fracture-developed zones. Tight sandstone reservoirs were regarded as their target areas. This type of reservoir comprises fractures with tectonic origins as their main seepage path and reservoir space (Bahrami et al., 2012; Abija & Nwankwoala, 2018). The formation, development, and evolution of structural fractures are the critical issues and difficulties in oil and gas exploration and development, especially in the study of the characteristics and division of the formation stages of reservoir fractures. This research area has received considerable attention from domestic and foreign experts and scholars (Larsen et al., 2010; Nelson, 2001; Ali et al., 2018).

Mandelbrot, a French mathematician, proposed the fractal theory to study a complicated phenomenon with similar features and suggested making a quantitative description of fractal complexity with fractal dimension (Mandelbrot, 1982; Roslee, 2018). Scholz & Aviles (1985) employed the fractal theory in the fracture study for the first time, providing a new mean for quantitative characterization of spatial distribution and the geometry of fracture structure. Barton & Hsieh (1989) made systematic research on the statistical law of rupture and cracks on field outcrops, in which he found fractal features of fracture distribution. Zhang et al. (1996) reported that fractal dimension of tectonic fissures in an oil and gas reservoir reflects fracture development degrees of different lithological reservoirs. Both fractures and cracks are a geological phenomenon and that rocks generate cracks or displacement under stresses. A self-similar structure is formed in a particular scale range (Deng et al., 2006; Rahim et al., 2018). The fractal dimension of fault and core cracks could contribute a quantitative description of the spatial development of cracks in reservoirs. Recently, the fraction theory is widely applied in the geological field. It provides a new means for the quantitative characterization of spatial distribution and the geometry of fault structure, as well as a new idea for studying crack distribution in reservoirs (Takayuki et al., 1987; Usman et al., 2018).

The Yuanba area is located in the northeastern part of the Sichuan basin. Yuanba spans several administrative divisions of Bazhong City, as well as the counties of Cangxi, Tongjiang, and Nanjiang, among others. Remarkable breakthroughs in oil and gas exploration have been achieved through perennial geological research in the continental and marine strata. Commercial oil and gas were found in the wells of several series of gas-bearing formations, which includes: The Lei-3 section of the Leikoupo Formation; second, third, and fourth sections of the Xujiache Formation; Zhenzhuchong and Daanzhai sections of the Ziliujing Formation; and the middle Jurassic Qianfoya Formation (Zeng et al., 2010; Nwankwoala & Oborie, 2018). The productive natural gas flow was obtained in multiple wells. Among these, the YL7 well in the third section of the Xujiache Formation was tested and produced a gas flow of approximately $120.3 \times 10^4 \text{ m}^3/\text{d}$. These discoveries indicate good prospects for gas exploration.

However, gas productivity varies dramatically from well to well. The daily gas output of a single well ranges from 0.1×10^4 to $120 \times 10^4 \text{ m}^3/\text{d}$. In the study area, the reservoir has low porosity and low permeability with fracture-dominated productivity (Zeng & Li, 2005; Zeng et al., 2008; Jiang et al., 2004; Veeraragavan et al., 2018). Structural fractures have relative development due to the multi-stage tectonic deformation they undergo. Fractures in different stages dominate and regulate hydrocarbon migration and accumulation. The presence of these fractures is likewise an indispensable condition for high gas production (Zeng, 2008; Raj & Prabhakaran, 2018). Therefore, the author used the fractal theory to study fractal features of cracks in reservoirs of the Xujiache Formation, in the Fault-Fold Belt of the central Yuanba area. The capacity dimension on the T_{3s} fracture and fractal dimension (D) of cracks on 12 cores were also calculated. Fractal features of cracks were explored based on the relationship between core crack density of a cored well and the capacity dimension of cracks. The fractal characteristics of fractures and the threshold of the fractal dimension (D) of cracks in the study area were determined by combining the verification of oil and gas statistics of the study area. On this basis, crack distribution in the study area was predicted.

2 Geological characteristic

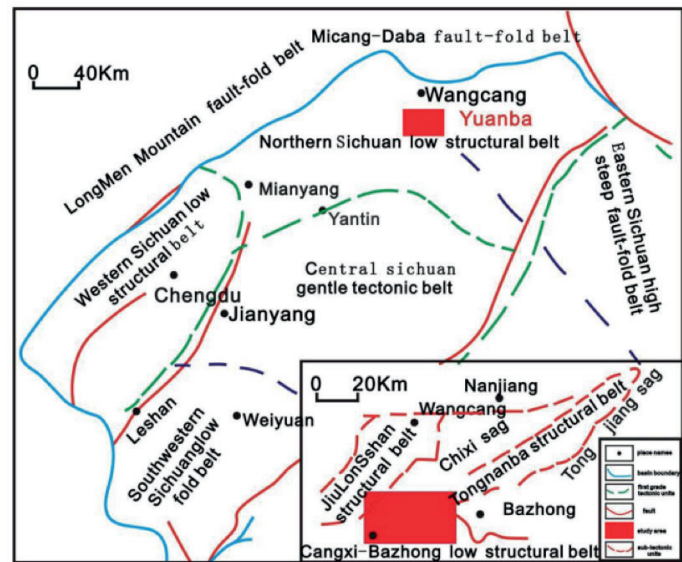


Figure 1. Map showing the general structural belts in the study area (large map)

In regional tectonics, the Yuanba area is located in the transition region between the frontal zone of Micangshan and the gentle fold belt of the central Sichuan basin, which connects the Micangshan-Dabashan foreland fold-thrust belt on the north and the Longmenshan orogenic belt in the northwest (Guo, 2011; Lin et al., 2011; Len et al., 2018) (Fig. 1). Central Yuanba lies close to the subsurface of Yuanba, which connects the Jiulongshan structure in the north and the Tongnanba structure in the northwest.

Proximity to the subsurface causes the structural features of the study area to have a close genetic relation to its nearby regional structure. The surrounding structural belts of the Longmenshan, Dabashan, and Micangshan exert varying degrees of influence on tectonic formation and evolution. Ever since the Indosinian movement, these surrounding structural belts have been reformed and superposed by multi-stage tectonic shifts. The study area and southern Qinling in the Yanshanian and Himalayan movement stages were intensively compressed from the North to the South. The structural movement patterns of the Himalayan scene inherit the characteristics of the Yanshanian stage. The study area was thrust continually from the North to the South. Thus, the structure was ultimately formed in the Late-Himalayan stage.

The principal structures of the study area can be divided into two second-order units: namely, low-flattish fold-thrust belts and syncline structural belts. The degree of the folds' development is weak, and the structural height is not extremely obvious when compared with that of the nearby Jiulongshan and Tongnanba structures (Roslee & Tongkul, 2018). The major faults developed are mostly of three sets: namely, the nearly SN thrust faults and the NW and NE compresso-shear faults, which are mainly middle-shallow and middle-small faults. Most faults can only break through the Xujiache Formation because of the small scale and range. Finally, the faults disappear upward in the Zhenzhuchong formation and downward in the Leikoupo formation. The faults that appeared on the seismic reflection profiles are mainly high-angle reverse faults.

The reservoir lithology of the Xujiache Formation in the central Yuanba area mainly consists of medium-grained lithic sandstone, quartz sandstone, and siltstone. Primarily, the sedimentary environment is a lake-deltaic sedimentary system, and the reservoir thickness is generally from 270 to 700m. The pore space of the reservoir is mainly composed of residual intergranular pore, intergranular dissolved pore, repitition, and fractures. The distribution of the reservoir porosity ranges from 0.61% to 6.88%, and the average value is 2.46%. Permeability distribution ranges from 0.0012×10^{-3} to $26.0086 \times 10^{-3} \mu\text{m}^2$ with an average value of 0.2944×10^{-3} . The reservoir has the typical low porosity and low permeability characteristics of a tight sandstone reservoir (Nwankwo & Nwankwoala, 2018). The distribution of the middle and shallow hydrocarbon

reservoir is controlled by a large area of overlapping, deltaic sand bodies. The development of fractures and faults provide favorable transportation conditions for hydrocarbon migration. Some sand bodies that are blocked by a reverse-fault offer a favorable trap condition for hydrocarbon enrichment and accumulation (Wali et al., 2018). Located in the gently low porosity and low permeability hydrocarbon reservoir, the multiphase petroleum system with a complicated oil-water-air relationship finally forms.

3 Self-similarity of middle Xujiache Formation in Yuanba

Reservoirs of the Xujiache Formation in the intermediate zone of the Fault-Fold Belt of the central Yuanba area are common pore-crack reservoirs. Crack development mainly determines Oil-gas enrichment and productivity. As viewed from the causes, fault, and fracture are different fractural structures of rocks with different cracking degrees and displacement under the effect of a uniform, tectonic stress field. They have self-similarity and meet the fractal theory.

3.1 Self-similarity of fault and fracture azimuth

T_{3x} reflects faults in the Xujiache Formation of Fault-Fold Belt of the central Yuanba area, which mainly suffers tectonic extrusion of the Longmenshan tectonic zone, Dabashan fault zone, and Micangshan tectonic zone. It is dominated by the nearly SN-oriented and NNW-oriented fracture system, followed by the NE-oriented faults (Fig. 1).

In the northeast area of the study area, considering the effect of the Dabashan arcuate tectonic belt, the advantageous fault azimuth is in the NW direction. The advantageous azimuths of the YL3 and YB4 cracks in this region are in the NW direction and the NNW direction. The NW direction is likely to be the advantageous azimuth. Influenced by the Micangshan tectonic zone, the fault azimuth at the middle area is close to the SN and NNW direction. The advantageous azimuth is close to the SN direction, while the advantageous azimuths of the YL1 and YL5 cracks that are located in the middle zone are close to the SN direction (Fig. 2). To sum up, the central crack azimuth of each well conforms suitably to the fault strike surrounding the borehole, which indicates the apparent self-similarity between fault and fracture layout.

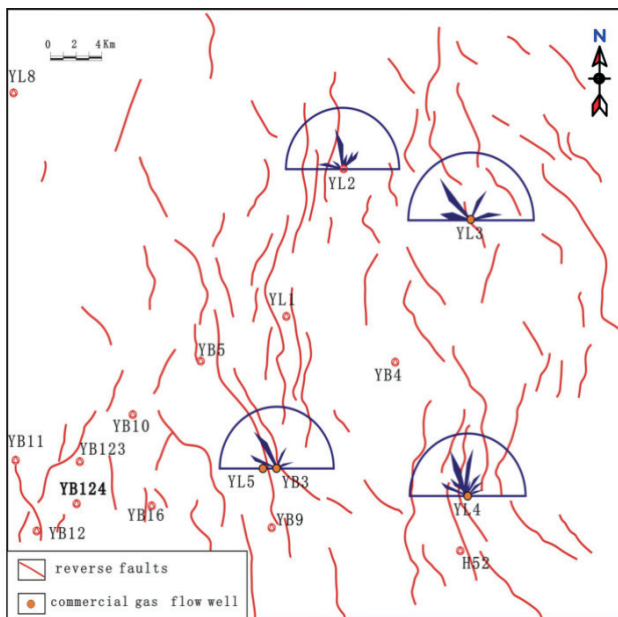


Figure 2. Faults systems diagram of Xujiache Formation in Fault-Fold Belt of central Yuanba area

3.2 Self-similarity between fault and fracture combinations

According to the rock sound emission test and analysis on homogenization temperature and the tectonic structure of inclusion, the tectonic system in this

area was mainly developed during the late Yanshan movement-early Himalayan movement. During the late Yanshan movement-early Himalayan tectonic movement, this area, together with the south Qinling Mountains, suffered sturdy extrusion from the North to the South and formed the NW-oriented and NE-oriented fracture system under the nearly SN-oriented tectonic extrusion. During the middle and late Himalayan tectonic movement, the roughly SN-oriented fault system was developed under the NE-oriented tectonic extrusion of the Dabashan arcuate tectonic belt, which reconstructed and superposed the previous NW-oriented and NE-oriented fault system. As a result, fault often represents the convergence of the NE-oriented fault tail and the SN-oriented fault, or the convergence of the NW-oriented fault tail and the SN-oriented fault. The result of the faults shows a distinctive zigzag structure. This result reflects the recombination and superposition of two tectonic movements. Moreover, the apparent X-shaped combination of faults could be seen along different fault extension directions.

Tectonic rupture and fault are material reflections at different stages of evolution from the same tectonic stress field. Tectonic fracture has evident direction. It often extends along the fault zone or forms a sharp angle with the fault zone. The discovery of the fracture azimuth of the Xujiache Formation was introduced based on imaging logging data of YL5 and YL2. Fractures still extend mainly toward SN, NNW and NE directions, conforming to the fracture azimuth and height on the T_{3x} reflection tectonic structure. Core observation found that there are mostly two types of fractures. One is shear cracks. They often have two groups, and most are perpendicular to bedding. They extend stably with apparent striations and have broad distributions, presenting an “X-shaped” conjugate (Fig. 3a). The other type of fracture is tension fissures. They are often indentation, manifested in tracing and reconstruction of the early two groups of shear cracks (Fig. 3b). The self-similarity between fault and core fracture demonstrates that fault combinations are the product of the typical stress field.

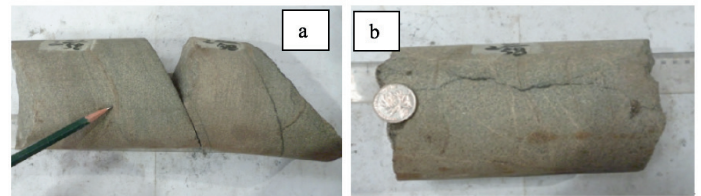


Figure 3. Characteristic of fractures of Xujiache Formation in Fault-Fold Belt of central Yuanba area, a) low angle shear fracture YL2, T_{3x} and b) low angle shear fracture YL2, T_{3x}

4. Fractal features of fault and core fracture

4.1 Principle and process of fractal dimension

According to the definition of Mandelbrot (1982), the fractal has a similar composition to the whole in some way. He applied fractal dimension (D) to make a quantitative description of fractal complexity. For quantitative research on the fractal problem, a fractal set could be defined as the following:

$$N_n = C / r_n^D \quad (1)$$

where N_n is the number of objects with appointed features, r_n is the radius of the particular object, D is the fractal dimension, and C is the proportional constant.

Calculate the natural logarithm to both sides of the equation (1), then,

$$\ln N_n = \ln C - D \ln r_n \quad (2)$$

It can be seen from equation (2) that $\ln N_n$ and $\ln r_n$ are in a linear relationship, and D is the slope of the straight line. A physical model was designed according to the definition of fractal dimension and equation (1), and thereby D of each entrapment was calculated.

There are a lot of methods to calculate the distribution fractal of reservoir fault and fractures, such as the box covering method, the cantors' dust method,

the box-counting method. In this paper, the fractal dimension of fault and fractures was calculated by using the box covering method, which is easy to be implemented on the computer. Elementary steps of this method include the following: use a square grid (side length= r) to cover the study area to make statistics on the number of squares covering fault zones and fractures (N_r). Next, change r gradually and make a statistic on corresponding N_r . Establish a rectangular coordinate system taking $\ln r_n$ as the x-axis and $\ln N_n$ as the y-axis, in which a regression analysis of statistical data is implemented by using the least square method. If fault and fracture distribution in the study area have fractal features, $\ln r_n$ and $\ln N_n$ shall meet the linear relationship of $D = \ln N_n / \Delta \ln r_n$. At this moment, the slope of this regression line is D of each fault distribution. D of the fault and fracture is calculated similarly except for the different standard of r .

smallest fault and the correlation coefficient is higher at 0.92, it can be viewed meeting requirements of statistical self-similarity. Therefore, T_{3x} faults in the study area have fractal features. Figure 4 shows calculated results of the sub-region in which the YB3 well lies. The absolute value of the straight slope is 1.5213, which is the capacity dimension of faults in this sub-region. After the information dimension of all sub-regions is calculated, the horizontal distribution of the information dimension of T_{3x} faults in the study area could be drawn (Fig. 5).

4.3 Fractal features of fractures

Fracture pictures were collected from drum scanning of 18 rock samples of the T_{3x} in the study area. The side length of the square gridding was set as $r=2, 3, 4, 5, 8, 10, 14, 16, 18, 20, 25$ and 30mm . The physical number of squares containing fractures was counted. The other calculation process is same as the calculation of the fractal dimension of fault. Finally, the capacity dimension of fractures on each rock sample D_h was calculated (Table 1). According to the calculated results, all correlation coefficients are higher than 0.98, indicating the desirable fractal feature of the general fracture distribution of the core samples. Therefore, distribution law of fractures could be predicted by using the fractal theory.

Table 1. Fractal statistics of fractures of the reservoir in the study area

well	Sample no	Fractal statistics	correlation coefficients	well	number	Fractal statistics	correlation coefficients		
	1	1.7123	0.9974	10	1.0612	0.9938			
YL1	2	1.7387	1.6988	0.9978	YB4	11	1.1853	1.0807	0.9974
	3	1.6854	0.9982	0.9956	12	0.9956	0.9972		
	4	1.7123	0.9982	1.1254	13	1.1254	0.9915		
YB3	5	1.7012	1.7187	0.9946	YL2	14	1.1801	1.1527	0.9924
	6	1.7428	0.9953	1.6897	15	1.6897	0.9968		
	7	1.5869	0.9945	1.7102	16	1.7102	1.6999	0.9932	
YL4	8	1.5445	1.5695	0.9956	17	1.5925	1.5986	0.9987	
	9	1.5772	0.9941	1.6048	18	1.6048	0.9964		

Due to different lengths of cores and different contributions of each section to the overall core density of the studied core segment, as well as the lack of a representative core section, the weighted average method was applied to calculate fracture density of the overall coring section of each well. In other words, the contribution of each rock sample to the fracture density of the whole well-section being studied was taken into account. This could be expressed as:

$$\rho_1 = \sum_{i=1}^n P_i \cdot \rho_{1i} \quad , \quad i=1,2,3, N$$

where $P_i=L_i/L$; P_i is the weight of each rock sample; ρ_1 is the coring density of the whole well-section being studied; ρ_{1i} is the density of each rock sample; L is the total coring length of the whole study well-section, and L_i is the length of each coring.

Coring fracture densities of YL2 and YL3 were calculated from the equation, 2.01 fractures/dm², and 3.43 fractures/dm², respectively.

4.4 Quantitative relationship between fault and fracture fractal features

Since fault and fracture have the same causes and self-similarity in term of fractal significance, fracture distribution could be predicted from fault distribution, as long as some internal quantitative relationship between them was discovered.

The capacity dimension of the fault on the sub-region and the capacity dimension of fractures on the coring section were connected through fracture density on the core. Finally, capacity dimension distribution of fault on the T_{3x} tectonic map was transformed into the capacity dimension distribution of fractures. Through statistical fitting on coring data (Fig.7), it was discovered that there is some relationship between the fracture density of different well-sections on the core and the capacity dimension of corresponding fractures:

where k is the fracture density on the core cross-section (fracture/dm²).

$$D_h = 0.0012k^2 + 0.086k + 1.1422$$

The fracture density of the coring well and the capacity dimension of the fault

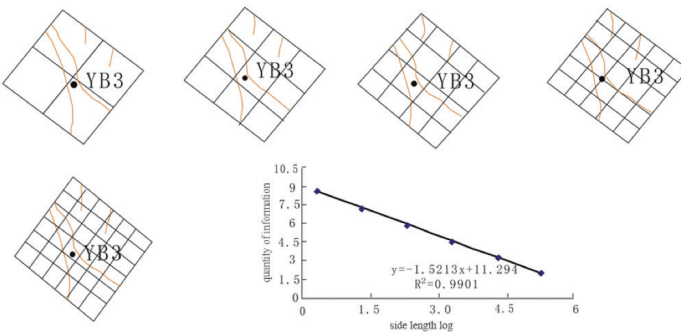


Figure 4. Calculation of information dimension of faults

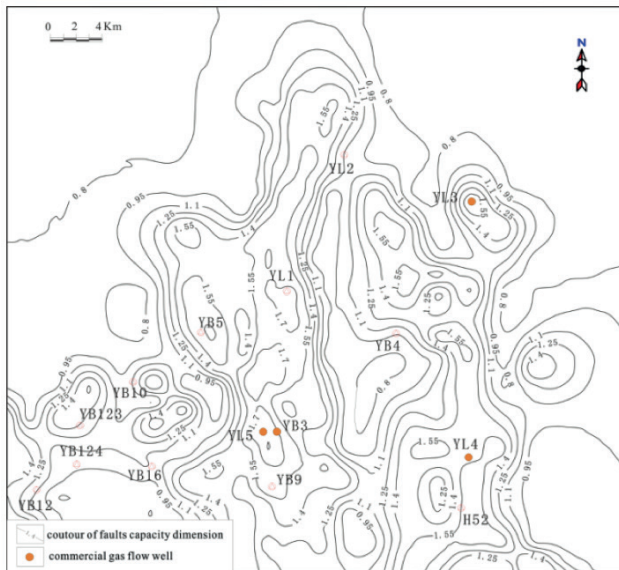


Figure 5. Contour map of the distribution of faults capacity dimension of T_{3x}

4.2 Fractal features of fault

This paper carried out different-scale gridding and calculated corresponding fractal dimensions to the T_{3x} fault tectonic map (fig.3) of the Fault-Fold Belt of the central Yuanba area using the box covering method. In the T_{3x} fault tectonic map, faults were vectorized with coredrawX6 and divided into 200 sub-regions (grids with an actual side length of 1.5km). The capacity dimension of each sub-region was calculated. Subsequently, the plane distribution map was drawn by using sufer8.0.

When calculating the fractal dimension of each sub-region, the sub-region was covered by same-scale ($r=1, 0.8, 0.6, 0.4, 0.25$ and 0.2km) gridding. D of this tectonic map was calculated as 1.5284, and the correlation coefficient was $R^2=0.9901$. When the minimum size of the box reaches the length of the

on the sub-region of this coring well have the following fitting relationship:
where D' is the capacity dimension of the fracture on the sub-region.

$$k = 8.6596D' - 11.014$$

The capacity dimension of the macro fault can be transformed into the capacity dimension of the micro-fracture through equation (1) and (2). Fig. 8 shows the capacity dimension of the fracture transformed from that of fault. Comparing Fig. 6 and Fig. 8, the region with higher D of fracture has higher D of fracture, indicating the higher development of fractures; the vice versa.

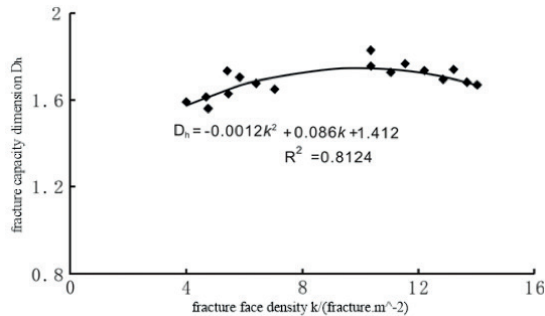


Figure 6. The fitting relation between fracture face density and fracture capacity dimension

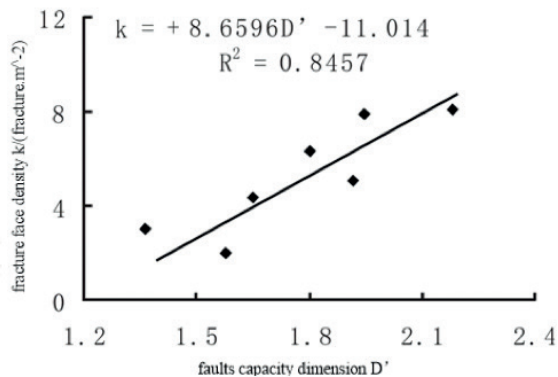


Figure 7. The fitting relation between faults capacity dimension and fracture face density

5 Fractal dimension prediction and oil & gas productivity

According to the distribution of discovered commercial hydrocarbon flow and oil & gas wells, regions with higher than 1.45 fractal dimension of fault often have better oil & gas flows. The fractal dimension of regions predicted favorable for fracture development from the above two formulas shall be higher than 1.4. Hence, regions with $D > 1.4$ are defined as favorable regions for fracture development. Regions with $0.95 < D < 1.4$ are defined relatively favorable regions for fracture development, and regions with $D < 0.95$ are unfavorable regions for fracture development.

In Fig.8, regions with fracture development in the Xujiache Formation of Yuanba mainly concentrate within the isoline region ($D > 0.95$) and surrounding areas. For example, well-areas like YB3, YL3 and YL4 show a higher than 1.5 fractal dimension of fracture and enjoy high productivity of commercial hydrocarbon flow. This agrees well with fracture prediction. Wells in the isoline region ($D < 0.95$), that is, predicted secondary fracture development regions, show no oil and gas. This confirms that the fractal theory is a useful technology to predict fracture development law.

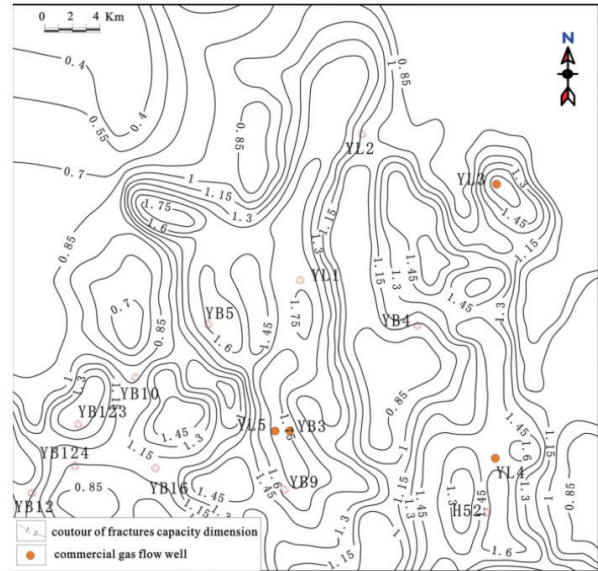


Figure 8. Prediction graph of fracture favorable zones of T_{3x}

6 Conclusions

1. Fault distribution and fracture distribution controlled by fault have remarkable self-similarity and fractal features. Therefore, studying fracture development law with the fractal theory is a reliable, technological idea and an effective approach.

2. The capacity dimension of the fault and fracture distributions (D) is calculated based on the fractal theory by using the box covering method, which could reflect the development degree of fault and fracture, as well as the complexity of the fracture system. As a result, D could be used as one quantitative parameter to study spatial development and the distribution characteristics of fractures.

3. According to the prediction results, fault distribution and fracture distribution have evident fractal features. Their correlation coefficients are all higher than 0.99. Higher D represents dense fracture development. Regions with $D > 1.45$ are favorable regions for fracture development and have reservoirs with good physical properties. These regions are favorable for oil and gas enrichment. Regions with $0.95 < D < 1.45$ are relatively favorable for fracture development. Regions $D < 0.95$ are unfavorable regions for fracture development.

Acknowledgments

This work was supported by Open Fund (PLN 201718) of State Key Laboratory of Oil and Gas Reservoir Geology and Exploitation (Southwest Petroleum University)

References

- Abija, F.A., & Nwankwoala, H.O. (2018). Characterization of Aquifers in Parts of Abia State Southeastern Nigeria. *Earth Sciences Pakistan*, 2(1), 18-22.
- Ali, W., Nasir, M.S., Nasir, A., Rashid, H., Ayub, I., Gillani, S.H., & Latif, M.J. (2018). Assessment of Carbon Footprints in Terms of Co2 Of Diesel Generator, Pakistan. *Earth Sciences Pakistan*, 2(1), 15-17.
- Bahrami, H., Rezaee, R., & Clennell, B. (2012). Water blocking damage in hydraulically fractured tight sand gas reservoirs: An example from Perth Basin, Western Australia. *Journal of Petroleum Science and Engineering*, 88-89, 100-106.
- Barton, C. C., & Hsieh, P. A. (1989). *Physical and hydrologic flow properties of fractures*. 28th International Geological Congress Field Trip Guidebook T385, American, Geophysical Union, Las

- Vega s, NV.
- Deng, P., Chen, M., & Yang, Y. (2006). The application of fractal approach to the quantitative estimation research and evaluation of fractured reservoir (in Chinese). *Petroleum Geology & Oilfield Development in Daqing*, 25(2), 18-20.
- Guo, T. L. (2011). Reservoir characteristics and its controlling factors of the Changxing Formation reservoir in the Yuanba gas field, Sichuan basin, China (in Chinese). *Acta Petrologica Sinica*, 27(8), 2381-2391.
- Jiang, L., Gu, J., & Guo, B. C. (2004). Characteristics and Mechanism of Low Permeability Clastic Reservoir in Chinese Petroliferous Basin. *Acta Sedimentologica Sinica*, 22(1), 14-18.
- Larsen, B., Grunnaleite, I., & Gudmundsson, A. (2010). How fracture systems affect permeability development in shallow-water carbonate rocks: An example from the Gargano Peninsula, Italy. *Journal of Structural Geology*, 32(9), 1212-1230.
- Len, N.L.S., Bolong, N., Roslee, R., Tongkul, F., Mirasa, A.K., & Ayog, J.L. (2018). Flood Vulnerability of Critical Infrastructures - Review. *Malaysian Journal of Geosciences*, 2(1), 31-34.
- Lin, L. B., Chen, Y. Q., Dan, Y., Zhong, Y. J., & Xu, S. L. (2011). Development characteristics of the Xujiache Formation bauxite in the northeast of Sichuan basin and its response to structural movement (in Chinese). *Acta Petrologica Sinica*, 27(8), 2392-2401.
- Mandelbort, B. B. (1982). *The fractal geometry of nature*. San Francisco, W. H. Freeman & Co.
- Nelson, R. A. (2001). *Geologic analysis of naturally fractured reservoirs*. Boston: Gulf Professional Publishing, 89-94.
- Nwankwo, C., Nwankwoala, H.O. (2018). Gully Erosion Susceptibility Mapping in Ikwuano Local Government Area of Abia State Using GIS Techniques. *Earth Sciences Malaysia*, 2(1), 08-15.
- Nwankwoala, H.O., & Oborie, E. (2018). Geological and Hydrogeological Characterization of a Hydrocarbon Impacted Site in The Niger Delta. *Pakistan Journal of Geology*, 2(1), 12-17.
- Rahim, I.A., Tahir, S., Musta, B. & Roslee, R. (2018). Urbanization Vs. Environmental Quality: Some Observation In Telipok, Sabah, Malaysia. *Geological Behavior*, 2(1), 12-17.
- Raj, N.J., & Prabhakaran, A. (2018). Lineaments of Kodaikanal-Palani massif, Southern Granulitic Terrain of Tamil Nadu, India: a study using SRTM DEM and LANDSAT satellite's OLI sensor's FCC. *Geology, Ecology, and Landscapes*, 2(3), 188-202.
- Roslee, R. (2018). Geohazards In Sandakan Town Area, Sabah, Malaysia. *Geological Behavior*, 2(1), 18-23.
- Roslee, R., & Tongkul, F. (2018). Engineering Geological Assessment (EGA) on Slopes Along the Penampang to Tambunan Road, Sabah, Malaysia. *Malaysian Journal of Geosciences*, 2(1), 06-14.
- Scholz, C. H., & Aviles, C. A. (1985). Fractal dimension of the 1906 San Andreas fault and 1915 Pleasant Valley faults. *Earthquakes Notes*, 55, 20
- Takayuki, H., Takashi, S., Keisuke, I. (1987). Fractal structure of spatial distribution of microfracturing in rock. *Geophysical Journal International*, 90(2), 369-374.
- Usman, M., Khalid, M.B., Yasin, H., Nasir, A., & Arslan, C.H. (2018). Impact of Industrial Effluents on Ground Water Quality- A Case Study of Gujranwala, Pakistan. *Pakistan Journal of Geology*, 2(1), 18-20.
- Veeraragavan, S., Duraisamy, R., & Mani, S. (2018). Prevalence and seasonality of insect pests in medicinally important plant *Senna alata* L. under tropical climate in the Coromandel Coast of India. *Geology, Ecology, and Landscapes*, 2(3), 177-187.
- Wali, E., Phil-Eze, P.O., & Nwankwoala, H.O. (2018). Saltwater - Freshwater Wetland Ecosystem and Urban Land Use Change in Port Harcourt Metropolis, Nigeria. *Earth Sciences Malaysia*, 2(1), 01-07.
- Zeng, L. B. (2008). Fissure And Its Seepage Characteristics In Low-Permeable Sandstone Reservoir (in Chinese). *Chinese Journal of Geology (Scientia Geologica Sinica)*, 39(1), 12-17.
- Zeng, L. B., & Li, X. Y. (2005) Fractures in sandstone reservoirs with ultra-low permeability: A case study of the Upper Triassic Yanchang Formation in the Ordos Basin, China (in Chinese). *AAPG Bulletin* 27(7), 14-16.
- Zeng, L. B., & Li, Y. (2010). Tectonic Fractures in Tight Gas Sandstones of the Upper Triassic Xujiache Formation in the Western Sichuan Basin, China. *Acta Geologica Sinica* 84(5), 1230-1238. (in Chinese)
- Zeng, L. B., Gao, C. Y., Qi, J. F., Wang, Y. K., Li, L., & Qu, X. F. (2008). The distribution rule and seepage effect of the fractures in the ultra-low permeability sandstone reservoir in East Gansu Province, Ordos Basin (in Chinese). *Science in China, Series D: Earth Sciences*, 51, 44-52.
- Zhang, J., Tian, G., & Liu, J. (1996). A fractal analysis on structure fractures of reservoirs (in Chinese). *Petroleum Exploration and Development*, 23(4), 65-68.