



UNIVERSIDAD NACIONAL DE COLOMBIA

# A hybrid evolutionary algorithm for vehicle routing problem with stochastic demands

**Robinson Andrés Jaque Pirabán**

Universidad Nacional de Colombia  
Facultad de Ingeniería, Departamento de Ingeniería de sistemas e industrial  
Bogotá, Colombia  
2015



# A hybrid evolutionary algorithm for vehicle routing problem with stochastic demands

**Robinson Andrés Jaque Pirabán**

Thesis presented as a partial requirement for the degree of:  
**Master of System Engineer and Computer Science**

Advisor:  
(Ph.D.) Germán Jairo Hernández P.

Research Topic:  
Stochastic optimization  
Research Group:  
ALGOS

Universidad Nacional de Colombia  
Facultad de Ingeniería, Departamento de Ingeniería de sistemas e industrial  
Bogotá, Colombia  
2015



(Dedication)

To Hari.



# Acknowledgements

I am very grateful with everyone who contributed to accomplish this work. I really appreciate your friendship, patience and support. I am especially thankful to my girlfriend, family, friends, my advisor and my professors.





## Abstract

In this work we propose a hybrid dynamic programming-evolutionary algorithm to solve the vehicle routing problem with stochastic demands, it is a well known NP-hard problem where uncertainty enhances the computational efforts required to obtain a feasible and near-optimal solution. We develop an evolutionary technique where a rollout dynamic programming algorithm is applied as local search method to improve the quality of solutions. Motivated by computational considerations, the rollout algorithm can be applied partially, so, this finds competitive solutions in large instances for which the global rollout dynamic programming strategy is time unfeasible.

**Keywords:** Stochastic programming, vehicle routing problem with stochastic demands, dynamic programming, logistics

## Resumen

En este trabajo se propone un algoritmo evolutivo híbrido que combina un método de programación dinámica estocástica para resolver el problema de enrutamiento de vehículos con demandas estocásticas, este es un problema demostrado como NP-difícil donde la presencia de incertidumbre incrementa los requerimientos computacionales necesarios para obtener soluciones factibles y cercanas a la óptima. Así, para el algoritmo evolutivo desarrollado se aplicó un algoritmo *rollout* de programación dinámica estocástica como operador de búsqueda local para mejorar la calidad de las soluciones. Motivado por requerimientos computacionales, el algoritmo de *rollout* puede ser aplicado parcialmente, con el objetivo de encontrar soluciones competitivas en instancias lo suficientemente grande para las cuales la estrategia global no es aplicable por consumir una cantidad de tiempo no tolerable.

**Palabras clave:** Optimización estocástica, problema de enrutamiento de vehículos con demandas estocásticas, algoritmos, programación dinámica, logística .

# Contents

<b>1. Introduction</b>	<b>2</b>
1.1. Introduction . . . . .	2
1.2. Proposal . . . . .	4
1.3. Objective . . . . .	4
1.3.1. Specifics objectives . . . . .	4
1.4. Contributions . . . . .	4
1.4.1. Divulcation . . . . .	4
1.5. Outline . . . . .	5
<b>2. Background</b>	<b>6</b>
2.1. A review of Vehicle Routing Problem with Stochastic Demands . . . . .	6
2.1.1. Application cases . . . . .	6
2.1.2. Solution methods . . . . .	8
2.2. Formulation of VRPSD . . . . .	10
2.2.1. Stochastic programming . . . . .	10
2.2.2. Stochastic Dynamic Programming . . . . .	13
2.2.3. Stochastic Dynamic Programming approach for VRPSD . . . . .	15
2.3. Summary . . . . .	18
<b>3. Stochastic Dynamic programming solution</b>	<b>19</b>
3.1. Dynamic approach for VRPSD . . . . .	19
3.1.1. Expected distance . . . . .	20
3.2. Policy iteration . . . . .	21
3.2.1. Rollout algorithm . . . . .	21
3.3. Summary . . . . .	23
<b>4. Hybrid evolutionary approach</b>	<b>24</b>
4.1. Hybrid evolutionary algorithm . . . . .	24
4.1.1. A basic genetic algorithm for vehicle routing problem with stochastic demands . . . . .	25
4.2. Summary . . . . .	29

---

<b>5. Experimental setting and numerical results</b>	<b>30</b>
5.1. VRPSD instances . . . . .	30
5.1.1. Instance generation . . . . .	30
5.2. Expected distance algorithm . . . . .	33
5.3. Rollout algorithm . . . . .	34
5.4. Evolutionary approach . . . . .	34
5.4.1. Evolutionary algorithms performance . . . . .	35
5.5. Comparative results . . . . .	37
<b>6. Conclusions</b>	<b>40</b>
<b>A. Algorithms</b>	<b>42</b>
A.1. Genetic algorithm parameters . . . . .	42
<b>B. Results</b>	<b>44</b>

# List of Figures

1-1. Basic variants of the Vehicle Routing Problem . . . . .	2
2-1. static and mixed routing policies . . . . .	16
2-2. Stochastic Dynamic System for VRPSD . . . . .	17
4-1. Basic genetic algorithm . . . . .	25
4-2. Basic genetic algorithm applied to an instance of 20 customers. The second image in the first row illustrate the last population and the next image shows the best solution found. . . . .	27
4-3. Memetic algorithm applied to an instance of 20 customers. The second image in the first row illustrate the last population and the next image shows the best solution found. . . . .	28
5-1. Instance demands. . . . .	32
5-2. Instance demands. Circles area represents the demand variance . . . . .	32
5-3. Color shows expected distance to an arbitrary policy. . . . .	33
5-4. Performance rollout algorithm vs. $\Gamma$ algorithm . . . . .	34
5-5. Policies improvement by rollout algorithm . . . . .	35
5-6. Performance basic genetic algorithm . . . . .	36
5-7. Performance memetic algorithm . . . . .	36
5-8. Expected distance computed by rollout algorithm (ra) , basic genetic algorithm (ga) and hybrid evolutionary algorithm (memetic) . . . . .	37
5-9. Boxplot for expected distance computed by rollout algorithm (ra) , basic genetic algorithm (ga) and hybrid evolutionary algorithm (memetic) . . . . .	38
5-10. Time performance evolutionary algorithms . . . . .	39
B-1. Scatter matrix comparing results and times . . . . .	45

# List of Tables

<b>5-1.</b> Vehicle capacity for each factor . . . . .	31
<b>5-2.</b> Instances characterization . . . . .	31
<b>5-3.</b> Differences between expected distances computed by the rollout algorithm, the basic genetic algorithm and the memetic algorithm. . . . .	38
<b>A-1.</b> Genetic algorithm parameters . . . . .	43

# 1. Introduction

## 1.1. Introduction

The classic issue about Vehicle Routing Problem (VRP) is a well known *NP-hard* [29] optimization problem of high importance in different logistics; it consists in delivery goods to a set of customers geographically dispersed, using a fleet of vehicles that begin its route in the central depot. The problem consists in assigning to each vehicle a route with the objective of minimizing the transportation cost.

The cost generated in the transport of goods, such as the size of the fleet of vehicles maintenance, combustible, and so on, are significant due to the fact that to the transport processes are involved at all stages of production processes, accounting for 10% to 20% of the final product cost [39].

One of the first investigation that studied the vehicle routing problem took place in the year 1959. In that work, Dantzing and Ramser [13] analyzed an oil dispatching problem with trucks; that problem arise as a generalization of the classic traveling salesman problem (TSP), where the salesman has to visit a set of customers for only one time and then come back to the origin point, building a Hamiltonian road on the graph consisting of customers (vertices) and the possible paths between clients (edges).

Different variations of the VRP have been proposed with the aim of approaching the problem real contexts; these problems include the addition of variables and constraints. The figure below shows a diagram with the most popular variants of VRP.

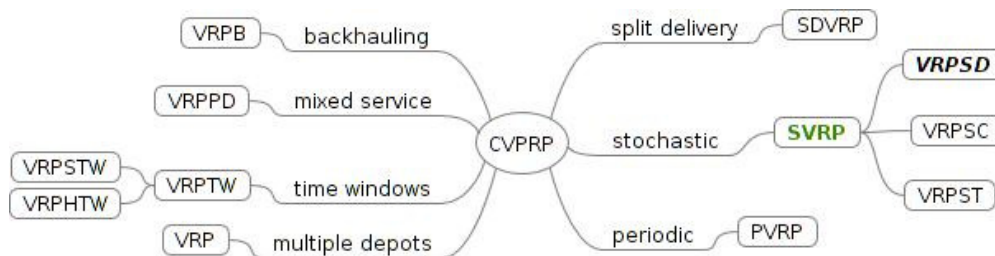


Figure 1-1.: Basic variants of the Vehicle Routing Problem

When vehicle capacity is fixed, the Capacited Vehicle Routing Problem (CVRP) originates; if there are many depots, then we have Multiple Deposit Vehicle Routing Problem (MDVRP). The Split Delivery Vehicle Routing Problem (SDVRP) is a relaxation of the problem that

allows a customer to be served by several vehicles, being important in cases where the customer demand exceeds the vehicle capacity. Generally the VRP provide a planning for a fixed period and the Periodic Vehicle Routing Problem (PVRP) provides that planning for  $m$  periods.

One of the most studied variants of the problem is caused by including time windows for deliveries, Vehicle Routing Problem with Time Windows (VRPTW), for this problem can be considered hard time windows (VRTHTW) were deliveries outside the established periods can not be done, and soft time windows (VRPSTW) in which deliveries can be made outside these periods, but with a penalty.

The problems that include pick-up and delivery can be divided in Vehicle Routing Problem with Backhauls (VRPB) and Vehicle Routing Problem with Pick-Up and Delivery (VRPPD) in the VRPB the group of customers is divided in two subgroups, for the first group, all pick-up's are made of some product, then the vehicle returns to the depot and the deliveries are realized to the second group of customers. In the VRPPD, the pick-up's and deliveries to customers are made simultaneously.

The Stochastic Vehicle Routing Problem (SVRP) arise when there is uncertainty about some of the components of the VRP, i.e., one or more variables are random. Usually these problems include Vehicle Routing Problem with Stochastic Customers (VRPSC) where customers appears randomly, the Vehicle Routing Problem with Stochastic Times (VRPST) where travel times are random and Vehicle Routing Problem with Stochastic Demands (VRPSD), where the customers demands are known only with a probability distribution.

The SVRP's differ from the deterministic VRP in many important aspects. The solution concept is different, since many properties of the deterministic problem are not manageable in the stochastic case and solution methodologies are considerably more complex; hence, SVRP is often considered a computationally intractable problem and only small instances can be solved optimally and algorithms are difficult to design and evaluate [21].

The SVRP is either often modeled in the framework of stochastic programming (optimization) integer or mixed or as a Markov decision process. In stochastic programming, problems are usually modeled as two-stage, as chance constrained program (CCP) or as a stochastic program with recourse (SPR).

The VRPSD is an open problem of great importance in logistics owing to the diversity of real situations it represents. This problem occurs in the delivery of home heating oil [15] in which each customer maintains a local inventory of the product and consumes an amount of oil each day; therefore, each day a fleet of trucks is dispatched to resupply a subset of customers. Stochastic demands are also evident in the collection of money by the vehicles of values, e.g. when collect money by a central bank [18] from several but not all of its branches every day; here the capacity of the vehicle used may be constrained for an upper bound on the amount of money that a vehicle might carry for safety reasons. The distribution of demand at each certain branch may be different, associated with the amount of money it handles. Other VRPSDs arise in delivering the post to large customers [26], vending machines [40]

or delivering medical supplies in response to large-scale emergency [14], or in recycling and waste management, among others.

## 1.2. Proposal

To design a hybrid evolutionary algorithm which combine stochastic dynamic optimization operators to find solutions for the vehicle routing problem with stochastic demands. Moreover, to evaluate the algorithm performance.

## 1.3. Objective

To design and test a hybrid evolutionary algorithm - Stochastic Dynamic Optimization (SDO) operator for the vehicle routing problem with stochastic demands.

### 1.3.1. Specifics objectives

1. To analyze the alternatives for modeling and representing the problem, and select the most computationally convenient one.
2. To design evolutionary and stochastic dynamic optimization operator algorithm to solve VRPSD.
3. To implement the designed algorithm.
4. To select benchmarking problems instances and alternative algorithms for testing.
5. To develop experimental analyses and comparisons.

## 1.4. Contributions

The evolutionary algorithms have not been broadly used to solve the vehicle routing problem with stochastic demands; thus, a hybrid evolutionary algorithm which combine stochastic dynamic optimization operators is proposed. This contribute with a new methodology to deal with the problem.

### 1.4.1. Divulagation

We presented this work at the Euro Conference in Stochastic Programming - ECSP 2014 which took place in Paris on October, 2014. The paper titled "A hybrid local rollout dynamic programming global evolutionary algorithm for the vehicle routing problem with stochastic



demands” will be published in an special issue of the journal INFORMATICA with the contributions given at this conference.

## **1.5. Outline**

In this first chapter a summary of the issues to be addressed was carried out, in chapter 2 presents the background and the state of the art of the VRPSD; chapter 3 presents the methodology used and the proposed algorithm. Chapter 4 presents the experiments and the numerical results and compares and discuss the results. Finally, chapter 5 presents the conclusions of the study.

## 2. Background

In this chapter, we carry out a specialized literature review of VRPSD, and point out applications and methodologies used to deal with it. Moreover, we examine modeling approaches to this problem in order to exploit the structure and solution properties following the methodology proposed, focusing on the stochastic dynamic programming (SDP) approach, where we first show a dynamic programming background before presenting the SDP formulation for VRPSD.

### 2.1. A review of Vehicle Routing Problem with Stochastic Demands

In recent years the literature related to the stochastic vehicle routing problem has grown due to its application to real life problems, as well as to the academic interest in studying the problem theoretically. Consequently, a number of solutions have been proposed to deal with these problems.

#### 2.1.1. Application cases

There are many applications of the VRPSD. In a huge number of real situations, the customer demand is unknown and its probability distribution can only be estimated. Eventhough, in spite of the fact that the demand can be known in many cases, when the vehicle arrives to the customer, the demand value changes, e.g., delivering petroleum products or industrial gases (Chepuri and Homem-De-Mello [9]). To illustrate these cases, we focus on the problem where gas stations are placed geographically dispersed and a fuel transport vehicle is entrusted to deliver a fuel quantity determined when the vehicle arrives at the customer location; the demand is unknown since despite the remaining fuel was known at the time to make the order, when the vehicle arrives after this time, the fuel stock has decreased.

In the case of Automatic Teller Machines (ATM), not only the daily demand for cash is uncertain, but the maximal amount of cash that may be picked up by trucks for money transportation is also limited for security and insurance reasons.

### **The Traveling Repairman Problem (TRP)**

This problem was introduced by Bertsimas and Van Ryzin [7] in 1991; they analyzed the mathematical model for dynamic and stochastic VRP with the dynamic TRP. In that model, the objective is to minimize the average time demands in the system.

That problem is presented when a machine breaks down and must be repaired, in order to achieve such objective, it is important to know the distance between the starting point and the arrival point, the urgency of the situation (high or low), the availability of the repairman, etc. A real example of that problem is on electric power company, which has to travel point by point to fix the problems that can suddenly arise; the problem has the characteristics of increased customer, and the time spent in fixing the problems varies according to the particular environment.

Many authors have studied the problem; Jothi and Raghavachari [27] analyze two algorithms to solve the problem; in 1993 Das and Wortman [37] studied the TRP with a single repairman, and they proposed a probability model that is useful for evaluating the system performance measures, such as the inactivity time, the availability of a machine and of the repairman.

### **Carrier mail services**

Nowadays, there are many companies that offer the service of pick-up packages or mail and delivery of goods to the point where the customer indicates; this problem, becomes dynamic because the driver does not know where will the next pick-up or quantity or volume of goods take place.

In 2004 Timon *et.al.* [38], investigated the DVRP (Dynamic VRP) applied to electronic commerce (e-commerce), they say that the environment of the e-commerce has voluminous, unpredictable, and dynamically changing customer orders. They studied the problem Business to Customer (B2C) in an e-commerce environment, and the purpose was a solution in three phases: initial-routes formation, inter-routes improvement, and intra-routes improvement.

Alan Slater [36] proposes a routing and scheduling method for the e-commerce environment, which allows the customers to select their own delivery time windows. The methodology that he used is based in parallel tour-building and parallel insertion algorithms, and the confirmation to the customers is realized using GPS tracking and tracing.

### **Emergency services**

Some services that arise into our society are “emergency services”. These occur when, for instance, a person is sick and needs an ambulance, a person is robbed and needs the police, in the case when there is a fire and a person has to call the firefighters. These are examples of services that can arise suddenly in any moment; in such case it is important to minimize the distance between the origin and arrival point, the availability of the resources (cars, trucks

etc.), and the level of the urgency.

### **Taxi cab services**

The taxi service is another application of the DVRP. It is difficult to plan the taxi route before the taxi leave the central, since the costumers can suddenly need the service; such problem of assigning a taxi route is more complex depending on the number of costumers, the positions of the taxi, the time and the arrival point.

Other VRPSD arise in delivering the post to large customers [26], vending machines [40] or delivering medical supplies in response to a large-scale emergency [14]. It is also possible to view the features of the problem in recycling and waste management, among others.

### **2.1.2. Solution methods**

There are two different ways for dealing with VRPSD, either with fixed routes or a dynamic approach often called reoptimization. The methodology used to solve it depends on the type of model used to represent the problem; in section 2.2 we point out some main formulations used to address the problem.

Some solution methods find the optimal solution, but however, the use of these techniques is limited to small size problems. Therefore, other methods have been proposed to aproximate optimal solutions.

#### **Exact methods**

The relevant exact methods are *branch-and-bound* algorithms where the problem can be formulated as a lineal model. Laporte *et.al.* [28] proposed an *L-shape method* for solve VRPSD, a *branch-and-cut* algorithm.

Bernard *et.al.* [10], present a Dantzing and Wolf decomposition to resolve a dynamic model analyzing multi-periodic vehicles fleet size and modeling the fleet size of each one. At the end, the authors obtained optimal solutions for different demand distribution.

In 2007 Christian H *et.al.* [11], presented a Branch and price algorithm for the capacitated vehicle routing problem with stochastic demands; they used dynamic programming to solve a subproblem.

#### **Aproximate methods**

The cyclic heuristic was proposed by Bertsimas [6], it is a simple and inexpensive algorithm that guarantee to reach the final state. We explain it in the section 3.2.1 where in our methodology is used. Gans and Ryzin [19] have studied the dynamic vehicle dispatching systems where the congestion is the main measure of performance. They used a lower and upper bound; based in a simple batching heuristic, they found stability conditions for the optimal work in heavy traffic.

Yang *et al.* [40] tested two heuristic algorithms which solve the problem in two stages: the *route-first-cluster-next* and *cluster-first-route-next*; they cluster the customers first and find the best route for each cluster after that. Furthermore, the cross-entropy heuristic method is proposed by Chepuri and Homem-de-Mello [9], to estimate the expected distance they used monte carlo sampling.

Local search heuristics commonly used for TSP have been used to solve VRPSD as OrOpt ([40], [8]). Yang *et al.* used the 3-opt local search algorithm as well.

Moretti *et al.* [31] implemented an algorithm to solve the DVRP. They consider the demand and the location as stochastic variables, and the time windows as soft. Their objective is to define a set of routes that are dynamically updated, taking into account the new costumers. To solve they used a constructive algorithm with an adaptive tabu search framework.

A genetic algorithm is another option used to solve this kind of problems, Haghani and Jung [24] presented a formulation for the DVRP with pick up and delivery and soft time windows, multiple vehicles with different capacities, variant real time service and and travel times. They proposed a genetic algorithm and their results were compared with exact methods.

### Dynamic programming

The dynamic programming is one of the techniques most used to solve this kind of problems. Bertsekas [2] proposed efficient methods such as Markov decision analysis, linear control model with quadratic cost, policies in the stochastic inventory problem, and so on. Furthermore, Secomandi [35] compared neuro-dynamic programming algorithms for VRPSD. Neuro Dynamic programming has been designed to deal with dynamic programming problems where the number of states is too large or is completely unknown [5], Many authors have followed this approach applying approximate policy iteration methods to deal with VRPSD. Bertsekas [4] presents the *rollout algorithm* (RA) applied to combinatorial optimization problems; later, Secomandi ([34], [33]) showed how to apply it to VRPSD. Novoa and Storer [32] proposed a solution for the VRPSD using dynamic programming algorithms; they also considered the cost-of-go with the help of Monte Carlo simulation, which showed that in that kind of problems the best method found is the one-step roll-out that started with a stochastic base sequence. In addition, [23] proposed rollout policies for dynamic solutions to the multivehicle routing problem with stochastic demands and constrained times.

### Hybrid methods

Bianchi *et al.* [8] implemented a simulated annealing, tabu search, iterated local search, ant colony optimization and evolutionary algorithms, and combined these with 2 local search techniques: OrOpt and 3-opt. The second local search has been used with good results in TSP.

Mendoza *et.al.* [30] proposed a memetic algorithm for the multi-compartment vehicle routing problem with stochastic demands (MC-VRPSD). It is modeled as stochastic programming with resource and under each iteration of the genetic algorithm, a 2-opt local search is performed. The results are compared with the deterministic version of the problem.

## 2.2. Formulation of VRPSD

Given a graph  $G(V, E)$ , where  $V = \{0, 1, 2, \dots, n\}$  and the node 0 denotes the starting point for vehicles (depot), and the remaining nodes represent individual customers. The set  $E$  of edges in the graph represents the roads or paths between a pair of customers  $(i, j)$  and  $d_{ij}$  is the distance between them, which is assumed to be known, symmetric and satisfies the triangle inequality.

A vehicle (only one) with fixed capacity  $Q < \infty$  starts from the depot and executes deliveries (or pickups only) of a product to different customers,  $D_i$  denotes the random variable representing the demand of customer  $i$ , and the probability distribution  $D_i$  is discrete and known and is denoted by  $p_i(k) = Pr\{D_i = k\}, k = 0, 1, \dots, K \leq R$ . The customer demands are assumed to be independent and their exact value is known only when the vehicle arrives to the customer location. If a customer demand exceeds the available capacity of the vehicle, i.e. a *route failure*, the vehicle must return to the depot to restore its original capacity. Hence, the depot must have a capacity at least equal to  $nR$ .

Yang, *et.al.* [40] propose a simple resource action for early replenishment, where the vehicle come back to the depot even when it has not depleted its stock, in order to restore the capacity to  $Q$ , allowing proactive depot trips to avoid route failures. Hence, considering proactive restocking of the vehicle is not necessary to consider multiple routes, in fact, Yang, *et.al.* [40] point out that a single route is more efficient than multiple vehicle route system, assuming that only distance constrain the route, omitting for example time duration.

The objective is to minimize the expected distance by finding out a routing solution, probably in the form of routing rules, so that demand of each customer is satisfied. Thus, VRPSDs are usually modeled as mixed or pure integer stochastic programs, or as Markov decision processes.

### 2.2.1. Stochastic programming

The stochastic programming goal is to find an optimal decision in problems that involve uncertainty in the data. Stochastic VRPs can be cast within the frame-work of stochastic programming [21]. Stochastic programs are modeled in two stages. In a first stage, an *a priori* solution is determined and the realizations of the random variables are then disclosed; in a second stage, a recourse or corrective action is then applied to the first stage solution. The recourse usually generates a cost or a saving that may have to be considered when

designing the first stage solution. A stochastic program is usually modeled either as a Chance Constrained Program (CCP) or as a stochastic program with recourse (SPR).

### Chance-constrained programming

In CCPs, one seeks a first stage solution for which the probability of failure is constrained to be below a certain threshold. A CCP solution does not take into account the cost of corrective actions in case of failure. Mainly, for a given customer demands parameters, e.g., means, variances. One subjectively specifies a control probability looking for avoid that a *route fail*. Following to Dror [17], a VRPSD is formulated as:

$$\text{minimize } \sum_v \sum_{i,j} d_{ij} x_{ij}^v \quad (2-1)$$

$$\text{subject to } Pr\left\{\sum_{i,j} D_i x_{ij}^v \leq Q\right\} \geq 1 - \alpha, \forall v = 1, \dots, NV, \quad (2-2)$$

$$x = [x_{ij}^v] \in S_{NV} \quad (2-3)$$

where  $x_{ij}^v$  is a binary decision variable that takes the value 1 if vehicle  $v$  travels directly from customer  $i$  to  $j$  and 0 otherwise, and  $S_{NV}$  is the set of feasible routes for the traveling salesman problem (TSP) with  $NV$  salesmen.

These models are based on the premise that stochastic optimization problems are transformable to deterministic problems controlling the probability of route failure events occurring. Nevertheless, this artificial control might result in bad routing decisions.

### Stochastic programming with resources

The aim in SPRs is to determine a first stage solution that minimizes the second stage solution expected cost. This is made up with the first stage solution cost plus the next expected recourse cost. SPRs are typically more difficult to solve than CCPs but their objective function is more meaningful [21].

Yang [40] propose two heuristic methods to solve the problem and Laporte *et.al.* [28] and Gendreau *et.al.* [20] propose an *L-shape* method to find optimal solutions, i.e. a branch-and-cut algorithm adjusted for the stochastic approach. Below, we present the model formulated by [17] based on the Laporte model ,although allowing proactive replenishments of the vehicle in a single route, supported on Yang's affirmation, this is more efficient than multiple routes.

Let  $T(\hat{x}, D) = \sum_i^n \sum_j^n d_{ij} x_{ij}$  be the cost of the routing solution where  $\hat{x} = \{x_{ij}\}, i \in V, j \in V$  is the vector of routing decisions,  $\hat{x}_{ij} = 1$  if the vehicle directly visits the node  $i$  from  $j$  node and 0 otherwise;  $D$  is a vector of the customer demands disclosed one a time when the vehicle arrive at customer location. Both  $\hat{x}$  and  $D$  are random variables.

$$\min_{\hat{x}} E_D[T(\hat{x}, D)] \quad (2-4)$$

$$\text{subject to } \sum_{i=0}^n \hat{x}_{ij} \geq 1, \forall i \in V \quad (2-5)$$

$$\sum_{j=0}^n \hat{x}_{ij} \geq 1, \forall j \in V \quad (2-6)$$

$$\sum_{i \in S} \sum_{j \notin S} \hat{x}_{ij} \geq 1, S \subseteq 1, \dots, n; |S| \geq 2 \quad (2-7)$$

$$\hat{x}_{ij} \in 0, 1, i, j \forall i, j \in V \quad (2-8)$$

$T(\hat{x}, D)$  can be divided in two parts; in the first part we have the term  $cx$  denoting the cost (distance) of the *a priori* sequence represented by  $x$ , and in the second part  $\mathcal{Q}(x, D)$ , would be the recourse cost given  $x$  and a realization of  $D$ .  $\mathcal{Q}(x, D)$  represents the cost of return trips incurred by route failures, minus some resulting savings.  $T(\hat{x}, D) = cx + \mathcal{Q}(x, D)$  where  $x$  represents a TSP route and  $\hat{x}$  is the binary routing vector which includes all the resource decisions. In order to keep  $\hat{x}$  as binary, it is assumed that the probability of a node demand greater than capacity of an vehicle, is zero, as well as the probability that a vehicle, upon failure, returning to a node to complete its delivery after visiting the depot, is also zero.

Setting the expectation  $\mathcal{Q}(x) = E_D[\mathcal{Q}(x, D)]$  the objective function becomes:

$$\min_x cx + \mathcal{Q}(x) \quad \min_x cx + E_D[\mathcal{Q}(x, D)] \quad (2-9)$$

In the standard modeling of the Two-Stage Stochastic Linear Programs, customers deliveries in the second stage are represented as follows:

$$\mathcal{Q}(x, D) = \min_y \{cy | Wy = h(D) - T(D)x, y \in Y\} \quad (2-10)$$

Where  $y$  is the binary vector representing the recourse initiated trips to the depot,  $T(D)$  represents the deliveries made by the  $x$  vector given that  $D$  and  $h(D)$  is the demand realization for  $D$  which has to be met (delivered) either by  $x$  or the resource  $y$ . Below, we show the model used by [28] for the L-shape method:



$$\min_x \{cx + \mathcal{Q}(x)\} \quad (2-11)$$

$$\text{subject to } \sum_{i=0}^n x_{ij} = 1, \forall i \in V \quad (2-12)$$

$$\sum_{j=0}^n x_{ij} = 1, \forall j \in V \quad (2-13)$$

$$\sum_{i \in S} \sum_{j \notin S} x_{ij} \geq 1, S \subseteq 1, \dots, n; |S| \geq 2 \quad (2-14)$$

$$\hat{x}_{ij} \in 0, 1, i, j \forall i, j \in V \quad (2-15)$$

An extended review of the models presented above, and others for VRPSD is presented by [17] and [16]

### 2.2.2. Stochastic Dynamic Programming

Stochastic Dynamic Programming (SDP) provides a frame-work where decisions are made in an finite number of stages under uncertainty. In these problems there is a set of states  $S$ , decisions variables  $U$  and the uncertainty is represented by a set of random variables  $W$ ; the dynamic system is of the form:

$$f : U \times W \times S \rightarrow S$$

or

$$x_{k+1} = f_k(x_k, u_k, w_k), k = 0, 1, \dots, N - 1 \quad (2-16)$$

where  $x_k \in S_k$  is the state of system at  $k - th$  time and summarizes past information,  $u_k$  is the control or decision variable to be selected in a given nonempty subset  $U(x_k) \subset U$  which depends on the current state  $x_k$ , i.e.  $u_k \in U_k(x_k) \forall x_k \in S_k$ ,  $w_k \in W$  is a random parameter whose value is disclosed at time  $k$  and is characterized by a probability distribution  $P_k(\cdot | x_k, u_k)$  that may depend on  $x_k$  and  $u_k$  but not on prior values of the random variable  $w_{k-1}, \dots, w_0$ .  $N$  is the horizon or number of times that control is applied

The objective is to minimize a cost function  $g_k(x_k, u_k, w_k)$  of the form

$$g_k : S \times U \times W \rightarrow \mathbb{R}$$

The cost function is assumed additive, i.e. the cost incurred accumulates over time.

$$g_N(x_N) + \sum_{k=0}^{N-1} g_k(x_k, u_k, w_k)$$

Nevertheless, given the cost as a random variable, we formulate the problem as an optimization of the expected cost:

$$E \left\{ g_N(x_N) + \sum_{k=0}^{N-1} g_k(x_k, u_k, w_k) \right\} \quad (2-17)$$

We define *admissible policies*  $\pi \in \Pi$ , where  $\Pi$  is the set of all admissible policies, as a sequence of functions  $\mu_k : x_k \rightarrow u_k$ , in which  $\mu_k$  maps state  $x_k$  to controls  $u_k = \mu_k(x_k)$  such that  $\mu_k(x_k) \in U_k(x_k) \forall x_k \in S_k$ .

$$\pi = \mu_0, \dots, \mu_{N-1}$$

Given a policy  $\pi$  and a initial state  $x_0$ , the equation 2-16 is rearranged as:

$$x_{k+1} = f_k(x_k, \mu_k(x_k), w_k), k = 0, 1, \dots, N - 1 \quad (2-18)$$

making  $x_k$  and  $w_k$  random variables with probability distributions defined. Hence, the expected cost function  $g_k$  2-17, with  $k = 0, 1, \dots, N$  is well defined:

$$J_\pi(x_0) = E_{w_k} \left\{ g_N(x_N) + \sum_{k=0}^{N-1} g_k(x_k, \mu_k(x_k), w_k) \right\} \quad (2-19)$$

An optima policy  $\pi^*$  for a given initial state  $x_0$  is one that minimizes the cost  $J(x_0)$ , i.e

$$J_{\pi^*}(x_0) = J^*(x_0) = \min_{\pi \in \Pi} J_\pi(x_0)$$

The SDP model applied to VRPSD is formulated below in the section 2.2.3

### Finite-Stage Models

Suppose that the states are the integers, and let  $A$ , a finite set, be the set of all possible actions.  $R(i, a)$  is the reward in  $i$ th-state given that  $a \in A$  action was chosen, and the next state is  $j$  with probability  $P_{ij}(a)$ . Let  $V_N(i)$  denote the maximum expected return for an  $N$ -stage problem that starts in state  $i$ .

When  $N = 1$  we have:

$$V_1(i) = \max_{a \in A} R(i, a) \quad (2-20)$$

Considering a  $N$ -stage problem that starts in  $i$  and has  $N - 1$  time periods to go. We can assess the expected return given initially we choose action  $a$ :

$$R(i, a) + \sum_j P_{ij}(a) V_{N-1}(j)$$

then,

$$V_N(i) = \max_a [R(i, a) + \sum_j P_{ij}(a) V_{N-1}(j)] \quad (2-21)$$

### 2.2.3. Stochastic Dynamic Programming approach for VRPSD

VRPSD is modeled in the framework of SDP as a stochastic shortest path problem; it is a Markov Decision Process (MDP) where is necessary to make decisions under situations where outcomes are partly random reaching an absorbing cost-free termination state in a random number of stages.

The problem formulation is presented below, based in the Novoa [32] and Secomandi [33] notation as a Markov decision model.

The objective of the problem is to find a routing policy so customer's demand is satisfied and the expected transportation costs (distance) minimized, this policy may order returns to the depot before the vehicle capacity runs out.

#### Types of policies

Secomandi [35] classifies the routing policies in three groups, static, dynamics and mixed

**Static** Static policies describe a sequence  $\tau$  of customers to be visited in that order for the vehicle.

**Dynamic** Dynamic policies provide a policy  $\pi$  that given the current state of the system, prescribe which location should be visited next.

**Mixed** Mixed policies combine elements of both static and dynamics policies.

Mixed policies not only follow a sequence  $\tau$  of customers but also prescribe decisions that depend on the state that allows proactive replenishments. In the figure 2-1, we illustrate static policy (left) where reactive replenishment or resource action are carried out when the customer demand is greater than the vehicle capacity, and is therefore forced to return to the depot for restocking, while on the right image, we have a dynamic policy in which the vehicle can do proactive replenishments, going to the station even when the vehicle capacity is not empty.

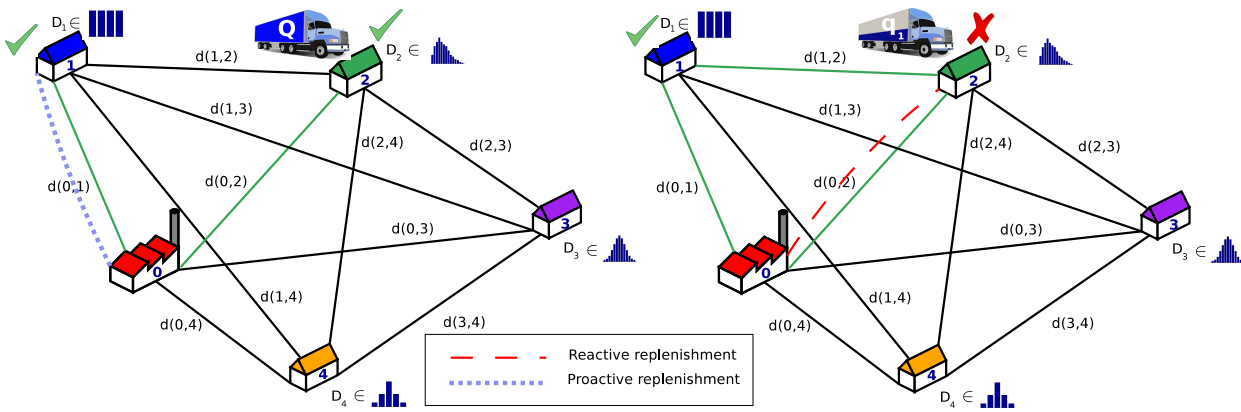


Figure 2-1.: static and mixed routing policies

In order to represent the system state at stage  $k$ , the vector  $x_k$  is defined as  $x_k = (l, q_l, r_1, \dots, r_n)$  of size  $n + 2$ , where  $l \in \{0, 1, \dots, n\}$ , is the current location of the vehicle and  $q_l \leq Q$  is its available capacity *after* delivery to customer  $l$ ; the elements  $r_i$  represents the remaining demand to satisfy to the customer  $i$ . An unknown demand is denoted as -, if customer  $i$  is visited and its demand has been completely satisfied,  $r_i$  will take the value 0; otherwise, it will take any value between 1 and  $R$ . The initial state of the system  $x_0$  is  $(0, Q, -, -, \dots, -)$  and the final state  $x_N$  occurs when the vehicle returns to the depot after serving the demands of customers, represented as  $(0, Q, 0, 0, \dots, 0)$ . Thus, the number of states in the system is  $O(nQR^n)$

Let  $N$  be a random variable representing the number of stages or transitions from initial state to the end, the vector  $\pi = \mu_0, \mu_1, \dots, \mu_{N-1}$  is the policy or sequence of functions to optimize, where  $\mu_k$  is a function that associates a decision or control  $u_k = \mu_k(x_k)$  for each state,  $u_k \in U_k(x_k)$  and  $U_k(x_k) = \{\{m \in \{1, \dots, n\} | r_m \neq 0\} \cup 0\} \times \{a : a \in \{0, 1\}\}$ . Control  $u_k$  is represented as ordered pairs  $(m, a)$ ,  $m$  is any customer not yet served,  $m$  is 0 when all demands have been satisfied and the system enters its completion stage,  $a$  is 0 if the vehicle directly visits customers and 1 if the vehicle first stops at the depot to resupply.

Given a state  $x_k = (l, q_l, r_1, \dots, r_m, \dots, r_n)$  and a control  $u_k$  in which it is decided to visit the node  $m$  at the next stage, the random variable  $D_m$  is realized ( $r_m = D_m$  if  $r_m$  is unknown;

otherwise  $r_m \neq -$ ) and the remaining demand of the customer  $m$  changes to  $r'_m$  as soon as the capacity of vehicle becomes  $q_m$ , where

$$q_m = \begin{cases} \max(0, q_l - r_m), & \text{whether } u_k(m, 0) = \mu_k(x_k) \\ q_l + Q - r_m, & \text{whether } u_k(m, 1) = \mu_k(x_k) \end{cases} \quad (2-22)$$

and

$$r'_m = \begin{cases} \min(0, r_m - q_l), & \text{whether } u_k(m, 0) = \mu_k(x_k) \\ 0, & \text{whether } u_k(m, 1) = \mu_k(x_k) \end{cases} \quad (2-23)$$

so the system goes to state  $x_{k+1} = (m, q_m, r_1, \dots, r'_m, \dots, r_n)$ . The transition between states is graphically represented as:

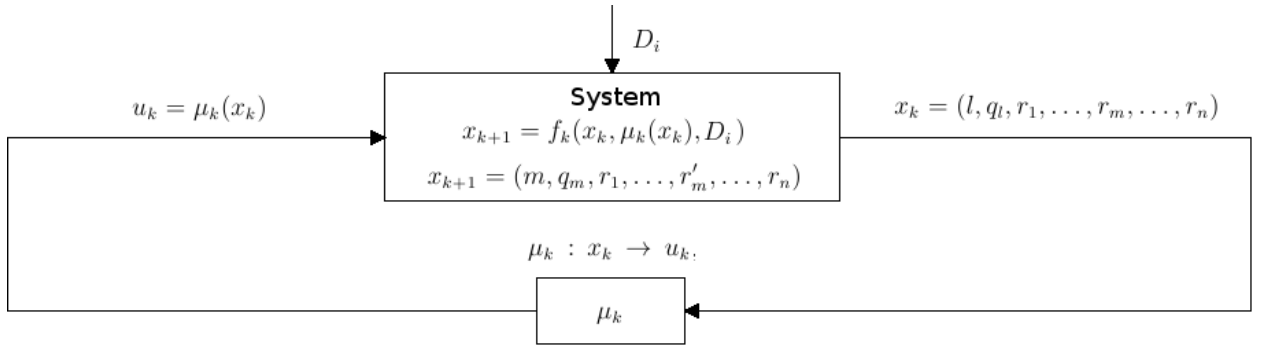


Figure 2-2.: Stochastic Dynamic System for VRPSD

Incurring in a transition cost  $g(x_k, u_k, x_{k+1})$

$$g(x_k, \mu_k(x_k), x_{k+1}) = \begin{cases} d(l, m), & \text{whether } u_k(m, 0) = \mu_k(x_k) \\ d(l, 0) + d(0, m), & \text{whether } u_k(m, 1) = \mu_k(x_k) \end{cases} \quad (2-24)$$

The objective of the problem is to find a policy  $\pi$  that minimizes the cost of transport  $J_N^\pi$  (2-25) in the  $N$ -stages or the expected cost to complete given an initial state. The optimal cost of transport in the  $N$ -stage  $x$  is  $J_N^*(x) = \min_{\pi \in \Pi} J_N^\pi(x)$ , where  $\Pi$  is the set of admissible policies.

$$J_N^\pi(x_0) = E \left\{ \sum_{k=0}^{N-1} g(x_k, \mu_k(x_k), x_{k+1}) \right\} \quad (2-25)$$

If  $J_N^*(x)$  is known for all stages, the optimal control  $u_k^*$  at each stage is to find the minimum of the following equation (2-26):

$$u_k^* = \mu_k^*(x) = \arg \min_{u_k \in U_k(x_k)} g(x_k, u_k, x_{k+1}) + \sum_{x_{k+1} \in S} p_{x_k x_{k+1}}(u_k) J_N^*(x_{k+1}) | x_k = x, \forall x \in S \quad (2-26)$$

The problem is that  $J_N^*(x)$  is unknown and its calculation is a computationally intractable problem given the size of state space. Secomandi [33] points out that computing an optimal policy becomes quickly intractable when  $n$  grows beyond 10. Chapter 3 deals with issue of approximating this function through a dynamic-programming method efficiently computable.

### 2.3. Summary

The VRPSD has been studied for more than 20 years, with important progress in 90's and 00's and wide areas of application in logistics, following the conclusions of [17] the most promising approach is modeling the problem as a Markov decision process. Hence, a stochastic programming model is selected: a methodology for sequential decisions made under uncertainty, based on dynamic system, where the main idea is to use an approximate a function  $J$  in order to make decisions in complex dynamic systems, allowing to deal with instances considered intractable for their size. In the next section, the dynamic programming solution is addressed.

# 3. Stochastic Dynamic programming solution

## 3.1. Dynamic approach for VRPSD

Dynamic programming is based on the principle of optimality formulated by Bellman [1]

*An optimal policy has the property that whatever the initial state and initial decision are, the remaining decisions must constitute an optimal policy with regard to the state resulting from the first decision.*

Following Bertsekas [3], the principle of optimality points out that an optimal policy can be constructed backwards, first finding an optimal policy for the *tail subproblem* involving the last stage, then extending the optimal policy to the problem regarding the last two stages, and continuing until cover the whole problem in the first stage; hence, an optimal policy is constructed for the entire problem.

$$J^*(x_0) = \min_{u_k^* \in U_k(x_k)} E_{w_k} \left\{ g_k(x_k, u_k^*, w_k) + J_{k+1}^*(f(x_k, u_k^*, w_k)) \right\}, \quad \forall k = 0, 1, \dots, N-1 \quad (3-1)$$

However, the exact assessing of  $J^*$  is computationally infeasible given the size of the state space. Therefore, it is necessary to approximate this function to generate good, but not necessarily optimal policies.

Let  $\tilde{J}_k$  be an approximation of  $J_k^*$ , then a control  $\tilde{u}_k$  can be assessed as:

$$\tilde{u}_k = \tilde{\mu}_k(x_k) = \arg \min_{u \in U_k(x_k)} \left\{ g(x_k, u_k, x_{k+1}) + \sum_{x_{k+1} \in S} p_{x_k x_{k+1}} \tilde{J}_k \right\} \quad (3-2)$$

The following section 3.1.1 discusses the computation of  $\tilde{J}_k$ .

### 3.1.1. Expected distance

The expected distance  $\tilde{J}$  or *cost-to-go* is computed based on the algorithm proposed by Secomandi [33]. We implemented the algorithm  $\Gamma$  represented below (algorithm 1) to compute expected distance in  $O(nRQ)$  time and  $O(nQ)$  space.

```

input : tour  $\tau_{1 \times n+2}$ ,  $d_{n+1 \times n+1}$  distance,  $x$  state
output:  $E$  expected distance of an a priori solution  $\tau$  (base sequence)
 $l = x_1$ ;
 $q_l = x_2$ ;
if  $l = n$  then it is the last customer on  $\tau$ 
  |  $E = d(\tau(l+1) + 1, 1)$ ;
end
else
  | if  $l=0$  then it is the first node depot in the tour  $\tau$ 
  | |  $E = \Gamma(\tau, l+1, q_l)$ ;
  | end
  | else
  | |  $E_0 = d(\tau(l+1), \tau(l)) + \sum_{j=0}^{\min\{q_l, \bar{D}_{\tau(l+1)}\}} \Gamma(\tau, l+1, q_l - j) * p^{\tau(l+1)}(j) + \sum_{j=q_l+1}^{\bar{D}_{\tau(l+1)}} 2 * d(0, \tau(l+1)) + \Gamma(\tau, l+1, Q + q_l - j) * p^{\tau(l+1)}(j)$ ;
  | |  $E_1 = d(0, \tau(l)) + d(0, \tau(l+1)) + \sum_{j=0}^{\bar{D}_{\tau(l+1)}} \Gamma(\tau, l+1, Q - j) * p^{\tau(l+1)}(j)$ ;
  | |  $E = \min\{E_0, E_1\}$ ;
  | end
end

```

**Algorithm 1:** Expected distance algorithm  $E = \Gamma(\tau, l, q_i)$

This algorithm was validated comparing the outcomes with the expected distance computed by an exhaustive algorithm applied to small instances. In addition, larger instances were benchmarked using the monte carlo simulation to asses the expected distance.

If the vehicle capacity is depleted, the methods used to compute the expected distance take into account that the vehicle can go to the depot for proactive restocking with less cost than to visit the customer first, which makes the route fail, as shown in 3.1.1.

**Theorem 3.1.1.** *if  $q_l = 0$  then the vehicle must go first to the depot for replenishment and later visit the next customer on the route; this is better than visiting the next customer to know its demand and then going to the depot for replanishment.*

*Proof.* Given the current state  $x_k = (l, 0, r_1, \dots, r_n)$  where the vehicle capacity is depleted, i.e.  $q_l = 0$ , assume that the next customer to be visited on the route is  $l'$ . If the customer is visited first, then the vehicle must go to depot for replenishment and go back to  $l'$  to satisfy its demand, so the distance is  $\delta(l, l') + 2\delta(l', 0)$ . Otherwise, if a proactive restocking of the vehicle is performed then the total distance is  $\delta(l, 0) + \delta(0, l')$ . Assume  $\delta(l, 0) + \delta(0, l') \leq$



$\delta(l, l') + 2\delta(l', 0)$ , then by triangular inequality:  $\delta(l, 0) \leq \delta(l, l') + \delta(l', 0)$ , hence, proving 3.1.1  $\square$

**Lemma 3.1.2.** *The theorem 3.1.1 can be generalized for all  $q_i \geq D'_i$  where  $D'_i$  is the demand of the customer  $i$  who is the next on the tour.*

## 3.2. Policy iteration

The policy iteration algorithm is a dynamic programming technique, it generates a sequence of stationary policies, each with improved cost over the preceding one. The algorithm describe the following sequence of algorithm 2:

1. **Initialization:** Guess an initial stationary policy  $\pi_0$
2. **Policy evaluation:** Given the stationary policy  $\pi_k$  compute the corresponding cost function  $J_{\pi_k}$
3. **Policy improvement:** Obtain a new stationary policy  $\pi_{k+1}$
4. Repeat steps 2 to 3

**Algorithm 2:** Policy iteration algorithm

If the policy evaluation step computes  $J_{\pi_k}(x)$  for all states  $x \in S$ , and the algorithm runs until  $J_{\pi_m} = J_{\pi_{m+1}}, \forall x \in S$ , then the algorithm finds the optimal policy  $\pi^*$ . In contrast, when  $|S|$  is too large this algorithm is impractical, although these steps can be approximated to deal with large-scale systems; this despite that convergence to optimal solution is not guaranteed.

### 3.2.1. Rollout algorithm

The rollout algorithm is an approximate policy iteration technique, used to increase the effectiveness of a heuristic by iteratively applying it, or rolling it out, at each decision stage [22]. The algorithm requires to know a base policy  $\pi$  for the problem. It may also be assumed that the cost-to-go of this base policy from any given state  $x$  can be easily computed [35]. Thus, a policy  $\pi$  is build starting from any given state and following an *a priori* solution to VRPSD.

#### Defining initial policy

Cyclic heuristic  $\mathcal{C}$  shifts  $\tau$  to obtain an permutation keeping an cyclic order. It builds the cyclic tour that starts at  $l$  and follows  $\tau$  cyclically; hence,  $\tau_l^{\mathcal{C}} = (l, l + 1, \dots, n, 1, \dots, l - 1, 0)$  represents an *a priori* policy  $\pi^{\mathcal{C}}$ . Cyclic heuristic was propossed by Bertsimas 92 and improved by himself 95; it was later used by many authors because it is simple, inexpensive and sequentially consistent [34]

Following cyclic heuristic, the rollout algorithm 3 describes a fixed number of iterations given an instance of the problem changing  $\tau$  after the first state. Since there is a transition of  $x_l$  state to  $x_{l+1}$ , only the segment of  $\tau$  that follows to  $l$  is shifted, maintaining in this section the customers still not visited or with demand different to 0. Once this is fully served, customers are assumed to be skipped in  $\tau_l^c$ .

In order to compute rollout policy controls, the control which defines the first customer  $l_1$  to be visited by  $\tilde{\pi}^c$  is found by:

$$\mu_0(x_0) = u_0 = (l_1, 0) = \arg \min_{l \in V - \{0\}} \{ \tilde{J}_{\pi_0}(x_0) \}$$

where the expected length  $\tilde{J}_{\pi_0}(x_0)$  of  $\pi_0$  that follows the cyclic tour  $\tau_l^c = (0, l, l+1, \dots, 1, n, \dots, l-1, 0)$ , in the initial state  $x_0$ , is computed using the algorithm  $\Gamma$  1. Hence, the system moves to the next state visiting the customer  $l_1$  directly, which is fully served since  $q_0 = Q$  and  $r_l \leq Q$ .

**input** :  $\pi_0$ , state  $x_0$

**output**:  $\tilde{\pi}^c$  policy

Given a initial policy  $\pi_0 = u_1, u_2, \dots, u_{N-1}$  and initial state  $x_0$

$\tilde{\pi}^c = \emptyset$

**repeat**

$$\tilde{\mu}_k = \arg \min_{u_k \in U_k(x_k)} \{ \min \{ \tilde{J}_{\pi_k}^0(x_k), \tilde{J}_{\pi_k}^1(x_k) \} \}$$

Add  $\tilde{\mu}_k$  to  $\tilde{\pi}^c$

Apply the control  $\tilde{\mu}_k$  to the state  $x_k$ .i.e.  $x_{k+1} = f_k(x_k, \tilde{\mu}_k(x_k), D)$

Roll out  $\pi_k$  since  $\tilde{\mu}_k$  to  $\mu_{N-1}$  following cyclic heuristic

**until** the final state  $x_N$  is reached;

**Algorithm 3:** Rollout algorithm

For some state  $x_k = (k, q_k, r_1, \dots, r_n)$ ,  $\tilde{J}_{\pi_k}^0(x_k)$ , compute the expected distance in order to move the vehicle directly to the next customer following the policy  $\pi_k$  thereafter:

$$\tilde{J}_{\pi_k}^0(x_k) = d(\tau_l, m) + \sum_{k=0}^{q_l} p_m(k) \Gamma(\tau, l+1, q_l - k) + \sum_{k=q_l+1}^{K_m} 2d(0, m) p_m(k) \Gamma(\tau, l+1, q_l + Q - k) \quad (3-3)$$

On the other hand,  $\tilde{J}_{\pi_k}^1(x_k)$  assesses the expected distance performing an proactive replanishment before moving the vehicle to the next customer following the policy  $\pi_k$  thereafter:

$$\tilde{J}_{\pi_k}^1(x_k) = d(0, \tau_l) + d(0, m) + \sum_{k=0}^{K_m} p_m(k) \Gamma(\tau, l+1, Q - k) \quad (3-4)$$

Thus, the control  $\tilde{\mu}_k$  which decides to visit the customer  $l$  is computed as follows depending on the smallest cost:

$$\tilde{\mu}_k = \begin{cases} (l, 0), & \text{if } \tilde{J}_{\pi_k}^0(x_k) \leq \tilde{J}_{\pi_k}^1(x_k) \\ (l, 1), & \text{in other case} \end{cases} \quad (3-5)$$

The rollout algorithm explores  $\frac{1}{2}n(n+1)$  different policies with a computational cost of  $O(nRQ)$  in order to evaluate the expected distance for each one; hence, the rollout algorithm runs in  $O(n^3RQ)$  time.

### 3.3. Summary

The rollout algorithm is an approximate atochastic dynamic programming technique implemented to improve a *a priori* policy. We use cyclic heuristic as base policy since it is simple, inexpensive and sequentially consistent. Finally, we describe the rollout algorithm and point out the computational complexity to perform it.

## 4. Hybrid evolutionary approach

An evolutionary algorithm (EA) is a technique bio-inspired in the evolution of the species. It was proposed by John Holland, early in the 70's [25]. This algorithm seeks to evolve a population of individuals that represent solutions to the problem through genetic operators such as crossover, mutations and selection. The population generated in each iteration is evaluated and then the individuals with a better fitness are chosen for the next generation with more chance.

### 4.1. Hybrid evolutionary algorithm

Hybrid evolutionary algorithms or hybrid genetic algorithms are very popular techniques that offer practical advantages to deal with complex and hardly optimization problems. Grosan [12] presents a review of hybrid genetic architectures frequently used.

Hybridization can be performed using prior knowledge, heuristics, local search, and other techniques. We use it to carry out local search through rollout algorithm. Sometimes, a hybrid genetic algorithm which combine other technique to local search is known as memetic algorithm.

Generally, the purpose of hybridization is:

- To improve the performance of the evolutionary algorithms.
- To improve quality of solutions obtained by evolutionary algorithm
- To incorporate evolutionary algorithm as part of a large system

Evolutionary algorithm behaviour is determined by the exploitation and exploration. In exploitation, local search is performed to improve solutions; in exploration, to avoid local optimum extending the search space, our implementation of memetic algorithm works to keep these relation throughout the run. Hence, in this application, the hybridization not only improves the quality of the solutions obtained by evolutionary algorithm, but also assembles as a framework for rollout algorithm in order to avoid local optimum.

### 4.1.1. A basic genetic algorithm for vehicle routing problem with stochastic demands

In figure 4-1 we show an example of a basic GA in general form. First, an initial population is selected and a fitness function is assessed for each individual in the population. In order to produce a new population for the next generation, crossover and mutation operators are applied to individuals, allowing those who have better fitness function to have more chances to reproduce themselves. In the selection stage, offspring's fitness is evaluated to choose the individuals which will integrate the new population; individuals with competitive fitness regarding population, have a higher probability to be selected. These steps are repeated until stopping criteriums are resolved.

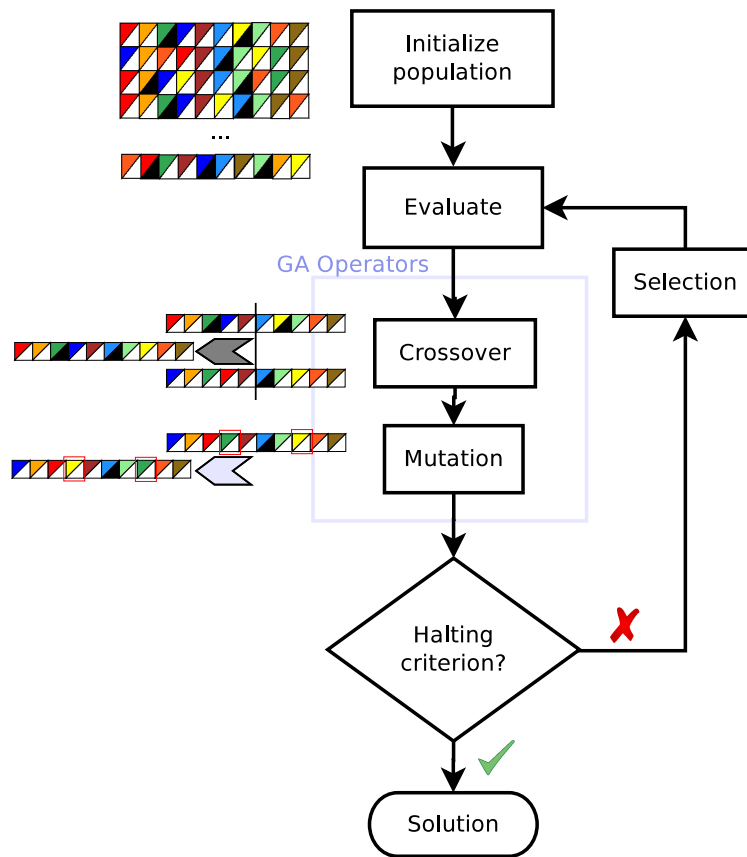


Figure 4-1.: Basic genetic algorithm

#### Initialization

We represent an individual in the population as a policy tour  $\pi^c$ , whose fitness is the expected distance  $\tilde{J}_{\pi^c}$ , computed using the algorithm  $\Gamma$  1.

The initial population  $P_0$  with a fixed size  $|P_0| = n$ , is obtained using the cyclic heuristic in  $O(n)$  time. It performs in this way to reduce the computational cost, since we can evaluate fitness to  $P_0$  in  $O(n)$  time when rollout is accomplished under some individual in the population.

### Crossover

The crossover operator  $\otimes$  consists in the selection of two different individuals  $I_i^{P_k}$  and  $I_j^{P_k}$  with probability dependent on their fitness value, respectively; meanwhile, a random cut point  $\rho \in [1, n]$  is uniformly selected in order to combine the parents' sequences to obtain a new sequence. Hence, a new individual raise to concatenate the subsequence  $I_i^{P_k}[1..\rho]$  with the subsequence  $I_j^{P_k}[\rho + 1, \dots, n]$ .

A crossover operation can yield a new individual that represents an unfeasible policy. However, we implement this operator to run in time  $O(n^2)$  and guarantee only feasible solutions as a result.

### Mutation

This operator performs three types of mutation with the same probability to produce and individual in the offspring: swap two elements of policy randomly selected, flip a random subsequence of policy or shift the policy a random number of times.

The mutation of an individual can happen with probability  $Prob_m = 0.04$  in the experiments presented in this document, and compute in  $O(1)$  time.

### Selection of the new population

New population originates as a result of crossover and mutation operators. Furthermore, the evolutionary algorithm also obtain individuals to the offspring performing the cyclic heuristic. Hence, those who have a better fitness can be chosen with more chance to integrate the new population.

In order to punish generation with fitness decrease and reward those who increase this value with respect to the previous generations, the size or number of individuals available to the next generation changes.

Let  $\Delta_{E'}^{P_k}$  be the rate of fitness change in the generation  $P_k$ , i.e.

$$\Delta_{E'}^{P_k} = \frac{\bar{\Gamma}_{P_{k-1}} - \bar{\Gamma}_{P_k}}{\bar{\Gamma}_{P_{k-1}}} \quad (4-1)$$

where  $\bar{\Gamma}_{P_k}$  is the best expected distance obtained by an individual in the generation  $k$ .

Then, the size of the next population  $P_{k+1}$  is computed so that:

$$\|P_{k+1}\| = \begin{cases} \lfloor \min\{n(1 + \alpha), \|P_k\|(1 + \alpha)\} \rfloor, & \text{if } \Delta_{E'}^{P_k} > 0 \\ \lceil \max\{n\alpha, \|P_k\|\alpha\} \rceil, & \text{if } \Delta_{E'}^{P_k} < 0 \text{ or } \|P_k\|, \text{ in other case.} \end{cases} \quad (4-2)$$

where  $\alpha$  is a tunable parameter which should be fixed in the range  $(0, 1]$  depending on computational resources. Consequently, this parameter reward a offspring that improve the quality of the solutions in comparison to their parents, increasing the population size at most an  $\alpha$  times the size. Otherwise, when the quality of the solutions decreases with respect to the previous generation, the size of population is punished decreasing it at least a  $\alpha$  factor of the population size. The figure 4-2 shows the results of basic genetic algorithm applied to one instance with  $\alpha = 0.5$ ; below, the last chart on the right side of figure exhibits the size of population for each generation.

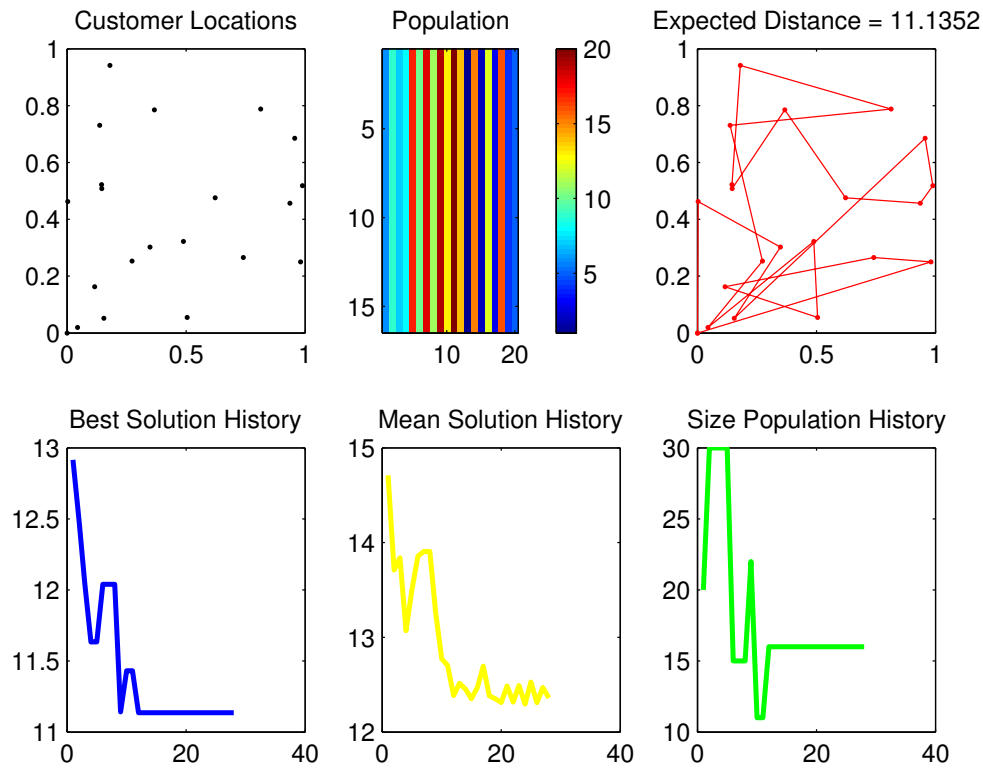


Figure 4-2.: Basic genetic algorithm applied to an instance of 20 customers. The second image in the first row illustrate the last population and the next image shows the best solution found.

### Stopping criterion

Finally, the evolutionary algorithm runs until a fixed number of iterations  $\kappa$  is reached. Nevertheless, it may stop once an  $\mathbf{m}$  number of consecutive iterations without a significant change, i.e.,  $|\Delta_{E'}^{P_k}| \leq \varepsilon$  is accomplished. Both  $\mathbf{m}$  and  $\varepsilon$  are tunable parameters.

### Local search

A classic genetic algorithm does not yield competitive results itself; due to basic GA, it does not exploit problem knowing to produce high quality solutions. In order to be effective, we combined local search methods. Local search can be incorporated in the initial population or among the offspring.

We applied the rollout algorithm as a local search method. The GA incorporates it in the initialization stage as in each iteration under the best policy obtained. Figure 4-3 shows the evolutionary algorithm with local search applied to the same instance used by the basic genetic algorithm above and showed in Figure 4-2

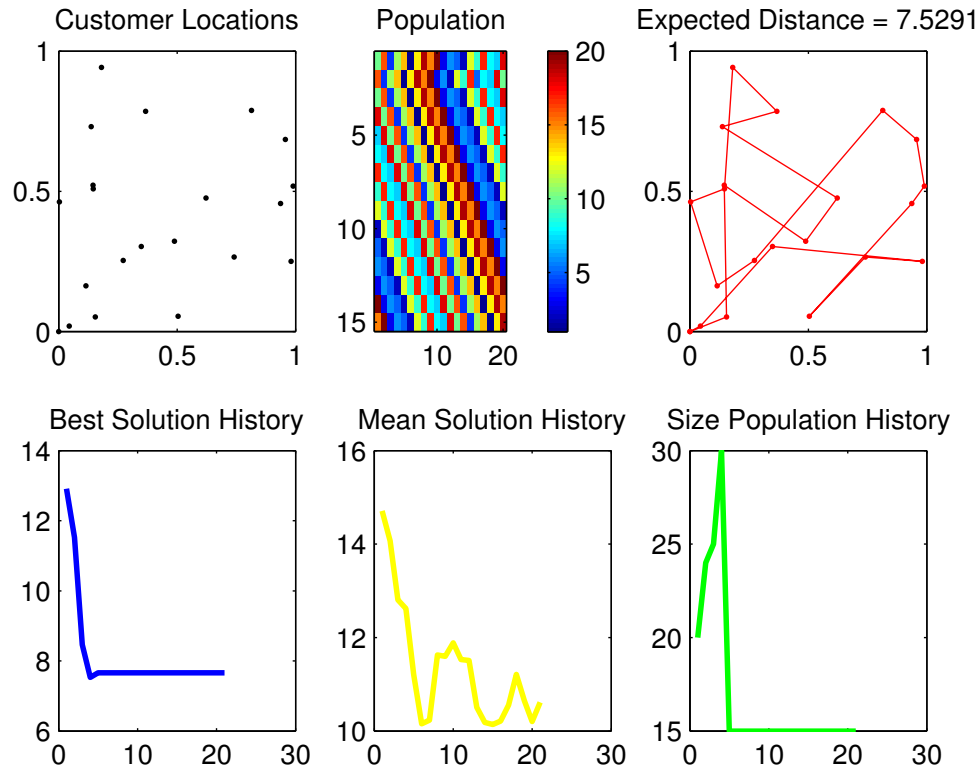


Figure 4-3.: Memetic algorithm applied to an instance of 20 customers. The second image in the first row illustrate the last population and the next image shows the best solution found.



## 4.2. Summary

In this chapter we presented a basic genetic algorithm for the vehicle routing problem with stochastic demands. In addition, we showed an hybrid approach, integrating the rollout algorithm as a local search method in the evolutionary algorithm.

# 5. Experimental setting and numerical results

In this chapter we present the computational results obtained when solving the instances selected.

## 5.1. VRPSD instances

In order to evaluate the algorithms proposed, we selected instances of two sources generated following a procedure similar to the one used in Secomandi [35]. The first set of instances is the one used by Novoa [32], while the second one was created by us, randomly.

### 5.1.1. Instance generation

The set of instances contains 45 different instances resulting from the combination of three number of customers  $n \in \{5, 10, 20\}$ , three vehicle capacities given for  $f'$  factor and five different assignments for customer locations and demand distribution for each one, the assignments result from changing the random seeds.

The customers' demands are both discrete and uniformly distributed in this possible sets  $U[1, 5]$ ,  $U[3, 9]$ ,  $U[6, 12]$ ; in each instance, each customer is assigned to any of the three groups with equal probability. Customers' locations are random points in  $[0, 1]^2$ , with the depot fixed at  $(0, 0)$ .

The filling rate  $f$  is an index of the total expected demand relative to vehicle capacity.

$$f = \sum_{i=1}^n \frac{E[D_i]}{mQ} \tag{5-1}$$

where  $E[D_i]$  is the expected demand of customer  $i$  and  $m$  is the number of available vehicles, when  $m = 1$ ;  $f$  can represent approximately the expected number of replenishment needed to serve all customer demands. It follows that, a priori, in all instances  $E[D_i] = (3+6+9)/3 = 6$ , for any customer  $i$ , and  $Q = 6n/f$ .  $f' = f - 1$  is the expected number of route failure in a given instance. Therefore, our instances are defined for this factor  $f' \in \{1.0, 1.5, 2.0\}$ , following the same factors used by Secomandi [35].

Table 5-1.: Vehicle capacity for each factor

$f'$	$n$		
	5	10	20
1.0	15	30	45
1.5	12	24	36
2.0	10	20	30

The 160 instances used by Novoa [32] were generated following the same method described above. This set is composed by 70 small size instances (5 to 20 vertex), 60 medium size (30 to 60 vertex) and 30 instances of large size with a number of vertices greater than 100. Table 5-2 shows the range of demands for each size instance, where the demand value is the difference between the maximum and minimum demand that some customers can take. In addition, Figure 5-2 exhibits the demands mean and variance for each instance, and in Figure 5-1 we classify each instance according to number of vertices  $n$  and demand range, which is computed as demand values in Table 5-2.

n	demand values									Total
	4	5	7	8	9	15	17	29	33	
5	2	4	1	1	8	2	3			21
8		4	2		8		5			19
20					5	5	10	5	5	30
30						5	5	5	5	20
40						5	5	5	5	20
60						5	5	5	5	20
100						5	5	5	5	20
150						5	5			10

Table 5-2.: Instances characterization

The most difficult instances to solve have 100 and 150 vertices. However some instances with 60 vertices are also difficult to solve since these have large demand ranges largest which increase complexity.

On the other hand, figure 5-2 not only shows difficult instances of large size, it also shows medium size instances since these exhibit large variance.

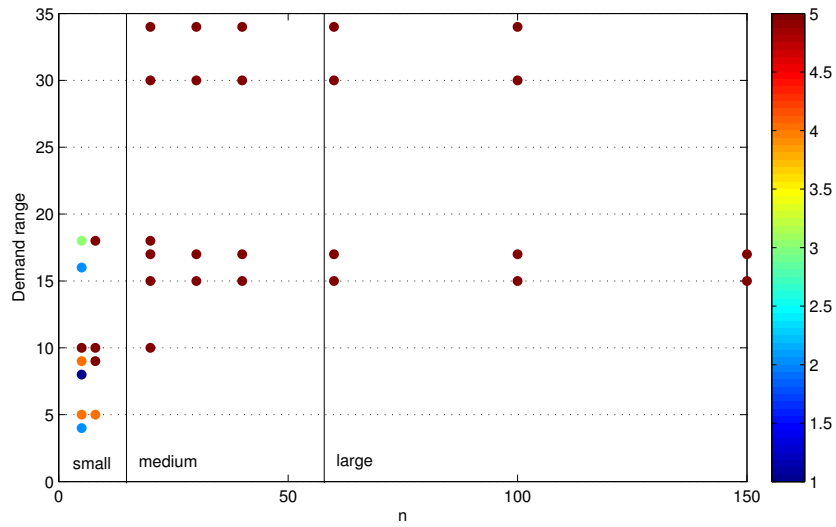


Figure 5-1.: Instance demands.

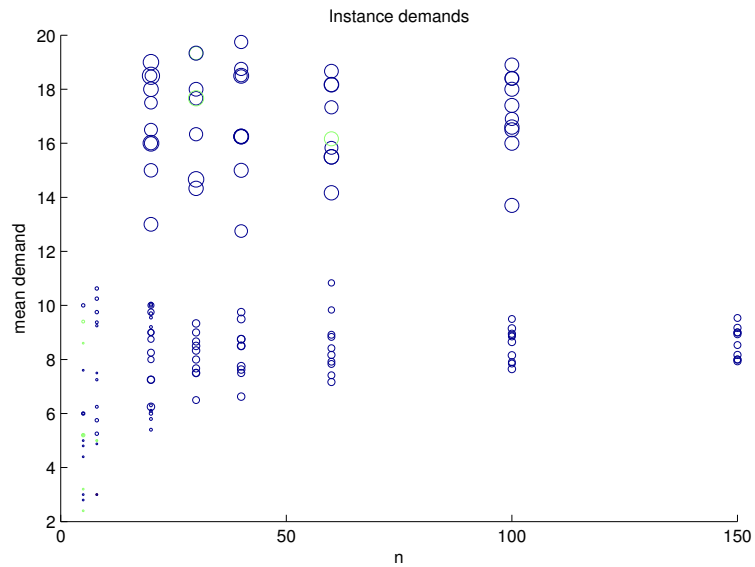


Figure 5-2.: Instance demands. Circles area represents the demand variance

## 5.2. Expected distance algorithm

In Figure 5-3, we show the time taken by algorithm  $\Gamma 1$  to compute the expected distance for each instance. As expected, a higher value of  $n$  and  $Q$  increases the computational cost to compute expected distance.

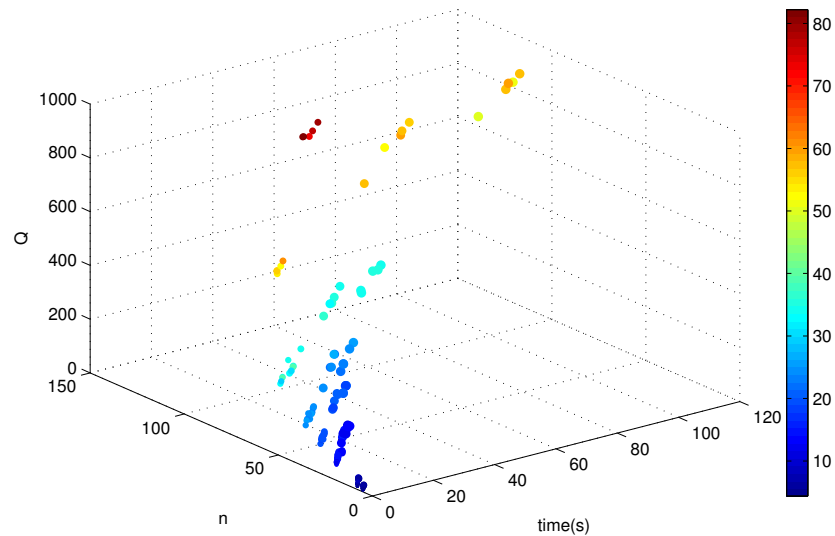


Figure 5-3.: Color shows expected distance to an arbitrary policy.

This algorithm that runs in  $O(nRQ)$  time, is very important for the global solution success and performance, since this computes both the objective function by rollout algorithm and fitness function on the evolutionary algorithm.

### 5.3. Rollout algorithm

In figure 5-4, we put together the running time obtained by the rollout algorithm and  $\Gamma$  algorithm. Thus, we experimentally show the computational cost of the rollout algorithm since this apply  $O(n^2)$  times the  $\Gamma$  algorithm.

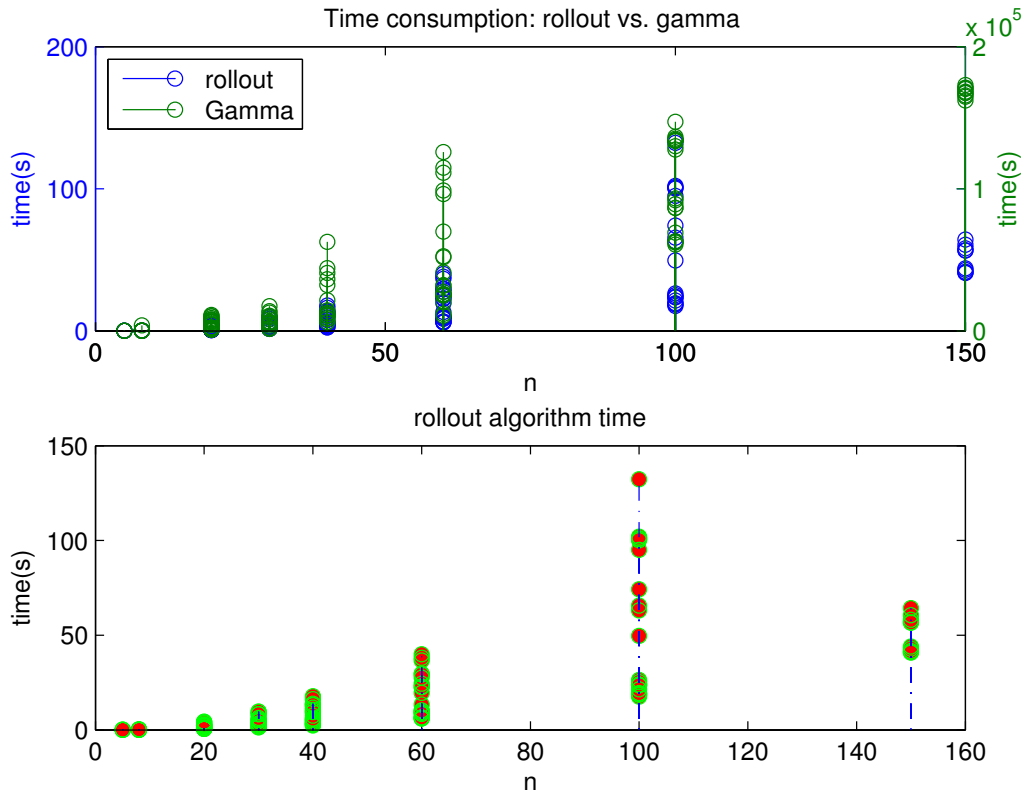


Figure 5-4.: Performance rollout algorithm vs.  $\Gamma$  algorithm

In figure 5-5, we show how an arbitrary policy is improved by rollout algorithm for each instance. The rollout algorithm yields a policy that is better than the a priori solution.

### 5.4. Evolutionary approach

We established the values for the tunable parameters of the genetic algorithm as a result of experimental observations. We selected a stratified sample of 10 instances and ran the basic genetic algorithm between 100 and 10 times for each instance in the sample in order to compute a policy solution. Finally, we selected the values for the parameters where the genetic algorithm obtained the best average outcome.

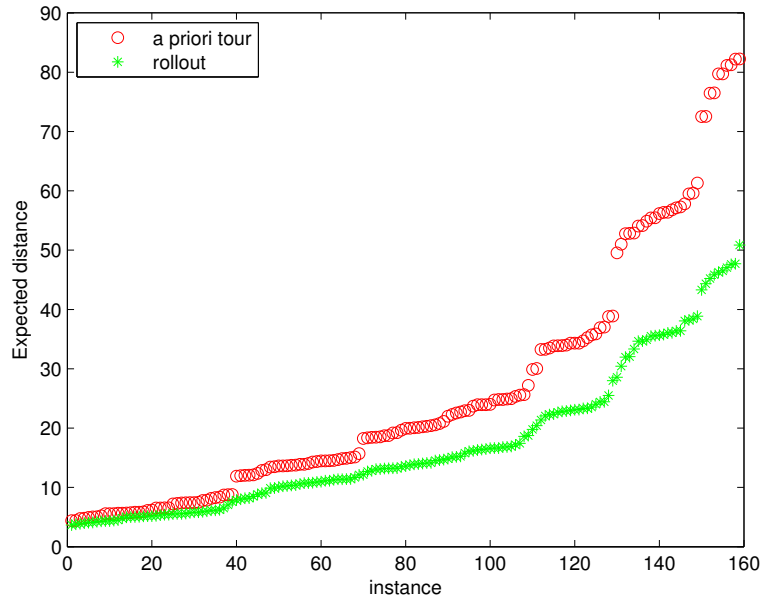


Figure 5-5.: Policies improvement by rollout algorithm

Hence, we defined the probability of mutation as  $Prob_m = 0.04$  and the maximum counting of consecutive iterations without significant changing  $\uparrow$  as 10% of the number of iterations and, the stopping criterion to determine a significance as  $\varepsilon = 1 \times 10^{-3}$ .

Other parameters were fixed to agree with computational capability, such as the number of iterations  $\kappa$  and size of population  $\alpha$ , since we recognized that a greater value for these increases the solutions explored. In concordance with the computational resource available, we took  $\kappa = 60$  and  $\alpha = 0.5$

#### 5.4.1. Evolutionary algorithms performance

In Figure 5-6, we show the basic genetic algorithm outcomes for each problem instance. For small instances the average expected value is 7.44 computed in an average time of 1979 seconds (s), while in medium and large size instances the average expected distance is 16.74 and 36.03 computed in an average time of 13033 s and 96357 s, respectively.

The memetic algorithm finds better average results than the basic genetic algorithm. Due to this, the hybrid genetic algorithm with rollout local search obtained an expected distance of 6.15, 10.99 and 16.67, for small, medium and large size instances, respectively. However, these were computed longer: 11441, 70460 and 123663 average seconds. Figure 5-7 shows the expected distance computed for each instance in contrast with the running time expended. In the behaviour of the genetic algorithms, we observe that if local search is applied, the evolutionary algorithm stops when the number of iterations is achieved, while the basic

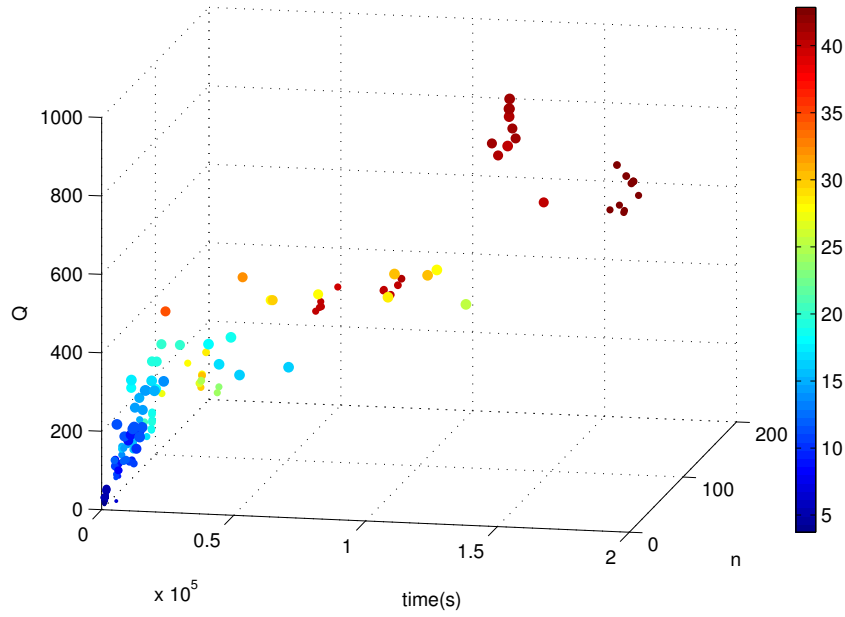


Figure 5-6.: Performance basic genetic algorithm

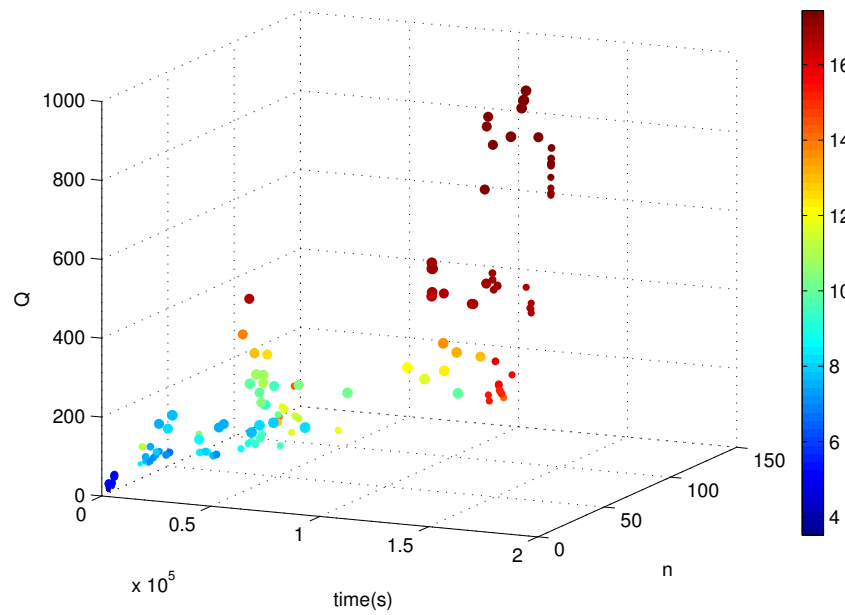


Figure 5-7.: Performance memetic algorithm



genetic algorithm often completes the maximum counting of iterations without significant change. This can be observed in Figure 4-2 in comparison to Figure 4-3.

## 5.5. Comparative results

In the Figure 5-8, we observe that the hybrid evolutionary algorithm beats both basic genetic algorithm as the rollout algorithm. In fact, when instance size increases, the distance between the quality of solutions found by the memetic algorithm and the solutions computed by others also grows.

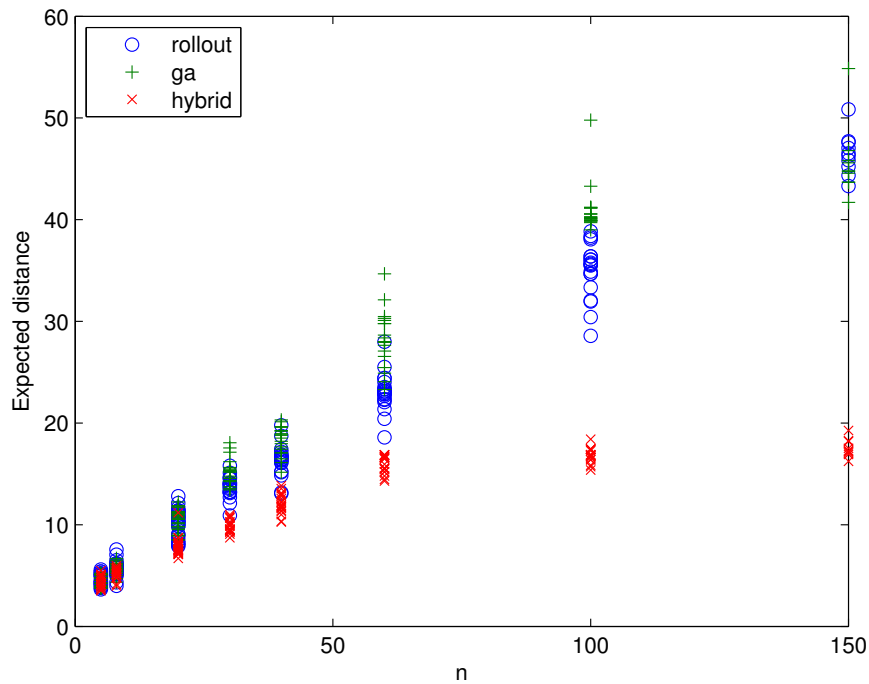


Figure 5-8.: Expected distance computed by rollout algorithm (ra) , basic genetic algorithm (ga) and hybrid evolutionary algorithm (memetic)

Indeed, not only memetic algorithm obtained better results than other algorithms implemented, also its outcomes had have less variability. We can observe this fact in Figure 5-9, where the hybrid evolutionary exhibits less variance in contrast with other techniques.

We ratify these results in Table 5-3, which tabulates descriptive statistics in order to explain the difference between the expected distance computed by each algorithm. In general, the basic genetic algorithm beats the rollout algorithm except, for instances of 5 and 8 customers (small), as well as for 150 customers (large).

In the figure 5-10, we compare the execution time consumed by the evolutionary algorithms.

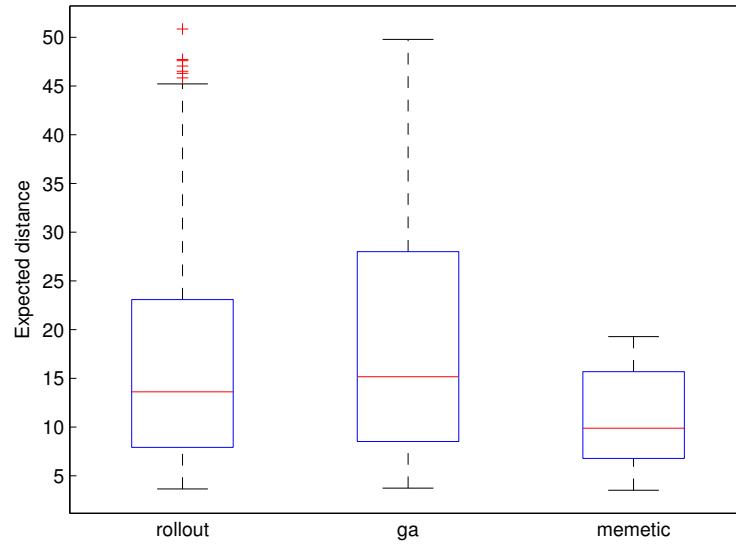


Figure 5-9.: Boxplot for expected distance computed by rollout algorithm (ra) , basic genetic algorithm (ga) and hybrid evolutionary algorithm (memetic)

	n	ga-ra		ra-memetic		ga-memetic	
		mean	desvest	mean	desvest	mean	desvest
	5	-0.126	0.217	0.164	0.203	0.038	0.118
	8	-0.024	0.6	0.522	0.538	0.499	0.446
	20	0.201	1.266	2.425	1.236	2.626	1.023
small		0.046	0.904	1.251	1.356	1.297	1.38
	30	1.486	1.682	3.894	1.404	5.38	1.032
	40	1.964	2.011	4.151	2.251	6.114	1.218
medium		1.725	1.846	4.022	1.856	5.747	1.187
	60	5.198	2.306	7.081	2.232	12.279	2.41
	100	5.372	2.563	17.977	2.804	23.348	0.383
	150	-3.746	2.03	29.287	2.049	25.541	0.131
large		3.479	4.323	15.88	8.708	19.359	6.037
All		1.548	3.027	6.549	8.16	8.096	8.601

Table 5-3.: Differences between expected distances computed by the rollout algorithm, the basic genetic algorithm and the memetic algorithm.

In spite of that basic genetic algorithm often expend less time, the hybrid approach finds a solution employing less time for many large instances.

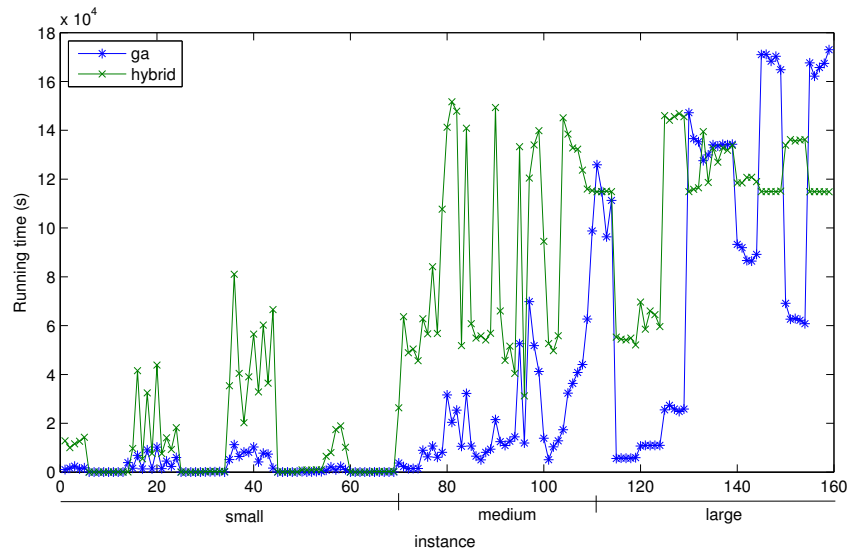


Figure 5-10.: Time performance evolutionary algorithms

## 6. Conclusions

- Although the genetic operators attempt to explore by extending the search space to avoid local optimum, these operators by themselves do not improve the solutions. Hence, it is necessary to focus on local search in order to improve the quality solutions and the convergence.
- When the instances size increase, the distance between the quality of solutions found by the memetic algorithm and the solutions computed by others algorithms increase as well.
- Not only the memetic algorithm results are better than other algorithms' results, but also its outcomes have also less variability.
- The memetic algorithm consumes similar running time in large instances than the basic genetic algorithm, but its results are better.
- Although the hybridization approach increases the computational time cost, this effort is rewarded in many cases given that the quality of the solutions is better than the one obtained when applying the rollout algorithm alone.
- The rollout algorithm is inexpensive in comparison with other techniques.
- The genetic algorithm is more inexpensive than the memetic one in small and medium instances.
- The rollout is better than the basic genetic algorithm since it produces better results by employing less computational resources.
- Local search is the most time-consuming component.
- The expected distance evaluation consumes a lot of execution time. An efficient approximation improves the algorithm performance.
- In the behaviour of the genetic algorithms with small and medium instances, we observe that if local search is applied, the evolutionary algorithm stops when the number of iterations is achieved, rather than with the basic genetic algorithm which often completes the maximum counting of iterations without a significant change. This contrasts with the behaviour that we expected, since local search accelerates the solution

convergence in the memetic algorithm. However, we do observe this behavior in large instances.

- Despite that the basic genetic algorithm often expends less time, the hybrid approach finds a solution employing less time for many large instances. The memetic algorithm can perform less iterations since it obtains an unbeatable solution earlier. This induces the algorithm to stop, since it accomplishes the number of iterations without a significant change.

# A. Algorithms

## A.1. Genetic algorithm parameters

In table **A-1**, we show the parameters used to run the genetic algorithm, also the time consumed by each operator is summarized.

Stage	Parameters	Time	Observations
Initialization	$ P_0  = n$	$O(n)$	Use cyclic heuristic to reduce time.
Crossover		$O(n^2)$	Applied until new population is accomplished.
Mutation	$Prob_m = 0.04$	$O(1)$	Swap two elements of policy randomly selected, flip a random subsequence of policy or shift the policy a random number of times.
Selection		$O(n)$	Individuals which have a better fitness can be chosen with more chance to integrate the new population.
Size of population	$ P_{k+1}  = f(\Delta_{E'}^{P_k}, \alpha)$	$O(1)$	Where $\Delta_{E'}^{P_k}$ is the rate of fitness change in the generation $P_k$ and $\alpha = 0.5$
Halting	$\kappa \in \{60, n\}$ , $\varepsilon = 0.001$ and $m = 0.1n$	$O(1)$	Stop when a number of iterations $\kappa$ is reached or once an $m$ number of consecutive iterations without a significant change i.e., $ \Delta_{E'}^{P_k}  \leq \varepsilon$ is accomplished.

Table A-1.: Genetic algorithm parameters

## B. Results

The matrix in figure **B-1** presents a compilation of interest variables, where each pair of variables is compared with themselves. On the matrix diagonal, a histogram shows the distribution for each variable.

The variables included in the matrix are:

**n** Customers number.

**Q** Vehicle capacity.

**range** Difference between min and max customer demands.

**time ra** Time consumption by the rollout algorithm.

**ed ra** Expected distance obtained by the rollout algorithm.

**time ga** Time consumption by the evolutionary algorithm.

**ed ga** Expected distance mean obtained by the evolutionary algorithm.

**time mem** Time consumption by the memetic algorithm.

**ed mem** Expected distance mean obtained by the memetic algorithm.



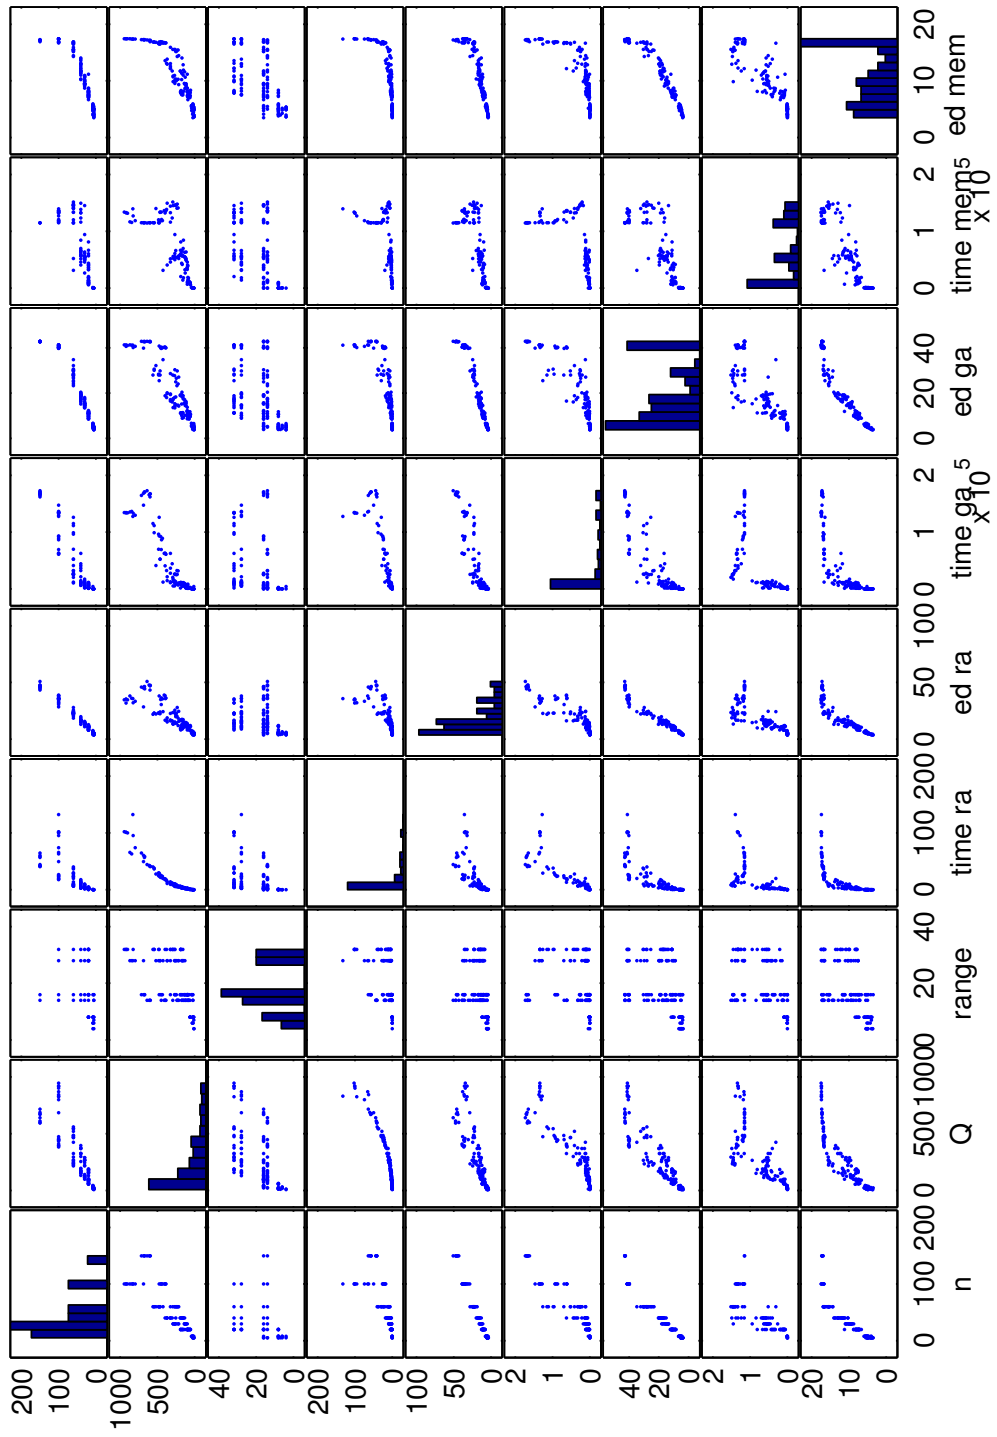


Figure B-1.: Scatter matrix comparing results and times

# Bibliography

- [1] BELLMAN, R.: The theory of dynamic programming. En: *Bull. Amer. Math. Soc* 60 (1954), Nr. 6, p. 503–515
- [2] BERTSEKAS, Dimitri: Dynamic programming and Stochastic Control. En: *Journal of the American Statistical Association* 74 (1979), p. 510–511
- [3] BERTSEKAS, Dimitri P.: *Dynamic Programming and Optimal Control*. Athena Scientific, 1995. – ISBN 9781886529113
- [4] BERTSEKAS, Dimitri P.: *Differential Training Of Rollout Policies*. 1997
- [5] BERTSEKAS, D.P. ; TSITSIKLIS, J.N.: Neuro-dynamic programming. En: *Proceedings of 1995 34th IEEE Conference on Decision and Control* Vol. 1, IEEE. – ISBN 0–7803–2685–7, p. 560–564
- [6] BERTSIMAS, Dimitris J.: A Vehicle Routing Problem with Stochastic Demand. En: *Operations Research* 40 (1992), Mai, Nr. 3, p. 574–585. – ISSN 0030–364X, 1526–5463
- [7] BERTSIMAS, Dimitris J. ; VAN RYZIN, Garrett: A Stochastic and Dynamic Vehicle Routing Problem in the Euclidean Plane. En: *Operations Research* 39 (1991), August, Nr. 4, p. 601–615. – ArticleType: primary\_article / Full publication date: Jul. - Aug., 1991 / Copyright © 1991 INFORMS. – ISSN 0030364X
- [8] BIANCHI, Leonora ; BIRATTARI, Mauro ; CHIARANDINI, Marco ; MANFRIN, Max ; MASTROLILLI, Monaldo ; PAQUETE, Luis ; ROSSI-DORIA, Olivia ; SCHIAVINOTTO, Tommaso: Hybrid Metaheuristics for the Vehicle Routing Problem with Stochastic Demands. En: *Journal of Mathematical Modelling and Algorithms* 5 (2006), April, Nr. 1, p. 91–110
- [9] CHEPURI K., Homem-De-Mello T.: Solving the vehicle routing problem with stochastic demands using the cross entropy method. En: *Annals of Operations Research* 55 (2005), p. 153–181
- [10] CHEUNG, Bernard K.-S. ; CHOY, K.L. ; LI, Chung-Lun ; SHI, Wenzhong ; TANG, Jian: Dynamic routing model and solution methods for fleet management with mobile technologies. En: *International Journal of Production Economics* 113 (2008), Juni, Nr. 2, p. 694–705. – ISSN 0925–5273

- 
- [11] CHRISTIANSEN, Christian H. ; LYSGAARD, Jens: A branch-and-price algorithm for the capacitated vehicle routing problem with stochastic demands. En: *Operations Research Letters* 35 (2007), November, Nr. 6, p. 773–781. – ISSN 0167–6377
- [12] CRINA GROSAN, Ajith A.: Hybrid Evolutionary Algorithms: Methodologies, Architectures, and Reviews. En: ABRAHAM, Ajith (Ed.) ; GROSAN, Crina (Ed.) ; ISHIBUCHI, Hisao (Ed.): *Hybrid Evolutionary Algorithms* Vol. 75. Berlin, Heidelberg : Springer Berlin Heidelberg, 2007. – ISBN 978–3–540–73296–9, Kapitel 1, p. pp 1–17
- [13] DANTZING, G. B. ; RAMSER, J. H. *The Truck Dispatching Problem*. Oct 1959
- [14] DESSOUKY, Maged ; ORDONEZ, Fernando ; JIA, Hongzhong ; SHEN, Zhihong: Rapid Distribution of Medical Supplies. En: *Patient Flow: Reducing Delay in Healthcare Delivery*. 2006, p. 309–338
- [15] DROR, M. ; BALL, M. ; GOLDEN, B.: A computational comparison of algorithms for the inventory routing problem. En: *Annals of Operations Research* 4 (1985), Dezember, Nr. 1, p. 1–23
- [16] DROR, Moshe: Modeling vehicle routing with uncertain demands as a stochastic program: Properties of the corresponding solution. En: *European Journal of Operational Research* 64 (1993), Nr. 3, p. 432–441. – ISSN 0377–2217
- [17] DROR, Moshe: Vehicle Routing with Stochastic Demands: Models & Computational Methods. En: *Modeling Uncertainty, International Series in Operations Research & Management Science*. Springer New York, 2005
- [18] FAN, Jianhua ; WANG, Xiufeng ; NING, Hongyun: A Multiple Vehicles Routing Problem Algorithm with Stochastic Demand. En: *Intelligent Control and Automation, 2006. WCICA 2006. The Sixth World Congress on* Vol. 1, 2006, p. 1688–1692
- [19] GANS, Noah ; VAN RYZIN, Garrett: Dynamic Vehicle Dispatching: Optimal Heavy Traffic Performance and Practical Insights. En: *Operations Research* 47 (1999), Nr. 5, p. pp. 675–692. – ISSN 0030364X
- [20] GENDREAU, Michel ; LAPORTE, Gilbert ; SEGUIN, Rene: An Exact Algorithm for the Vehicle Routing Problem with Stochastic Demands and Customers. En: *TRANSPORTATION SCIENCE* 29 (1995), Mai, Nr. 2, p. 143–155
- [21] GENDREAU, Michel ; LAPORTE, Gilbert ; SGUIN, Ren: Stochastic vehicle routing. En: *European Journal of Operational Research* 88 (1996), Nr. 1, p. 3–12
- [22] GOODSON, JC: *Solution methodologies for vehicle routing problems with stochastic demand*, Tesis de Grado, 2010

- 
- [23] GOODSON, JC: Rollout policies for dynamic solutions to the multivehicle routing problem with stochastic demand and duration limits. En: *Operations Research* 61 (2013), Nr. 1, p. pp. 138–154
- [24] HAGHANI, Ali ; JUNG, Soojung: A dynamic vehicle routing problem with time-dependent travel times. En: *Computers & Operations Research* 32 (2005), November, Nr. 11, p. 2959–2986. – ISSN 0305–0548
- [25] HOLLAND, John H.: *Adaptation in natural and artificial systems: an introductory analysis with applications to biology, control, and artificial intelligence*. University of Michigan Press, 1975. – 183 p.. – ISBN 0472084607
- [26] HRVOJE MARKOVIC, Ivana Cavar Ton?i C.: Using data mining to forecast uncertain demands in stochastic vehicle routing problem. En: *13th International Symposium on Elecronics in Transport (ISEP), Slovenia, 2005*
- [27] JOTHI, Raja ; RAGHAVACHARI, Balaji: Approximating the k-traveling repairman problem with repairtimes. En: *Journal of Discrete Algorithms* 5 (2007), Juni, Nr. 2, p. 293–303. – ISSN 1570–8667
- [28] LAPORTE, Gilbert ; LOUVEAUX, FranÇois V. ; VAN HAMME, Luc: An Integer L-Shaped Algorithm for the Capacitated Vehicle Routing Problem with Stochastic Demands. En: *Operations Research* 50 (2002), Mai, Nr. 3, p. 415–423. – ISSN 0030–364X, 1526–5463
- [29] LENSTRA, J. K. ; KAN, A. H. G. R.: Complexity of vehicle routing and scheduling problems. En: *Networks* 11 (1981), Januar, Nr. 2, p. 221–227. – ISSN 00283045
- [30] MENDOZA, Jorge E. ; CASTANIER, Bruno ; GUÉRET, Christelle ; MEDAGLIA, Andrés L. ; VELASCO, Nubia: A memetic algorithm for the multi-compartment vehicle routing problem with stochastic demands. En: *Computers & Operations Research* 37 (2010), November, Nr. 11, p. 1886–1898. – ISSN 0305–0548
- [31] MORETTI, Rodrigo: Adaptive granular local search heuristic for a dynamic vehicle routing problem. En: *Computers & Operations Research* 36 (2009), p. 2955–2968
- [32] NOVOA, Clara ; STORER, Robert: An approximate dynamic programming approach for the vehicle routing problem with stochastic demands. En: *European Journal of Operational Research* 196 (2009), Juli, Nr. 2, p. 509–515. – ISSN 0377–2217
- [33] SECOMANDI, N.: A rollout policy for the vehicle routing problem with stochastic demands. En: *Operations Research* (2001), p. 796–802
- [34] SECOMANDI, Nicola: *Exact and Heuristic Dynamic Programming Algorithms for the Vehicle Routing Problem with Stochastic Demands*. Houston, TX, Department of Decision and Information Sciences, University of Houston, Tesis de Grado, 1998

- 
- [35] SECOMANDI, Nicola: Comparing neuro-dynamic programming algorithms for the vehicle routing problem with stochastic demands. En: *Computers & Operations Research* 27 (2000), September, Nr. 11-12, p. 1201–1225. – ISSN 0305–0548
- [36] SLATER, Alan: Specification for a dynamic vehicle routing and scheduling system. En: *International Journal of Transport Management* 1 (2002), Februar, Nr. 1, p. 29–40. – ISSN 1471–4051
- [37] TAPAS K. DAS, Martin A. W.: Analysis of asymmetric patrolling repairman systems. En: *European Journal of Operational Research* 64 (1993), p. 45–60
- [38] TIMON C. DU, Eldon Y. L. ; CHOUC, Defrose: Dynamic vehicle routing for online B2C delivery. En: *The international journal of management science* 33 (2004), p. 33–45
- [39] TOTH, Paolo ; VIGO, Daniele: *The vehicle routing problem*. SIAM, 2001. – 385 p.. – ISBN 0898715792, 9780898715798
- [40] YANG, Wen-Huei ; MATHUR, Kamlesh ; BALLOU, Ronald H.: Stochastic Vehicle Routing Problem with Restocking. En: *TRANSPORTATION SCIENCE* 34 (2000), Februar, Nr. 1, p. 99–112