

## A REVIEW OF AMBIENT VIBRATION TECHNIQUE ON BRIDGES

Nurul Shazwin Idris<sup>1, a</sup>, Koh Heng Boon<sup>2, b</sup> and Ahmad Fahmy Kamarudin<sup>3, c</sup>

<sup>1,2,3</sup>Department of Structural and Material Engineering, Universiti Tun Hussein Onn Malaysia, 86400, Parit Raja, Batu Pahat, Johor, MALAYSIA.

<sup>a</sup>nurulshazwin@gmail.com, <sup>b</sup>koh@uthm.edu.my, <sup>c</sup>fahmy@uthm.edu.my

**Keywords:** Dynamic characteristic, ambient vibration, natural frequency,

**Abstracts.** Bridge is one of the important facilities use in daily life as bridge is built to span physical obstacles such as a body of water, valley or road for the purpose of providing passage over the obstacle. Various testing conducted on the bridge in order to know the dynamic characteristics of the bridges. One of popular testing use is ambient vibration test. Ambient vibration is a non-destructive test conducted using highly sensitive sensor. This testing is easy to be conducted with less labour, time and also cost. This paper aim to provide up to date literature review on ambient vibration test on bridge includes sources of ambient vibration, procedure of conducting the measurement and results from ambient vibration test. It is important to know the dynamic characteristics of the bridge especially to determine the dynamic response of the structure and also as dynamic information for seismic design.

### Introduction

Ambient vibration also known as microtremoris the excitation experienced by a structure under its normal operating condition [5]. Examples of ambient vibration test exerted on bridge are traffic vibration, wind, wave motion and seismic excitation. Ambient vibration test conducted to determine the dynamic characteristic of the structure by measuring the vibration behavior using highly sensitive acceleration sensor [18]. The vibration was recorded, evaluated and interpreted under ambient influences without artificial excitation.

Ambient vibration test widely applied to different types of bridges such as double-deck bridge [7], PC box girder bridge [2,6], continuous girder bridge [12], reinforced concrete bridge [6], cable stayed bridge [13] and stone masonry bridge [10]. In order to determine the dynamic characteristics of the bridge by using different kind of sensors such as seismometer and accelerometer to conduct the test.

It is desirable to measure the dynamic characteristics for both newly constructed bridge and for the existing bridge, in terms of natural frequencies, mode shape and modal damping of the bridge to understand better their dynamic behavior under normal traffic loads and also during extreme loads such as those caused by seismic events or high wind [5]. Ambient vibration test have been used for many studies because of many reasons such as simplicity in procedure, relatively fast, low-cost consuming and no disturbance of the traffic when carrying out the test [8]. Besides, this testing is a non-destructive and easy to be conducted with less labour.

From previous earthquake in Loma Prieta, USA (1989), Kobe, Japan (1995), Izmit, Turkey (1999), Chi-chi, Taiwan (1999) have results the extensive damage to transportation facilities such as bridges [8]. Those event shows that bridges could be vulnerable under dynamic loading [13]. Therefore, this paper aim to provide up to date literature review of ambient vibration test on bridge includes sources of ambient vibration, procedure of conducting the test and the test results.

## Sources of Ambient Vibration

Ambient vibration sources are divided into free vibration and forced vibration. All sources are collected using highly sensitive acceleration device sensors such as seismometers and accelerometers. Seismometers collect ambient vibration from free vibration sources, whereas accelerometers collect ambient vibration from both free and forced vibration sources. Generally, it is accepted that seismometers are more reliable to record ambient vibration. Advantages of free vibration sources is that the sources represent the actual operating conditions of the structure which vibrates under its natural excitation loads such as traffic, winds, and microtremors [16]. This paper is focusing on ambient vibration tests from free vibration sources using seismometer sensors.

## Procedure of Conducting Ambient Vibration Test on Bridge

Basically, ambient vibration tests are conducted using several sensor units, cables, and a main body that contains amplifiers and A/D (analogue to digital) converters known as data loggers or measurement stations and a notebook or personal computer type. Ambient vibration is collected using sensitive sensors and all the vibration data is saved into the data logger. The sensor mainly used in the civil infrastructures and particularly for soil records. All the vibration data from the data logger is analyzed using specific software such as Geopsy, ARTeMIS Extractor and other supported software. Fig. 1 shows the devices used for ambient vibration tests.

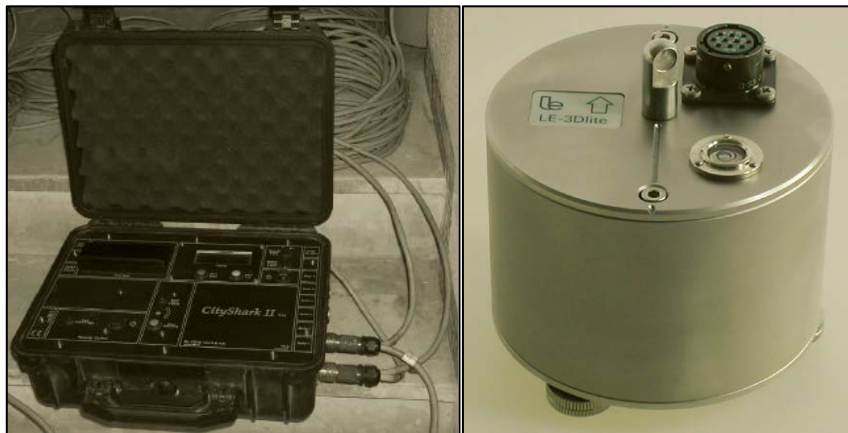


Fig. 1: CityShark II data logger and seismometer Lennartz LE3Dlite [1]

Ambient vibration tests are conducted by installation of sensors at different locations on the bridge deck and all real-time response data is recorded through the data logger simultaneously. Depending on the number of sensors used. Fig. 2 shows the location of eight units of sensor for ambient vibration tests. Each test is conducted for 15-30 minutes [8]. The longer recording times increase the amount of usable data. For every test, ambient vibration is collected from three directions which are vertical (Z), lateral (NS) and longitudinal (EW) directions. The sampling frequency varies from 10-100 Hz according to the selected rate.

There are no specific methods or guidelines to conduct ambient vibration tests on bridges, but some interests need to be concerned as described in Wenzel & Pichler (2005):

- 1) The acceleration sensors must be arranged in such a way that sufficient number of points along the system lines of the structure to be examined is covered for the determination of the mode. In particular, inconstant points (joints and coupling spots) need to be instrumented.
- 2) Sensors are repeatedly rearranged, with reference sensor always remaining at the same spot in order for the individual signals to refer to each other and. The reference sensor positions need to

be considered as to obtained clear reference signal for the identification of higher natural vibration form.

- 3) Mid-points of the main field are unsuitable as reference locations because a node often already exist at the second vertical bending vibration point.
- 4) It is advantages if the tests are carried out at the both sides of the structure in order to be able identify torsion modes clearly.
- 5) It is sufficient to have sensor working in parallel in order to obtain information regarding the vibration behavior at the corresponding Eigen frequency.

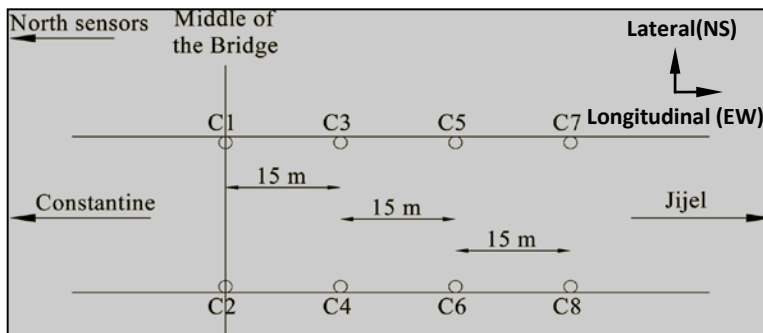


Fig. 2: Location of sensor for ambient vibration test [8]

### Result from Ambient Vibration Test

The analysis response of the bridge to ambient vibration consisted of computation of Fourier spectra for different window taken from the response signal. Responses signal from ambient vibration test enables prediction of the bridge dynamic characteristic in term of natural frequencies. Fig. 3 shows example of waveform from bridge testing on Mila-Algeria cable stayed bridge.

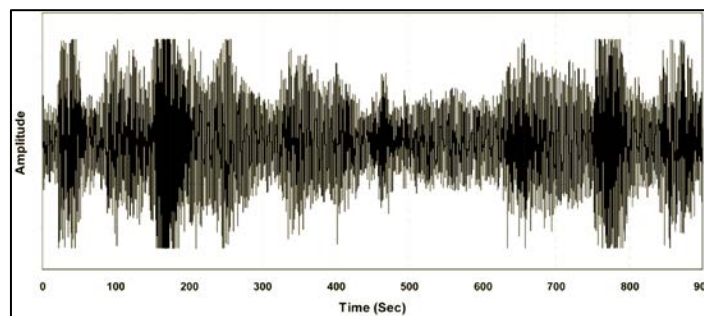


Fig. 3: Recorded ambient vibration on bridge (Kibboua & Farsi, 2008)

The dynamic response analyzed by selecting windows from the recorded signal. The signal must approach as much possible the characteristic of a white noise record. Spectral amplitude for each window was computed through Fourier transform. Computed spectra are smoothed through a sliding window which the form and the width depend on the frequency [9]. Finally, the obtained spectra are averaged and their standard deviation determined.

The recorded signal enable the identification of the bridge natural frequencies ( $f_0$ ). Natural frequencies ( $f_0$ ) can be obtained by locating the peaks corresponding to maximum responses as illustrated in Fig 4. The mode of frequencies of the tested bridge obtained through the record at different location peaks [2,8]. From the mode of frequencies, the identification of vibration mode shape can be obtained for each natural frequency. The mode shape corresponds to the deflected shape when the structure vibrating at that frequency [15].

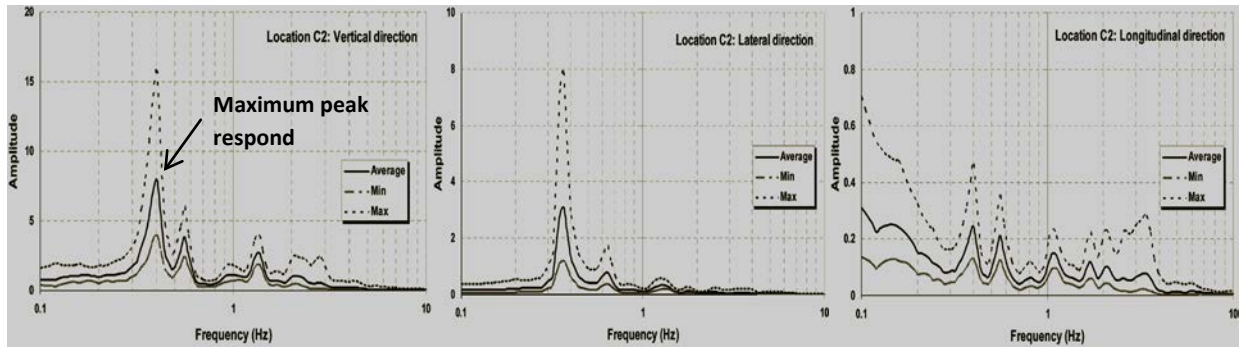


Fig.4: Fourier spectra on bridges for vertical, lateral and longitudinal direction [8]

From the example above it shows six mode of frequencies were identified in the range 0 to 1 Hz. The first vertical mode is 0.36 Hz and the first longitudinal mode is 0.38 Hz and the first mode lateral is 0.39 Hz. Table 1 shows experimental natural frequencies of the bridge. To confirmed the result from ambient vibration is acceptable, most of the researcher use finite element modeling to compared the natural frequencies values.

Table 1: Identified experimental natural frequencies [8]

Mode	Frequencies (Hz)	Direction
1	0.36	Vertical (Z)
2	0.38	Longitudinal (NS)
3	0.39	Lateral (EW)
4	0.56	Lateral (EW)
5	0.55	Longitudinal (NS)
6	0.63	Vertical (Z)

## Conclusion

As a conclusion it is proven that using ambient vibration dynamic behavior of the bridges in term of mode of frequency can be determined. Identification of dynamic characteristic is important to predict the dynamic response of the structure and also as dynamic information for seismic design

## Acknowledgement

A lot of thank to my supervisor who improvise us on doing this paper and also to my entire beloved lecturer, friend and especially to my family to support and encourage me to finished this paper. Lots of thank also to Universiti Tun Hussein Onn Malaysia in providing the financial support for this research.

## References

- [1] Chatelain, J., Guillier, B., Guéguen, P., Fréchet, J., & Sarrault, J. (2012). Ambient Vibration Recording for Single-Station, Array and Building Studies Made Simple: CityShark II, International Journal of Geosciences. 2012. 3(6A): 1168–1175.
- [2] Citak, S. O., Ogori, M., & Nakamura, T. (2012). Microtremor Measurements And Earthquake Response Analysis On Urado Bridge, Kochi, Japan.
- [3] Duval, A., Chatelain, J., & Guillier, B. (2004). Influence Of Experimental Condition For «HV» On Ambient Noise Vibration Method. 13<sup>th</sup> World Conference on Earthquake Engineering, Vancouver, Canada: 306.

- [4] Fah, D., Wathelet, M., Kristekova, M., Havenith, H., Endrun, B., Stamm, G., Poggi, V., Burjanek, J., Cornou, C. (n.d.). Report Using Ellipticity Information for Site Characterisation Using Ellipticity Information for Site Characterisation.
- [5] Farrar, C.R., & James III, G. H. (1997). System Identification From Ambient Vibration Measurements On A Bridge. *Journal of Sound and Vibration*. 205, 1–18.
- [6] Farrar, C.R, Duffey, T. A., Cornwell, P. J., & Doebling, S. W. (1984). Excitation Methods For Bridge Structures. 1063–1068.
- [7] Graves, R. L. S. M. G. R. C., Harison, J., & Gawry, M. J. (1997). Free and Ambient Vibration of Brent-Spence Bridge By I. E. Harik. 1262–1268.
- [8] Kibboua, A., & Farsi, M. N. (2008). Modal analysis and ambient vibration measurements on Mila-Algeria cable stayed bridge. 29(2): 171–186.
- [9] Konno, K. and Ohmachi, T. (1998). "Ground-Motion Characteristics Estimation from Spectral Ratio between Horizontal And Vertical Component Microtremor", *Bull Seismol.Soc.Am.* 88(1), 228-241
- [10] Krstevska, L. S., Kustura, M., & Tashkov, L. A. Experimental In-Situ Testing Of Reconstructed Old Bridge In Mostar, The 14th World Conference On Earthquake Engineering. October 12-17. Beijing, China. 2008.1-8.
- [11] Negulescu, C., Luzi, G., Crosetto, M., Raucoules, D., Roullé, A., Monfort, D., Pujades, L., Colas, B., Dewez, T. (2013). Comparison Of Seismometer and Radar Measurements for the Modal Identification of Civil Engineering Structures. *Engineering Structures*, 51, 10–22.
- [12] Ren, W., Peng, X. & Lin, Y. (2005). Experimental and analytical studies on dynamic characteristics of a large span cable-stayed bridge. *Engineering Structures*, 27(4), 535–548.
- [13] Ren, W., Zatar, W., & Harik, I. E. (2004). Ambient vibration-based seismic evaluation of a continuous girder bridge, 26, 631–640.
- [14] Sherif, B., Liam, W., & Quincy, T. M. (2013). System Identification of a 13-Story Reinforced Concrete Building Through Ambient and Forced. 4th ECCOMAS Thematic Conference on Computational Methods in Structural Dynamics and Earthquake Engineering.
- [15] Salawu, O. S., & Williams, C. (1995). Review of full-scale dynamic testing of bridge structures. *Engineering Structures*, 17(2), 171-186.
- [16] Siringoringo, D. M., Fujino, Y., Asce, M., & Nagayama, T. (2013). Dynamic Characteristics of An Overpass Bridge in a Full-Scale Destructive Test, (June), 691–701.
- [17] Smaoui, H., Cherif, F., Bahlous, S., & Ghrairi, A. (2004). Modal Identification And Finite Element Model Updating Of A Reinforced Concrete Bridge, 9(2), 29–34.
- [18] Uehan, F., & Meguro, K. (2008). Vulnerability Evaluation of Jacketed Viaduct Using Microtremor Measurement & Numerical Simulation, 1–8.
- [19] Wenzel, H., & Pichler, D (2005). *Ambient Vibration*. Unite Kingdom: John Wiley & Sons, Ltd. 2005.