



UNIVERSITI PUTRA MALAYSIA

**DESIGN AND DEVELOPMENT OF A MOBILE SOIL PROFILE
DIGITIZER**

WEE BENG SUI.

FK 2004 42

**DESIGN AND DEVELOPMENT OF A MOBILE SOIL PROFILE
DIGITIZER**

By

WEE BENG SUI

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia, in
Fulfillment of Requirements for the Degree of
Master of Science**

March 2004



DEDICATED TO

HIS PARENTS, BROTHERS AND SISTER



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment
of the requirement for Degree of Master of Science

**DESIGN AND DEVELOPMENT OF A MOBILE-TYPE 2 AXIS LASER
SURFACE SOIL PROFILE DIGITIZER**

By

WEE BENG SUI

March 2004

Chairman : Associate Professor Dr. Azmi HJ Yahya, Ph.D.

Faculty : Engineering

This study describes the design and development of an automated, mobile-type 2-axis laser soil surface profile digitizer for 3D mapping of soil surface. The construction of the digitizer consists of 2 main parts, the measurement apparatus and a special design trailer. The measurement apparatus provides the non-contact soil surface digitizing and the special design hydraulically powered open-base trailer is used for transporting, uplifting or releasing the measurement apparatus during field operation. The digitizer was pulled by a Massey Ferguson 3060 Instrumented agricultural tractor. Three PLC controlled stepper motors and 3 sets of precision ball screw carriage mechanism were used to drive the sensor in 2-axis of digitizing direction. Dewe-2010 PC Instrument was employed to perform the data acquisition and user control task for the digitizer. The simplified method of the user control interface integrates the concept of touch-screen virtual control panel built on DasyLab[®] V5.5 programming platform. The Digitizer was capable to digitize a maximum area of 1.05m x 1.8m with an adjustable digitizing speed, digitizing interval and digitizing area to suit with the required operation time and output resolution. Field tests were

conducted to determine adequate digitizing speed and digitizing interval for the digitizer, and also to evaluate the significant of tillage operations, tractor travel speeds and rotary tiller's speeds with respect to average elevation height, Degree of Tilt, and Random Roughness Index of the soil surface profile, and sensing error of the digitizer. Result from field test showed that implement types, tractor travel speed, and rotary tiller speed had significant effects on random roughness index of the soil surface profile. Implement types had only significant effect on the sensing error of the digitizer and rotary tiller speed had only significant effect the Degree of Tilt of the soil surface profile.



Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Master Sains

**MEREKABENTUK DAN MEMBINA SEBUAH ALAT PENDIGITALAN
PROFIL PERMUKAAN TANAH LASER 2-PAKSI DAN MUDAH-ALIH**

Oleh

WEE BENG SUI

Mac 2004

Pengerusi : Profesor Madya Azmi Hj. Yahya, Ph.D.

Faculty : Kejuruteraan

Kajian ini melibatkan rekabentuk dan pembangunan sebuah alat pendigitalan profil permukaan tanah laser 2-paksi jenis automatik dan mudah-alih untuk pemetaan 3-dimensi permukaan tanah. Pembinaan alat pendigitalan ini terdiri daripada 2 bahagian utama, iaitu alat pengukuran dan sebuah treler yang direkabentuk khas. Alat pengukuran tersebut memainkan peranan sebagai alat pendigitalan permukaan tanah tanpa-sentuh, manakala treler khas dengan kuasa hidraul serta permukaan bawah terbuka pula memainkan peranan untuk mengangkut, menaikkan, dan menurunkan alat pengukuran tersebut semasa pengendalian di ladang. Alat pendigitalan ini ditarik oleh sebuah traktor pertanian Massey Ferguson 3060 yang dilengkapi dengan sistem instrumentasi. Tiga motor lelangkah yang dikawal oleh PLC dan 3 set mekanisme pembawa jenis skrew bebola persis diguna untuk memacu penderia dalam 2 arah paksi pendigitalan. Perkakas PC Dewe-2010 digunakan untuk perolehan data serta kawalan untuk alat pendigitalan. Kaedah kawalan-mudah tersebut menggunakan konsep skrin-sentuh maya yang berasaskan pengaturcaraan DasyLab[®] V5.5. Alat pendigitalan ini berupaya untuk mendigitalkan keluasan maximum bersaiz 1.05m x 1.80m dengan keupayaan mengubah kelajuan pendigitalan, julat pendigitalan serta keluasan pendigitalan



untuk disesuaikan dengan masa pengendalian dan resolusi keluaran. Ujian ladang dijalankan untuk menentukan laju serta julat pendigitalan yang sesuai bagi alat pendigitalan tersebut, dan juga untuk menilai kesan operasi pembajakan, kelajuan traktor, dan kelajuan alat bajak putar ke atas purata ketinggian, Darjah Kegemburan, dan Index Kekasaran Rawak bagi profile permukaan tanah, serta juga ralat penderiaan bagi alat pendigitalan. Keputusan ujian ladang menunjukkan jenis pembajak, kelajuan traktor, dan kelajuan alat bajak putar memberikan kesan yang nyata hanya kepada Index Kekasaran Rawak bagi profil permukaan tanah. Manakala hanya jenis pembajak memberikan kesan yang nyata kepada ralat penderiaan bagi alat pendigitalan dan hanya kelajuan alat bajak putar memberikan kesan yang nyata kepada Darjah Kegemburan.

ACKNOWLEDGEMENTS

This work was carried out with a hope to contribute towards the expansion of the knowledge on precision agriculture. The completion of this thesis would have been impossible if not for the assistance and direct involvement of many kind-hearted individuals. I am very much indebted to all my mentors and have no way of repaying such a debt except to express my sincerest gratitude.

First and foremost, I am very grateful to my supervisor, Assoc. Prof. Ir. Dr. Azmi Dato' Yahya, for his valuable comments, patience, guidance, and strong support for the very enriching and thought-provoking discussions which helped to shape the thesis. He was always there to help whenever needed throughout my engagement on this project. Next, I would also like to thank the other 2 members in my supervisory committee; Mr. Isa Othman and Dr. Bambang Sunarjo Suparjo for the kindly contributions, feedback, and comment during the examination of my project.

Acknowledgement is also extended to MOSTE for my granting the financial support for my master degree study. For all the lecturers and staffs of the Department of Biological and Agricultural Engineering, Universiti Putra Malaysia, thanks for giving me fully commitment and co-operation during the process of doing my Masters degree project.

I am also indebted to Dr. A. F. Kheiralla who has given various discussions and suggestions which contributed a lot towards the improvement of my final



manuscript. My heartfelt thanks also go to Roshdi Zamri, Gew Soon Kiat, Ng Eng Boon, Nar Hai Sin, Athur, Darius, Tan Chye Hee, and all my fellow friends for their sacrifices, encouragement, and generous co-operation throughout my project.

Thanks are extended to Mr. P. C. Tuang of MAC Engineering Sdn. Bhd. and Mr. William Wu of UEW Sdn. Bhd. for their assistance in the fabrication process of my project. My gratitude is also due to University Agriculture Park (TPU) for granting us the permission to conduct the field test in the corn field of Universiti Putra Malaysia.

I am forever indebted to my beloved family members for their understanding and everlasting love and care during the course of my study.



I certify that an Examination Committee met on 12th March 2004 to conduct the final examination of Wee Beng Sui on her Master of Science thesis entitled “Design and Development of a Mobile Soil Profile Digitizer” in accordance with Universiti Pertanian Malaysia (Higher Degree) Act 1980 and Universiti Pertanian Malaysia (Higher Degree) Regulations 1981. The Committee recommends that the candidate be awarded the relevant degree. Members of the Examination Committee are as follows:

Ir. DESA AHMAD, Ph.D.

Professor
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

AZMI DATO' HJ. YAHYA, Ph.D.

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

ISA OTHMAN

Center of Mechanization and Automation
Malaysian Agricultural Research and Development Institute (MARDI)
Serdang
(Member)

BAMBANG SUNARYO SUPARJO, Ph.D.

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)



GULAM RUSUL RAHMAT ALI, Ph.D.

Professor/Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 17 JUN 2004




This thesis submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirements for the degree of Master of Science. The members of the Supervisory Committee are as follows:

AZMI HJ YAHYA, Ph.D.
Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

ISA OTHMAN
Center of Mechanization and Automation
Malaysia Agriculture Research and Development Institute (MARDI)
(Member)

BAMBANG SUNARJO SUPARJO, Ph.D.
Faculty of Engineering
Universiti Putra Malaysia
(Member)




AINI IDERIS, Ph.D.
Professor/Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 29 JUL 2004

DECLARATION FORM

I hereby declare that the thesis is based on my original work except for quotations and citations which have been duly acknowledged. I also declare that it has not been previously or concurrently submitted for any other degree at UPM or other institutions.



WEE BENG SUI

Date: 15/05/2004

TABLE OF CONTENTS

| | Page |
|------------------|------|
| DEDICATION | i |
| ABSTRACT | ii |
| ABSTRAK | iv |
| ACKNOWLEDGEMENTS | vi |
| APPROVAL | viii |
| DECLARATION | x |
| LIST OF TABLES | xiii |
| LIST OF FIGURES | xv |

CHAPTER

| | | |
|------------|--|----|
| I | INTRODUCTION | |
| | 1.1 Justification | 1 |
| | 1.2 Objectives | 3 |
| II | LITERATURE REVIEW | |
| | 2.1 Soil Surface Roughness | 5 |
| | 2.2 Soil Surface Profile Measurement Instruments | 18 |
| III | MATERIALS AND METHODS | |
| | 3.1 Design Consideration of the Digitizer | 33 |
| | 3.2 General Configuration of the Digitizer | 33 |
| | 3.3 Measurement Apparatus | 36 |
| | 3.4 Trailer | 38 |
| | 3.5 Motion Control System of Measurement Apparatus | 40 |
| | 3.6 Instrumentation System of Measurement Apparatus | 45 |
| | 3.7 Electrical Power Supply of Measurement Apparatus | 48 |
| | 3.8 Digitizer Mechanical Setup | 54 |
| | 3.9 Digitizer Software Setup | 57 |
| | 3.10 Calibration of Elevation Measurement of the Sensor | 58 |
| | 3.11 Laboratory Digitizing Experiment of the Digitizer | 60 |
| | 3.12 Formulas for Quantifying Soil Surface Profile and Sensing Error | 60 |
| | 3.13 Calibration of Digitizing Interval of the Digitizer | 64 |
| | 3.14 Soil Surface Roughness Resulted from Disk Plow, Moldboard Plow, Disk Harrow, and Rotary Tiller | 64 |
| | 3.15 Soil Surface Roughness Resulted from a Rotary Tiller Operated at Different Tractor Travel Speed and Rotary Tiller Speed | 66 |
| IV | RESULTS AND DISCUSSIONS | |
| | 4.1 Calibration of Elevation Measurement of the Sensor | 68 |
| | 4.2 Laboratory Digitizing Demonstration of the Digitizer | 74 |



| | | |
|----------|---|-----|
| 4.3 | Calibration of Digitizing Interval of the Digitizer | 74 |
| 4.4 | Soil Surface Roughness Resulted from Disk Plow, Moldboard Plow, Disk Harrow, and Rotary Tiller | 78 |
| 4.5 | Soil Surface Roughness Resulted from a Rotary Tiller Operated at Different Tractor Travel Speed and Rotary Tiller Speed | 88 |
| V | CONCLUSIONS | 98 |
| | BIBLIOGRAPHY | 102 |
| | APPENDICES | 107 |
| A | Overall Dimensions of the Laser Soil Surface Profile Digitizer | 108 |
| B | Selection Charts of Linear Bushing Sizes | 109 |
| C | Selection Charts of Ball Screw and Nut Sizes | 118 |
| D | Selection Charts of Stepper Motor Sizes | 123 |
| E | Data Sheet of Pacific Scientific MA6410 Stepper Motor Driver | 139 |
| F | Data Sheet of Wenglor YT 33 MGV 80 Laser Displacement Sensor | 148 |
| | BIODATA OF THE AUTHOR | 149 |



LIST OF TABLES

| Table | | Page |
|--------------|---|-------------|
| 2.1 | Average Random Roughness value for different tillage operation | 7 |
| 2.2 | Random Roughness Index and estimated amount of soil erosion | 16 |
| 4.1 | ANOVA for sensor output voltage | 70 |
| 4.2 | Duncan multiple-range test on the sensor mean output voltage with different colored surfaces | 70 |
| 4.3 | Regression equations for sensor output voltage with different surface colors | 71 |
| 4.4 | Regression analysis for sensor voltage output for common surface colors | 71 |
| 4.5 | Verification of sensor measured voltage output against the predicted voltage output | 71 |
| 4.6 | Average elevation height, Degree of Tilth, Random Roughness Index at varying digitizing intervals | 77 |
| 4.7 | ANOVA for average elevation height, Degree of Tilth, Random Roughness Index at varying digitizing intervals | 78 |
| 4.8 | Soil properties, soil surface profile, and sensing error for different tillage operations | 80 |
| 4.9 | ANOVA for average elevation height, Degree of Tilth, Random Roughness Index, and sensing error when subjected to different tillage implements | 83 |
| 4.10 | Duncan's multiple-range test on Random Roughness Index when subjected to different tillage implements | 84 |
| 4.11 | Duncan's multiple-range test on sensing error when subjected to different tillage implements | 84 |
| 4.12 | Soil moisture content, soil cone index, and soil shear strength for different tilling configuration | 91 |



| | | |
|------|--|----|
| 4.13 | ANOVA of average elevation heights when subjected to different tractor travel speed and rotary tiller speed | 91 |
| 4.14 | ANOVA of Degree of Tilth when subjected to different tractor travel speed and rotary tiller speed | 91 |
| 4.15 | Duncan's test on Degree of Tilth when subjected to different rotary tiller speed | 92 |
| 4.16 | ANOVA of Random Roughness Index when subjected to different tractor's travel speed and rotary tiller speed | 92 |
| 4.17 | Duncan's test on Random Roughness Index when subjected to different tractor travel speed | 92 |
| 4.18 | Duncan's test on Random Roughness Index when subjected to different rotary tiller speed | 93 |
| 4.19 | ANOVA of sensing error when subjected to different tractor travel speed and rotary tiller speed | 93 |
| 4.20 | Orthogonal regression analysis of Random Roughness Index with different tractor travel speed and rotary tiller speed | 95 |
| 4.21 | Orthogonal regression analysis of Random Roughness Index with different tractor travel speed and bite length | 96 |



LIST OF FIGURES

| Figure | | Page |
|--------|--|------|
| 2.1 | Random Roughness Measurement | 6 |
| 2.2 | Shelter Angle Concept | 13 |
| 2.3 | Clod Sizes and Its Equivalent Random Roughness Index | 15 |
| 2.4 | A Chain-Method Contact-Type Profile Meter | 19 |
| 2.5 | A Paper and Paint Contact-Type Profile Meter | 19 |
| 2.6 | A Multiple Pins Contact-Type Profile Meter | 21 |
| 2.7 | Experimental Instrumentation for Stereoscopic Measurements | 28 |
| 2.8 | Long Profiling Instruments | 28 |
| 2.9 | A Portable Tillage Profile | 30 |
| 2.10 | 3-dimensional Schematic Diagram of Instantaneous Profile Laser Scanner | 31 |
| 2.11 | Instantaneous Profile Laser Scanner in Outdoor Use | 31 |
| 3.1 | General Configuration of the Digitizer | 35 |
| 3.2 | Measurement Principle of Laser Displacement Sensor | 35 |
| 3.3 | CAD Illustration of the Measurement Apparatus | 39 |
| 3.4 | CAD Illustration of the Trailer | 39 |
| 3.5 | The Hydraulic Circuit for the Trailer | 40 |
| 3.6 | The Complete Configuration of the PLC Unit | 41 |
| 3.7 | Stepper Motors and Inductive Proximity Sensors Location | 44 |
| 3.8 | Wiring Configuration of 37 Pin D-sub Male Connector | 44 |
| 3.9 | Complete Motion Control Circuit Diagram | 46 |
| 3.10 | Three-beams Correction Principle of Wenglor® YT33MGV | |



| | | |
|---------|--|----|
| | Laser Displacement Sensor | 49 |
| 3.11 | Wiring Configuration for 9 Pin D-sub Male Connector | 49 |
| 3.12 | DAQx-V module on Dewe-2010 PC Instrument | 50 |
| 3.13 | Instrumentation Cabinet | 50 |
| 3.14 | Pictorial Programming on DaisyLab® | 51 |
| 3.15 | Layout of Touch-screen Virtual Control Panel | 51 |
| 3.16 | Complete Instrumentation System Circuit Diagram | 52 |
| 3.17(a) | The Yanmar LA-series Generator | 53 |
| 3.17(b) | The Yanmar LA-series Generator on the MF 3060 Tractor | 53 |
| 3.18 | The Power Outlet Distribution Cabinet in the MF 3060 Tractor | 54 |
| 3.19 | The Complete Circuit Diagram of Electrical Power Supply of Measurement Apparatus | 55 |
| 3.20 | Digitizer Alignment Setup Parameters | 56 |
| 3.21 | Calibration of the Laser Displacement Sensor | 59 |
| 3.22 | Digitizing of an Egg Pad | 61 |
| 3.23 | Degree of Tilt Measurement | 63 |
| 3.24 | The Tilling Configuration of Rotary Tiller Experiment Plot | 67 |
| 4.1 | Calibration Curve for Output Voltage of the Sensor on Colored Surfaces | 72 |
| 4.2 | Verification Curve for Output Voltage of the Sensor on Type I Colored Soil Surface | 72 |
| 4.3 | Verification Curve for Output Voltage of the Sensor on Type II Colored Soil Surface | 73 |
| 4.4 | Verification Curve for Output Voltage of the Sensor on Type III Colored Soil Surface | 73 |
| 4.5 | The DEM Model of the Egg Pad | 75 |
| 4.6 | The Actual Surface Profile of Egg Pad | 75 |
| 4.7 | Bar Chart of Average Elevation Height, Degree of Tilt, and | |



| | | |
|------|--|----|
| | Random Roughness Index for Different Tillage Operations | 80 |
| 4.8 | DEM Model of Soil Surface Profile Produced by Disk Plow | 85 |
| 4.9 | DEM Model of Soil Surface Profile Produced by Moldboard Plow | 85 |
| 4.10 | DEM Model of Soil Surface Profile Produced by Disk Harrow After Disk Plow | 86 |
| 4.11 | DEM Model of Soil Surface Profile Produced by Rotary Tiller After Moldboard Plow | 86 |
| 4.12 | DEM Model of Soil Surface Profile Produced by Disk Harrow After Moldboard Plow | 87 |
| 4.13 | DEM Model of Soil Surface Profile Produced by Rotary Tiller After Disk Plow | 87 |
| 4.14 | Three-Dimensional Plot of Random Roughness Index with Different Tractor Travel Speed and Rotary Tiller Speed | 96 |
| 4.15 | Three-Dimensional Plot of Random Roughness Index with Different Tractor Travel Speed and Bite Length | 97 |



CHAPTER I

INTRODUCTION

1.1 Justification

Soil as one of the most important natural resources, has been damaged by erosion and agricultural practices. Tillage as one of the important and delicate phases in seedbed preparation, has contributed a significant effect to the soil physical properties. Excessive tillage, which is an unfortunate habit of Malaysian farmers, causes considerable damage to the soil structure. To sustain a productive and profitable agriculture, the present conventional soil management system need to be re-evaluated, and a precise and scientifically proven method has to be applied in modern soil management system. Therefore, it is important to identify an optimal tillage conditions in accordance to the crop growth requirements, soil conservation's level, and the machine operation economics. To achieve the above objective, it is necessary to identify one or more precise parameters describing the degree of roughness, that can be utilized not only within experimental boundaries, but also to check with the work quality and correctly regulated implements in the field (Sandry et al.,1998).

Various concepts of quantifying soil surface roughness has been proposed and tested by the agricultural researchers all around the world in the efforts of searching the most appropriate, precise, consistent, reliable, time saving, and user friendly measurement methodology. Various roughness indexes have also been proposed for the study of soil surface roughness. Romkens and Wang (1986)

describe four categories of soil roughness. The first category is the roughness due to individual particles or aggregates in the order of 0 to 2mm in magnitude. The second category is the roughness due to the clod size in the surface variation in the order of 100mm in the magnitude. The third category is the roughness due to plowing effect of the tillage implements on the terrain surface, which is in the order of 100mm to 300mm in magnitude. The fourth category is the higher order roughness due to field topography in the order of more than 300-mm in the magnitude. The second and third category of roughness is are those, which change most rapidly due to weathering and tillage and are the importance-measured parameters in this study.

Even though various soil surface roughness indexes have been used and proposed, all these parameters are based on the common principal of measuring soil surface elevations at selected intervals to form a Digital Elevation Model (DEM). DEM is a computer representation of a surface morphology. Basically, this is a grid of points where each point has an altitude. Two types of commonly used DEM is a macro DEM where each point size is greater than 1m, and micro DEM where each point size is less than 100mm. This study will concentrate only on the micro DEM since micro DEM gives a significant effect to soil surface roughness and erosion due to tillage implement.

However, the recent designed and developed measurement apparatus for measuring soil surface roughness are still not perfect and needs some modifications. The sensing device of the recent instrumentation system uses a dedicated pair of laser beam emitter and beam receiver, which is quite complicated to be aligned and need field calibration for each operation. These measurement apparatus also need to

be in-field assembly, which can be a time consuming process. The control and data acquisition system of these measurement apparatus also utilizes a dedicated personal computer (PC), power generator, and signal analyser, which can be quite messy and time consuming cabling process during operation. A large-scale measurement apparatus of this kind also faces transportation problem, which is due to its size and weight.

Thus, there is a need of having a user friendly and reliable measurement apparatus that can be used to measure the soil surface roughness that is mobile, utilize integrated instrumentation system, and faster field setup. The develop measurement apparatus should be able to generate a DEM of soil surface profile and at the same time could be used to quantify soil surface roughness.

1.2 Objectives

The main objective of this study is to design, develop, and test a laser soil surface profile digitizer for the purpose of quantifying soil surface roughness for seedbed preparations.

The specific objectives of this study are as follows:

1. To design and develop an automated measurement apparatus that is able to digitize soil surface elevations in 2-axis directions.

2. To design a special trailer for supporting and carrying the measurement apparatus with a built-in mechanism for uplifting and releasing the measurement apparatus during its operation in the field.
3. To design a computer program that can control, calculate, visualize, and perform a real time display of the surface elevations data obtained from the measurement apparatus.
4. To calibrate the laser displacement sensor of the measurement apparatus for its output variations due to the color variety of the target surfaces and its output resolutions in accordance to the selected predefined digitizing intervals.
5. To quantify and evaluate soil surface profile of seedbeds prepared after a disk plow, a moldboard plow, a disk harrow, and a rotary tiller using the developed digitizer.

CHAPTER II

LITERATURE REVIEW

2.1 Soil Surface Roughness

Various types of soil surface roughness quantification techniques and parameters have been proposed by past researchers in the study of soil science. Among the commonly used parameters include the Random Roughness Index, Micro-relief index, Degree of Tilt Index, Tilt Index, Regionalized Soil Roughness Index, and Coefficient of Manning's Roughness Index. However, Random Roughness Index (RR) has been widely used to describe surface roughness for a range of soils and tillage implements (Chi-hua Huang et al., 1992). It represents a scale equivalent to the standard deviation of soil surface elevations heights (Kuipers, 1957; Allmaras et al., 1966; Currence and Lovely, 1970). The employed technique implicitly assumed that soil surfaces have a Random Roughness with no spatial correlation. Various equations have been proposed and used to describe the Random Roughness index. Gupta et al., (1991) describes the measurement of Random Roughness index in the following equation:

$$RR = (\sum(Z_i - Z)^2 / (n - 1))^{1/2} \quad (2.1)$$

where RR is a Random Roughness index, Z_i is the standard deviation of the elevation heights, Z is a mean value of elevation heights after slope and tillage Oriented Roughness in both directions has been removed, and n is a number of measured points. The schematic representation of Random Roughness measurement is illustrated in Figure 2.1.

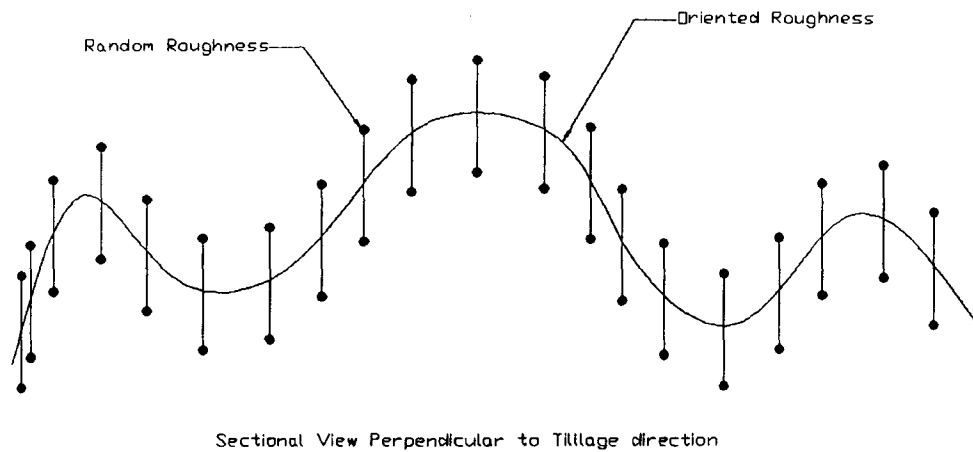


Figure 2.1: Random Roughness Measurement

Allmaras et al., (1967) suggested that since the elevation heights in logarithm values were normally distributed, the Random Roughness index could be defined as the natural logarithm of standard deviation for the correlated elevation heights after multiplication with a constant value of 100 as in equation 2.1.

$$RR = 100 \times \text{Log } \sigma \quad (2.2)$$

where RR is the Random Roughness index and σ is the standard deviation of the elevation heights. The computation for σ were to be made based on the elevation heights after corrected from slope and tillage orientation in both directions with the exclusion of 10% upper and lower extreme values of the elevation heights data set.