

UNIVERSITI PUTRA MALAYSIA

APPLICATION OF ELECTRICAL RESISTIVITY METHOD IN QUANTITATIVE ASSESSMENT OF GROUNDWATER RESERVE OF UNCONFINED AQUIFER

HAGO ALI HAGO

FSAS 2000 12



APPLICATION OF ELECTRICAL RESISTIVITY METHOD IN QUANTITATIVE ASSESSMENT OF GROUNDWATER RESERVE OF UNCONFINED AQUIFER

BY

HAGO ALI HAGO

Thesis Submitted in Fulfilment of Requirements for the Degree of Master of Science in the Faculty of Science and Environmental Studies
Universiti Putra Malaysia

January 2000



DEDICATED TO

The soul of my beloved brother Mohammed El Fadl El Amin in his falseless abode. Who was my true mentor in the wisdom of his words and in the strength of his protection. May Allah accept him as a true shahid.



Abstract of thesis presented to the senate of Universiti Putra Malaysia in fulfilment of the requirements for the degree of Master of Science.

APPLICATION OF ELECTRICAL RESISTIVITY METHOD IN **QUANTITATIVE ASSESSMENT OF GROUNDWATER** RESERVE OF UNCONFINED AQUIFER

By

HAGO ALI HAGO

January 2000

Chairman: Associate Professor Shaharin Ibrahim, Ph.D.

Faculty: Science and Environmental Studies

The thesis describes the application of the electrical resistivity method in groundwater exploration carried out at Bukit Jalil-Serdang area, Selangor Darul Ehsan, Malaysia. Electrical Resistivity Imaging surveys have been conducted in order to locate, delineate subsurface water resources and estimate its reserve. A Wenner electrode configuration was employed. The field survey was conducted along thirteen profiles providing continuous coverage. Color-modulated sections of resistivity versus depth were plotted for all lines, giving an approximate image of the subsurface structure. The field survey was accompanied by a laboratory work. Resistivity of rock and soil samples taken from the field was measured and the resistivity formation factors were obtained. The porosity of the same sample was



calculated. A relationship between the porosity and the formation factor has been established. The laboratory established relationship was applied to the data obtained in the field to calculate the porosity values of the formation present within the investigated area. The porosity values were contoured and plotted. Depth to the bedrock for each line was obtained. A 2-dimensional and 3-dimensional representation of the subsurface topography of the area was prepared using a commercial computer software. The use of the software also enabled the computation of groundwater reserve within the investigated area.

The results showed that the layer associated with the aquifer has resistivities between 20 Ω .m and 150 Ω .m and is located at a depth varying from 5 to 20m. The layer has porosity between 18% and 35%. The results obtained from the electrical resistivity profiles indicate that the aquifer occupies a surface area of about 15977900 m² and has a mean depth of 13m, with net volume of 204610000 m³. The average aquifer porosity is 30%. Therefore, a usable capacity of about 61,383,000 \pm 6,752,130 m³ can be inferred.



Abstrak tesis ini dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk mendapatkan Ijazah Master Sains.

PENGGUNAAN KAEDAH KERINTANGAN ELEKTRIK DALAM PENINJAUAN SECARA KUANTITATIF SIMPANAN AIR BAWAH TANAH UNTUK AKUIFER TERBUKA

Oleh

HAGO ALI HAGO

Januari 2000

Pengerusi: Profesor Madya Shaharin Ibrahim, Ph.D.

Fakulti: Sains dan Pengajian Alam Sekitar

Kajian ini menerangkan satu contoh penggunaan kaedah kerintangan elektrik dalam eksplorasi air bawah tanah yang telah dijalankan dikawasan Bukit Jalil-Serdang, di Negeri Selangor Darul Ehsan, Malaysia. Tinjauan pengimejan kerintangan elektrik telah dijalankan untuk mengenalpasti lokasi dan memetakan sumber air bawah tanah serta menganggarkan jumlah kandungan air yang terdapat didalam sumber tersebut. Konfigurasi elektrod Wenner telah digunakan dalam kajian ini. Kerja lapangan di sepanjang tiga belas profil telah dikendalikan. Keratan rentas bermodulasikan warna bagi kerintangan bahan melawan kedalaman telah diplot untuk semua profil yang menghasilkan imej bagi struktur dibawah tanah. Kajian dimakmal juga telah dijalankan bersama-sama kajian dilapangan.



Kerintangan sampel batuan dan tanah telah diukur. Jumlah kandungan liang rongga bagi sampel-sampel batuan dan tanah ini juga telah dikira. Daripada nilai kerintangan ini, faktor formasi telah diperolehi. Satu hubungan antara jumlah kandungan liang rongga dan faktor formasi telah diperolehi. Kaitan faktor formasi-kandungan liang rongga ini telah diaplikasikan keatas data-data kerintangan elektrik yang diperolehi dari lapangan. Penggunaan kaitan ini telah menghasilkan nilai keronggaan bagi formasi-formasi batuan dikawasan kajian.

Nilai-nilai jumlah kandungan liang rongga telah dikontur dan diplotkan. Kedalaman batuan desar di bawah tiap-tiap geris rentasan telah diperolehi. Satu gambaran 2-dimensi dan 3-dimensi topografi permukaan batuan dasar telah disediakan dengan menggunakan perisian komersial. Penggunaan perisian ini juga telah membolehkan pengiraan jumlah kandungan air tanah yang terdapat di kawasan kajian.

Keputusan menunjukkan lapisan pada akuifer memiliki kerintangan di antara 20Ω .m dan 150Ω .m dan berada pada kedalaman yang di antara 5 hingga 20 m. Lapisan ini mempunyai jumlah kandungan liang rongga di antara 18% dan 35%. Keputusan daripada profil kerintangan elektrik menunjukkan, akuifer yang dikaji meliputi kawasan permukaan seluas $15,977,900 \text{ m}^2$ dan memiliki purata



kedalaman 13 m dari permukaan dengan isipadu bersih 204,610,000 m³. Purata jumlah liang rongga bagi akuifer ialah 30%. Oleh itu kapasiti penggunaan $61,383,000 \pm 6,752,130$ m³ boleh diperolehi.



ACKNOWLEDGMENTS

Firstly Praise be to Allah for giving me the strength and patience to complete this work and Peace be upon his final Prophet and Messenger Mohammed. My full thanks to associate professor, Dr. Shaharin bin Ibrahim, chairman of my supervisory committee, for his useful discussions, invaluable suggestions, unlimited assistance, beneficial advice and continuous encouragement through out this work. I have the highest regard for his professional courtesy and the profound humility of his character.

Similar thanks must go to members of my supervisory committee, associate professor Dr. Wan Nor Azmin bin Sulaiman and associate professor, Dr. Mohd Kamil bin Yusoff, for taking interest in and offering helpful suggestions and guidance.

I would like to thank members and staff in the department of physics who have always willing to offer assistance, in particular, Mr. Mohd Shah Ibrahim, Mr. Roslim Mohd, Mr. Nordin Abdul Kadir and Mr. Razak Harun. I would like to take this opportunity to express my thanks to my friends who have helped me in this work: Mr. Ugantharan Maruthaveeran, Mr. Abdelatif Mukhtar, Mr. Elrashied Imam Elkhidir and Mr. Elsadig Eljack.



Higher Education Ministry (Sudan) and Malaysian Technical Corporation program (MTCP) which is highly appreciated and gratefully acknowledged provided financial support. May Allah reward my supervisor and committee for their dedication and service to humankind.



I certify that an Examination Committee met on January 27, 2000, to conduct the final examination of Hago Ali Hago Ali, on his Master of Science thesis entitled "Application of Electrical Resistivity Method in Quantitative Assessment of Groundwater Reserve of Unconfined Aquifer" in accordance with Universiti Pertanian Malaysia (Higher Degree) Act 1980 and Universiti Pertanian Malaysia (Higher Degree) Regulation 1981. The Committee recommends that the candidate be awarded the relevant degree. Members of the Examination Committee are as follows:

PAUZIAH ABD. LATIF, Ph.D.

Lecturer, Department of Environmental Studies Faculty of Science and Environmental Studies Universiti Putra Malaysia (Chairman)

SHAHARIN IBRAHIM, Ph.D.

Associate Professor, Physics Department Faculty of Science and Environmental Studies Universiti Putra Malaysia (Member)

MOHD KAMIL YUSOFF, Ph.D.

Associate Professor, Department of Environmental Studies Faculty of Science and Environmental Studies Universiti Putra Malaysia (Member)

WAN NOR AZMIN SULAIMAN, Ph.D.

Lecturer, Department of Environmental Studies Faculty of Science and Environmental Studies Universiti Putra Malaysia (Member)

MOHO GHAZALI MOHAYIDIN, Ph.D. Professor / Deputy Dean of Graduate School University Putro Molovojo

Universiti Putra Malaysia

Date: 24 FEB 2000



This thesis was submitted to the Senate of Universiti Putra Malaysia and was accepted as fulfillment of the requirements for the degree of Master of Science.

KAMIS AWANG, Ph.D. Associate Professor Dean of Graduate School Universiti Putra Malaysia

Date: 1 1 MAY 2000



DECLARATION

I hereby declare that the thesis is based on my original work except for quotations and citations, which have been duly acknowledged. I also declare that it has not been previously or concurrently submitted for any other degree at UPM or other institutions.

Hago Ali Hago Ali

Date: 24 /2 /2000



TABLE OF CONTENTS

		Pag
DEDICAT	TION	ii
	T	iii
	.	v
	'LEDGEMENTS	viii
	AL SHEETS	x
	ATION FORM	xii
	ΓABLES	xvii
	FIGURES	xix
CHAPTEI	₹	
I	INTRODUCTION	1
	Previous Work in the Study Area	3
	Objectives of the Present Study	3
	The Study Area	4
	Drainage	5
	Topography	6
	Climate	6
	Vegetation	7
	Layout of the Thesis	7
II	LITERATURE REVIEW	9
	Introduction	9
	Role of Geophysics in Groundwater Prospecting	
	and Hydrogeology	10
	The Use of the Resistivity Method in Groundwater	
	Prospecting	16
III	GEOLOGY OF THE STUDY AREA	35
	Introduction	35
	Kenny Hill Formation	37
	Occurrence	37
	Lithology	38
	Structure	41
	Fossils and Age	42
	Origin of Sediments	44
	Tectonic History	46
VI	METHODS OF INVESTIGATIONS	48
	Introduction	48
	Traditional Resistivity Surveys	40



	The Relationship between Geology and Resistivity
	Earth Resistivity Method
	Electrode Configuration used
	Wenner Configuration
	2-D Electrical Imaging Surveys
	Introduction
	Field Survey Method
	Pseudosection Data Plotting Method
	The Advantages and Disadvantages of the Different Arrays
	Wenner Array
	Dipole-Dipole Array
	Schlumberger Array
	Summary
	Interpretation of Resistivity Field Data with
	the Aid of Computer
	Contouring of Porosity Values
V	LABORATORY DETERMINATIONS OF
	PETROPHYSICAL PROPERTIES
	Introduction
	Total Porosity and Effective Porosity
	Total or Absolute Porosity
	Effective Porosity
	Rocks and their Porosity
	Determinations of Effective Porosity of the Core Samples
	Introduction
	Methodology
	Selection and Preparation of Samples
	Cleaning of Samples
	Drying of Samples
	Weighing of Samples and Volume Determination
	Saturation of Samples
	Calculations of Effective Porosity
	Determinations of Hydraulic Conductivity of the
	Core Samples
	Introduction
	Darcy's Law
	Permeability
	Determinations of Hydraulic Conductivity
	Laboratory Methods
	Equation for the Determination of Hydraulic
	Conductivity of a Rock Specimen by the Falling
	Head Method
	Determination of Electrical Resistivity



	Introduction
	Methodology
	Preparation of Core Samples
	Sample Drying
	Samples Saturation with Electrolyte Solution
	Measurements of Resistivity
	Formation Factor
	Methods of Calculation.
	Measurements of Parameters on Soil Samples
	<u>-</u>
	Porosity
VI	RESULTS AND DISCUSSION
	Introduction
	Laboratory Work
	Effective Porosity
	The Variation of Electrical Resistivity, Formation
	Factor and Fractional Porosity of Earth Materials
	from the Study Area
	Hydraulic Conductivity
	2 Dimensional Electrical Resistivity Imaging
	Bukit Jalil Line 1
	Bukit Jalil Line 2
	Bukit Jalil Line 3
	Bukit Jalil Line 4
	Bukit Jalil Line 7
	Bukit Jalil Line 5.
	Bukit Jalil Line 6.
	Bukit Jalil Line 8.
	Apm Line
	Taman Uninersity Line
	Mardi Line 1
	Mardi Line 2
	Mardi Line 3
	Porosity Distribution
	Porosity Distribution along Electrical Resistivity
	Imaging Lines
	Bukit Jalil Line 1
	Bukit Jalil Line 2
	Bukit Jalil Line 3.
	Bukit Jalil Line 4.
	Bukit Jalil Line 7
	Bukit Jalil Line 5.
	Dukit Jain Ling J



Mardi Line 2. Mardi Line 3. Bedrock Elevation and the Estimation of Groundwater Reserve. II SUMMARY AND CONCLUSION. IBLIOGRAPHY. PPENDICES A Borehole Geological Logging. B Laboratory Investigations. C Interpretation of Resistivity Field Data with		Bukit Jalil Line 8
Apm Line Taman University Line Mardi Line 1. Mardi Line 2. Mardi Line 3. Bedrock Elevation and the Estimation of Groundwater Reserve. II SUMMARY AND CONCLUSION IBLIOGRAPHY. PPENDICES A Borehole Geological Logging. B Laboratory Investigations. C Interpretation of Resistivity Field Data with		
Taman University Line Mardi Line 1 Mardi Line 2. Mardi Line 3. Bedrock Elevation and the Estimation of Groundwater Reserve. II SUMMARY AND CONCLUSION IBLIOGRAPHY PPENDICES A Borehole Geological Logging. B Laboratory Investigations. C Interpretation of Resistivity Field Data with		
Mardi Line 1 Mardi Line 2. Mardi Line 3. Bedrock Elevation and the Estimation of Groundwater Reserve. II SUMMARY AND CONCLUSION. IBLIOGRAPHY. PPENDICES A Borehole Geological Logging. B Laboratory Investigations. C Interpretation of Resistivity Field Data with		Taman University Line
Mardi Line 2. Mardi Line 3. Bedrock Elevation and the Estimation of Groundwater Reserve. II SUMMARY AND CONCLUSION. IBLIOGRAPHY. PPENDICES A Borehole Geological Logging. B Laboratory Investigations. C Interpretation of Resistivity Field Data with		Mardi Line 1
Bedrock Elevation and the Estimation of Groundwater Reserve		Mardi Line 2
Groundwater Reserve II SUMMARY AND CONCLUSION IBLIOGRAPHY PPENDICES A Borehole Geological Logging B Laboratory Investigations C Interpretation of Resistivity Field Data with		Mardi Line 3
II SUMMARY AND CONCLUSION IBLIOGRAPHY PPENDICES A Borehole Geological Logging		Bedrock Elevation and the Estimation of
IBLIOGRAPHY PPENDICES A Borehole Geological Logging		Groundwater Reserve
PPENDICES A Borehole Geological Logging B Laboratory Investigations C Interpretation of Resistivity Field Data with		SUMMARY AND CONCLUSION
 A Borehole Geological Logging B Laboratory Investigations C Interpretation of Resistivity Field Data with 	JOC	GRAPHY
B Laboratory Investigations C Interpretation of Resistivity Field Data with	END	DICES
C Interpretation of Resistivity Field Data with	1	Borehole Geological Logging
	}	Laboratory Investigations
4	•	Interpretation of Resistivity Field Data with
the Aid of Computer		the Aid of Computer
D Relationship between Porosity and Formation)	Relationship between Porosity and Formation
Factor using Curve Fit		Factor using Curve Fit
E Determination of the Total Volume of the Aquifer	:	· · · · · · · · · · · · · · · · · · ·
IODATA	,	1



LIST OF TABLES

Table		Page
1	Resistivity of Some Rocks, Minerals, Chemicals and Metals	53
2	The Effective Depth of Investigation for the Different Arrays	70
3	Average Porosities of Some Rocks	81
4	Correlation Between Porosity and Permeability	88
5	Representative Values of Hydraulic Conductivity	89
6	Electrical Resistivity of Earth Materials	107
7	Variation of Formation Factor against Porosity of Rock Samples.	108
8	Variation of Formation Factor against Porosity of Soil Samples	110
9	Variation of Formation Factor against Porosity of Rock and Soil Samples	111
10	Variation of Formation Factor against Hydraulic Conductivity of Rock Samples.	115
11	Variation of Formation Factor against Hydraulic Conductivity of Rock and Soil Samples	117
12	Conversion of Electrical Resistivity Values into Porosity	133
13	Calculation of Porosity for Rock Samples	169
14	Calculation of Porosity for Soil Samples	171
15	Calculation of Hydraulic Conductivity for Rock Samples	172
16	Calculation of Hydraulic Conductivity for Soil Samples	173



17	Elevation of the Bedrock	189
18	Depth to the Bedrock	190



LIST OF FIGURES

Figure		Page
1	Map Showing the Location of the Study Area, Samples and Electrical Resistivity Imaging Lines	2
2	Geology of the Study Area	36
3	The Three Different Models Used in the Interpretation of Resistivity Measurements	51
4	A Graphical Plot of the Resistivity Values of Different Types of Materials.	55
5	A Conventional Four-Electrode Array to Measure the Subsurface Resistivity	56
6	Electrode Spreads in Common Use	61
7	The Arrangements of Electrodes for A 2D Electrical Resistivity and Sequence of Measurements Used to Build Up A pseudosection	64
8	The Sensitivity Pattern for the Wenner, Schlumberger and Dipole-Dipole Arrays	69
9	Dipix-Plus for Plotting and Contouring of Dipole-Dipole Resistivity Data, IP Data and Profiling Data	77
10	Experimental Apparatus for the Illustration of Darcy's Law	87
11	Permeameter for Measuring Hydraulic Conductivity of Geologic Samples by Falling Head Method	91
12	An Example of the Variation of Log ₁₀ hl as A Function of Time	93
13	Resistivity Measuring Cell	98
14	Permeameter for Measuring Hydraulic Conductivity of Geologic Samples by Constant Head Method	104



15	SamplesSamples	10
16	Variation of Formation Factor against Porosity of Soil Samples	11
17	Variation of Formation Factor against Porosity of Rock and Soil Samples.	11
18	Variation of Formation Factor against Hydraulic Conductivity of Rock Samples	11
19	Variation of Formation Factor against Hydraulic Conductivity of Soil Samples	11
20	Distribution of Electrical Resistivity Values along Bukit Jalil Line 1	11
21	Distribution of Electrical Resistivity Values along Bukit Jalil Line 2	12
22	Distribution of Electrical Resistivity Values along Bukit Jalil Line 3	12
23	Distribution of Electrical Resistivity Values along Bukit Jalil Line 4	12
24	Distribution of Electrical Resistivity Values along Bukit Jalil Line 7	12
25	Distribution of Electrical Resistivity Values along Bukit Jalil Line 5	12
26	Distribution of Electrical Resistivity Values along Bukit Jalil Line 6	12
27	Distribution of Electrical Resistivity Values along Bukit Jalil Line 8	12
28	Distribution of Electrical Resistivity Values along Apm Line	13
29	Distribution f Electrical Resistivity Values along Taman University Line	12
30	Distribution of Electrical Resistivity Values along Mardi Line 1	12
31	Distribution of Electrical Resistivity Values along Mardi Line 2	13
32	Distribution of Electrical Resistivity Values along Mardi Line 3	13
33	Subsurface Porosity Distribution along Line Bukit Jalil 1	1.



34	Subsurface Porosity Distribution along Line Bukit Jalil 2	136
35	Subsurface Porosity Distribution along Line Bukit Jalil 3	137
36	Subsurface Porosity Distribution along Line Bukit Jalil 4	138
37	Subsurface Porosity Distribution along Line Bukit Jalil 7	139
38	Subsurface Porosity Distribution along Line Bukit Jalil 5	140
39	Subsurface Porosity Distribution along Line Bukit Jalil 6	141
40	Subsurface Porosity Distribution along Line Bukit Jalil 8	142
41	Subsurface Porosity Distribution along Apm Line	143
42	Subsurface Porosity Distribution along Taman University Line	144
43	Subsurface Porosity Distribution along Mardi Line 1	145
44	Subsurface Porosity Distribution along Mardi Line 2	146
45	Subsurface Porosity Distribution along Mardi Line 3	147
46	Bedrock Contour	150
47	3-D View of the Top of the Bedrock	151
48	3-D view of the Depth to the Bedrock	151
49	Geological Profile for Borehole 1	166
50	Geological Profile for Borehole 2	167
51	Geological Profile for Borehole 3	168
52	Variation of Formation factor against Porosity of Rock and Soil Samples using Curve Fit	188



CHAPTER I

INTRODUCTION

Groundwater is a major source of clean drinking water all over the world. It has been an important resource especially in the dry part of the world. Groundwater has been used in Malaysia for many decades (Ang, 1994).

Increased demands for water have stimulated development of underground water resources. As a result, techniques for investigating the occurrence and movement of groundwater have been improved, better equipment for extracting has been developed, concepts for resource management have been established, and the research has contributed to a better understanding of the subject.

Since geophysical exploration is the scientific measurement of physical properties of the earth crust for investigation of mineral deposits or geologic structure, the present project conducted mainly to apply electrical resistivity method in groundwater exploration, in particular to estimate the groundwater reserve within the unconfined aquifer.



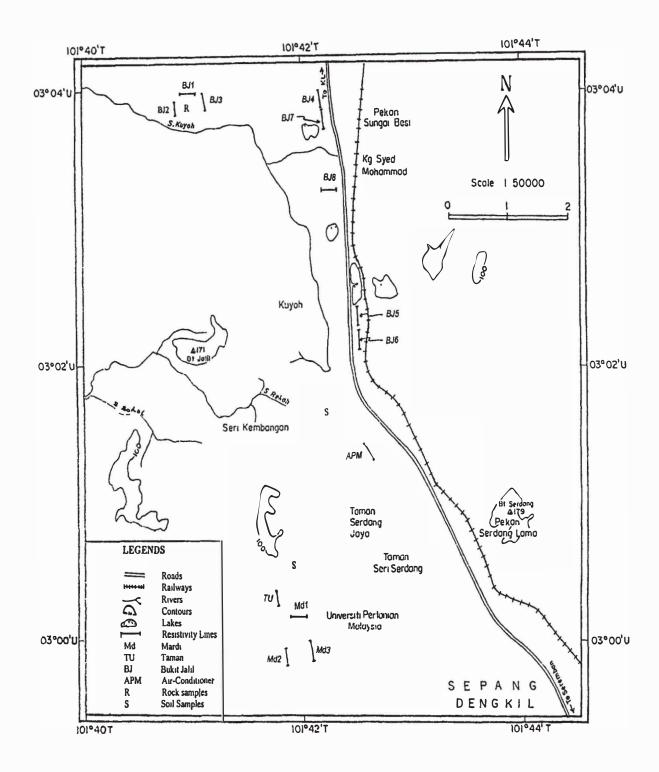


Figure 1: Map Showing the Locations of the Study Area, Samples and Electrical Resistivity Imaging Lines



PREVIOUS WORK IN THE STUDY AREA

The geological survey of Malaysia first started hydrogeological investigations in Peninsular Malaysia in 1903. The only previous published account of the geology of the whole of the present area was entitled "Account of the geology and mining industries of south Selangor and Negeri Sembilan" (Willbourn 1922). A geological map accompanies this publication on a scale of 1 inch to 4 miles.

Ahmed and Othman (1992, 1997), using DC resistivity and other methods to provide sharp lateral resistivity variations by electrical profiling carried out two geophysical investigations. The resistivity profiling was carried out at Sungai Besi Toll plaza along the Kuala Lumpur-Seremban Highway using Wenner array with 10m-electrode spacing. They found that in the first line, the southern part has low resistivity value due to higher water and higher clay content. In the second line the resistivity profiling results show localized anomalies occurring at several parts of the line which is most probably due to the presence of week zones in the sediment layer.

OBJECTIVES OF THE PRESENT STUDY

The primary objective of the present study is to apply electrical resistivity method in the quantitative assessment of groundwater reserve. From the combination of the resistivity techniques used in the field, processing and

