



**UNIVERSITI PUTRA MALAYSIA**

**DIELECTRIC PROPERTIES OF OIL PALM MESOCARP  
AT VARIOUS STAGES OF MATURITY**

**ZAHARIAH ZAKARIA**

**FSAS 1998 25**

**DIELECTRIC PROPERTIES OF OIL PALM MESOCARP  
AT VARIOUS STAGES OF MATURITY**

**ZAHARIAH ZAKARIA**

**MASTER OF SCIENCE  
UNIVERSITI PUTRA MALAYSIA**

**1998**



**DIELECTRIC PROPERTIES OF OIL PALM MESOCARP  
AT VARIOUS STAGES OF MATURITY**

By

**ZAHARIAH ZAKARIA**

Thesis Submitted in Fulfilment of the Requirements for  
the Degree of Master of Science in the Faculty of  
Science and Environmental Studies,  
Universiti Putra Malaysia

August 1998



To my beloved mother and my late father:

*LOSING MAKES WINNING WORTHWHILE*

Thank you so much



## ACKNOWLEDGEMENTS

A number of people have been involved in the course of this thesis.

First and foremost, I would like to express my deepest appreciation to my supervisor, Assoc. Prof. Dr Hj. Kaida Khalid for the support, encouragements and advices throughout this work.

To Dr. Wan Mohd. Daud, thank you for the co-operation and assistance. To Dr. Zainul Abidin Hassan, thank you for carefully checking the equations and grammatical errors as well as the fruitful suggestions.

Thanks are also expressed to the University Research Park for supplying the fresh oil-palm fruits and Faculty of Forestry for preparing the sample of fibre of the mesocarp. Thanks also to PORIM for supplying the oil palm.

Last but not least, to all academic staffs and supporting staffs of Physics Department: THANK YOU SO MUCH.



## TABLE OF CONTENTS

		<b>Page</b>
<b>ACKNOWLEDGEMENTS</b> .....		iii
<b>LIST OF TABLES</b> .....		vi
<b>LIST OF FIGURES</b> .....		vii
<b>LIST OF PLATES</b> .....		x
<b>LIST OF SYMBOLS</b> .....		xi
<b>ABSTRACT</b> .....		xiii
<b>ABSTRAK</b> .....		xv
 <b>CHAPTER</b>		
<b>I</b>	<b>INTRODUCTION</b> .....	1
	Introduction to Sampel Composition .....	2
	Radio Frequency (RF) and Microwave Frequency (MW) .....	6
	Properties of Dielectric and Response Model.....	8
	Measure of Ripeness of Oil Palm Fruits .....	10
	The Objective of the Research .....	13
	Order of Presentation .....	14
<b>II</b>	<b>GENERAL THEORY</b> .....	15
	Ionic Interaction .....	18
	Polar Interaction .....	19
	The Dielectric Theory .....	19
	Dielectric Mixtures Theory .....	24
	Presentation of Dielectric Properties .....	28
	Debye-Basic Model .....	34
	The Response of Universal Capacitor.....	39
<b>III</b>	<b>DIELECTRIC MEASUREMENTS</b> .....	45
	Determination of $\epsilon'$ and $\epsilon''$ versus Open-ended Coaxial Line..	45
	Dielectric Permittivity Measurements from 0.2 to 20 GHz ....	49
	Calibration of the ANA .....	53



Error Correction in ANA System.....	54
Dielectric Measurements from $10^{-5}$ to $10^6$ Hz.....	54
Sampel Preparation.....	57
Fruit Selection.....	57
Preparation of Mashed Palm Mesocarp.....	57
Solid Part of the Fruit.....	58
Fibre of the Fruit.....	58
Palm Oil.....	58
Different Moisture Content with Different Position.....	60
Moisture Measurement.....	61
Experimental Errors.....	62
<b>IV    RESULTS AND DISCUSSION.....</b>	<b>64</b>
High Frequency.....	65
Low Frequency.....	89
Summary.....	98
<b>V    CONCLUSION AND RECOMMENDATION FOR FUTURE WORK.....</b>	<b>100</b>
Conclusion.....	100
Recommendation for Future Work.....	103
<b>REFERENCES.....</b>	<b>105</b>
<b>APPENDICES.....</b>	<b>109</b>
<b>VITA.....</b>	<b>114</b>



## LIST OF TABLES

Table		Page
1.1	Fruit Maturity Based on Percentage Moisture Content or Oil per Fresh Mesocarp .....	12
4.1	Dielectric Permittivity and Maturity Index at 26 <sup>0</sup> C of Mashed Mesocarp at Four Stages of Maturity .....	69
4.2	Characterisation of the Dielectric Response in Figure 4.11 .....	97





## LIST OF FIGURES

Figure	Page
1.1 Palm Oil Fruit, Tree and Bunch, a) Cross-section of Fruits, b) Palm Oil Tree, c) Schematic Division of Fruit Bunch and d)The Outer and Inner Halves of a Fruit .....	3
1.2 a) The Electromagnetic Spectrum, and b) Definition of Various Frequencies .....	7
2.1 Schematic Presentation of Sodium Ion and Chlorine Ion .....	17
2.2 A Plate Capacitor of Area A, charged with the Charged Q .....	23
2.3 a) A Parallel Combination of an Ideal, Frequency-independant Capacitance C and Conductance G and b) A Series Combination of an Ideal Capacitor C and a Resistor R .....	30
2.4 a) The Locus of the Tip of the Admittance Vector Y for the Parallel Circuit b) The Locus of the Tip of the Admittance Vector Z for the Series Circuit..	32
2.5 The Frequency Dependance of the Complex Permittivity According to the Debye Relation .....	38
2.6 The Cole-Cole Representation of the Debye Relation .....	38
2.7 Model for Dipole.....	43
2.8 Model for Quasi-dc .....	44
3.1 Sample Configuration for Measuring the Permittivity Using Reflection Methods .....	48
3.2 Equivalent Circuit of an Open-Ended Coaxial Line .....	48
3.3 Variation of Dielectric Properties a) Dielectric Constant, b) Dielectric Loss with Frequency for Known dielectric Properties of Water .....	52
3.4 Block Diagram for the Dielectric Measurements Using the Dielectric Spectrometer in the Low-frequency Range .....	56
3.5 A Cylindrical Shape Holder for Mashed Mesocarp Measurement .....	56



3.6	a) A Fruit Sample Shows a Measurement Made in Different Position Using the ANA, b) A cut of a Fruit's Sample in a Sample Holder .....	59
3.7	A Fruit's Sample with 20 Different Area of Contact .....	60
4.1	Dielectric Spectrum of Mashed Mesocarp from 0.2 GHz to 20 GHz at Various Stages of Maturity .....	66
4.2a	Comparison of the Experimental Dielectric Data for Mashed Mesocarp with Predicted Values from Mixture Equation at 26 <sup>0</sup> C and at 0.2 GHz and 0.92 GHz .....	71
4.2b	Comparison of the Experimental Dielectric Data for Mashed Mesocarp with Predicted Values from Mixture Equation at 26 <sup>0</sup> C and at 2.45 GHz and 5.8 GHz .....	72
4.2c	Comparison of the Experimental Dielectric Data for Mashed Mesocarp with Predicted Values from Mixture Equation at 26 <sup>0</sup> C and at 10 GHz and 15 GHz .....	73
4.2d	Comparison of the Experimental Dielectric Data for Mashed Mesocarp with Predicted Values from Mixture Equation at 26 <sup>0</sup> C and at 20 GHz .....	74
4.3	A Summary of Dielectric Constant and Dielectric Loss with Moisture Content .....	75
4.4	The Variation of Dielectric Properties of Mashed Mesocarp, Oil Content, Fibre Content and Moisture as a Function of Development Time of Oil Palm Fruit .....	77
4.5	The Variation of Moisture Content with 20 Positions of an Oil Palm Fruit and at Various Stages of Maturity. The Corresponding MC of a Mashed Mesocarp of the Fruits are Ranging from 23%-86% .....	78
4.6a	The Variation of $\epsilon'$ and $\epsilon''$ with Frequency for Various Positions of the Fruits in Under-ripe Fruits .....	80
4.6b	The Variation of $\epsilon'$ and $\epsilon''$ with Frequency for Various Positions of the Fruits in Nearly-ripe Fruits .....	81
4.6c	The Variation of $\epsilon'$ and $\epsilon''$ with Frequency for Various Positions of the Fruits in Ripe Fruits .....	82



4.6d	The Variation of $\epsilon'$ and $\epsilon''$ with Frequency for Various Positions of the Fruits in Fully-ripe Fruits .....	83
4.7	The Variation of $\epsilon'$ and $\epsilon''$ of Mashed Mesocarp with Frequency for Over-ripe Fruits .....	85
4.8a	The Variation of $\epsilon'$ and $\epsilon''$ with Frequency for Various Moisture Content on Top of the Fruits .....	86
4.8b	The Variation of $\epsilon'$ and $\epsilon''$ with Frequency for Various Moisture Content on Middle of the Fruits .....	87
4.8c	The Variation of $\epsilon'$ and $\epsilon''$ with Frequency for Various Moisture Content on Bottom of the Fruits .....	88
4.9a	The Variation of Arbitrary Unit of Mashed Mesocarp with Log Frequency for Under-ripe and Nearly-ripe .....	91
4.9b	The Variation of Arbitrary Unit of Mashed Mesocarp with Log Frequency for Ripe and Fully-ripe .....	92
4.10a	The Response Characteristic of a Parallel Non-dispersive and Quasi-dc Capacitance in Series with the Experimental Data for Under-ripe and Nearly-ripe .....	95
4.10b	The Response Characteristic of a Parallel Non-dispersive and Quasi-dc Capacitance in Series with the Experimental Data for Ripe and Fully-ripe .....	96
4.11	The Equivalent Circuit Model for Dielectric Response .....	99



## LIST OF PLATE

<b>Plate</b>		<b>Page</b>
1	Operational Set-up of HP 8720B Network Analyzer .....	51



## LIST OF SYMBOLS AND ABBREVIATIONS

$\epsilon^*$	Complex permittivity
$\epsilon'$	Dielectric constant
$\epsilon''$	Dielectric loss
$M_p$	Maturity index
$Na^+$	sodium ion
$Cl^-$	chlorine ion
$\epsilon_f$	Permittivity of fibre
$\epsilon_i$	Permittivity of oil
$\epsilon_w$	Permittivity of water
$V_f$	Volume fraction of fibre
$V_i$	Volume fraction of oil
$V_w$	Volume fraction of water
$\rho_f$	Relative density of fibre
$\rho_i$	Relative density of oil
$\rho_w$	Relative density of water
$W_f$	Mass of fibre
$W_i$	Mass of oil
$W_w$	Mass of water
<i>m.c</i>	Moisture content
<i>C</i>	Capacitance
<i>dQ</i>	Small change in charge
<i>dV</i>	Small change in voltage
<i>E</i>	Electric field
<i>A</i>	Area
<i>d</i>	Distance
<i>tan δ</i>	Tangent of loss angle
<i>Y</i>	Admittance
<i>I</i>	Current
<i>V</i>	Voltage
<i>G</i>	Conductance
<i>Z</i>	Impedance
<i>i</i>	$\sqrt{-1}$
$\epsilon_s$	Static permittivity
$\epsilon_\infty$	Infinite permittivity



$\omega$	Angular frequency
$\tau$	Relaxation period
$\chi$	Dielectric susceptibility
$\kappa$	Geometrical factor
$Z_0$	Characteristic impedance
$M_w$	Mass of wet sample
$M_d$	Mass of dry sample

Abstract of thesis submitted to the Senate of Universiti Putra Malaysia in fulfilment of the requirements for the degree of Master of Science.

**DIELECTRIC PROPERTIES OF OIL PALM MESOCARP AT VARIOUS STAGES OF MATURITY**

By

**ZAHARIAH ZAKARIA**

**August 1998**

**Chairman: Associate Professor Hj. Kaida Khalid, Ph.D**

**Faculty : Science and Environment Studies**

Dielectric properties at frequencies from  $10^{-2}$  to  $10^6$  Hz and 0.2 to 20 GHz of mashed mesocarp of oil palm fruits at various stages of maturity are presented. The study includes the variation of dielectric constant,  $\epsilon'$  and dielectric loss,  $\epsilon''$  with moisture content ranging from 40 to 100% (wet basis). Measurement of the dielectric properties was done by using open-ended coaxial line probe and automated network analyzer for high frequency and spectrum analyzer for low frequency. The accuracy of the measurement is about 5% for dielectric constant,  $\epsilon'$  and 3% for dielectric loss,  $\epsilon''$ . Results of measurements demonstrate a good relationship between dielectric properties of the mesocarp and moisture content or maturity of the fruit and also close to the values predicted by dielectric mixture models especially at frequencies above 3 GHz. At 10 GHz the difference between predicted and measured values are within 5%.

Results of measurement also show that the ac ionic conductivity dominated in the region less than 3 GHz while above 3 GHz the dipole orientation of water molecules



becomes dominant. Such a crossover in the form of dielectric loss from conductive loss to the dipole orientation about 2 GHz was observed. The effect of ac ionic conductivity is higher in young fruit and decreasing as a degree of maturity increases.

Permittivity of oil palm mesocarp over the frequency range was found to increase with moisture content. A significant variation of  $\epsilon'$  and  $\epsilon''$  with maturity at 0.2 GHz and 10 GHz respectively make it suitable to form a maturity index as suggested by Nelson et al.. With moisture content ranging from 25% to 85%, the  $\epsilon'$  at 2 GHz varies from 11 to 61 and the  $\epsilon''$  varies from 2.1 to 24.6 at 10 GHz. Based on the above values the permittivity-based maturity index for young and fully ripe fruits are 1 and 0.3 respectively.

In low frequency the results show that almost the same type of dielectric dispersion mechanisms are observed at different range of moisture content. It may be possible to explain all these dispersion processes by means of dielectric mechanism for quasi-dc and diffusive.

This study gives valuable information for the analysis and design of microwave sensor for assessment of quality of the oil palm fruits and could also be used for estimating microwave absorption during fruit sterilization and fruit loosening.



Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi syarat-syarat untuk penganugerahan ijazah Master Sains.

## **CIRI-CIRI DIELEKTRIK MESOKARP BUAH KELAPA SAWIT PADA PELBAGAI PERINGKAT KEMATANGAN**

Oleh

**ZAHARIAH ZAKARIA**

**Ogos 1998**

**Pengerusi: Professor Madya Hj. Kaida Khalid, Ph.D**

**Fakulti: Sains dan Pengajian Alam Sekitar**

Ciri-ciri dielektrik bagi mesokarp buah kelapa sawit yang lumat di antara  $10^{-2}$  ke  $10^6$  Hz dan 0.2 ke 20 GHz dikaji pada pelbagai peringkat kematangannya. Kajian ini meliputi perubahan pemalar dielektrik,  $\epsilon'$  dan kehilangan dielektrik,  $\epsilon''$  dengan kandungan kelembapan di antara 40% ke 100%. Pengukuran ciri-ciri dielektrik dibuat menggunakan penduga talian sepaksi terbuka hujung dan 'automated network analyzer' dengan frekuensi tinggi dan penganalisa spektrum dengan frekuensi rendah. Ketepatan pengukuran adalah lebih kurang 5% bagi pemalar dielektrik dan 3% bagi kehilangan dielektrik. Keputusan pengukuran ini menunjukkan perhubungan di antara ciri-ciri dielektrik mesokarp dan kandungan lembapan atau kematangan buah dan hampir kepada nilai yang dijangkakan oleh model campuran dielektrik terutama pada frekuensi yang melebihi 3 GHz. Keputusan pengukuran ini juga menunjukkan kekonduksian ionik dominan di kawasan kurang daripada 3 GHz sementara orientasi dwikutub molekul air menjadi dominan di kawasan melebihi 3 GHz. Peralihan dalam bentuk kehilangan



dielektrik kepada kehilangan konduksi ke orientasi dwikutub dapat diperhatikan pada 2 GHz. Kesan daripada kekonduksian ionik adalah tinggi pada buah muda dan menurun apabila kematangan meningkat.

Ketelusan mesokarp pada julat frekuensi meningkat mengikut kandungan lembapan. Perubahan ketara  $\epsilon'$  dengan kematangan pada 0.2 GHz dan  $\epsilon''$  dengan kematangan pada 10 GHz adalah sesuai untuk membentuk indeks kematangan seperti yang dicadangkan oleh Nelson et al.. Dengan kandungan lembapan daripada 35% ke 85%,  $\epsilon'$  pada 2 GHz berubah dari 11 ke 61 dan  $\epsilon''$  berubah dari 2.1 ke 24.6 pada 10 GHz. Berdasarkan nilai-nilai di atas, ketelusan berdasarkan indeks kematangan bagi buah muda ialah 1 dan buah masak ialah 0.3.

Keputusan pada frekuensi rendah menunjukkan bahawa hampir kesemua mekanisma penyebaran dielektrik adalah kelihatan pada kadar yang berbeza mengikut kandungan lembapan. Kajian ini dapat memberikan penerangan yang penting untuk analisis dan rekaan pengesan gelombang mikro bagi penilaian kualiti buah kelapa sawit dan boleh juga digunakan bagi menganggarkan penyerapan mikrogelombang semasa pensterilan dan peleraian buah.

## **CHAPTER I**

### **INTRODUCTION**

Palm oil is now the leading vegetable oil in international trade. Malaysia is the world's leading producer of palm oil where it accounted for about 51% of total global palm oil production as reported in 1996 (FAO,1996). There are some major features determining the future demand and market opportunities for palm oil. Some of them are (PORIM Occasional Paper No. 30):

- The impact of the EC agriculture policy:


Latest changes are going to have a double-positive effect on palm oil: They are firstly, the effect on EC domestic production and supplies of oilseeds and, secondly the effects on oilmeal demand (and thus oilseed crushings and seed oil output)

- The population factor in demand.
- The nutritional advantages of palm oil should also have a beneficial effect on both the demand for and price of palm oil.
- The prospective trend on the production of animal fats up to the year 2000.

## Introduction to Sampel Composition

Palm oil is obtained from the mesocarp of the oil palm fruits. The fruit of the oil palm is a drupe. It consists of a pericarp, made up of exocarp (skin), mesocarp (often wrongly called pericarp) and endocarp (shell), surrounding usually one, but sometimes up to four kernels. The kernel has a testa (skin), a solid endosperm and an embryo. The mesocarp contains fibres which run longitudinally through the oil bearing tissue from the base towards the fruit tip. The fibrous material constitutes almost 16% of the mesocarp (Hartley, 1977). Based on the shell thickness, a fruit or palm may be described as being either dura, tenera or psifera variety. The psifera is shell-less; many psifera palms fail to set fruit, so the psifera is not commercially important. The other variety dura has a thick shell, while tenera has a thin shell and high mesocarp content. The tenera variety is the type of fruit preferred for commercial use, because more of the pericarp consists of oil bearing mesocarp than in dura.

The fruit bunch is ovoid and may reach 50 cm in length and 35 cm in breadth. The bunch consists of the outer and inner fruit and the spikelets stalks and spines, as illustrated in Figure 1.1 (Khalid, 1992). Ripening is usually from the apical to the basal of the bunch and from the outer spreading gradually towards the inner fruits of the spikelet. As the fruit in the bunch ripens, the colour changes from black to reddish orange and the oil content increases in the process. When the oil content reaches the maximum, the fruit becomes loose and falls to the ground.

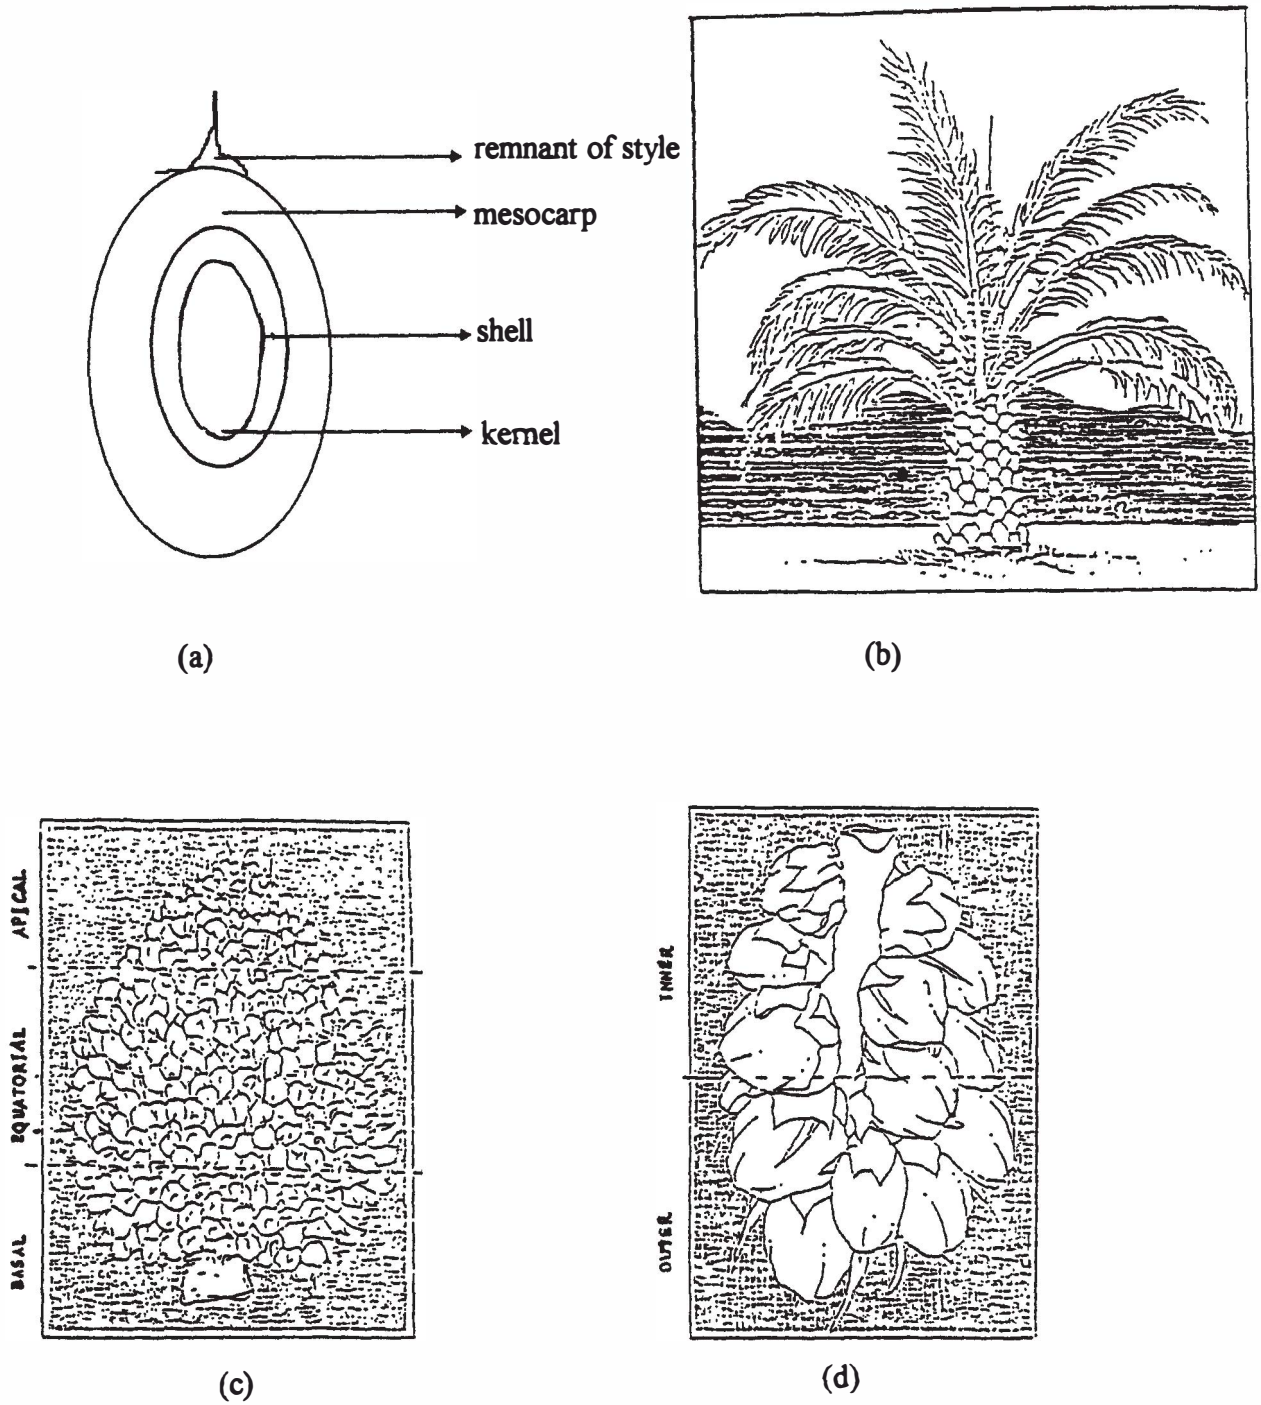

**Figure 1.1:** Palm oil fruit, tree and bunch  
 a) cross-section of fruits  
 b) palm oil tree  
 c) schematic division of fruit bunch  
 d) the outer and inner halves of a spikelet

The fruit has at least three important constituents that is water, oil and fibre. It has also been assumed that fibre consists almost 16% of the total constituents throughout. The water and oil contents depend on the stage of ripeness.

Oil from fresh ripe fruit contains as little as 0.1% fatty acid (estimated as palmitic acid), but in bruised and crushed fruit the free fatty acid (FFA) may increase up to 50% in a few hours (Hartley,1977). Fruits which has been kept for several days before processing or which has been allowed to become over-ripe on the palms, may be covered or invaded by a number of moulds. Usually these fungi invaded the base of detached fruits or wounds on the fruit surface.

Fat formation in the mesocarp takes place very late in fruit development. From the 8th. to the 16th. week after pollination fats constitute less than 2% of the dry weight. There is in fact very little addition of any kind to the dry weight of the mesocarp from the 8th. to the 19th. week when, just prior to ripening, dry weight increases by 300-500% and fats rather suddenly come to constitute 70-75% of dry matter (Hartley,1977).

For the production of low FFA in the oil, the major requirements are:

- i) minimal bruising of the fruit during harvesting, carriage and movement at mill side.
- ii) minimal time between harvesting and sterilisation.

iii) the processing system must be such that the fruit or extracted oil does not cool down and come into contact with apparatus or materials which could cause a recommencement of lipolysis.

Oil and fats are predominantly made up of triglycerides. In palm oil saturated palmitic acid and mono-unsaturated oleic each account for about 40% of the fatty acids present since fatty acids contribute about 95% of the total weight of triglyceride molecule and because they comprise the reactive portion of the molecule, they greatly influence the character of the glyceride. Thus the chemistry of oils and fats is to a large extent the chemistry of their constituent fatty acids and their physical characteristics are related to the make-up of the triglycerides.

Free fatty acids (FFA) occur as a result of fat splitting reactions in which the glyceride molecule combines with water to yield FFA and in succession, diglycerides, mono-glycerides, free glycerol (Joncin, 1953). Enzymatic hydrolysis, due to a highly active lipase which occurs naturally in palm fruits, is prevented by prompt sterilisation of the freshly cut bunches; subsequent contact of the processed oil with cell debris and dirt should be avoided.

The percentage of FFA is a useful quality criterion for crude palm oil. It is indicative of the total damage suffered, as the increase in FFA is generally paralleled by oxidation spoilage as well.

## Radio Frequency (RF) and Microwave Frequency (MW)

Before we briefly introduce the topics, it is important to define the frequency ranges for which the terms microwave and radio frequency will be subsequently used. At frequency below 100 MHz, where conventional open wire circuits are used, the technique of industrial processing will be referred to as radio frequency heating. However at microwave frequencies (above 500 MHz) wired circuit cannot be used and the power is transferred to the applicator containing the material to be processed in waveguides. This technique will be referred to as microwave heating systems. This definition combining the two frequencies regime is shown in the spectrum in Figure 1.2.

Microwave permittivities or dielectric properties of materials are important because these properties affect the interaction of electromagnetic energy with the materials at microwave frequencies. The complex relative permittivities is represented as  $\epsilon^* = \epsilon' - i\epsilon''$ , where the real part  $\epsilon'$  is the dielectric constant and the imaginary part  $\epsilon''$  is the dielectric loss factor. The dielectric constant  $\epsilon'$  influences the electric field distribution and the phase of the waves travelling through the material, where the energy absorption and consequent attenuation is influenced principally by the loss factor,  $\epsilon''$  (Nelson, 1994).



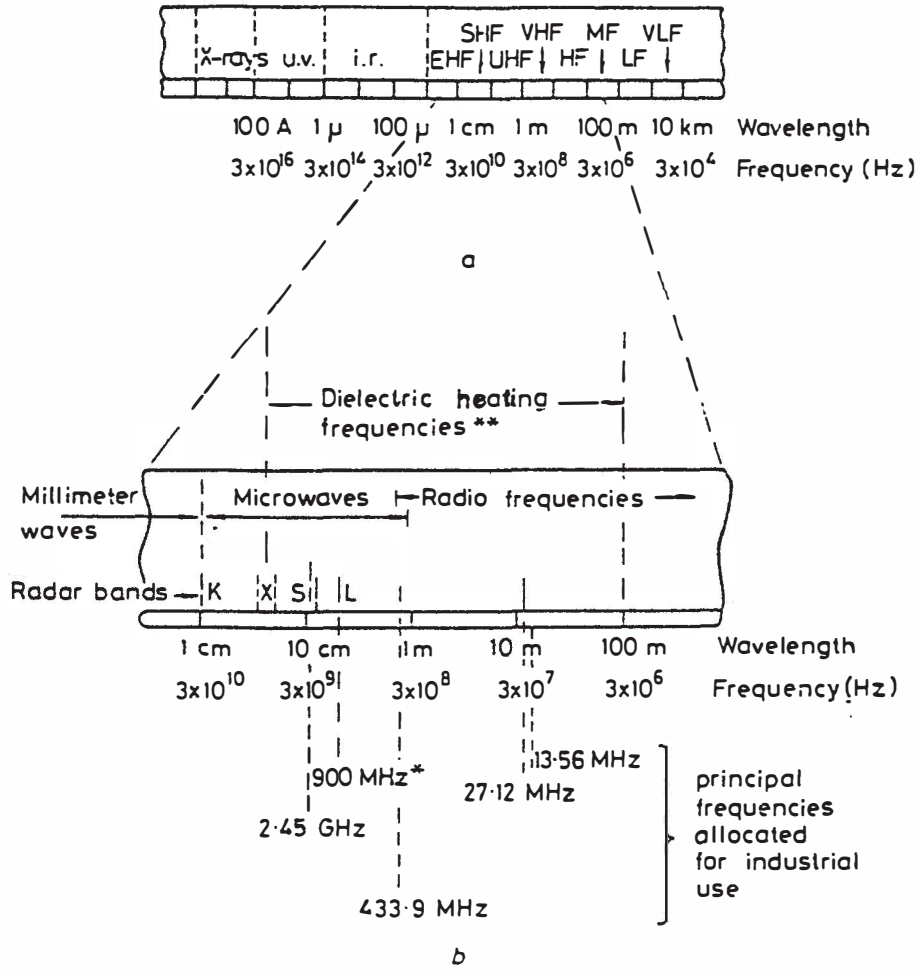


Figure 1.2. (a) The electromagnetic spectrum  
 (b) Definition of various frequencies.