



UNIVERSITI PUTRA MALAYSIA

**PREPARATION AND CHARACTERISATION OF
POLYACRYLONITRILE AND POLY(METHYL
METHACRYLATE) GRAFTED CHITOSAN**

FARAJ AHMAD FARAJ ABU-ILAIWI

FSAS 1998 8

**PREPARATION AND CHARACTERISATION OF
POLYACRYLONITRILE AND POLY(METHYL
METHACRYLATE) GRAFTED CHITOSAN**

By

FARAJ AHMAD FARAJ ABU-ILAIWI

**Thesis Submitted in Fulfilment of the Requirements for the
Degree of Master of Science in the Faculty of
Science and Environmental Studies,
Universiti Putra Malaysia.**

Jun 1998



بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

الرَّحْمَنُ ① عَلمَ الْقُرْءَانَ ② خَلَقَ الْإِنْسَانَ ③ عَلمَهُ الْبَيَانَ ④

إلى الشمعة التي تضيء طريقي في ظلمة الغربة...
إلى من صلواتها أنسي في غربتي... إلى أمي...
إلى صلي وقدوتي العليا...
إلى من يُفني جسده لإسعادي... إلى أبي...
إلى من أتجىء إليهم في ضيقتي... إلى إخواني وأخواتي...
إلى من أجد عندهم الراحة والسعادة... إلى أصدقائي...
إلى كل من يعشق العلم والمعرفة... يتعلم ليعلم غيره...

إليكم جميعاً هذا العمل المتواضع...

ACKNOWLEDGMENTS

In The Name of Allah, The Most Merciful and Most Beneficent

I would like to take this opportunity to convey my sincere thanks and deepest gratitude to my supervisor Dr. Mansor bin Haji Ahmad who introduces me to the field of Polymer Chemistry. I am also very thankful to my co-supervisors Asso. Prof. Dr. Wan Md. Zin Wan Yunus and Dr. Mohamad Zaki Ab. Rahman. I am very grateful to all of them for all the help and invaluable guidance, fruitful discussions, patience and continued encouragement provided to me at every stage of this thesis. I am really touched by Dr. Mansor and indeed grateful to him for having taken so much of his valuable time with the preparation of this thesis. His dedication and enthusiasm will never be forgotten and continue to serve as inspiration to me. I consider myself privileged to have the opportunity to work under his guidance.

I would like to convey my appreciation to the staff of the Department of Chemistry, the University Library, and the



Graduate School Office, especially: Mr. Kamal, Mr. Jegan, and Mr. Zainal. In preparing this thesis, Md. Lutfor Rahaman, Secken Balci and her husband Mr. Ali Balci, Ms. Pushpa and Ms. Zuliawati have been helpful with their suggestions and comments. Thank you for your helpful, kindness, and encouragement.

I am also very grateful and wish to thank my Jordanian friends in Malaysia: Saleh Al-Khawaldeh, Rafa Elayyan Al Qutaish, Isam Qudsieh, Khleel Al-Hasan, Mohmmad Saleh Mostafa, Ahmad Suliman Al-Khawaldeh, Hasan Al-Omoush, Malik Al-Qudah, and Abdullah Omoush for their encouragement and support.

Finally and most important, I would like to express my most sincere and warmest gratitude to my father, mother, brothers, sisters, uncle, aunts, cousins, nieces, and nephews for their prayers, love, generous moral and financial support during my study. Not forgotten my best friends in my beloved city Al-Mafraq: Sulieman Al-Azazmeh, Khaleel Sheha, Amin Bnieah and Mamdouh Bnieah for their correspondence and concern during the period of my staying in Malaysia.



TABLE OF CONTENTS

	Page
ACKNOWLEDGEMENT	iii
LIST OF TABLES	viii
LIST OF FIGURES	x
ABSTRACT	xiv
ABSTRAK	xvi
 CHAPTER	
I INTRODUCTION	1
Polysaccharides	1
Chitin and Chitosan	2
Graft Copolymerization	3
Scope of the Research	7
Objective of the Research	9
II LITERATURE REVIEW	10
Chitin and Chitosan	10
Grafting of Vinyl Monomers onto Chitin and Chitosan	20
Grafting of Vinyl Monomers onto Polysaccharides	35
Initiator Method	35
Photo-I	47
Poly(Hydroxamic Acid)	48
Absorption of Metal Ions by Poly(Hydroxamic Acid) and Amidoxime Groups	48
III MATERIALS AND METHODS	54
Materials	54
Methods	55
Graft Copolymerisation	55



	Extraction of Homopolymers	56
	Determination of Graft Level	57
	Infrared Spectral Analysis	58
	Differential Scanning Calorimetry (DSC)	58
	Thermogravimetric Analysis (TGA) ...	58
	Atomic Absorption Analysis	59
	Conversion of Chitosan-g-PAN into Poly(Hydroxamic Acid)	59
	Hydrogen Capacity	59
	Absorption of Metal Ions	60
	Water Regain	61
IV	RESULTS AND DISCUSSION.....	62
	Polyacrylonitrile Grafted Chitosan.....	62
	Effect of Monomer Concentration on Grafting	62
	Effect of Acetic Acid Concentration on Grafting Percentage	64
	Effect of the Reaction Temperature on Grafting	64
	Effect of Initiator Concentration on Grafting	66
	Effect of the Reaction Time on Grafting	68
	FT-IR Measurements	70
	Differential Scanning Calorimeter (DSC) of Copolymer	71
	Thermogravimetric Analysis (TGA) ...	72
	Poly(Methyl Methacrylate) Grafted Chitosan	78
	Effect of Initiator Concentration on Grafting	78
	Effect of Monomer Concentration on Grafting	80
	Effect of Acetic Acid Concentration on Grafting Percentage	82
	Effect of the Reaction Temperature on Grafting	83
	Effect of the Reaction Time on Grafting	84



	FT-IR Measurements	86
	Differential Scanning Calorimeter (DSC) of Copolymer	87
	Thermogravimetric Analysis (TGA) ...	88
	Grafting Sites and Copolymerization Reaction	92
	Resin Prepared from Chitosan-g- Polyacrylonitrile	95
	Poly(Hydroxamic Acid) Characterisation	95
	Hydrogen Capacity	96
	Water Regain	97
	Absorption of Metal Ions	97
V	CONCLUSION AND FURTHER STUDIES ..	104
	Conclusion	104
	Further Studies	106
	BIBLIOGRAPHY	108
	APPENDIX	
A1	Data for the Parameters for Grafting of Polyacrylonitrile onto Chitosan	118
A2	Data for the Parameters for Grafting of Poly(Methyl Methacrylate) onto Chitosan ...	123
A3	Data of Absorption Capacity for Metal Ions by Poly(Hydroxamic Acid) and Chitosan	128
VITA	134



LIST OF TABLES

Table		Page
1.	Cationic Properties for Chitosan	18
2.	Applications of chitosan	19
3.	Influence of Acrylonitrile (AN) Concentration on the Grafting of Acrylonitrile (AN) onto Chitosan ..	119
4.	Influence of Acetic Acid Concentration on the Grafting of Acrylonitrile (AN) onto Chitosan	120
5.	Influence of Reaction Temperature on the Grafting of Acrylonitrile (AN) onto Chitosan	121
6.	Influence of Initiator Ceric Ammonium Nitrate (CAN) on the Grafting of Acrylonitrile (AN) onto Chitosan	122
7.	Influence of Time Reaction on the Grafting of Acrylonitrile (AN) onto Chitosan	123
8.	Influence of Initiator Ceric Ammonium Nitrate (CAN) on the Grafting of Methyl methacrylate (MMA) onto Chitosan	124
9.	Influence of Time Reaction on the Grafting of Methyl methacrylate (MMA) onto Chitosan	125
10.	Influence of Methyl methacrylate (MMA) Concentration on the Grafting of Methyl methacrylate (MMA) onto Chitosan	126



11.	Influence of Acetic Acid Concentration on the Grafting of Methyl methacrylate (MMA) onto Chitosan	127
12.	Influence of Reaction Temperature on the Grafting of Methyl methacrylate (MMA) onto Chitosan	128
13.	absorption capacity of Fe^{3+} by poly(hydroxamic acid) and chitosan	129
14.	absorption capacity of Pb^{2+} by poly(hydroxamic acid) and chitosan	130
15.	absorption capacity of Ni^{2+} by poly(hydroxamic acid) and chitosan	131
16.	absorption capacity of Co^{2+} by poly(hydroxamic acid) and chitosan	132
17.	absorption capacity of Cr^{3+} by poly(hydroxamic acid) and chitosan	133
18.	absorption capacity of Cu^{2+} by poly(hydroxamic acid) and chitosan	134



LIST OF FIGURES

Figure	Page
1. Chemical modification of chitin (1) and chitosan (2) ; alkali-chitin (3) ; polyelectric salt (4) ; metal chelate (5) ; <i>N</i> -alkylidene or <i>N</i> -arylidene derivatives (6) ; <i>N</i> -acyl derivatives (7) ; deoxyhalo derivative (8) ; <i>N</i> -alkyl derivative (9) ; <i>O</i> -carboxy or hydroxy-alkyl derivative (10) ; oxido-deaminative product (11) ; <i>O</i> -acyl derivative (12) ; <i>O</i> -sulfonyl derivative (13) ; sulfated, phosphorylated and nitrated derivatives (14)	11
2. Structure of Chitin, Chitosan and Cellulose	15
3. Chitosan Manufacturing Process	16
4. Graft Copolymerization using Boron Trifluoride Diethyl- Etherate as Initiator	43
5. Effect of Acrylonitrile Concentration on Grafting of Polyacrylonitrile onto Chitosan. (Reaction Conditions: Chitosan, 1.0g; CAN, 0.548g; Acetic Acid, 125ml of 2%; Reaction Time, 2h; Reaction Temperature, 60°C)	63
6. Effect of Acetic Acid concentration on Grafting of Polyacrylonitrile onto Chitosan. (Reaction Conditions: Chitosan, 1.0g; CAN 0.548g, Acrylonitrile, 10ml; Volume of Acetic Acid Solution, 125ml; Reaction Time, 2h; Reaction Temperature, 60°C)	65



7.	Effect of Reaction Temperature on Grafting of Polyacrylonitrile onto Chitosan. (Reaction Conditions: Chitosan, 1.0g; CAN, 0.548g; Acrylonitrile, 10ml; Acetic Acid, 125ml of 2%; Reaction Time, 2h)	66
8.	Effect of Ceric Ammonium Nitrate (CAN) concentration on Grafting of Polyacrylonitrile onto Chitosan. (Reaction Conditions: Chitosan, 1.0g; Acrylonitrile, 10ml; Acetic Acid, 125ml of 2%; Reaction Time, 2h; Reaction Temperature, 60°C)	67
9.	Effect of Reaction Time on Grafting of Polyacrylonitrile onto Chitosan. (Reaction Conditions: Chitosan, 1.0g; Acrylonitrile, 10ml; CAN, 0.548g; Acetic Acid, 125ml of 2%; Reaction Temperature, 60°C)	69
10.	FT-IR Spectrum for chitosan, (A) ; Grafted Chitosan, (B) ; and polyacrylonitrile, (C)	71
11.	DSC Thermogram of Chitosan: (Rate: 10°C /min)	73
12.	DSC Thermogram of polyacrylonitrile: (Rate: 10°C /min)	74
13.	DSC Thermogram of Chitosan-g-Polyacrylonitrile : (Rate: 10°C /min)	75
14.	TGA and DTG Curves of Chitosan	76
15.	TGA and DTG Curves of Chitosan-g-polyacrylonitrile	77
16.	Influence of initiator (CAN) concentration on grafting of poly(methyl methacrylate) onto chitosan	79



17.	Influence of methyl methacrylate concentration on the grafting onto chitosan	80
18.	Effect of acetic acid concentration on grafting of poly(methyl methacrylate) onto chitosan	82
19.	Effect of temperature on the grafting of poly(methyl methacrylate) onto chitosan	84
20.	Influence of time on grafting of poly(methyl methacrylate) onto chitosan	85
21.	FT-IR Spectrum for Chitosan, (A) ; Grafted Chitosan, (B) ; and Poly(methyl methacrylate), (C)	87
22.	DSC Thermogram of Chitosan-g-Poly(methyl Methacrylate): (Rate: 10°C /min)	89
23.	DSC Thermogram of Poly(methyl Methacrylate) (PMMA): (Rate: 10°C /min)	90
24.	TGA and DTG Curves of Chitosan-g-Poly(Methyl Methacrylate)	91
25.	Reaction Mechanism for Grafting of Polyacrylonitrile onto Chitosan using Ceric Ammonium Nitrate as Initiator	93
26.	Reaction Mechanism for Grafting of Poly(Methyl Methacrylate) onto Chitosan using Ceric Ammonium Nitrate as Initiator	94
27.	FT-IR Spectra of Poly(Hydroxamic Acid), (A) ; and Chitosan-g-Polyacrylonitrile, (B)	96
28.	Absorption capacity of Cu ²⁺ by the poly(hydroxamic acid) and chitosan at different pHs	99



29.	Absorption capacity of Fe^{3+} by the poly(hydroxamic acid) and chitosan at different pHs	100
30.	Absorption capacity of Co^{2+} by the poly(hydroxamic acid) and chitosan at different pHs	100
31.	Absorption capacity of Cr^{3+} by the poly(hydroxamic acid) and chitosan at different pHs	101
32.	Absorption capacity of Pb^{2+} by the poly(hydroxamic acid) and chitosan at different pHs	101
33.	Absorption capacity of Ni^{2+} by the poly(hydroxamic acid) and chitosan at different pHs	102
34.	Absorption capacity of metal ions by the poly(hydroxamic acid) at different pHs	103
35.	Absorption capacity of metal ions by the chitosan at different pHs	103



Abstract of thesis presented to the Senate of Universiti Putra
Malaysia in fulfilment of the requirements
for the degree Master of Science.

**PREPARATION AND CHARACTERISATION OF
POLY(ACRYLONITRILE) AND POLY(METHYL
METHACRYLATE) GRAFTED CHITOSAN**

By

FARAJ AHMAD FARAJ ABU-ILAIWI

July 1998

Chairman: Mansor Bin Ahmad, Ph.D.

Faculty : Science and Environmental Studies

Poly(acrylonitrile) (PAN) and poly(methyl methacrylate) were grafted onto chitosan in acidic medium by using cerium ammonium nitrate as initiator under nitrogen gas atmosphere. The grafting percentage showed dependence on initiator concentration, monomer concentration, acetic acid concentration, as well as time of the reaction and temperature of the reaction.

Extent of grafting, percentage of homopolymer formation, grafting efficiency and total conversion were estimated. The highest percentage of grafting of acrylonitrile achieved was as high as



2340% when the optimum conditions were used (cerium ammonium nitrate (CAN) = 0.015 mol. L⁻¹, acrylonitrile (AN) = 2.1 mol. L⁻¹, and acetic acid = 2%, the reaction time = 60 minutes and reaction temperature = 50°C). The maximum percentage of grafting of methyl methacrylate was 450% when the optimum conditions were used (cerium ammonium nitrate (CAN) = 7.4 mmol. L⁻¹, methyl methacrylate (MMA) = 0.7 mol. L⁻¹, and acetic acid = 2%, the reaction time = 180 minutes and reaction temperature = 60°C). The resulting graft copolymers showed much hygroscopic compared to chitosan itself. Differential scanning calorimeter (DSC) and thermogravimetry analysis (TGA) studies showed that the graft copolymer of chitosan and chitosan are different in their thermal behaviour. Also thermogravimetry analysis (TGA) showed the temperature of the degradation for the copolymer. On the other hand, poly(hydroxamic acid) was prepared from chitosan-g-PAN with percentage of grafting 500%. Hydrogen capacity for the resin was calculated and water content was estimated. Absorption capacity for metal ions such as Cr²⁺, Cu²⁺, Fe²⁺, Co²⁺, Ni²⁺, and Pb²⁺ was estimated. The absorption capacity for these metal ions follow the order: Cr³⁺ > Co²⁺ > Pb²⁺ > Cu²⁺ > Fe³⁺ > Ni²⁺.



Abstrak tesis yang dikemukakan kepada Senat Universiti
Putra Malaysia bagi memenuhi keperluan
untuk ijazah Master Sains.

**PENYEDIAAN DAN PENCIRIAN KITOSAN
CANGKUK POLI(AKRILONITRIL) DAN
POLI(METIL METAKRILAT)**

Oleh

FARAJ AHMAD FARAJ ABU-ILAIWI

Jun 1998

Pengerusi : Mansor Bin Ahmad, Ph.D.

Fakulti : Sains dan Pengajian Alam Sekitar

Poliakrilonitril (PAN) dan poli(metil metakrilat) dicangkukkan pada kitosan di dalam medium berasid dengan menggunakan serium ammonium nitrat sebagai mangkin di bawah gas nitrogen atmosfera. Peratus cangkukan bergantung kepada kepekatan mangkin, monomer, asid asetik, masa dan suhu tindakbalas.

Peratus cangkukan, peratus pembentukan homopolimer, kecekapan cangkukan dan pertukaran total telah dianggarkan. Peratus cangkukan akrilonitril adalah tinggi, iaitu 2340% di bawah keadaan optimum iaitu serium ammonium nitrat (CAN) = 0.015



mol.L⁻¹, akrilonitril (AN) = 2.1 mol.L⁻¹, asid asetik = 2%, masa tindakbalas = 60 minit dan suhu tindakbalas = 50°C. Peratus cangkukan metil metakrilat adalah 450%. Keadaan optimum, tindakbalas mencangkuk adalah seperti berikut, serium ammoniam nitrat (CAN) = 7.4 mmol.L⁻¹, metil metakrilat (MMA) = 0.7 mol.L⁻¹, asid asetik = 2%, masa tindakbalas = 180 minit dan suhu tindakbalas = 60°C. Keputusan menunjukkan bahawa kopolimer cangkuk adalah lebih higroskopik berbanding dengan kitosan. Kalorimeter pembiasan pembezaan (DSC) dan termogravimetri (TGA) menunjukkan suhu perguraian kopolimer yang berbeza. Selain itu, poli(asid hidroksamik) disediakan dari kitosan-g-PAN hasil peratusan cangkuk sebanyak 500%. Kapasiti hidrogen untuk resin dan kandungan air dikira. Kapasiti penyerapan bagi ion-ion logam berat seperti Cr³⁺, Cu²⁺, Fe³⁺, Co²⁺, Ni²⁺, dan Pb²⁺ dikira. Kapasiti penyerapan bagi ion-ion logam ini adalah mengikut susunan: Cr³⁺ > Co²⁺ > Pb²⁺ > Cu²⁺ > Fe³⁺ > Ni²⁺.



CHAPTER I

INTRODUCTION

Polysaccharides

Polysaccharides are widely used in variety of industrial and food applications. They are representing a broad family of materials with very similar molecular structure. Polysaccharides have played an essential role in the development of life on this planet, and constitute important members of the family of industrial water-soluble polymers¹.

Until recently, polysaccharides mainly originated from plant sources (e.g. starch, guar gum, and pectin) or were from marine origin (e.g. alginate, agar, and chitin). Microbial polysaccharides such as dextran and xanthan gum have found commercial applications².



Chitin and Chitosan

Chitin and chitosan are manufactured commercially in large scale from the outer shell of crustaceans (shrimp and crab). With the commercial availability of purified chitosan coupled with its ability to be used in a variety of forms (powder, solution, gel, film, fibre, bead, and membrane), chitosan is being used in many commercial applications³.

New medical and biotechnology applications require high purity forms of chitin and chitosan to be made commercially. Chitosan is being evaluated in a number of medical applications. These include wound dressings, homeostatic agent, drug delivery system, and as a hypocholesterolemic agent³.

Chitin and chitosan are the environmentally friendly, versatile, and modern materials. The importance of chitin and chitosan has grown partly because they represent a renewable and biodegradable source materials, and also of recent increased understanding of their functionality in biology, technological, biotechnological and medical applications⁴. As the second most

abundant natural polymer, chitin, and its derivative chitosan, represent a great challenge both to the scientific community and to industry.

New derivatives of chitin and chitosan continue to appear, providing new solubility and useful properties. With the increasing availability of commercial products, coupled with chitin/chitosan's variety of forms (powder, solution, gel, films, fibre, bead, and derivatized), the need for continued research on the basic and applied aspects of chitin/chitosan would inevitably increase³.

Graft Copolymerisation

A polymer is a high molecular-weight molecule composed of simpler low molecular-weight molecules, which are known as monomers. If a polymer consists of two or more different monomers then the resulting polymer is called copolymer. The copolymer is classified into four types depending on the sequences of monomers in the polymer backbone.

1. Random copolymers: There is no definite sequence of the monomers. The distribution of monomer is rather random.

The random copolymer is represented as follows:



2. Regular copolymers: Such molecules are characterized by some regular sequence of monomers in the polymer chain.




3. Block copolymers: It is characterised by an arrangement where the block of one monomer is linearly connected to a block of another as follows:



4. Graft copolymers: Graft copolymers are prepared by linking two different polymers but unlike block copolymers, structural sequence is such that one type of polymer is


linked to the other through a branched structure. The structure is assumed as follows:

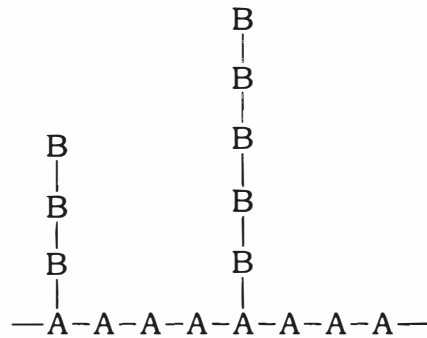

(Note: *A and B are two different monomeric units*)


In general, there may be two ways by which graft copolymers can be synthesised.

- Cross-linking reactions of two polymer chains of different types.



where *A* is the polymeric backbone and *B* is the cross-linker polymer

- Initiation of active sites on the polymeric backbone (A) when the monomers (B) can be grafted.

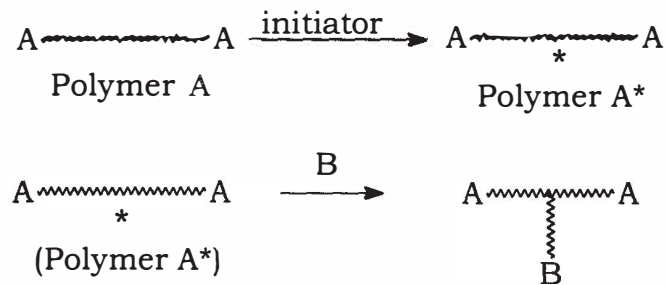

where A* is a polymer having an active site.

Of the two methods, the second process has attracted the widest attention, and initiation has been carried out both by simple chemical means and by using suitable irradiation techniques. The active site may arise from the formation of radicals or ions of which the former again constitutes the main intermediate step by means of which the bulk of graft copolymerization work has been done.

In general, grafting means addition of side chains to the backbone polymer. Such side chains may be located at the surface or may be deeply penetrating. If the option is such that the grafting

does not encompass the far interior of the backbone polymer, it may be envisaged that this will cause little perturbation in the molecular property of the backbone polymer. In addition it is known that the monomer does not usually penetrate into the ordered crystalline regions of polysaccharides but enters into the disordered amorphous regions. On the other hand, if the penetration of the side chains is deeper, major changes in the properties of graft copolymer may develop.

Scope of the Research

Polyacrylonitrile (PAN) and poly(methyl methacrylate) (PMMA) will be grafted onto chitosan in acidic medium by using cerium(IV) ammonium nitrate (CAN) as initiator under nitrogen gas atmosphere to produce biodegradable polymer. The effect of initiator concentration, monomer concentration, acetic acid concentration, as well as time and temperature of the reaction on grafting percentage will be examined to achieve the optimum conditions of the grafting.