

## Topology optimization of super hydrophobic surfaces: design and fabrication

Andersen, Nis Korsgaard; Cavalli, Andrea; Okkels, Fridolin; Taboryski, Rafael J.

*Publication date:*  
2014

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*

Andersen, N. K., Cavalli, A., Okkels, F., & Taboryski, R. J. (2014). Topology optimization of super hydrophobic surfaces: design and fabrication. Poster session presented at Pittcon 2014, Chicago, United States.

## DTU Library

Technical Information Center of Denmark

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.




# Topology optimization of super hydrophobic surfaces: design and fabrication

Nis Korsgaard, Andrea Cavalli, Fridolin Okkels and Rafael Taboryski

## Topology Optimization


### Collapse of the Cassie State

Super hydrophobic surfaces is usually associated with the so called Cassie state, where a drop rests atop of asperities. The Cassie Baxter state is often just a metastable state where the wetting state, called Wenzel state, is the energetically favorable. The transition from the Cassie state to the Wenzel state is often hindered by an energy barrier, this energy barrier can be overcome by an applied pressure to the drop.

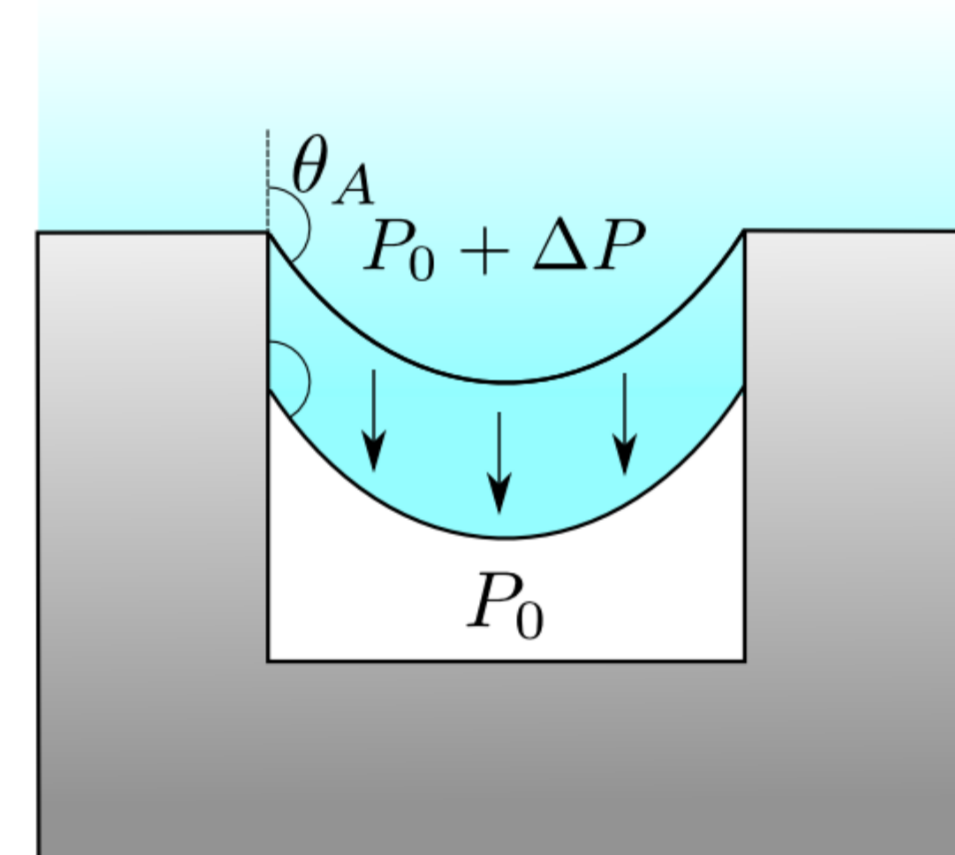

### Topology Optimization


Topology optimization is a free shape optimization routine already applied with success in several areas of science and engineering. We use it here to find the optimal cross section for a micrometric post, in order to minimize the displacement of the liquid-air interface under applied pressure [1]. This should improve the robustness of the suspended Cassie state, and make the patterned substrate super hydrophobic under a wide range of working conditions.

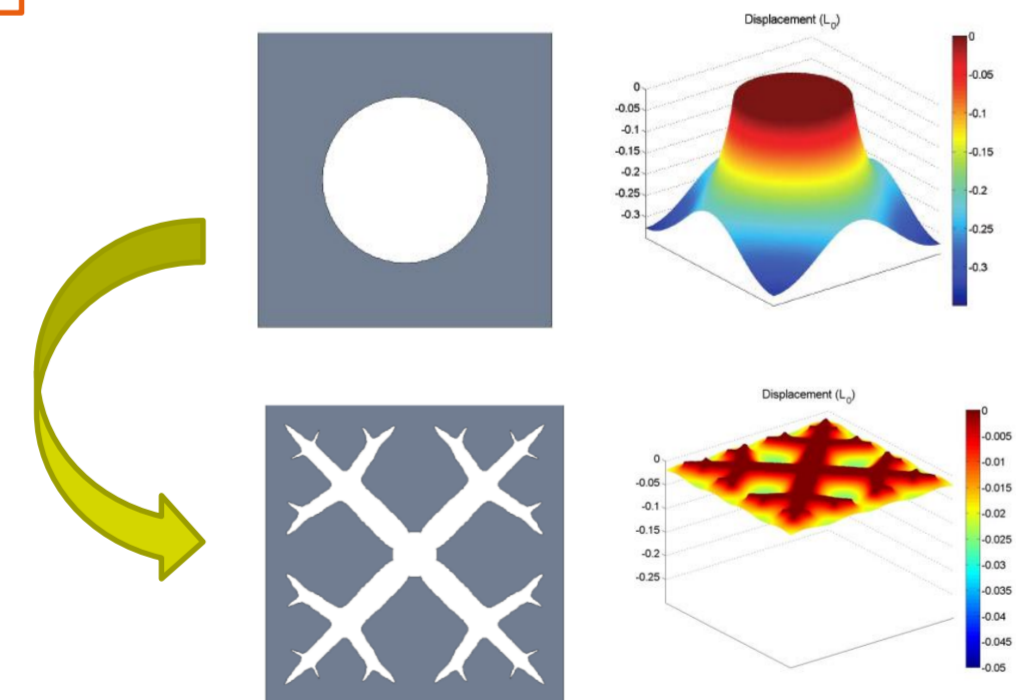

## Fabrication


### Post Processing of Topology Optimized Structures

Post processing of the calculated structures are necessary to reduce the difference in length scale of topology optimized structure. The post processing algorithm ensures dilation of narrow parts without changing the overall structure.

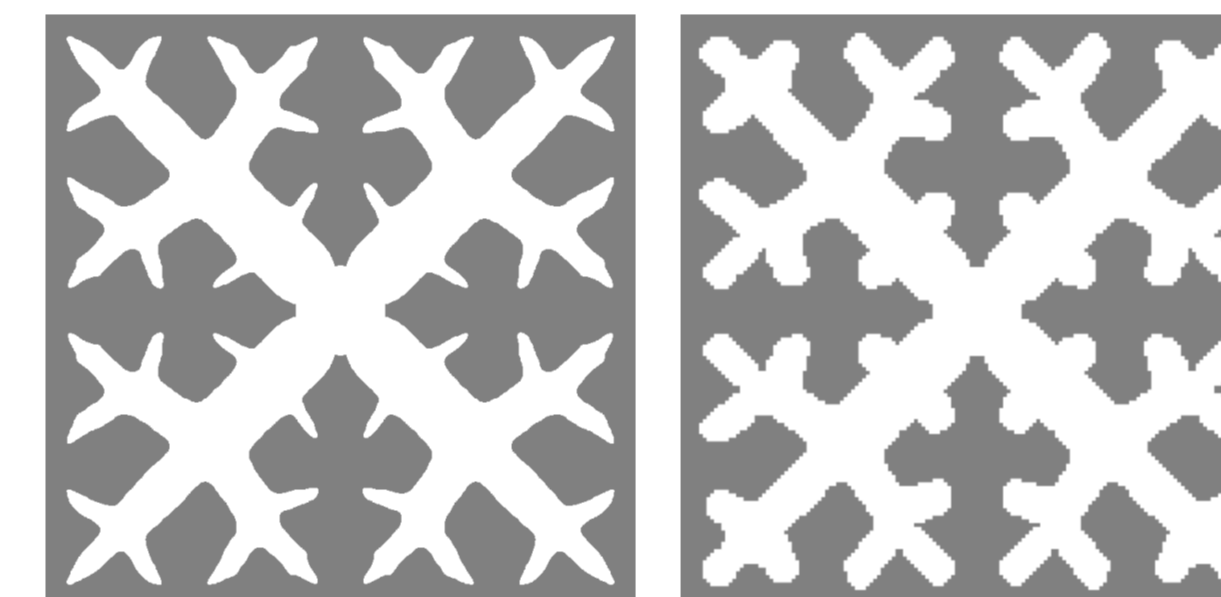

### Fabrication Process

- Spinning of photoresist.
- Standard UV-Lithography, consisting of UV exposure and development.
- Pattern transfer by D-RIE etch, followed by removal of remaining photoresist.
- Silicon structures are coated with FDTS to create a hydrophobic surface.

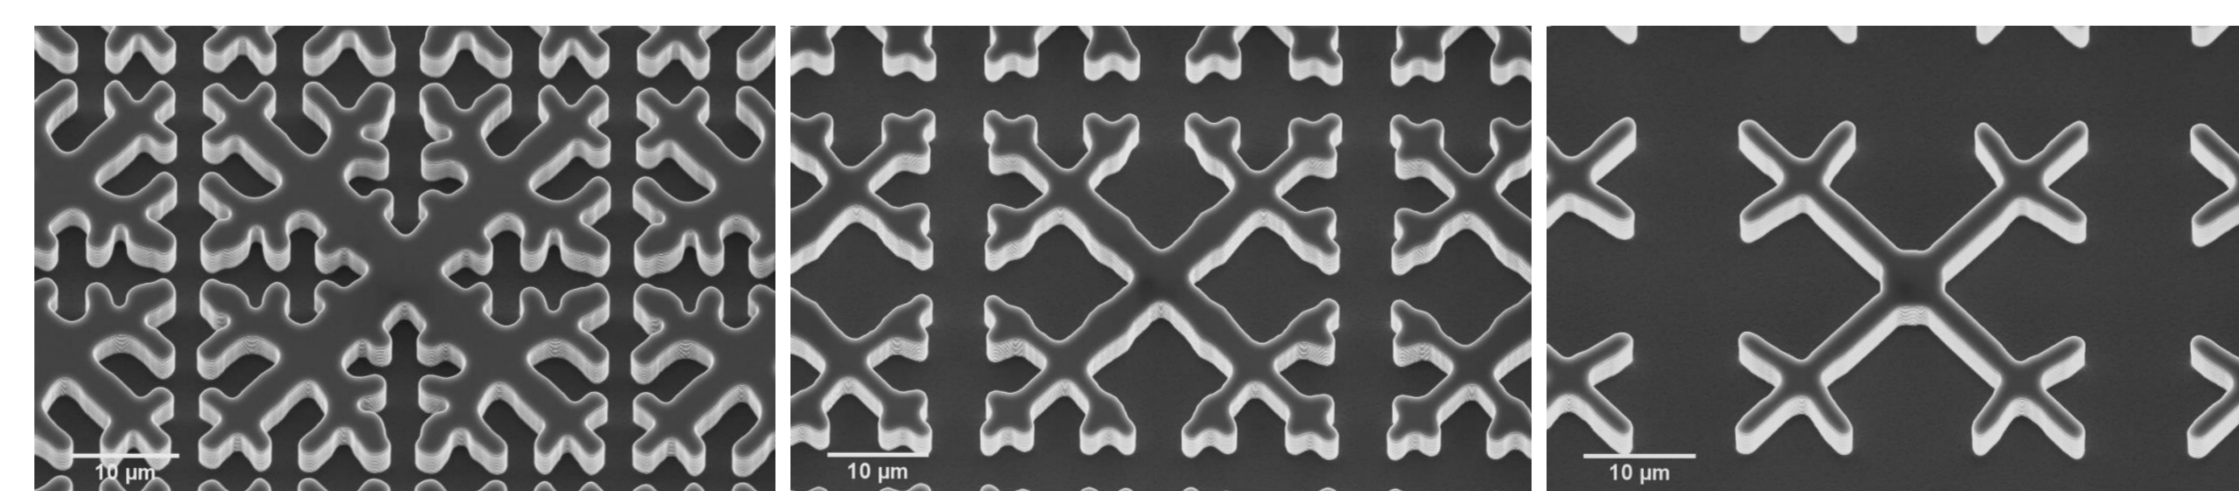

SEM images of some of the produced structures with varying surface coverage.


## Characterization

### Impact Measurements

The effect of applied pressure have been tested by dropping a water drop from different heights. The different velocities results in different dynamic pressures.



### Impact Results

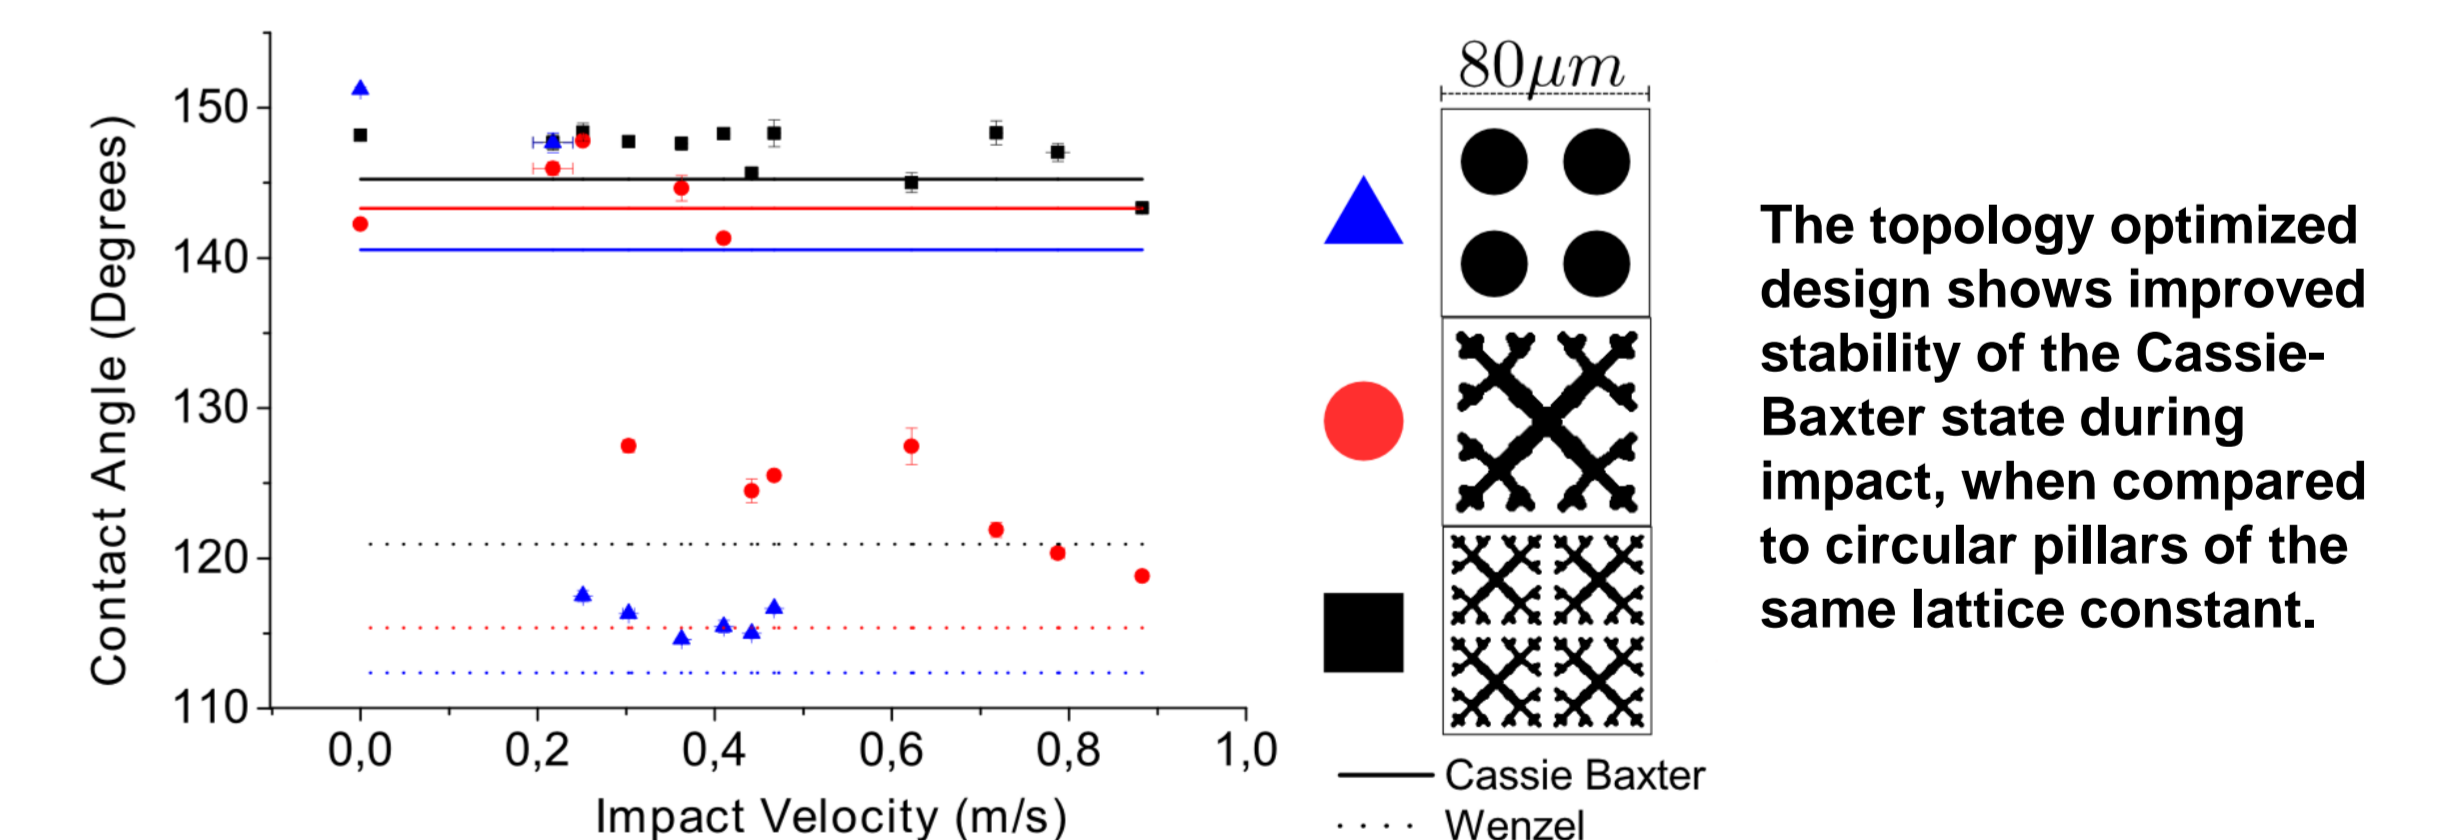

Contact angles measurement after different impact velocities. Measurements showing contact angles below 135 degrees are pinned on the microstructures.

[1] A. Cavalli, P. Bøggild and F. Okkels, Soft Matter, 2013, 9, 2234