

Technical University of Denmark



Parametric City Scale Energy Modeling Perspectives on using Termite in city scaled models

Negendahl, Kristoffer; Nielsen, Toke Rammer

Publication date:
2014

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Negendahl, K., & Nielsen, T. R. (2014). Parametric City Scale Energy Modeling Perspectives on using Termite in city scaled models. Poster session presented at International Energy Systems Integration European Workshop 2014, Copenhagen, Denmark.

DTU Library Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.


- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Parametric City Scale Energy Modeling

Perspectives on using Termite in city scaled models


Termite is a parametric tool using the Danish building performance simulation engine Be10 written for the Grasshopper3D/Rhino3D environment. The tool Be10 is originally intended for building energy frame calculations and is required by Danish law when constructing new buildings. Termite opens up for fully parametric district- and city-size simulations of yearly building energy consumption with the same precisions of energy use as the tool simulates on each and every building. The poster demonstrates some of the parametric flexibilities in using Termite e.g. planning for optimal synergetic envelope requirements, placing solar energy production facilities etc.

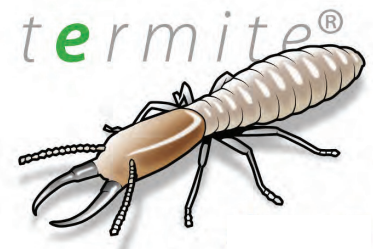


TERMITE MAKES PEOPLE WORK TOGETHER TO DESIGN BETTER BUILDINGS




Termite is able to simulate the dynamics of building energy consumption over the year, which includes thermal transport, natural and mechanical ventilation, cooling and heating systems, heatpumps, solar cells and much more.

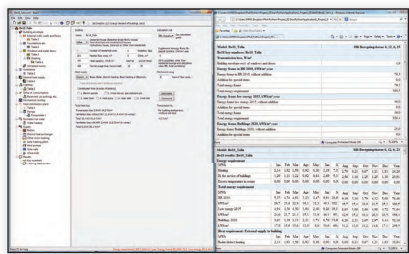


Be10 is a mono-zone, monthly based building performance simulation tool based on the Danish national energy standards of BR10



Termite uses the calculation engine of Be10 that accepts every input as a parametric variable in the programmable scripting environment of Grasshopper. Basically all geometric relationships can be modelled and visualized in the CAD environment of Rhino, while user defined algorithms can handle any system setting and input in Be10. While the tool is originally intended to be used in calculating the energy consumption of single buildings, Termite open up for multiple building simulations, thus providing a very efficient tool for city scale energy analysis.

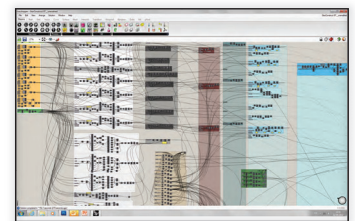

Termite is built by Ph.D candidate Kristoffer Nøgendahl in collaboration with Grontmij Architectural Engineering Denmark in the quest for qualifying sustainable buildings, districts and cities in the early stages of the design process.

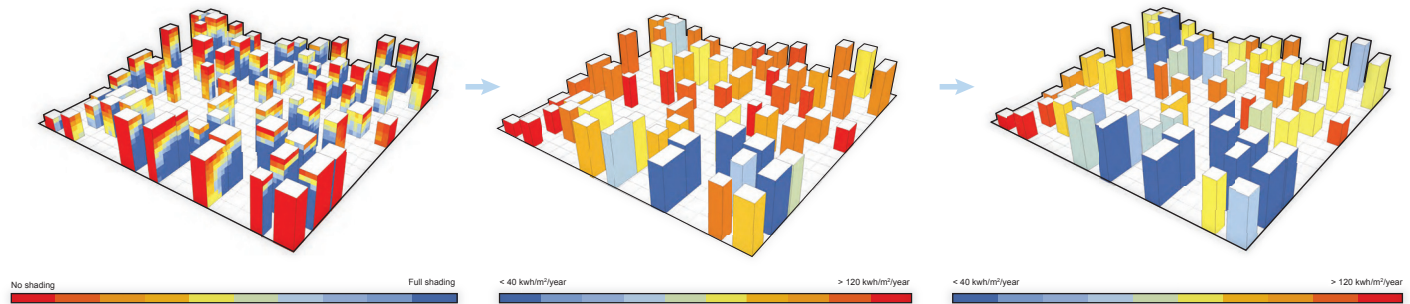

This illustration is showing the self shading mechanisms in a fairly condensed city scape. The shading is calculated with an isotvist-method based on C. Reinhart insolation distribution used in Radiance. The shadow effects are then used by Termite in calculating the monthly heat gain through window openings.

Termite can be used to calculate the monthly and yearly energy consumption in kWh/m², here displayed as a colour of building energy consumption. The entire city site is simulated within 5 seconds on an ordinary desktop machine, thus making the tool ideal for parametric design exploration purposes.

Fundamental changes in heating strategies and ventilation requirements can lead to very different energy consumption. Here is the district heating exchanger efficiency improved by 10% and criteria on window g-values is changed in all buildings.

Termite provides very detailed toolsets to model and analyze large scale building energy problems. Effects from building-to-building relationships can be defined by custom user-algorithms with Grasshopper while utilizing Termite to provide valid feedback of each building energy production and consumption. Energy reductions/increases can easily be visualized and Termite may be used as an effective tool for energy planning purposes.

Ph.D student Kristoffer Nøgendahl
Supervisor Toke Rammer Nielsen

Contact: krnj@byg.dtu.dk | +45 2670 4550