

Technical University of Denmark



## Screening of amino acid salts solutions for application in CO<sub>2</sub> capture from flue gas.

Lerche, Benedicte Mai; Stenby, Erling Halfdan; Thomsen, Kaj

*Publication date:*  
2011

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*

Lerche, B. M., Stenby, E. H., & Thomsen, K. (2011). Screening of amino acid salts solutions for application in CO<sub>2</sub> capture from flue gas.. Abstract from 1st Post Combustion Capture Conference, Abu Dhabi, United Arab Emirates.

## DTU Library

Technical Information Center of Denmark

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



1<sup>st</sup> Post Combustion Capture Conference

# Screening of amino acid salts solutions for application in CO<sub>2</sub> capture from flue gas.

Benedicte Mai Lerche<sup>a</sup>, Erling H. Stenby<sup>b</sup> and Kaj Thomsen<sup>a</sup>

CERE (Center for Energy Resources Engineering) <sup>a</sup>Department of Chemical and Biochemical Engineering. <sup>b</sup>Department of Chemistry, DTU (Technical University of Denmark) Søtofts plads building 229, 2800 Kgs. Lyngby. DK

---

CO<sub>2</sub> capture; Amino acid salt solution; Flue gas; solvent properties; CO<sub>2</sub> loading capacity; Precipitation; Dynamic flow method

---

## 1. Introduction

Reversible absorption of carbon dioxide (CO<sub>2</sub>) into a chemical solvent is currently the leading CO<sub>2</sub> capture technology. During contact with the flue gas, the solvent chemically absorbs the CO<sub>2</sub>. Heating of the CO<sub>2</sub> rich solvent leads to release of the CO<sub>2</sub> from the solvent, which is hereby regenerated and ready for another round of absorption. The captured CO<sub>2</sub> can now be compressed and transported to a storage location [1]. Available solvents are almost exclusively based on aqueous solutions of alkanolamines, which entail both economic and environmental complications [2]. Because the need to capture CO<sub>2</sub> is gaining relevance, there is an urgent need for the development of new and better solvents. Due to a number of advantages, amino acid salt solutions have emerged as an alternative to alkanolamine solutions. However, only few studies of amino acids in CO<sub>2</sub> capture from flue gas have been performed so far [3]. In order to select appropriate amino acids for the process, we have developed a screening procedure, in which amino acid salts are tested in regard to important solvent properties, such as water solubility, heat stability, CO<sub>2</sub> loading capacity, as well as the ability to form precipitation upon the absorption of CO<sub>2</sub>. Results are presented for a number of amino acids subjected to our screening procedure. Based on these results, general conclusions have been made on the use of amino acid salt solutions as solvents for CO<sub>2</sub> capture from flue gas.

## 2. Steps of the screening procedure

The maximum solubility of the amino acid salt in water will determine the maximal CO<sub>2</sub> loading per kg water. A higher CO<sub>2</sub> loading per kg water will reduce the cost of the capture process, as less energy is lost to the heating of water during stripping of the CO<sub>2</sub> from the amino acid. We started our screening procedure with a solubility study, where the water solubility of selected amino acids was examined. The amino acid salts showing good solubility, were carried on to the next step of the screening procedure, the heat stability study.

As the solution has to be heated in order to release the CO<sub>2</sub>, knowledge of the heat stability of the amino acid salt solutions is important. The method used for the heat stability study is a well known biochemical technique, called amino acid analysis, which is developed for determining the amount of different amino acids in a protein sample. By comparing heated and unheated samples, the degree of degradation due to heating was determined.

For the purpose of studying the CO<sub>2</sub> loading capacity of amino acid salt solutions, we developed an experimental set-up based on a dynamic analytical mode, with analysis of the effluent gas (Figure1).

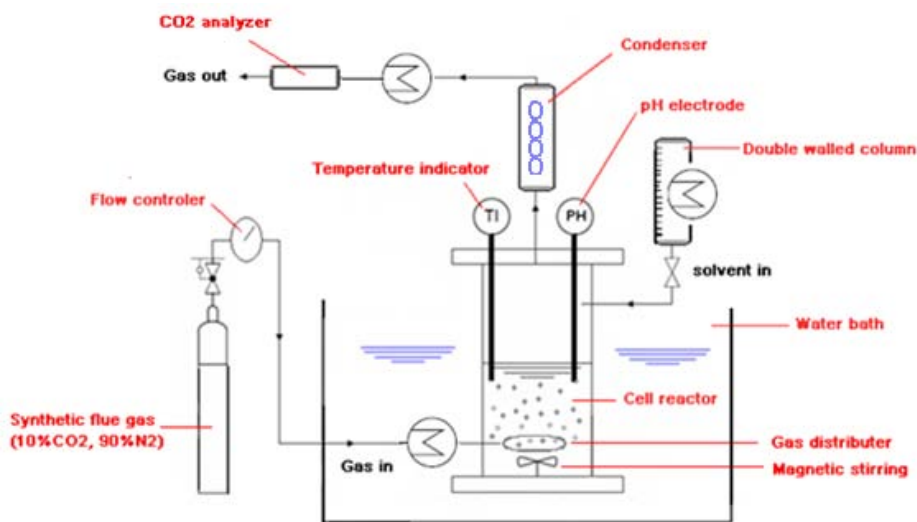


Figure 1: Experimental set-up to study the CO<sub>2</sub> loading capacity of amino acid salt solutions.

Using this set-up, the CO<sub>2</sub> loading capacity of aqueous solutions of the potassium salts of selected amino acids were examined, and the relation between the initial amino acid salt concentration and precipitation ability of each solution were determined. Experiments were performed at a partial pressure of CO<sub>2</sub> close to 10 kPa, and a total pressure around 100 kPa, and a temperature close to 298 K. The chemical nature of the obtained precipitates was determined using X-ray diffraction and infra-red spectroscopy.

## 3. References

1. IPCC Special Report on Carbon Dioxide Capture and storage. (2005)
2. P.S. Kumar et al. *Ind. Eng. Chem. Res.* 42 (2003) 2832-2840.
3. Benedicte Mai Lerche, Erling H. Stenby and Kaj Thomsen "CO<sub>2</sub> Capture from Flue Gas using Amino Acid Salt Solutions". *Proceedings from Risoe International Energy Conference 2009*.