

Design tool for offshore wind farm cluster planning

Hasager, Charlotte Bay; Giebel, Gregor; Hansen, Kurt Schaldemose; Madsen, Peter Hauge; Schepers, Gerard; Cantero, Elena ; Waldl, Igor; Anaya-Lara, Olimpo

Publication date:
2015

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):
Hasager, C. B., Giebel, G., Hansen, K. S., Madsen, P. H., Schepers, G., Cantero, E., ... Anaya-Lara, O. (2015). Design tool for offshore wind farm cluster planning European Wind Energy Association (EWEA). [Sound/Visual production (digital)]. EWEA Annual Conference and Exhibition 2015 , Paris, France, 17/11/2015

DTU Library

Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



Design tool for offshore wind farm cluster planning

Charlotte Hasager (1) Gregor Giebel (1) Kurt S. Hansen (1) Peter Hauge Madsen (1) Gerard Schepers (2) Elena Cantero (3) Igor Waldl (4) Olimpo Anaya-Lara (5)

(1) DTU Roskilde Denmark (2) ECN Petten The Netherlands (3) CENER Pamplona Spain (4) Overspeed Oldenburg Germany (5) University of Strathclyde Glasgow United Kingdom

DTU Wind Energy



Support by



Design tool for offshore wind farm cluster planning

Charlotte Bay Hasager, Peter Hauge Madsen, Gregor Giebel, Pierre-Elouan Réthoré, Kurt S. Hansen, Jake Badger, Alfredo Peña, Patrick Volker, Merete Badger, Ioanna Karagali, Nicolaos Cutulusis, Petr Maule (1), Gerard Schepers, Edwin, J. Wiggelinkhuizen (2), Elena Cantero (3), Igor Waldl (4), Olimpo Anaya-Lara, A.B. Attya (5), Harald Svendsen (6), Ana Palomares (7), Jose Palma, Vitor Costa Gomes (8), Julia Gottschall, Gerrit Wolken-Möhlmann, Ilona Bastigkeit (9), Hauke Beck, Juan Jose Trujillo (10), Rebecca Barthelmie (11), Giorgos Sieros, Takis Chaviaropoulos (12), Pauline Vincent, Romain Husson (13), John Prospathopoulos (14)

- (1) DTU Wind Energy, Roskilde, Denmark, cbha@dtu.dk, phone +45 21327328, (2) ECN, Petten, The Netherlands, (3) CENER, Sarriguren, Spain, (4) Overspeed, Oldenburg, Germany, (5) University of Strathclyde, Glasgow, UK (6) SINTEF Energy Research, Trondheim, Norway, (7) CIEMAT, Madrid, Spain, (8) University of Porto, Porto, | Portugal, (9) IWES Fraunhofer, Bremerhaven, Germany, (10) FORWIND, University of Oldenburg, Oldenburg, Germany, (11) University of Cornell, Ithaca, NY, USA, (12) CRES, Athens, Greece, (13) CLS, Plouzane, France, (14) NTUA, Athens, Greece


Project partners



INDIANA UNIVERSITY



EERA DTOC project vision

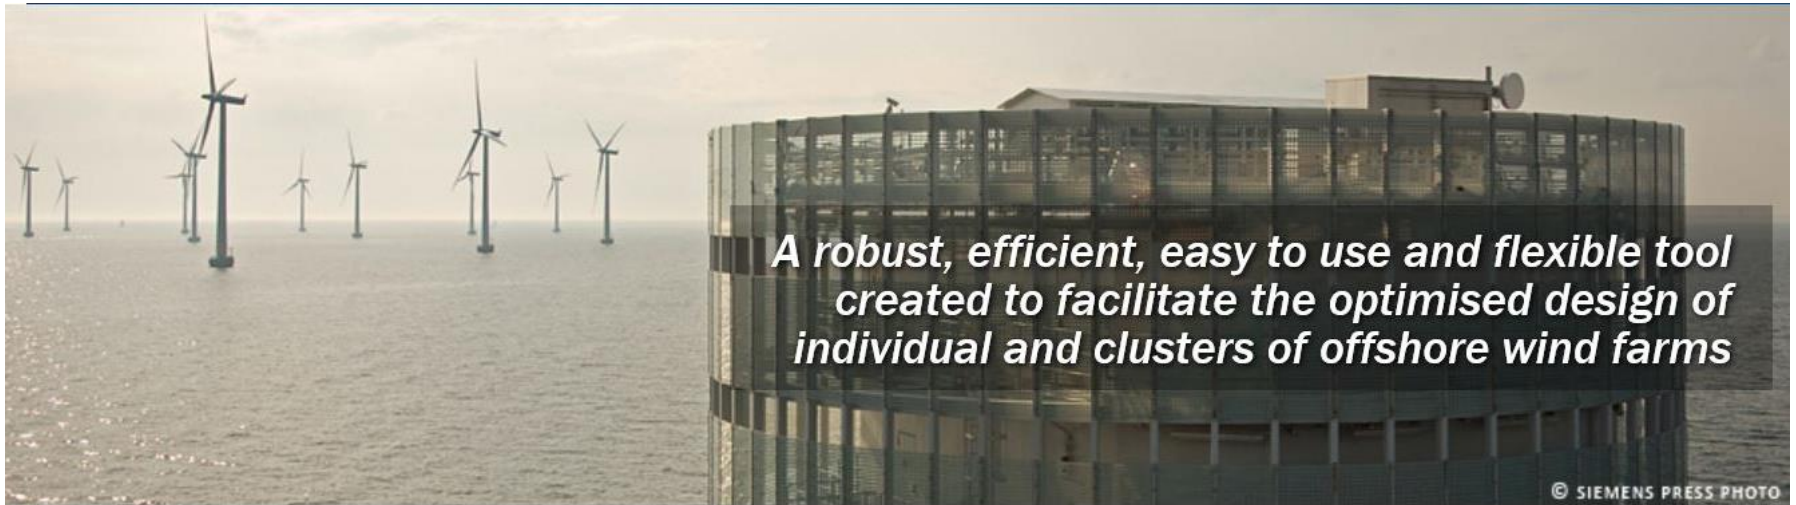

*A robust, efficient, easy to use and flexible tool
created to facilitate the optimised design of
individual and clusters of offshore wind farms*

© SIEMENS PRESS PHOTO

Streamlining project planning of offshore wind farms


Even though offshore wind farms are incredibly expensive—and a great deal of time is devoted to planning them—communication between project developers leaves a lot to be desired. Simply put: one expert often has little idea what another is doing, and this costs a lot of time and money. However, this situation may soon be history thanks to a new tool developed by DTU Wind Energy in Roskilde.



<http://www.dtu.dk/english/News/2015/04/Offshore-wind-farms-to-be-developed-with-a-single-model?id=c3435bfd-ef12-42cf-8f39-fd5fa8e948c8>

- Use and bring together existing models from the partners
- Develop open interfaces between them
- Implement a shell to integrate
- Fine-tune the wake models using dedicated measurements
- Validate final tool

Concept and implementation

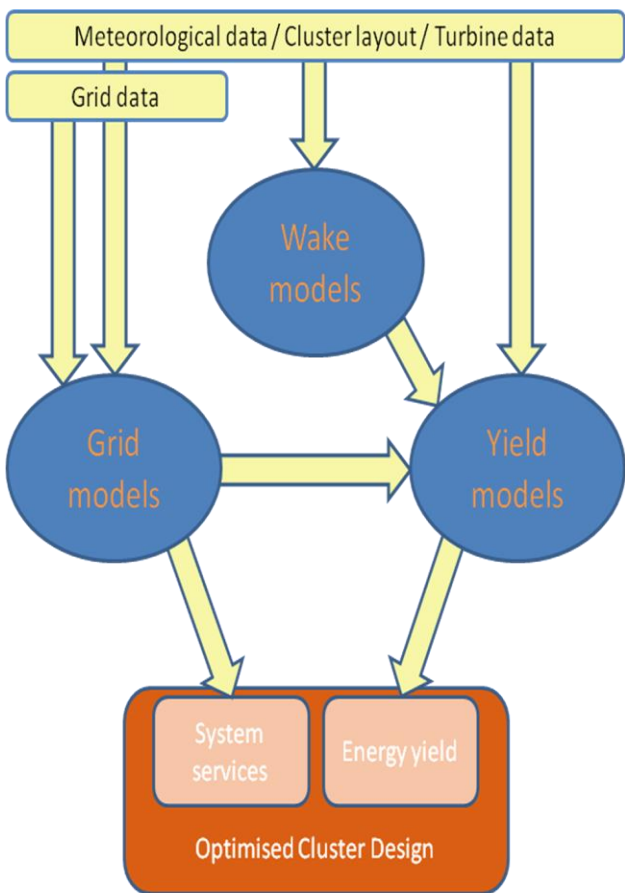

DTOC Tool

- GIS
- LCOE
- uncertainty
- FUGA
- WAsP
- WRF
- WRF/ROMS
- CorWind

DTOC Services

- eefarm
- FarmFlow
- WCMS
- Net-op
- SKIRON
- VENTOS

Local computer: GIS and local web browser



Web application



Logged in as igor 
[Logout](#)
GmbH & Co. KG

[Wind & Economy GUI](#) | [Documentation](#) | [About](#)

Scenario: DTOC WP5 Base Scenario meteo WRF

- Project: DTOC WP5 Base Scenario (Race Bank)
 - Tree: DTOC WP5 BaseScenario Tree
 - Scenario: DTOC WP5 Base Scenario
 - Scenario: DTOC WP5 Base Scenario meteo
 - Scenario: DTOC WP5 Base Scenario meteo WP5
 - Scenario: DTOC WP5 Base Scenario meteo WRF
 - Scenario: DTOC WP5 Base Scenario meteo WRF FUGA
 - Scenario: DTOC WP5 Base Scenario meteo WRF

Scenario Properties

Wind Farm Parameters

- Race Bank ✓
 - Parameters
 - Location
 - WindFarmShape
 - WindTurbines
 - Substations
 - Cables
 - Dudgeon
 - Inner Dowsing
 - Lincs
 - Lynn
 - Sheringham Shoal
 - Triton Knoll A
 - Triton Knoll B


Wind Turbine Type Parameters

Model Parameters

Map | Scenarios Report | Single Farm Report



GIS Triton Knoll A Triton Knoll B

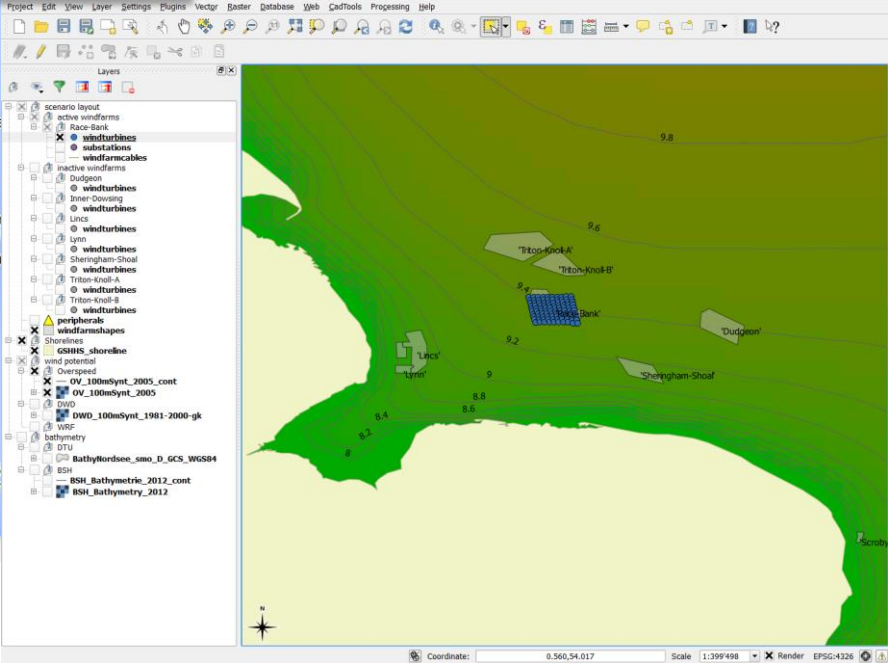

- As a developer I can **determine the optimum** spacing, position, turbine model and hub height of turbines within an offshore wind farm.

*Software supports the **comparison** of many design scenarios.*

***Comparative** reporting enables selection of optimised configurations.*

Score for comparison: Levelised Cost of Energy

Optimisation Process

1. Generate Design Options

- Scenario 1
- Scenario 2
- Scenario 3
- Scenario 4
- Scenario 5
- Scenario 6
- Scenario 7


2. Evaluate Design Options

Wake Model

Electrical Model

Energy model

3. Compare Design Options

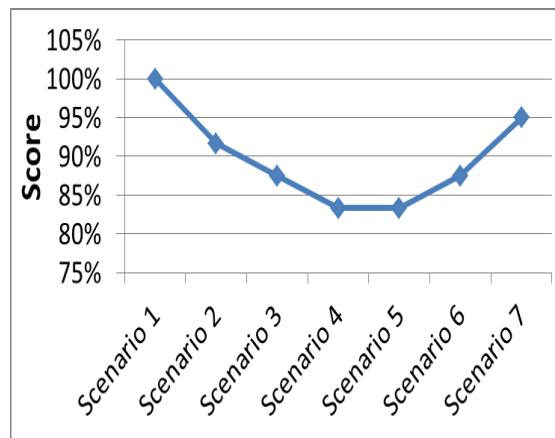

4. Iterate steps 1 to 3



Score: Levelized cost of energy

What decision parameter can we use to compare design options?

Validation of wake models




SCADA data at Horns Rev 1, Lillgrund and Rødsand 2 offshore wind farms have been compared to more than 10 wake models


SCADA data and lidar data at Alpha ventus have been compared to three wake models

Satellite data have been compared to four wake models


The benchmark concludes that several models were able to handle the clustering of wind farms

Horns Rev 1

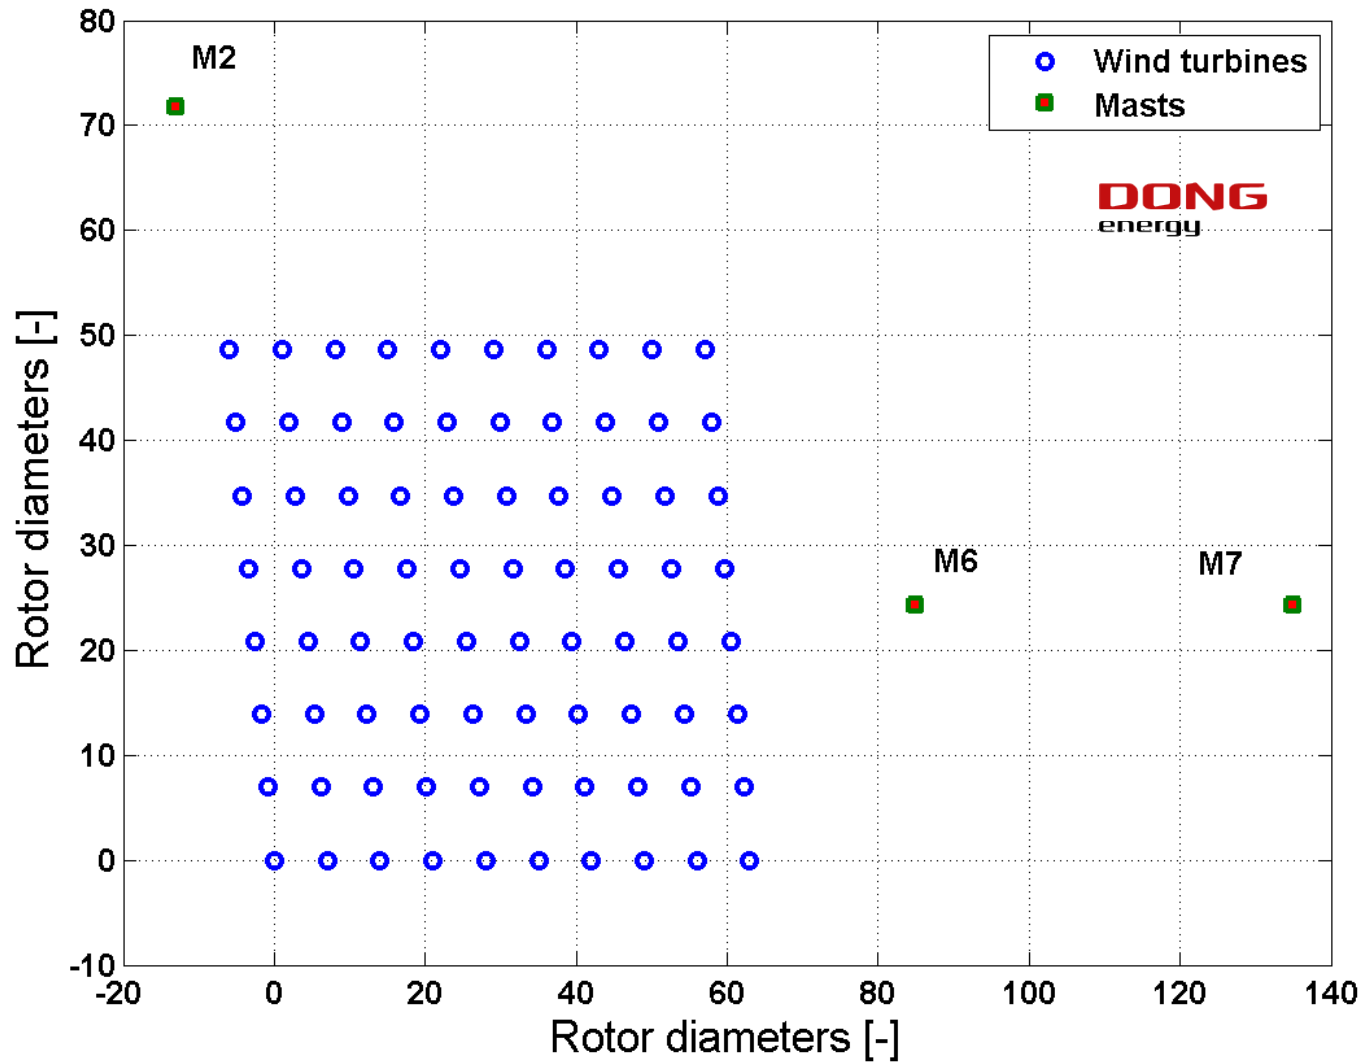

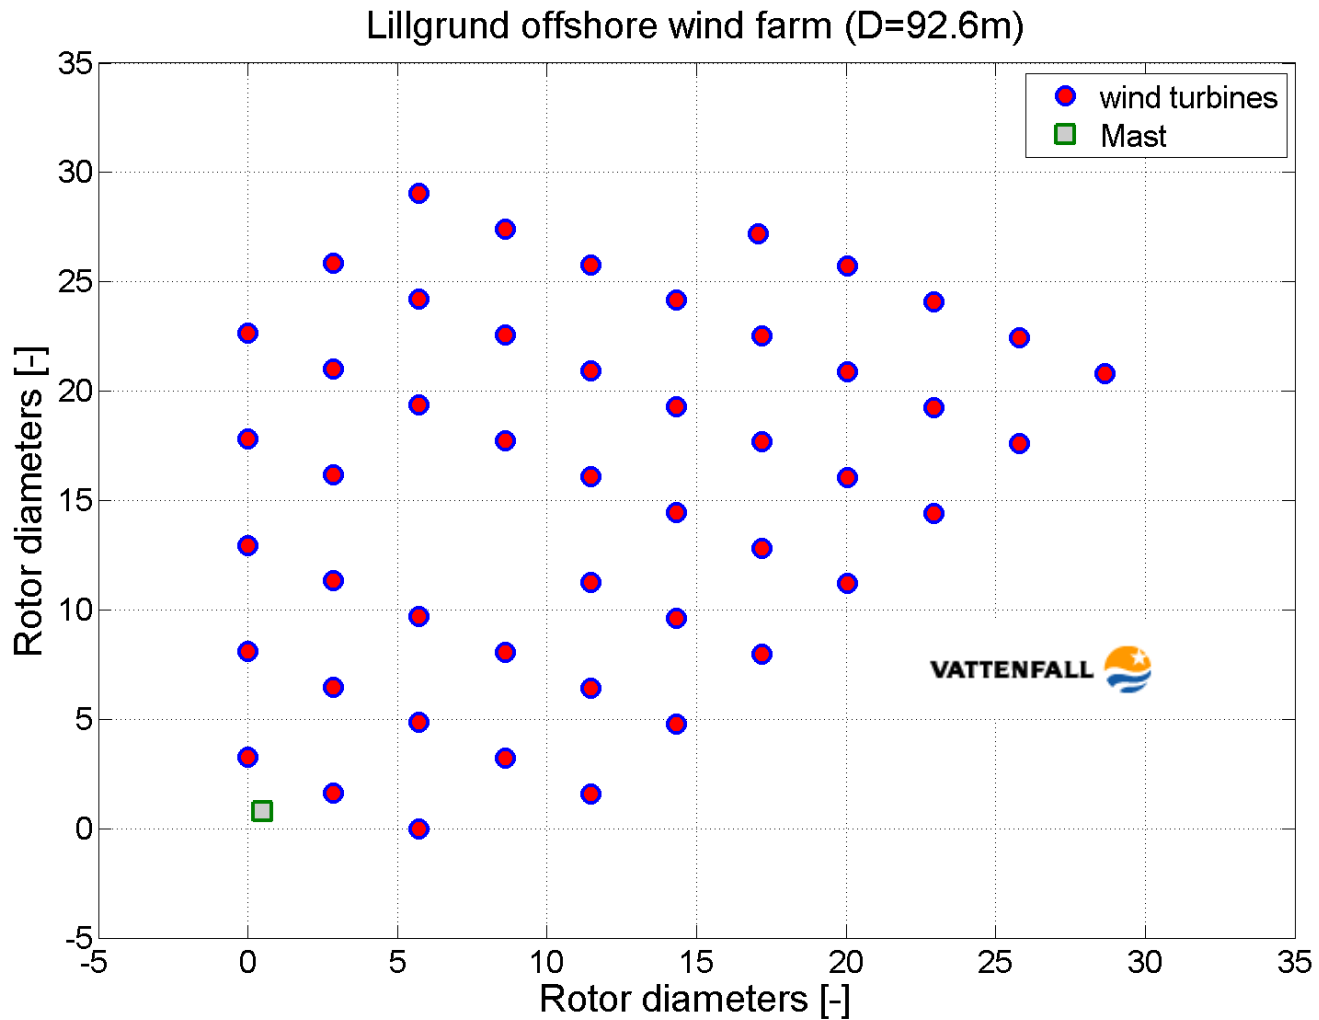

Offshore wind farm cluster: Rødsand II & Nysted

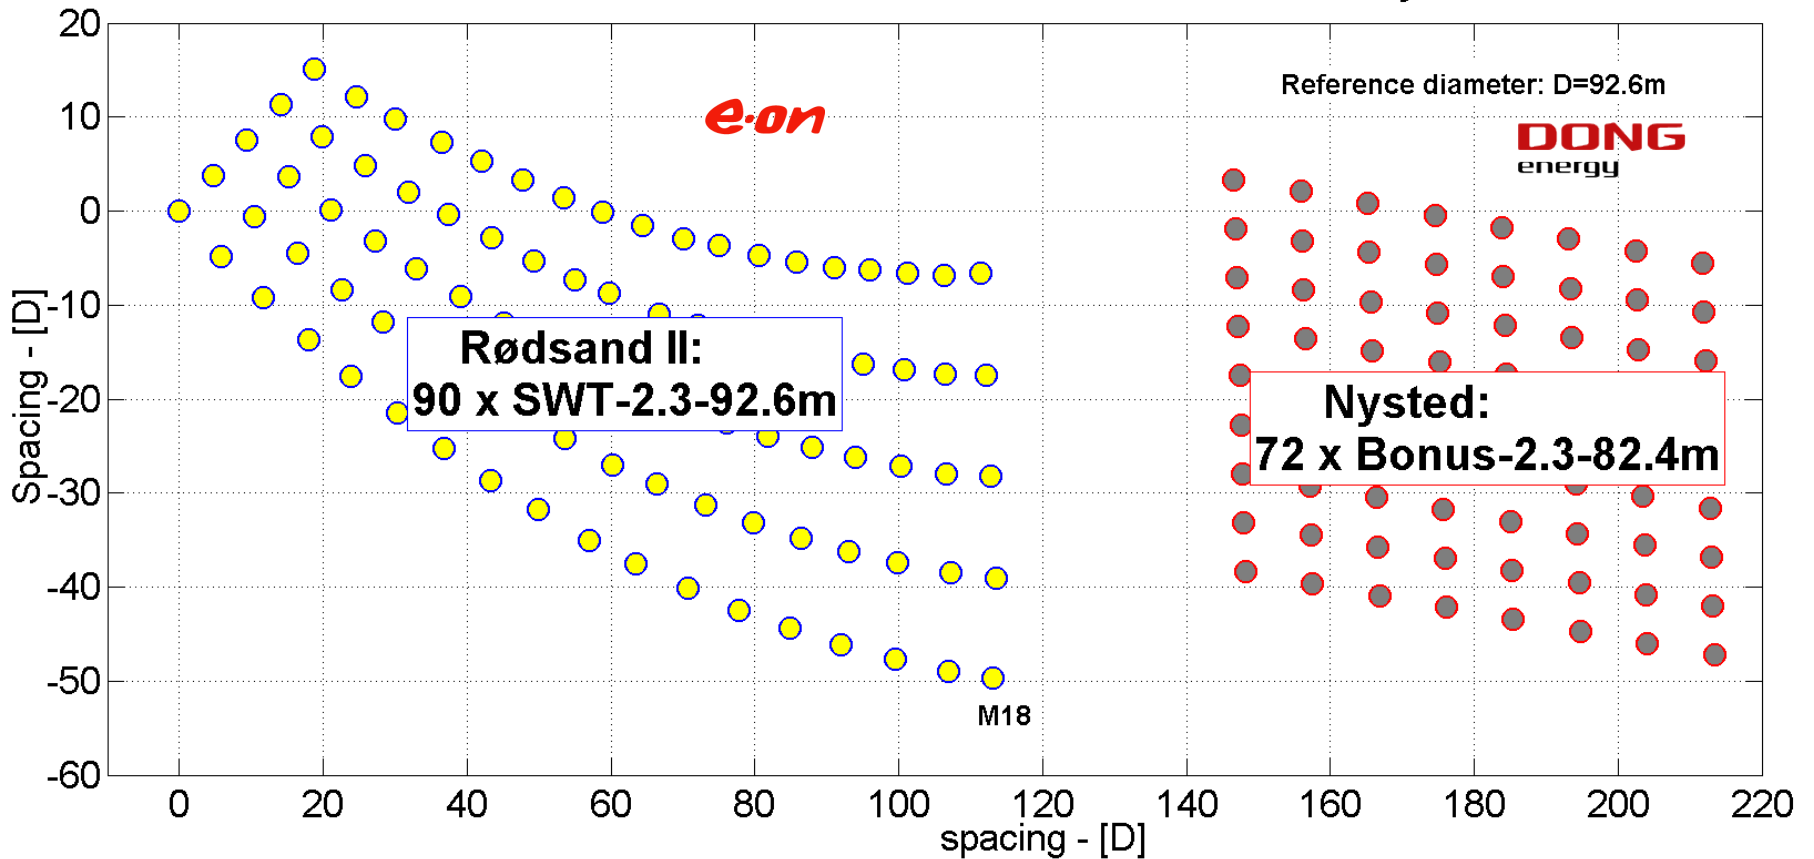


Participants and park models

Models	Affiliation	Horns Rev WF	Lillgrund WF	Rødsand II WF	Rødsand II/Nysted WF
SCADA/BA	DTU Wind Energy/K.S.Hansen	x	x	x	(x)
NOJ/BA	DTU Wind Energy/misc		x		
NOJ/GU	DTU Wind Energy/misc		x	x	
NOJ/BA	DTU Wind Energy/A. Pena	x	x	x	
WASP/NOJ	Indiana Uni/RB	x			
GCL/BA	DTU Wind Energy/misc		x		
GCL/GU	DTU Wind Energy/misc	x	x		
GCL(GU)	CENER/JS.Rodrigo	x	x		
FUGA/SO	DTU Wind Energy/S. Ott	x	x	x	
DMW	DTU Wind Energy/TJ.Larsen	x			
AD/RANS	UPORTO/J.L. Palma	x		x	x
CRESflowNS	CRES/ J. Prospathopoulos	x	x	x	
FarmFlow	ECN Wind Energy/J.G Scheepers	x	x	x	x
CFDWake	CENER/B.G. Hevia	x		x	
RANS/f _p C	DTU Wind Energy/P.vd Laan			x	x
Ainslie	RES-LTD/T.Young	x	x		
WRF/UPM	Ciemat/A.Palomares			x	
Mesoscale	DTU Wind Energy/P.Volker			x	

BA=Bin averaged & GU=Gaussian Uncertainty

Horns Rev park efficiency @ 0 - 360°

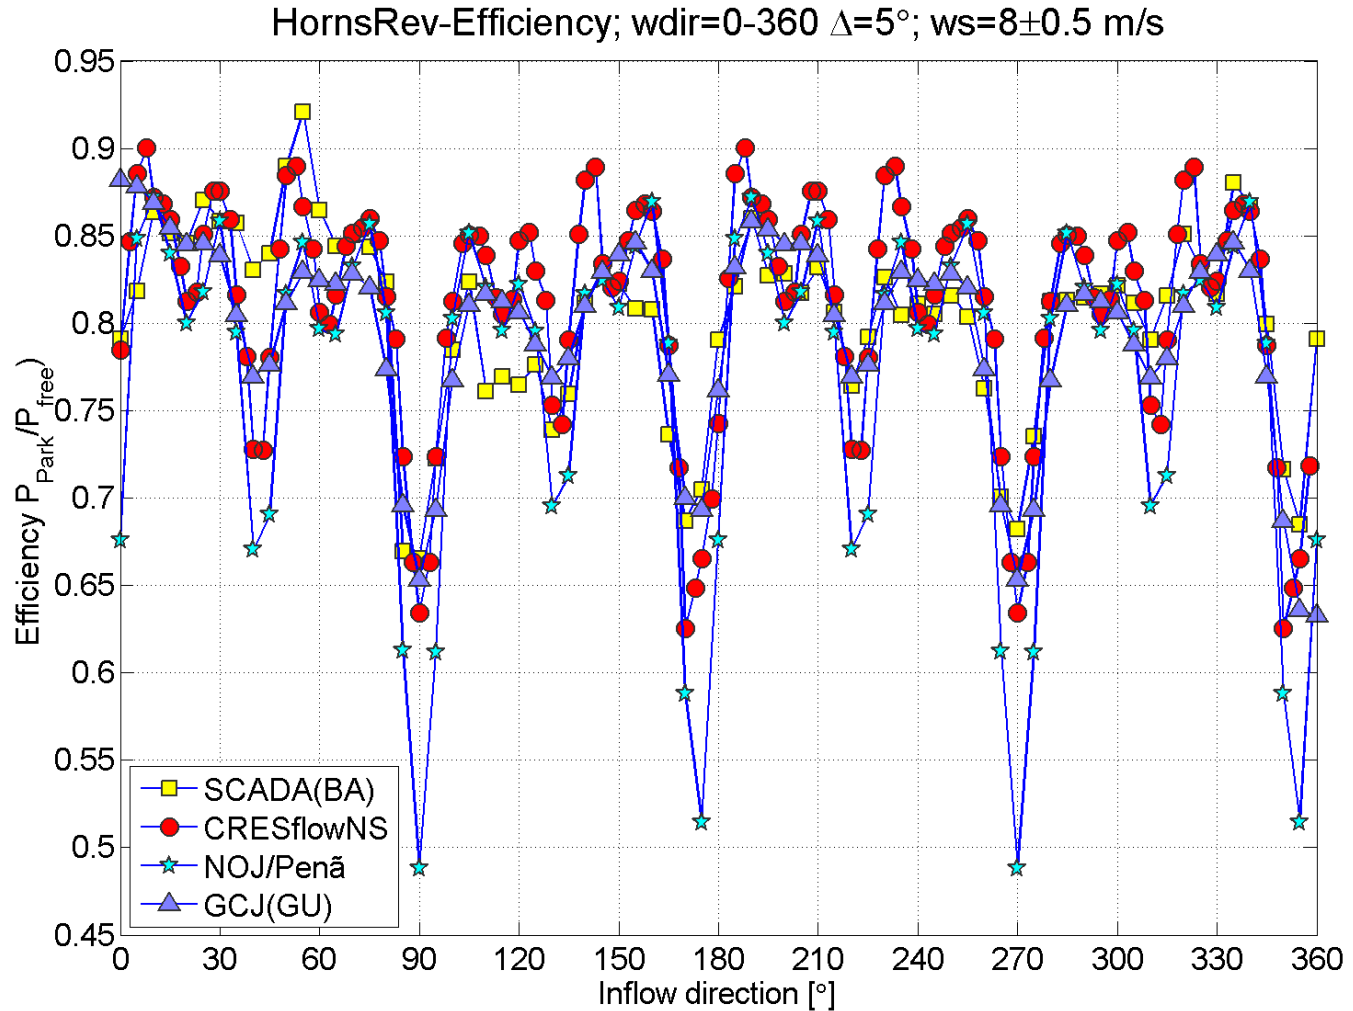


Horns Rev benchmark - conclusion



- First EERA-DTOC benchmark included 11 models, which have been implemented successfully;
- The basic flow cases displayed some sector size dependent differences;
- The park efficiency case demonstrated that the participating models are able to handle a complete wind farm consisting of 80 turbines.

Lillgrund park efficiency @ 0 - 360°

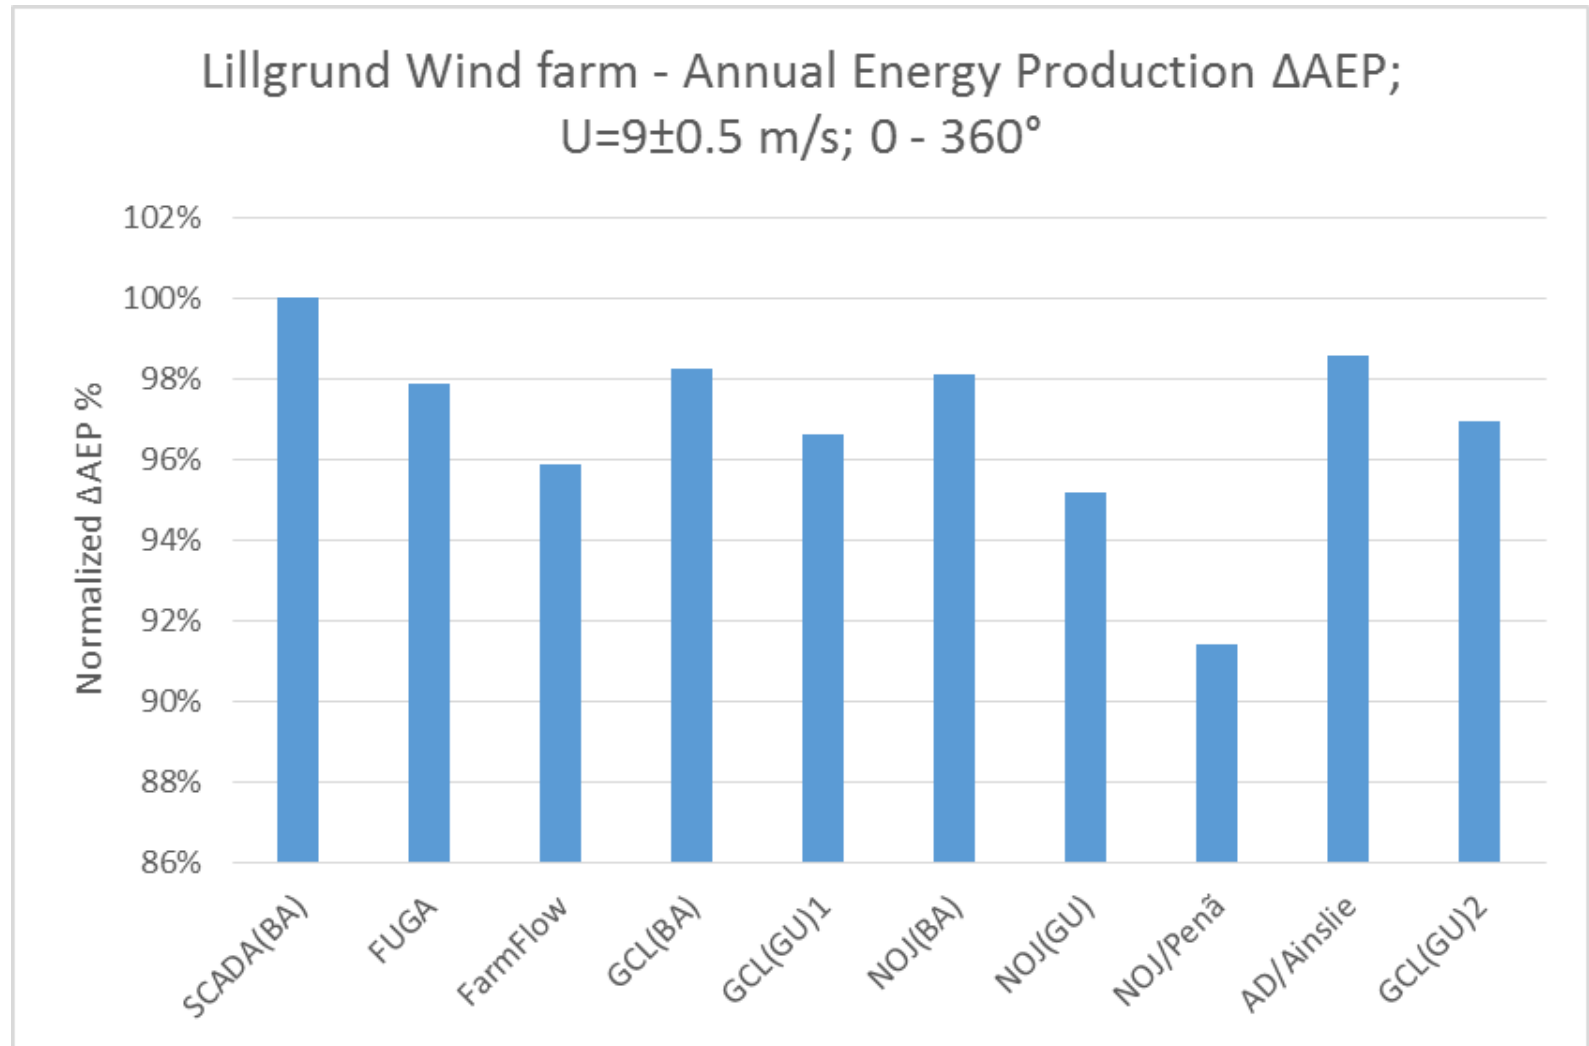


Lillgrund benchmark - conclusion




- All models handles 3.3 and 4.3D spacing well;
- All models handles the speed recovery due to "missing" turbines;
- All models were able to simulate the park efficiency for 0 - 360° inflow;
- The simulated ΔAEP demonstrates a variation of $\pm 3\%$ compared to the measured value;


Rødsand-2 wind farm cluster effect

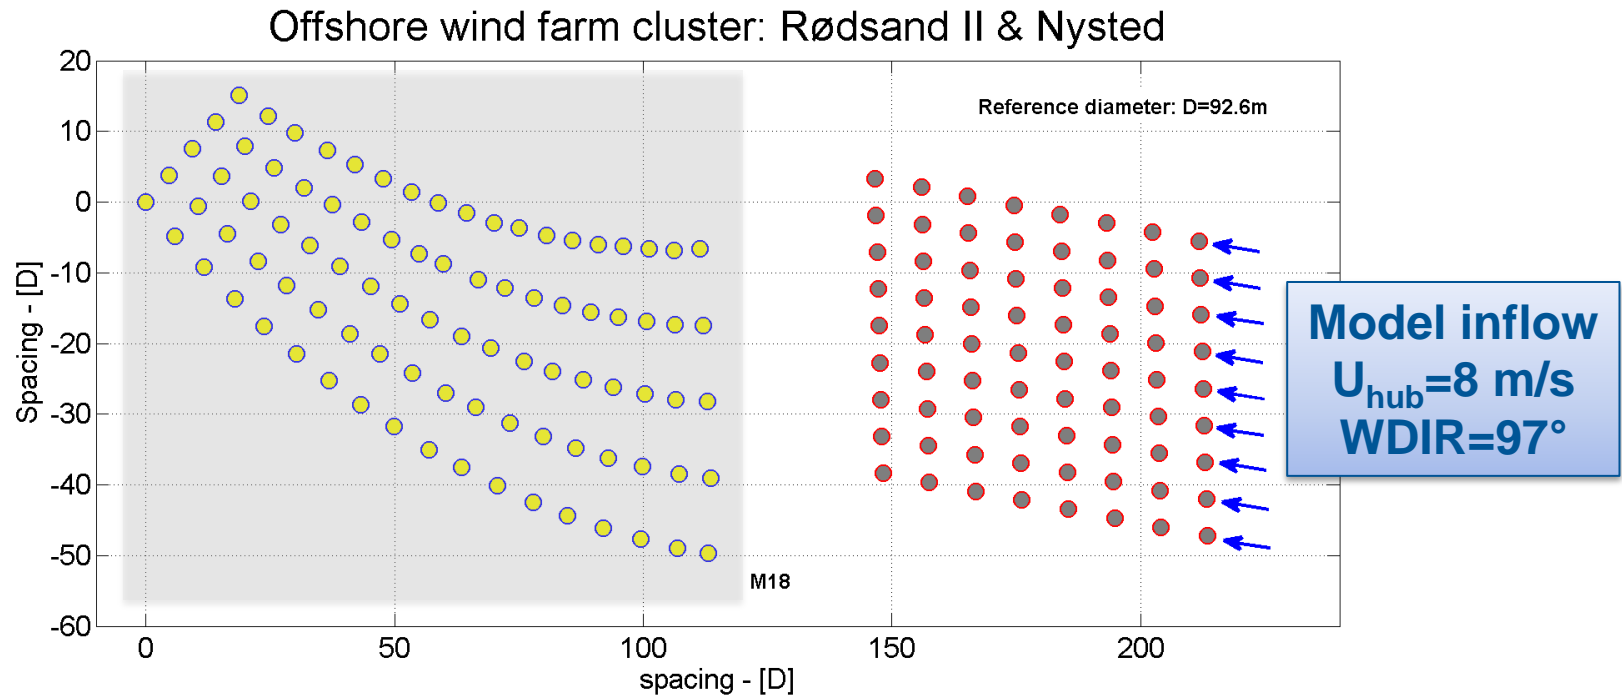

Cluster effect for $U=8$ m/s; $WD=97^\circ$

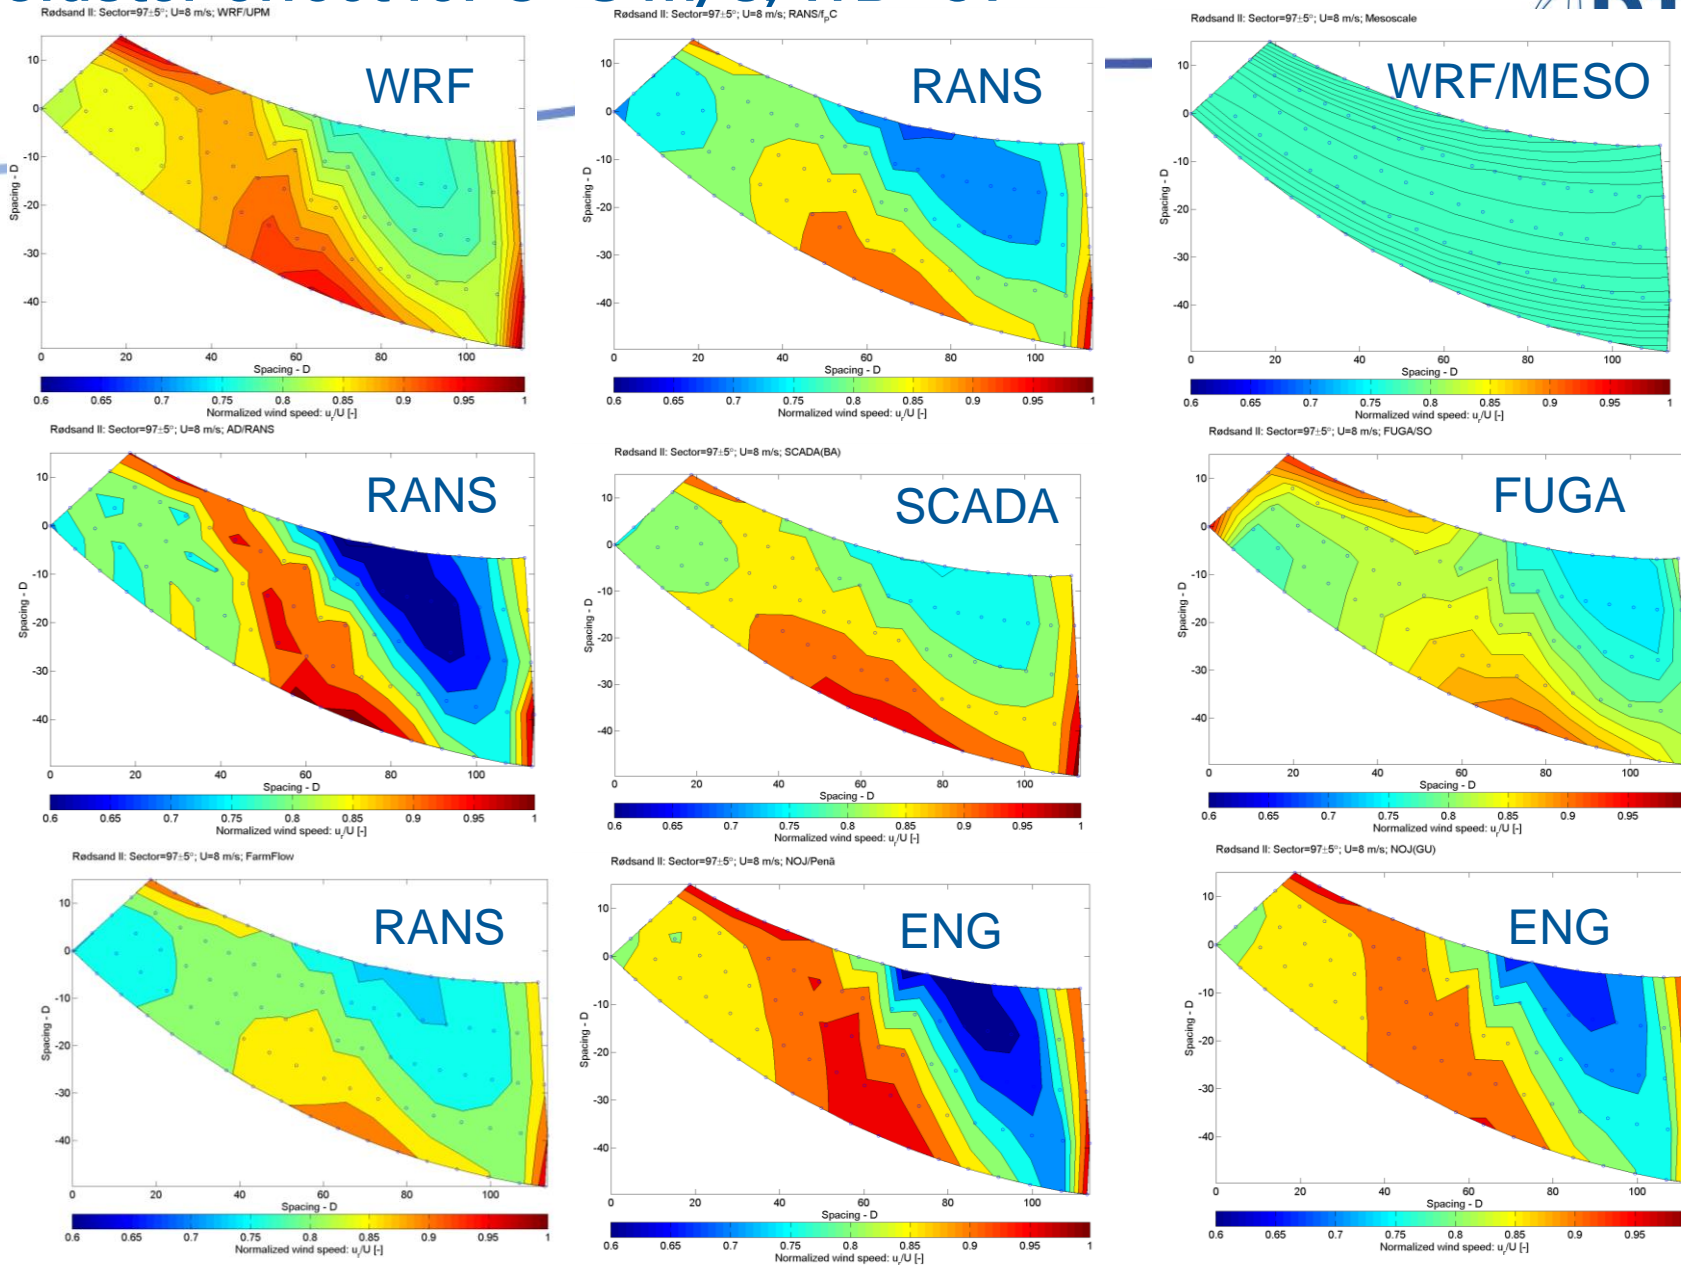

Rødsand-2 park efficiency @ 77-118°

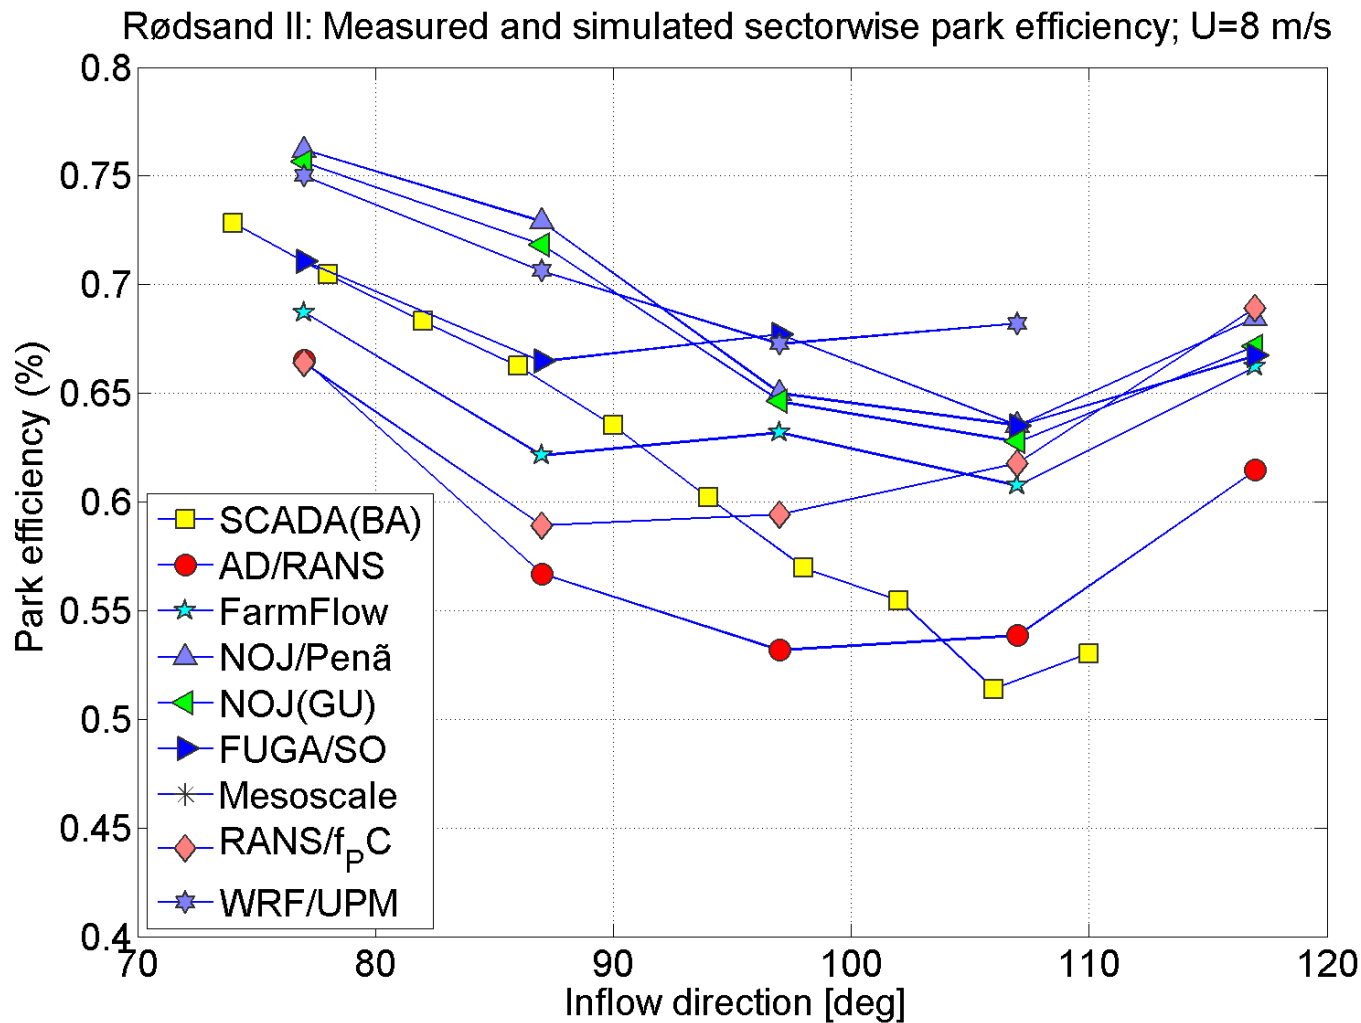


Rødsand cluster effect - conclusion




- Quantification of the cluster effect is not possible due to lack of measurements and park asymmetries.
- The benchmark has demonstrated that both size and location of the distinct deficit zone - caused by the Nysted wind farm has been predicted quite well by the models.
- The benchmark concludes that several models were able to handle the clustering of wind farms.

R RS-2 20130701 17:33:51 UTC- Wind inversion

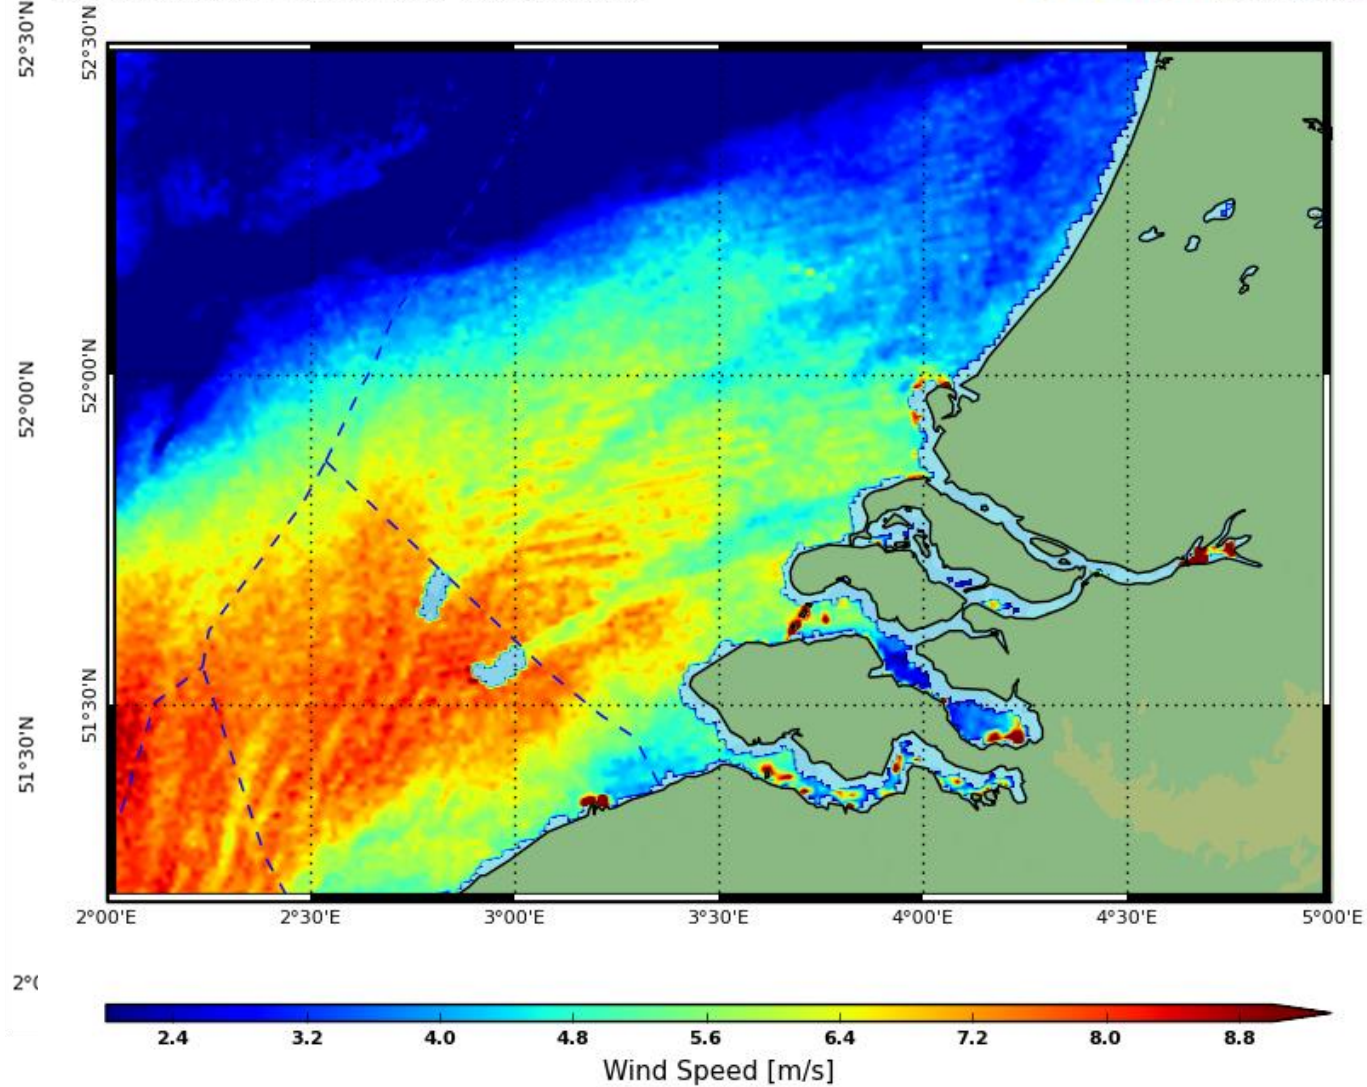

Pauline
Vincent

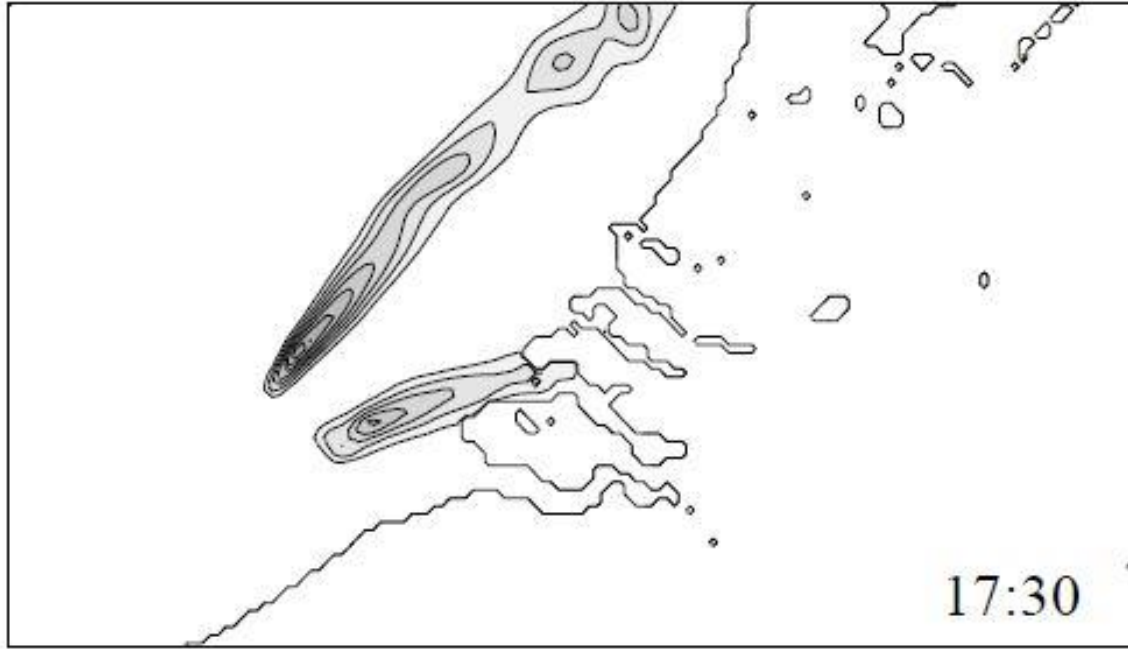

WRF V3.4
ERA Interrim
Nests 18 km, 6 km, 2 km
12 m amsl
MYNN
EWP scheme applies a grid-cell averaged deceleration to the model's flow equation and additional turbulence is produced by the PBL scheme from the changed vertical shear in horizontal velocity.

Velocity deficit with contours in ranges from -1.25 to -0.1 ms⁻¹ over the sea surface only

Volker, P.J.H., Badger, J., Hahmann, A.N., Ott, S. *Geosci. Model Dev. Discuss.*, 8, 3481–3522, 2015

Patrick Volker

Energies **2015**, *8*, 5413-5439; doi:10.3390/en8065413

OPEN ACCESS

energies

ISSN 1996-1073

www.mdpi.com/journal/energies

Article

Using Satellite SAR to Characterize the Wind Flow around Offshore Wind Farms

Charlotte Bay Hasager ^{1,*}, Pauline Vincent ^{2,†}, Jake Badger ^{1,†}, Merete Badger ^{1,†},
Alessandro Di Bella ^{1,†}, Alfredo Peña ^{1,†}, Romain Husson ^{2,†} and Patrick J. H. Volker ^{1,†}

¹ Technical University of Denmark, Wind Energy Department, Frederiksborgvej 399, Roskilde 4000, Denmark; E-Mails: jaba@dtu.dk (J.B.); mebc@dtu.dk (M.B.); adia@dtu.dk (A.D.B.); aldi@dtu.dk (A.P.); pvol@dtu.dk (P.J.H.V.)

² Collecte Localisation Satellites, Avenue La Pérouse, Bâtiment le Ponant, Plouzané 29280, France; E-Mails: pvincent@cls.fr (P.V.); romain.husson@cls.fr (R.H.)

Home

News

Strategic Optimisation Software

Wind Farm Optimisation

Wind Farm Scenarios

Wind Resource




Wake Losses

GIS Integration

Uncertainty Modelling for Risk Management

Welcome to Wind & Economy

One of the most challenging tasks for wind farm developers is the optimisation of offshore wind power plants. Our new software tool, Wind & Economy, supports your challenging work with the seamlessly integrated modelling of wind climate, large scale and localized wind farm effects, electrical loss calculations and derivation of economic key figures.

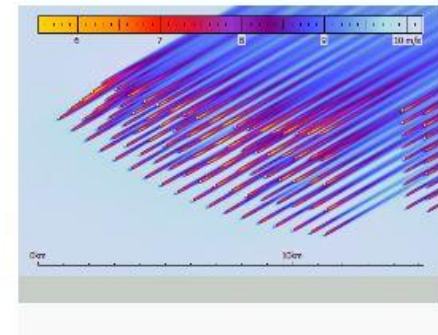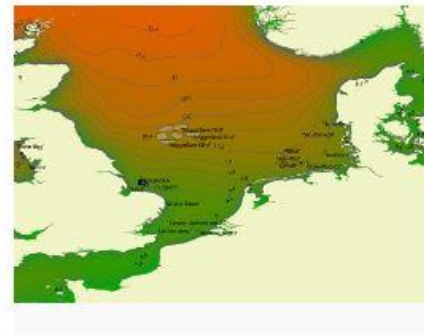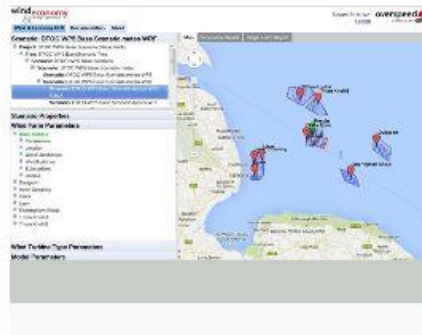


<http://wind-and-economy.com/home/>

Wind & Economy: The tool for wind farm optimization



- wind climate
- turbine type selection
- turbine spacing and placing
- interaction between wind farms in clusters with respect to energy production
- LCOE and economic uncertainty
- Scenario approach
- GIS integration

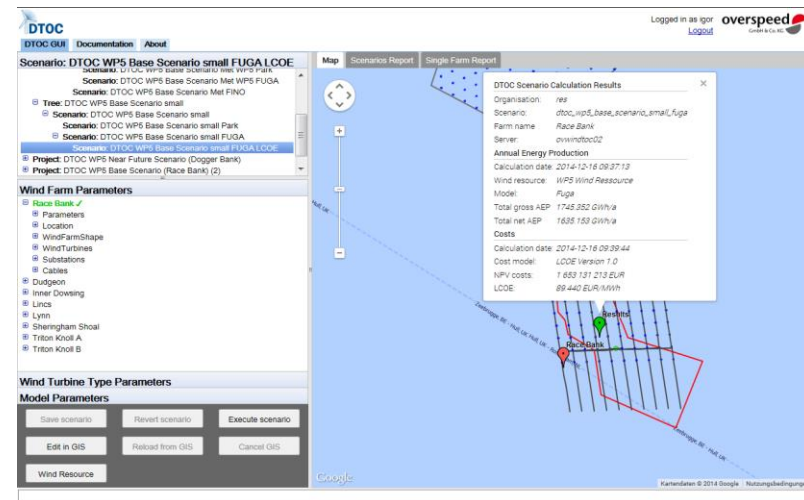

Bringing leading edge modelling to your desktop

Conclusion



The main project output, the 'Wind & Economy' software, provides a new frame for planning offshore wind farm clusters.

By seamless integration of state- of-the-art models from the scientific development by the EERA members, which have been compared and validated by the research community and end-users, provides a significant potential for cost reductions.

The rapid development of offshore wind farms in the Northern European Seas with major clusters planned in many countries makes the release of this novel tool available with due diligence.

We aim at developing the tool for strategic planners

- 1) Add environmental aspects and restricted zones
- 2) Add sea bed and estimate foundation costs
- 3) Improved cost of energy and O&M module
- 4) Further detail wind farm cluster effects
- 5) Include social acceptance

DTU has submitted EUDP2015 proposal (Danish national activity).

Visit www.eera-dtoc.eu



Search this website

Search

Home

About

Work structure

Events

Articles & Presentations

Press

Consortium

Links

Contact



What is EERA-DTOC?

EERA-DTOC stands for the European Energy Research Alliance - Design Tool for Offshore Wind Farm Cluster.

The project is funded by the EU – [Seventh Framework Programme \(FP7\)](#) – and runs from January 2012 to June 2015. It is coordinated by the [Technical University of Denmark - DTU Wind Energy](#).

- New: Final Summary Report available now!
- New: software tool (Wind & Economy) available now!
- Consult the presentations with results from EERA-DTOC

Support by



This project has received funding from the European Union's Seventh Programme for research, technological development and demonstration under grant agreement No FP7-ENERGY-2011-1/ n° 282797

Acknowledgements:

Funding: EERA DTOC FP7 and partners

SCADA data: DONG energy, Vattenfall, E.On, RAVE

Radarsat image: MacDonald, Dettwiler and Associates Ltd.

Wake modelling more than 20 participants at many partner institutes