

Technical University of Denmark



Micro injection moulding process validation for high precision manufacture of thermoplastic elastomer micro suspension rings

Calaon, Matteo; Tosello, Guido; Elsborg Hansen, R. ; Hansen, Hans Nørgaard

Publication date:
2015

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):

Calaon, M., Tosello, G., Elsborg Hansen, R., & Hansen, H. N. (2015). Micro injection moulding process validation for high precision manufacture of thermoplastic elastomer micro suspension rings. Abstract from Micro/Nano Manufacturing Workshop, Teddington, United Kingdom.

DTU Library

Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Micro injection moulding process validation for high precision manufacture of thermoplastic elastomer micro suspension rings

Calaon M.¹, Tosello G.¹, Elsborg R.², Hansen, Hansen H.N.¹

¹ Department of Mechanical Engineering, Technical University of Denmark, Lyngby, Denmark

² Ortofon A/S, Nakskov, Denmark

mcal@mek.dtu.dk

Abstract

Micro injection moulding (μ IM) is one of the most suitable micro manufacturing processes for flexible mass-production of multi-material functional micro components. The technology was employed in this research used to produce thermoplastic elastomer (TPE) micro suspension rings identified as critical component in micro acoustic applications (e.g. phono cartridges, see Figure 1a). The suspension ring holds in place the preassembled aluminium cantilever, magnet and diamond tip seen (see Figure 1b and 1c). The specific damping properties of the TPE material reduces vibrations differently depended on the frequency in order to improve the signal quality and assure acoustic reproduction fidelity. Production quality of the TPE rings drastically influence the product functionality.

In the present study, a procedure for μ IM TPE micro rings production optimization has been established. The procedure entail using the tool geometry as reference calibrated artefacts to establish optimal process operating conditions, enabling production of parts within specification. The μ IM process window with respect to the target tolerances and dimensions has been verified (see nominal dimensions in Figure 1d) with respect to 3 main μ IM process parameters (melt temperature, injection speed, packing pressure) using the Design of Experiment statistical technique. Measurements results demonstrated the importance of calibrating mould's master geometries to ensure correct part production and effective quality conformance verification.

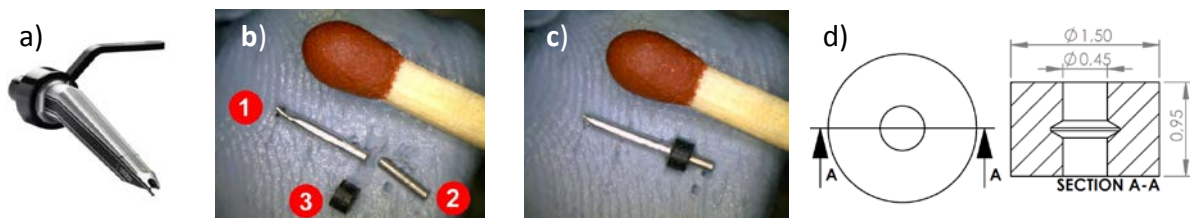


Figure 1: a) High performance phono cartridge; b) 1 - aluminium cantilever with diamond tip, 2 - magnet rod, 3 - rubber suspension ring; c) assembled micro components; d) suspension ring nominal dimensions.