

Technical University of Denmark



Optimal algal cultivation for used water resource recovery

Valverde Pérez, Borja; Wágner, Dorottya Sarolta; Fuentes-Martínez, José Manuel ; Steidl, Michael ; Dechesne, Arnaud; Flores Alsina, Xavier; Gernaey, Krist V.; Huusom, Jakob Kjøbsted; Plósz, Benedek G.

Publication date:
2016

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Valverde Pérez, B., Wágner, D. S., Fuentes-Martínez, J. M., Steidl, M., Dechesne, A., Flores Alsina, X., ... Plósz, B. G. (2016). Optimal algal cultivation for used water resource recovery. Poster session presented at 13th IWA Leading Edge Conference on Water and Wastewater Technologies, Jerez da la Frontera, Spain.

DTU Library

Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



Optimal algal cultivation for used water resource recovery

Borja Valverde-Pérez* (bvape@env.dtu.dk), Dorottya S. Wágner*, José Manuel Fuentes-Martínez*, Michael Steidl*, Arnaud Dechesne*, Xavier Flores-Alsina**, Krist V. Gernaey**, Jakob K. Huusom**, Benedek Gy. Plósz*

*Department of Environmental Engineering, Technical University of Denmark, Miljøvej, Building 113, 2800 Kgs. Lyngby, DENMARK
**Department of Chemical and Biochemical Engineering, Technical university of Denmark, Søtofts Plads, Building 229, 2800 Kgs. Lyngby DENMARK



1. INTRODUCTION

Current resource recovery strategies [1]:

- Metal salt addition for phosphorus precipitation
- Ultrafiltration

Resource recovery through a two-stage bacterial-algal system [2]:


- Enhanced biological phosphorus removal and recovery system (EBP2R) to produce green microalgal growth medium with optimised N-to-P ratios
- Optimal algal cultivation, thereby intracellularly storing N and P
- Direct application on land for fertigation

Disadvantages:

- High energy demand
- Requires the use of chemicals

Advantages:

- Completely biochemical process
- Comparably lower environmental impacts

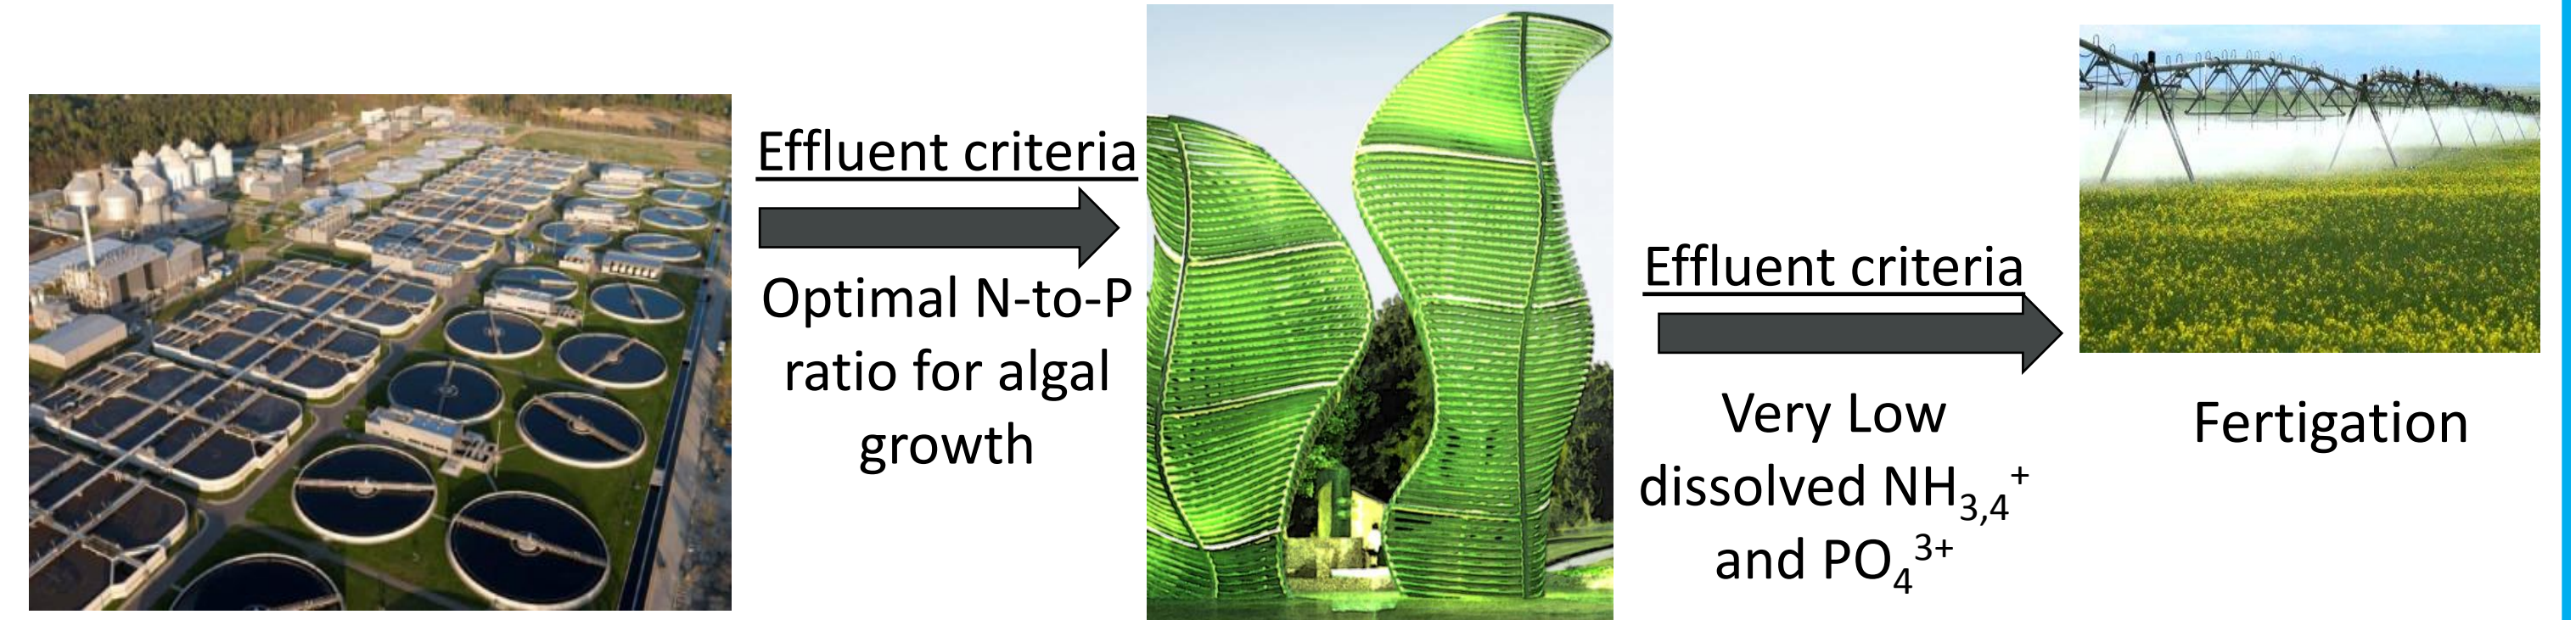


Objective: How to effectively maintain optimal N-to-P ratio in the EBP2R effluent which is the influent of the photobioreactor?

2. METHODS

EBP2R-MODELLING

EBP2R performance assessed via **dynamic simulations**:


- Activated sludge model ASM-2d [3]
- Implementation in Matlab/Simulink [4]

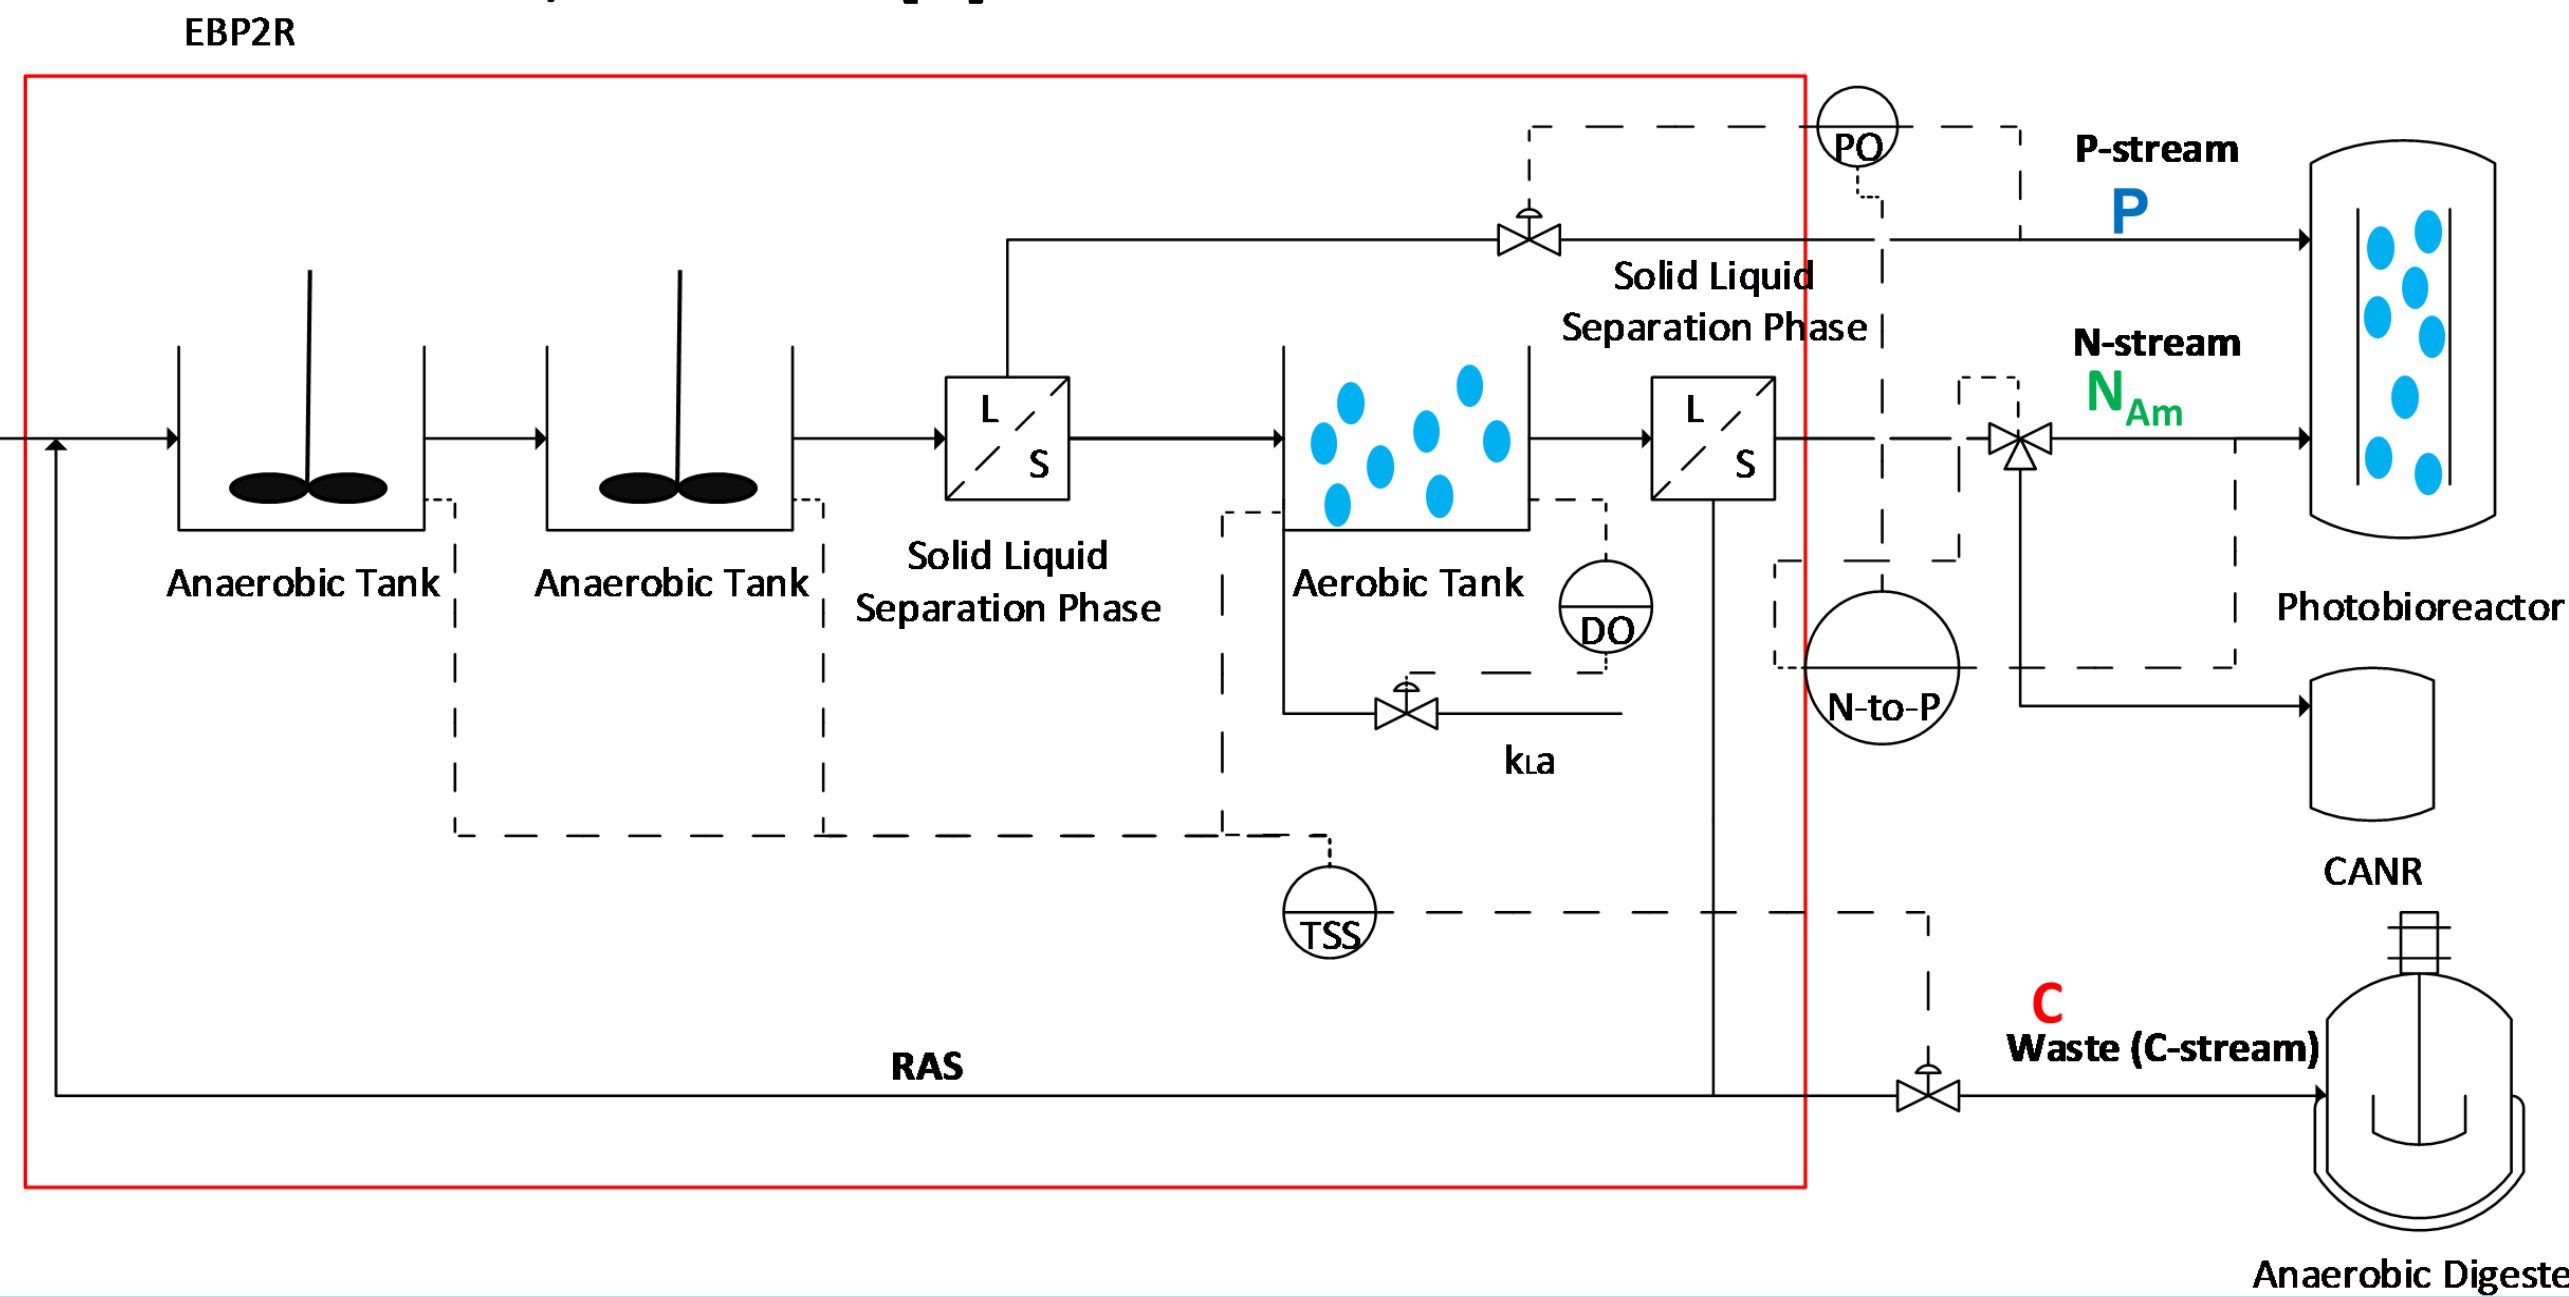

PBR-EXPERIMENTS

Photobioreactor performance assessed in **lab-scale** reactors:

- 1.4 L reactors treating the effluent of an EBPR
- **Microbial diversity** analysis and quantification via novel image analysis tool: **shape recognition**

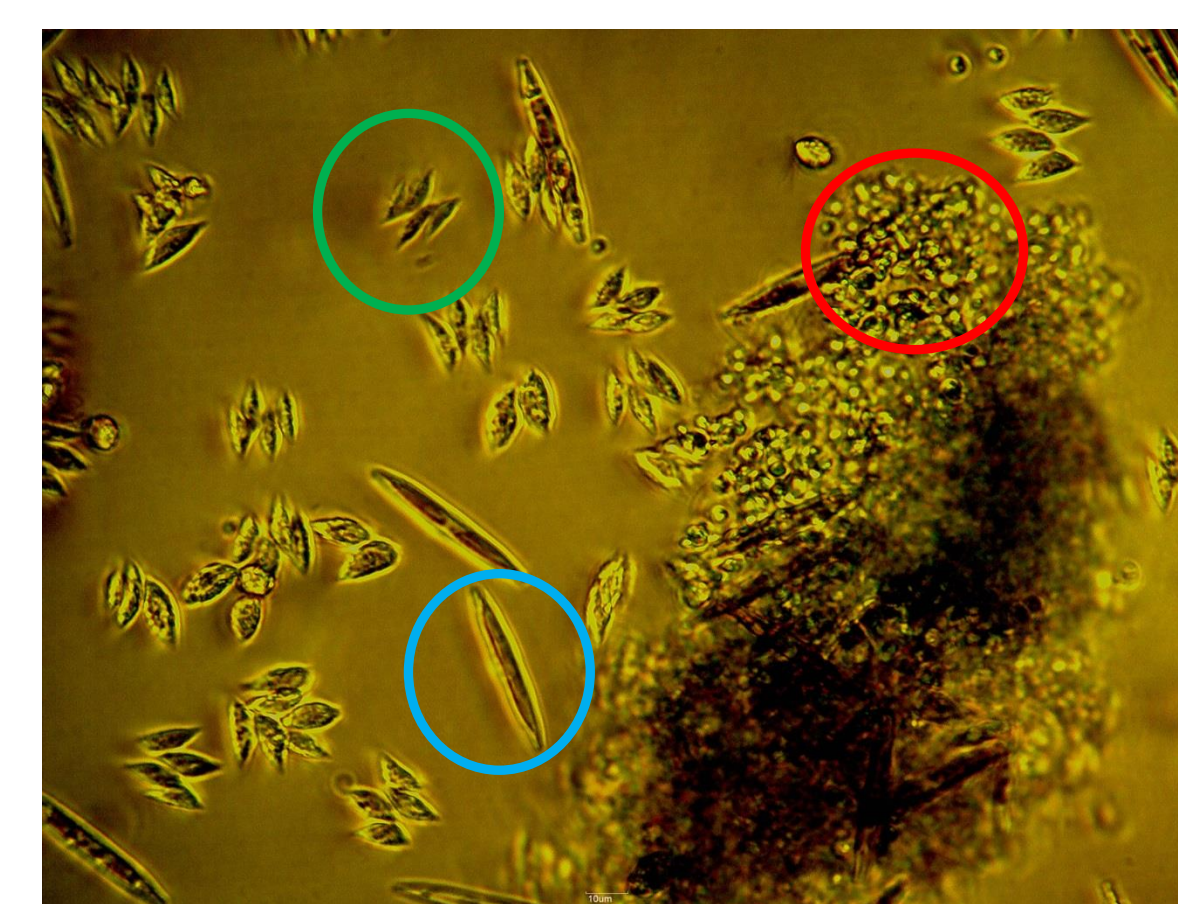

- *Chlorella sp.*
- *Scenedesmus sp.*
- *Diatoms*

3. RESULTS


EBP2R Performance:

System response to step disturbances in the influent:

- **Total nitrogen ($\pm 30\%$)**: the control system rejects the influent disturbance.
- **Total COD ($\pm 20\%$)**: the control system rejects the influent disturbance.
- **Total phosphorus ($\pm 20\%$)**: the control system rejects an increase of phosphorus load into the system; the control system fails keeping the optimal phosphorus load when influent load decreases due to process constraints.

System response to dynamic influent conditions :

- Control system maintains stable phosphorus load
- Control system fails to keep the optimal N-to-P ratio when the nitrogen influent load is low

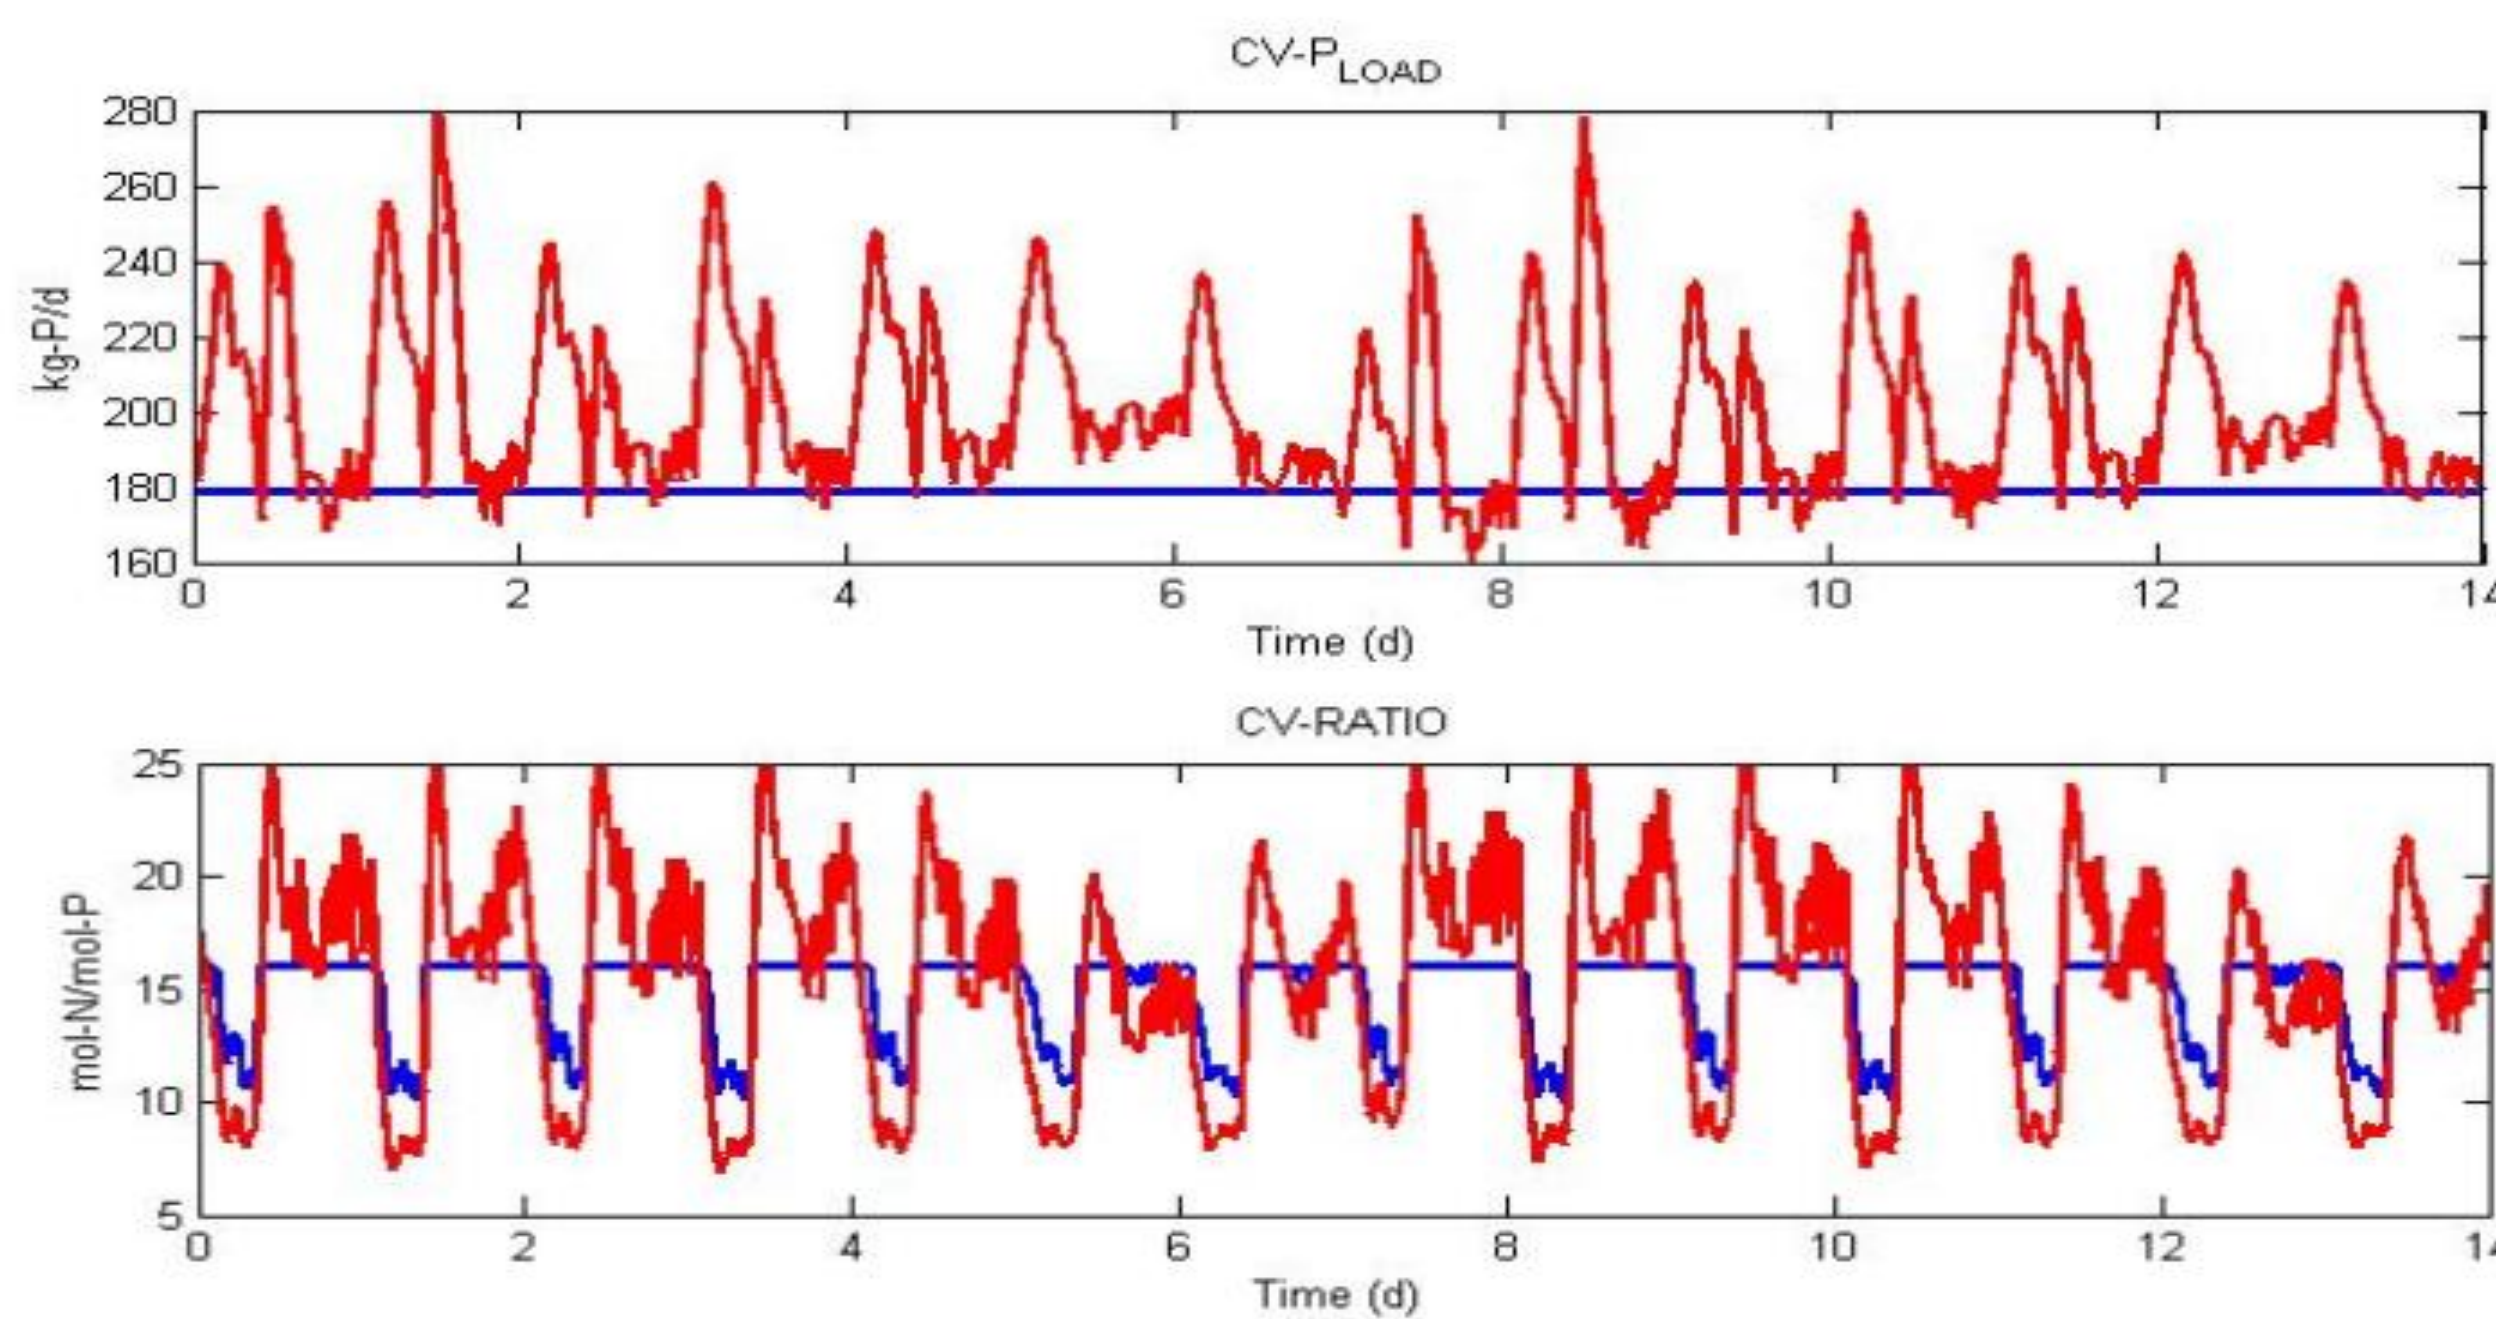

Process performance under **controlled** and **uncontrolled** conditions


Photobioreactor Performance:

N-to-P ratio of 17 (optimal):

- Effective nutrient removal and storage:
 - Up to 95% nitrogen removal
 - Up to 85% phosphorus removal
- Stable microbial community: *Chlorella sp.* (10%) and *Scenedesmus sp.* (90%)

N-to-P ratio of 5 (suboptimal):

- Poor phosphorus removal (40%)
- Culture contamination by *Diatoms* (34%) present in the influent

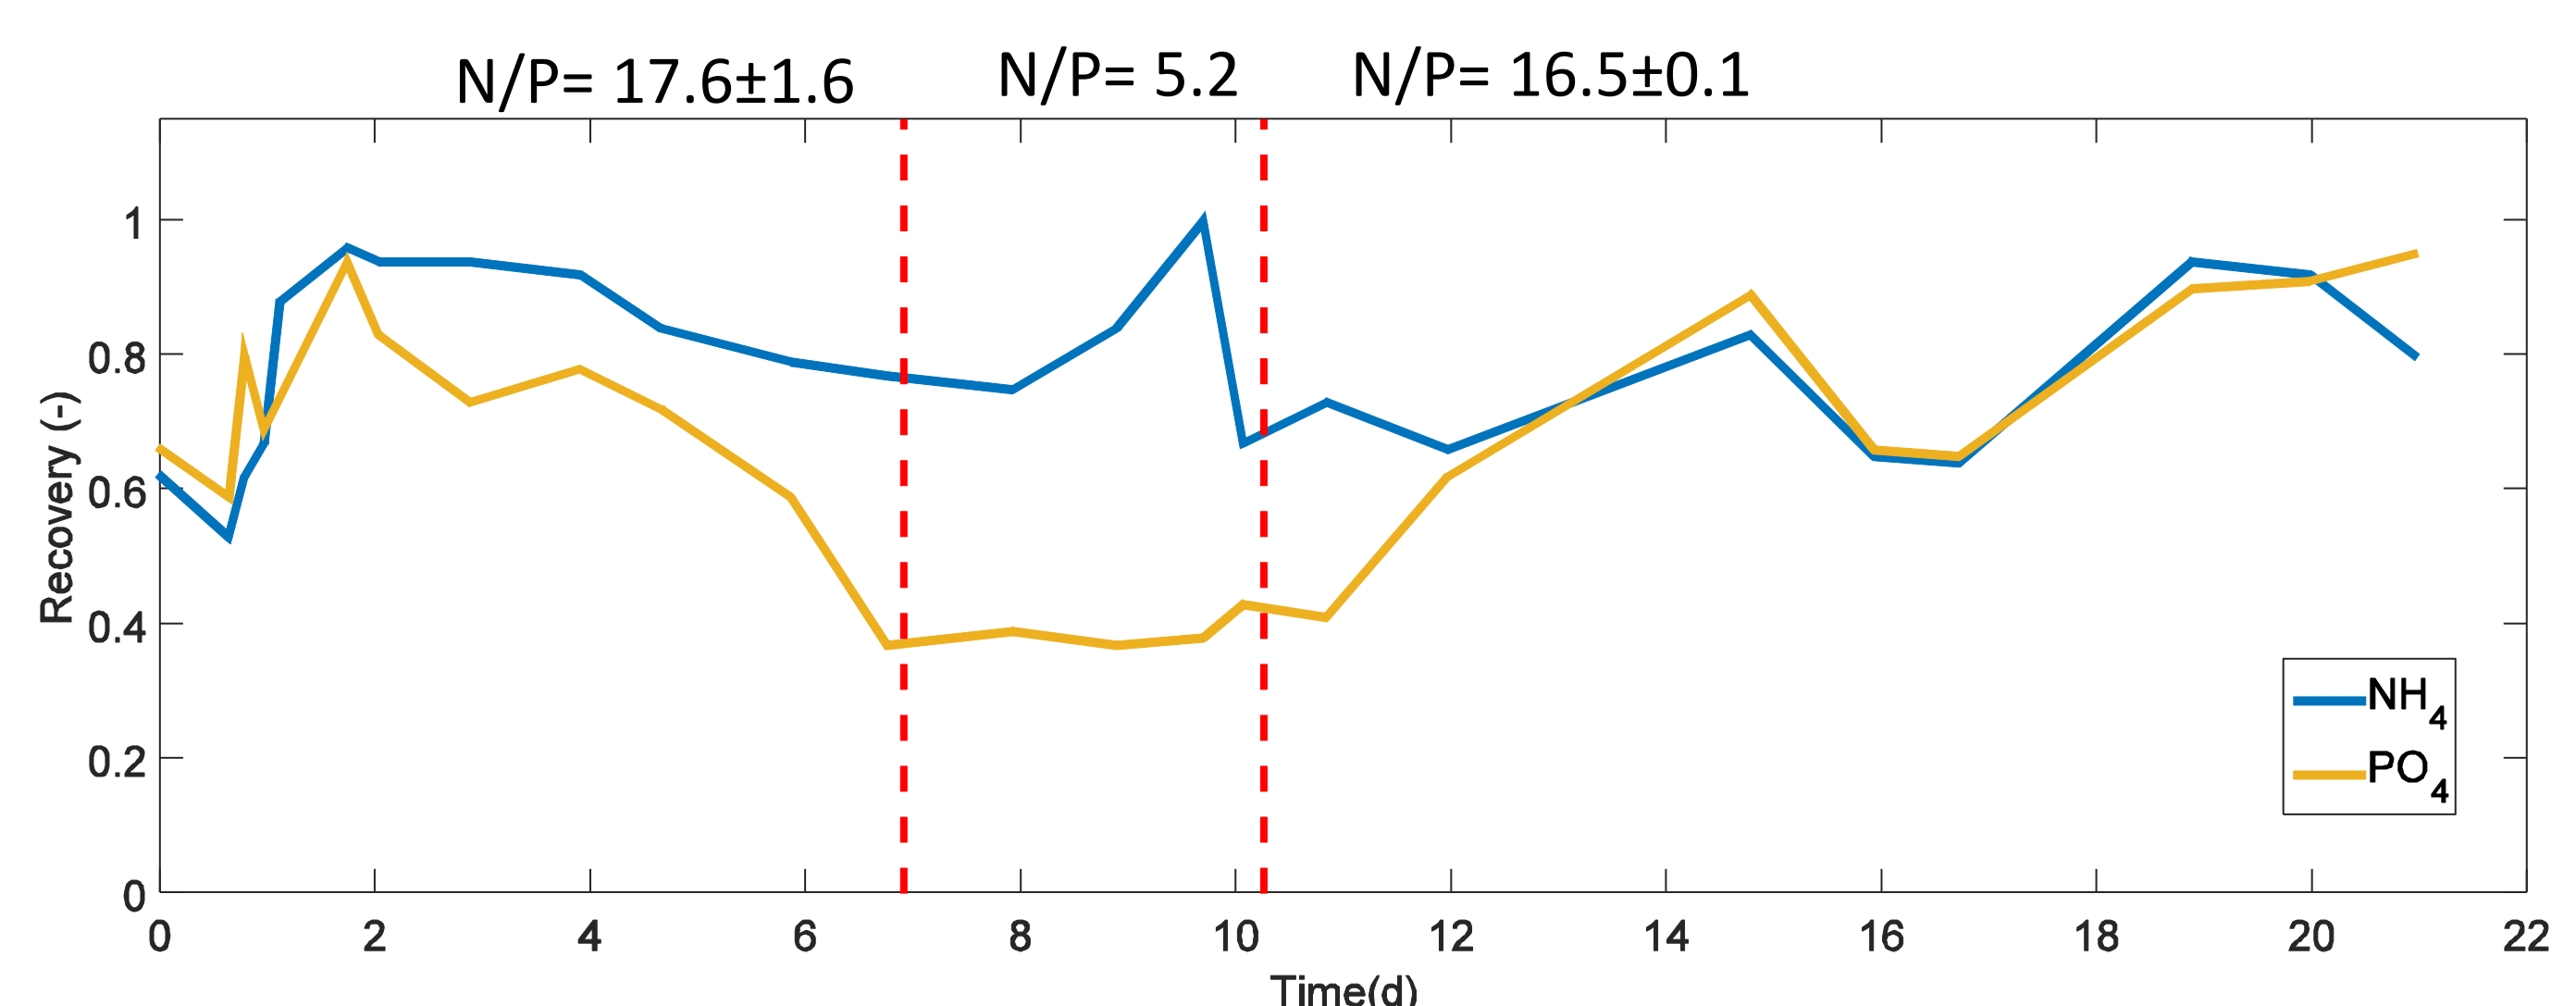

4. CONCLUSIONS

- EBP2R effluent N-to-P ratio shows **limited variability** under controlled conditions
- EBP2R can **support optimal algal growth**
- The proposed **control structure** has the potential to be implemented at **large scale**
- N-to-P ratio is a powerful tool for **microbial community control** in open PBR

ACKNOWLEDGEMENT

The research was financially supported by the **Integrated Water Technology** (InWaTech) project, a collaboration between the Technical University of Denmark (DTU) and the Korea Advanced Institute of Science and Technology (KAIST) and by the European Commission (**E4WATER Project**, FP7-NMP-2011.3.4-1 grant agreement 280756)



References:

- [1] Verstraete, W., Van de Caveye, P. and Diamantis, V., 2009. Maximum use of resources present in domestic used water. *Bioresource Technology*, 100, 5537-5545
- [2] Valverde-Pérez, B., Ramin, E., Smets, B.F., and Plósz, B. Gy., 2015. EBP2R – An innovative enhanced biological nutrient recovery activated sludge system to produce growth medium for green microalgae cultivation. *Water Research*, 68, 821-830
- [3] Flores-Alsina, X., Gernaey, K.V., Jeppsson, U., 2012. Benchmarking biological nutrient removal in wastewater treatment plants: influence of mathematical model assumptions. *Water Science and Technology*, 65(8), 1496-1505
- [4] Valverde-Pérez, B., Fuentes-Martínez, J.M., Flores-Alsina, X., Gernaey, K.V., Huusom, J.K., Plósz, B.Gy., 2016. Control structure design for resource recovery using the enhanced biological phosphorus removal and recovery (EBP2R) activated sludge process. *Chemical Engineering Journal*, 296, 447-457