

ONE-DIMENSIONAL ANALYSIS OF STEADY-FLOW AIR-WATER
MIXTURES IN PIPES

by

MERSON BOOTH, LIEUTENANT, U. S. NAVY

B.S., U. S. NAVAL ACADEMY

(1946)

SUBMITTED IN PARTIAL FULFILLMENT

OF THE REQUIREMENTS FOR THE

DEGREE OF NAVAL ENGINEER

at the

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

May, 1953

Signature of Author

Department of Naval Architecture and Marine Engineering
May 25, 1953

Certified by

The ~~Head~~ Supervisor
)

Accepted by

Chairman, Departmental Committee on Graduate Students

ONE-DIMENSIONAL ANALYSIS OF STEADY-FLOW AIR-WATER
MIXTURES IN PIPES

By

Merson Booth, Lieutenant, U. S. Navy

Submitted to the Department of Naval Architecture and Marine Engineering On May 25, 1953, in partial fulfillment of the requirements for the degree of Naval Engineer.

ABSTRACT

The object of this thesis is to investigate a number of simple flow examples of air-water mixtures and to present the results in a simple quick reference form which can be valuable for engineering use in design and understanding the phenomena of flow of two-component mixtures. The problems analyzed are:

1. The one-dimensional trajectory of droplets accelerated in a gas stream
2. The variation of stream properties during the droplet acceleration process
3. The variation of stream properties due to wall friction with water present in the stream.

The procedure used was entirely analytical. The results of the first problem were calculated, tabulated, and plotted in dimensionless form for various water and air velocities, droplet diameters, distance moved down the duct, and water and air properties. The plots should be valuable for engineering use in determining the one-dimensional trajectory of spherical particles in a gas stream. An iteration procedure using the plots can be used where air velocity, droplet diameter, or stream properties vary during the acceleration.

The results of the second and third problem were calculated, tabulated, and plotted in dimensionless form for various water to air velocity ratios, water to air mass rates, air Mach numbers, and stream property ratios. The results should be valuable for engineering use in all regions except near choking conditions in the stream. Near this condition the air velocity increases too rapidly for the droplets to accelerate with the air. Since this was one of the assumptions in the analysis the plots are not correct in this region.

The analysis of the third problem incorporates in it a pseudo-frictional term accounting for the effect of momentum exchange of droplets with the duct wall. The exact nature of this effect is not known, but some correlation with experimental data is given.

Thesis Supervisor: A. H. Shapiro
Title: Professor of Mechanical Engineering

Cambridge, Massachusetts
May 25, 1953

Professor Earl B. Millard
Secretary of the Faculty
Massachusetts Institute of Technology
Cambridge, Massachusetts

Dear Sir:

In accordance with the requirements of the degree of Naval Engineer,
I herewith submit a thesis entitled, "One-Dimensional Analysis of Steady-
Flow Air-Water Mixtures in Pipes."

Respectfully,

Merson Booth
Lieutenant, U. S. Navy

TABLE OF CONTENTS

I.	INTRODUCTION	1
II.	DROPLET TRAJECTORY ANALYSIS	2
	Procedure	2
	Results	2
	Conclusion	4
III.	DISCONTINUITY ANALYSIS	9
	Procedure	9
	Results	9
	Conclusion	10
IV.	MODIFIED FANNO LINE ANALYSIS	17
	Procedure	17
	Results	17
	Conclusion	19
V.	APPENDIX	27
	Symbols	28
	Details - Droplet Trajectory Analysis	29
	Details - Discontinuity Analysis	39
	Details - Modified Fanno Line Analysis	55
	Modified Fanno Line - Low Velocity Analysis	61
	Bibliography	66

TABLE OF FIGURES

Figure I	Droplet Trajectory, $v_w < v_a$	5
Figure II	Droplet Trajectory, $v_w > v_a$	6
Figure III	Droplet Trajectory, Cold	7
Figure IV	Droplet Trajectory, Hot	8
Figure V	Discontinuity, M_2 vs M_1	11
Figure VI	Discontinuity, $\frac{P_{o2}}{P_{ol}}$ vs M_1	12
Figure VII	Discontinuity, $\frac{P}{P_{ol}}$ vs M_1	13
Figure VIII	Discontinuity, $\frac{P_2}{P_1}$ vs M_1	14
Figure IX	Discontinuity, $\frac{T_2}{T_1}$ vs M_1	15
Figure X	Discontinuity, $\frac{V_2}{V_1}$ vs M_1	16
Figure XI	Friction, $\left[4 \frac{f}{D} + K \right] L_{max}$ vs M	20
Figure XII	Friction, $\frac{P}{P^*}$ vs M	21
Figure XIII	Friction, $\frac{P}{P^*}$ vs M	22
Figure XIV	Friction, $\frac{P}{P^*}$ vs M	23
Figure XV	Friction, $\frac{T}{T^*}$ vs M	24
Figure XVI	Friction, $\frac{V}{V^*}$ vs M	25
Figure XVII	Friction, $\frac{F}{F^*}$ vs M	26

TABLE OF TABLES

Table I	Values of $C_D = f(R)$ for spherical particles	32
Table II	Values of $\int \frac{dR}{C_D R^2}$ and $\int \frac{dR}{C_D R}$	33
Table III	Values of $\frac{x}{dw} \frac{\rho_a}{\rho_w}$ vs $\frac{V_R}{V_a}$	35
Table IV	Discontinuity, all $\frac{w}{w_a}, \frac{v}{v_a} = 0$	42
Table V	Discontinuity, $\frac{w}{w_a} = .1, \frac{v}{v_a} = 1$	44
Table VI	Discontinuity, $\frac{w}{w_a} = .2, \frac{v}{v_a} = 1$	46
Table VII	Discontinuity, $\frac{w}{w_a} = .3, \frac{v}{v_a} = 1$	48
Table VIII	Discontinuity, $\frac{w}{w_a} = .4, \frac{v}{v_a} = 1$	50
Table IX	Discontinuity, $M_2 = f(M_1, \frac{w}{w_a})$	52
Table X	Friction, Coefficients of Friction Term	58
Table XI	Friction, Formulas in Integral Form	59
Table XII	Friction, $\frac{w}{w_a} = .1$	62
Table XIII	Friction, $\frac{w}{w_a} = .2$	63
Table XIV	Friction, $\frac{w}{w_a} = .3$	64
Table XV	Friction, $\frac{w}{w_a} = .4$	65

I. INTRODUCTION

The object of this thesis is to investigate a number of simple flow examples of air-water mixtures. The problems to be analyzed are:

- (1) the one-dimensional trajectory of droplets accelerated in a gas stream,
- (2) the variation of stream properties during the acceleration process, and
- (3) the variations of stream properties due to wall friction with water present in the stream.

This investigation is undertaken as part of the Aerothermopressor Project at Massachusetts Institute of Technology. The Aerothermopressor is a device to increase the stagnation pressure of a gas stream by reducing the stagnation temperature through evaporation of water injected into the flow.

In the work on the Aerothermopressor, there has been no quick reference guide to aid in design or in understanding the phenomena of flow of air-water mixtures. The purpose of this thesis is to analyze these separate effects and to present the results in a simple quick reference form which can be valuable for engineering use in problems concerning flow of air-water mixtures.

II: DROPLET TRAJECTORY

Procedure

The example studied is the injection of one droplet at a given initial velocity into a moving gas stream. The problem is to determine the subsequent droplet velocities as a function of distance moved downstream and the properties of the gas and droplet.

The assumptions made are:

- (1) the gas velocity is constant,
- (2) the droplet is spherical and of constant diameter during the acceleration, and
- (3) the table of drag coefficient vs. Reynolds number as given in reference (1) and repeated in Table I is correct.

The details of this analysis are given in the appendix. It was necessary to perform a graphical integration of a function of Reynolds number. The results of one of these integrations is contained in reference (1). The other integration was done using the trapezoidal rule. The results of both these integrations are given in Table II.

Results

Figures I and II are non-dimensional plots of droplet velocity vs. distance moved downstream as a function of gas velocity, droplet diameter, and the properties of the gas and droplet. This same information is given in Table III. Figure I is for droplet velocity less than gas velocity; Figure II is for droplet velocity greater than gas velocity. The plots in Figures I and II are normalized to specific initial droplet velocities. For droplet

velocity less than gas velocity, the initial droplet velocity is assumed zero. For droplet velocity greater than gas velocity, the initial droplet velocity is assumed twice the air velocity. For an initial droplet velocity other than the normalized conditions, it is necessary to subtract the distance read at the initial condition from that of the final condition. This is shown in more detail in the appendix.

Figures I and II are used in the following manner: From given initial droplet velocity, gas velocity, droplet diameter, and gas and droplet properties, calculate $\frac{V_w}{V_a}$ and $\frac{V_d}{V_a}$. Enter the plot with these quantities to determine the initial point at the intersection of ordinate $\frac{V_w}{V_a}$ and the curve corresponding to $\frac{V_d}{V_a}$. Read on the abscissa the initial value $\frac{X}{d} \frac{\rho_a}{\rho_w}$. Now follow along the same $\frac{V_d}{V_a}$ curve to the intersection of that curve and the desired $\frac{V_w}{V_a}$ or $\frac{X}{d} \frac{\rho_a}{\rho_w}$ distance from the initial point. Read off the value of $\frac{X}{d} \frac{\rho_a}{\rho_w}$ which gives the distance from the initial point with the required $\frac{V_w}{V_a}$ or the value of $\frac{V_w}{V_a}$ at that distance respectively.


Figures III and IV are plots of distances required to reach specific values of $\frac{V_w}{V_a} = .5, .1$ as a function of droplet diameter, air Mach number, and given air properties assuming initial droplet velocity is zero. Figure III is for air stagnation temperature of 70°F and stagnation pressure of 1 atmosphere. Figure IV is for air stagnation temperature of 1500°R and stagnation pressure of 1 atmosphere.

If the gas velocity, droplet diameter, or the stream and droplet properties are not constant, the solution can be approximated by assuming the variation to occur in a stepwise fashion and apply the plots successively over each step. This can be done in the case of evaporation in which a curve of droplet diameter vs. droplet velocity or distance may be assumed, or in the

case of a converging or diverging section in which, because of known area changes, a curve of gas velocity vs. distance can be assumed.

Conclusion

The results obtained are given in dimensionless form in as simple a manner as possible. The plots should be valuable for engineering use in determining one-dimensional trajectory of spherical particles in a gas stream.

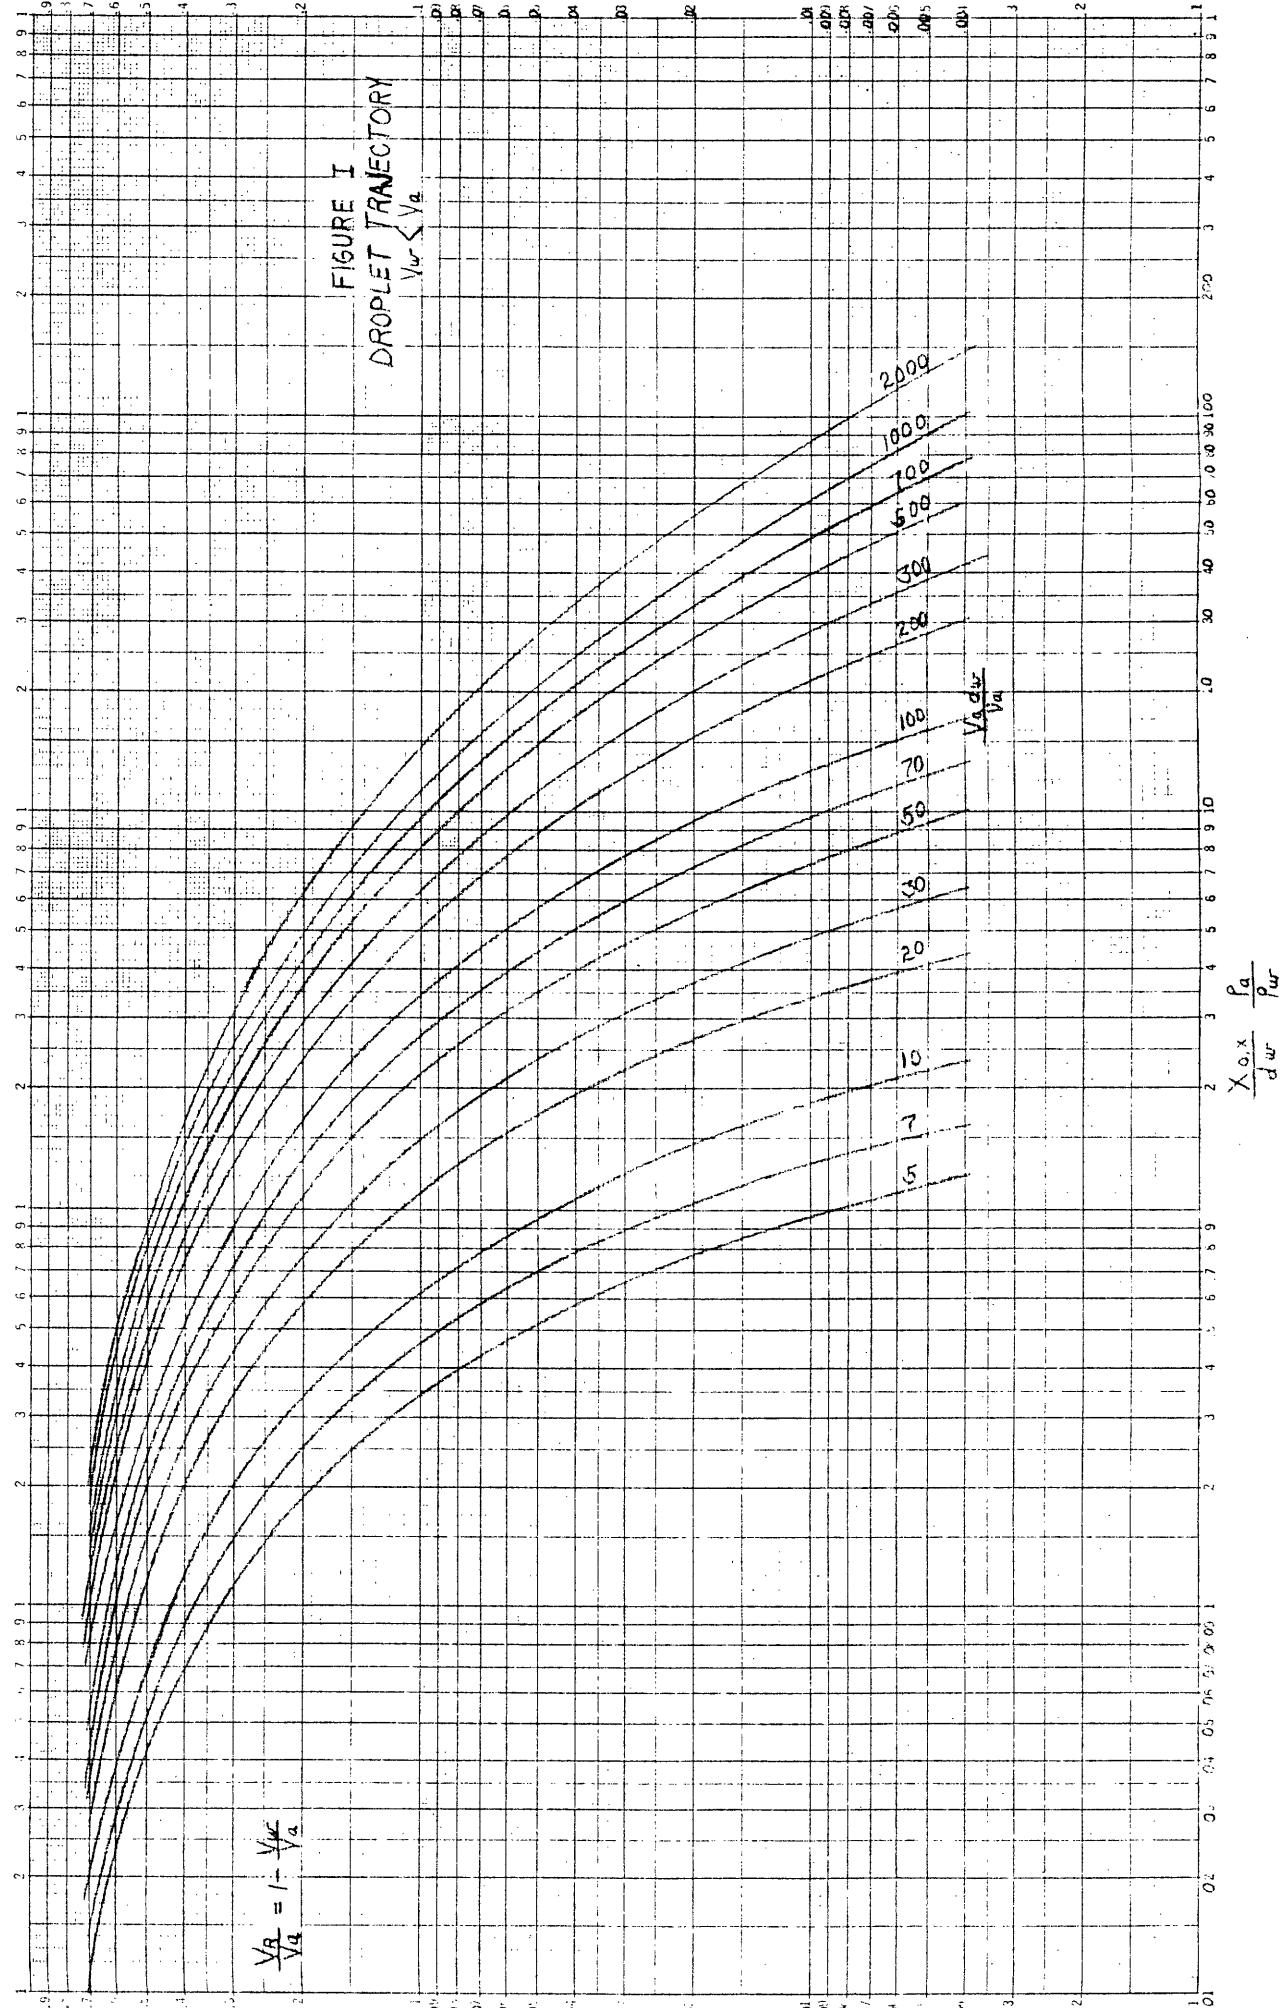

6/1/53
m.c.

$\frac{S/m}{\mu_B}$

FIGURE II
DROPLET TRAJECTORY
 $V_w > V_a$

$$\frac{V_w}{V_a} = \frac{V_w - 1}{V_a}$$

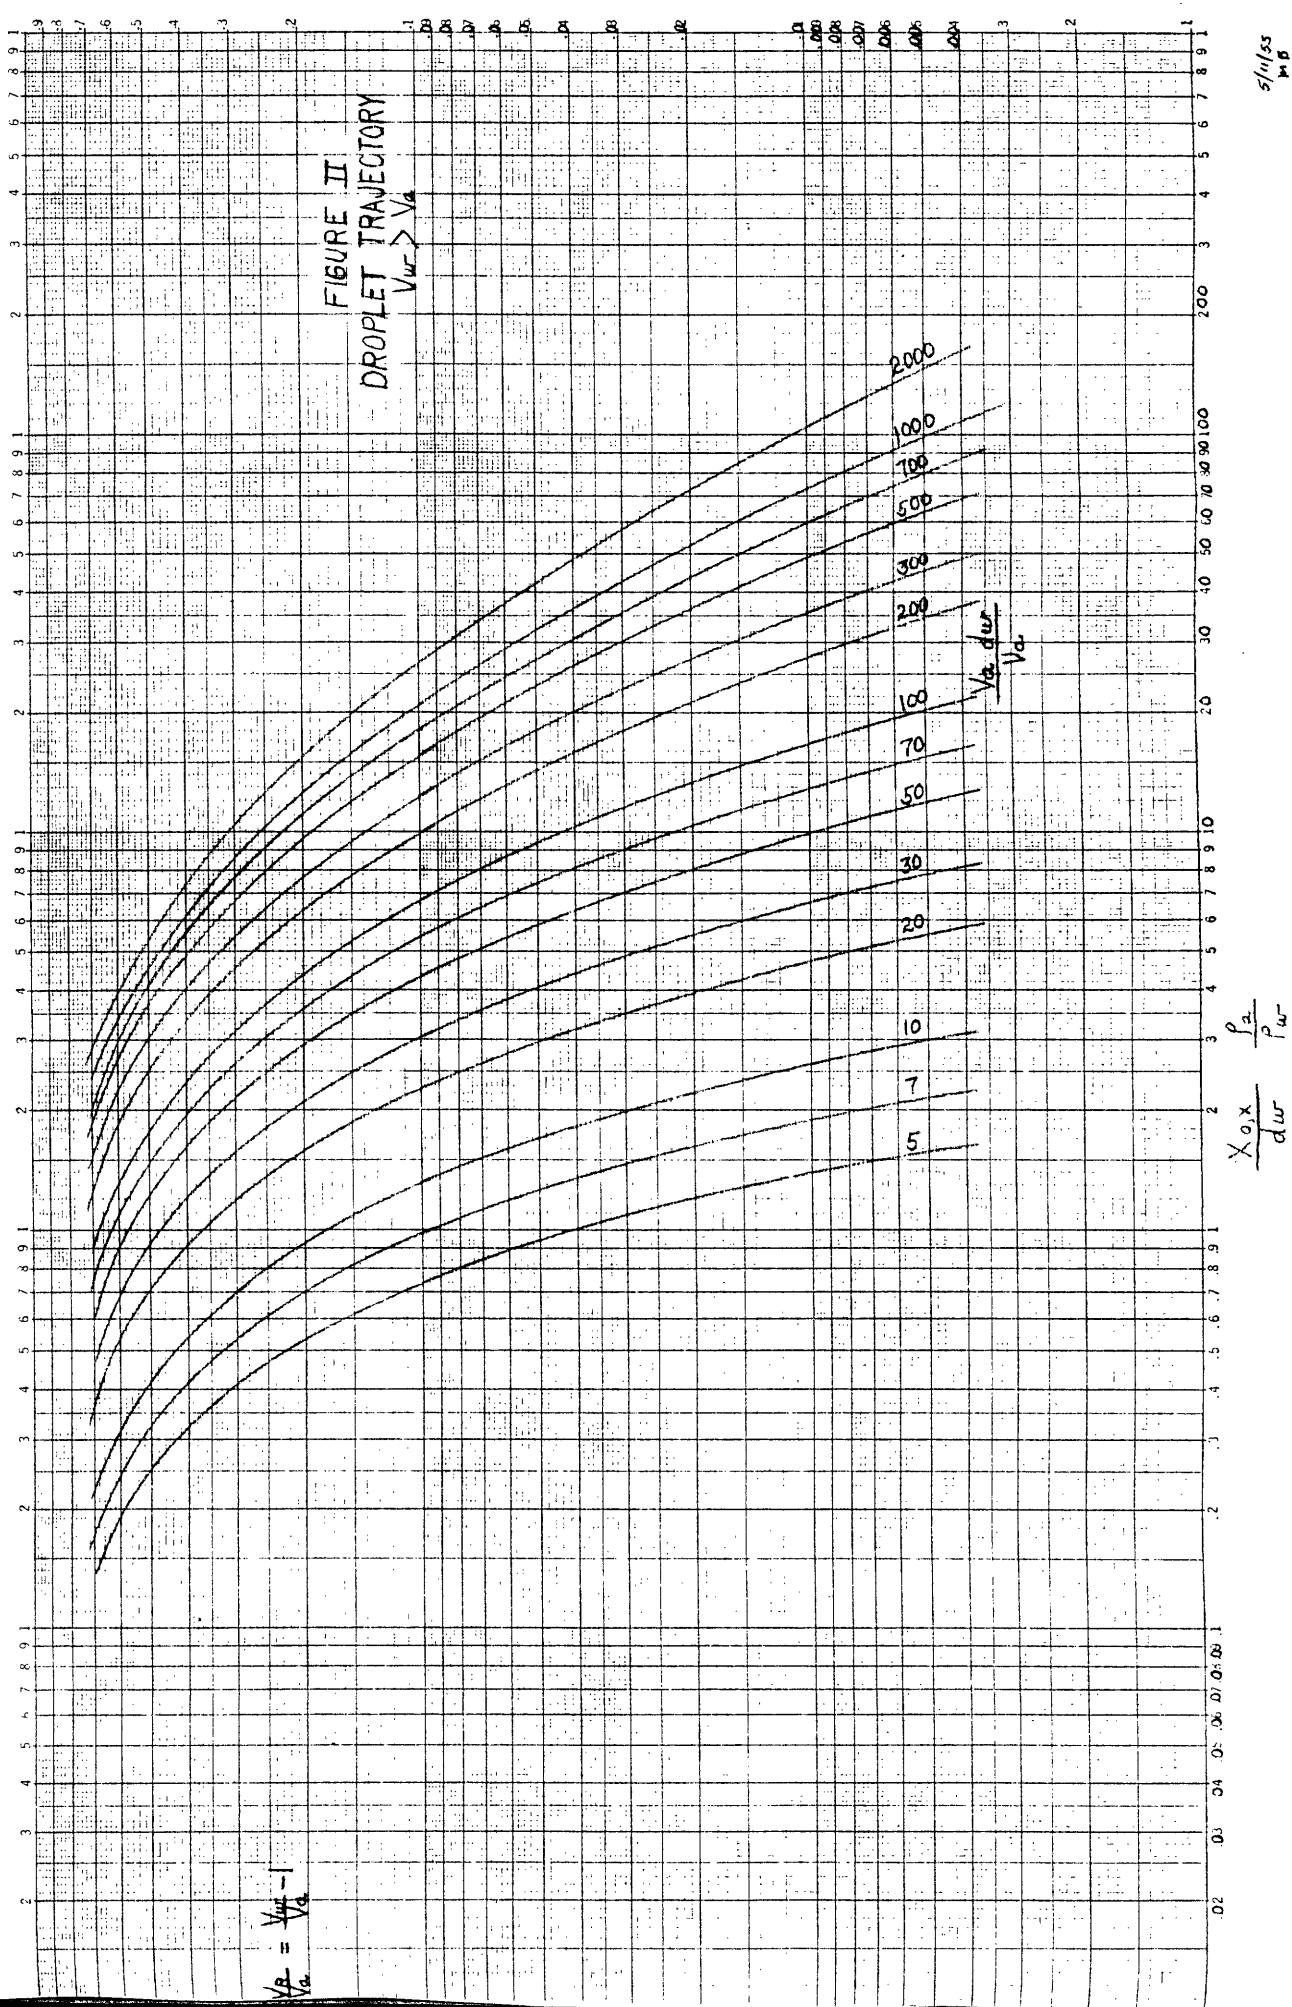


FIGURE III
DROPLET TRAJECTORY

$T_0 = 70^{\circ}\text{F}$

$P_0 = 1 \text{ ATMOS}$




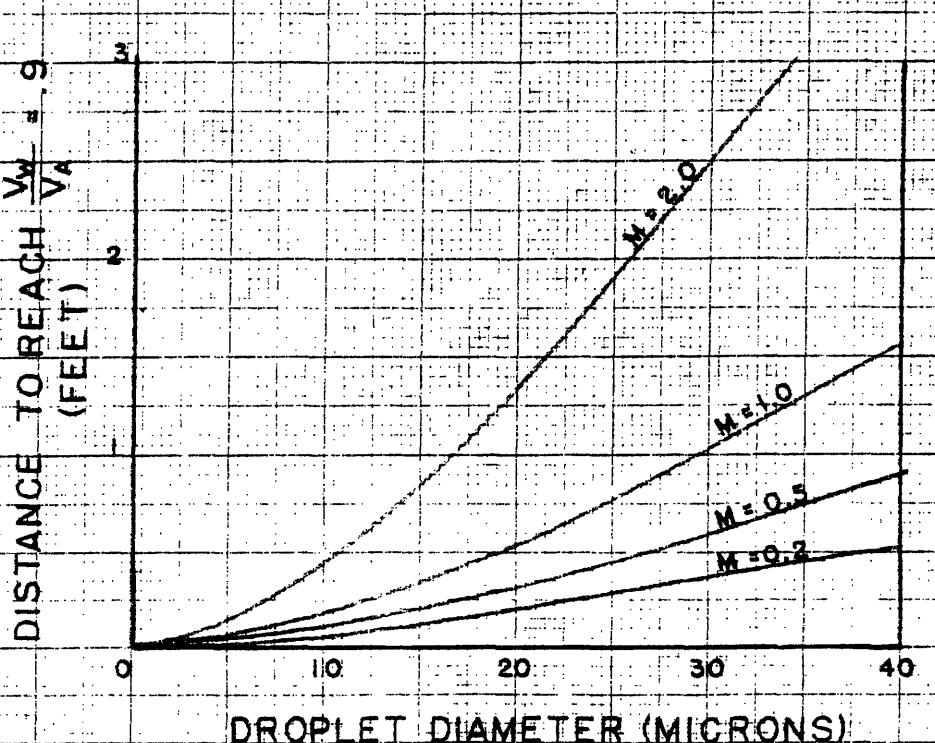


FIGURE IV
DROPLET TRAJECTORY
 $T_0 = 1500^{\circ} R$
 $P_0 = 1 \text{ ATMOS.}$

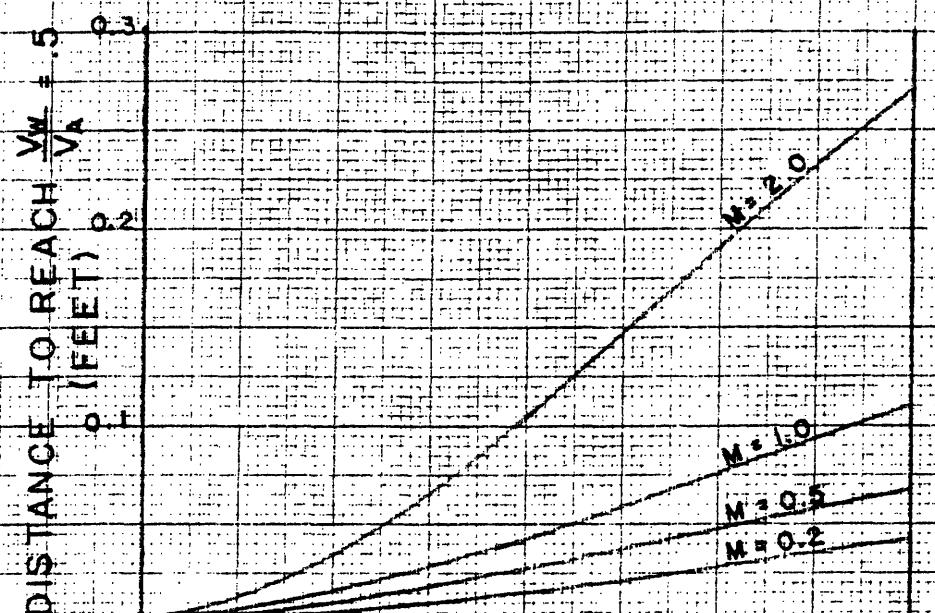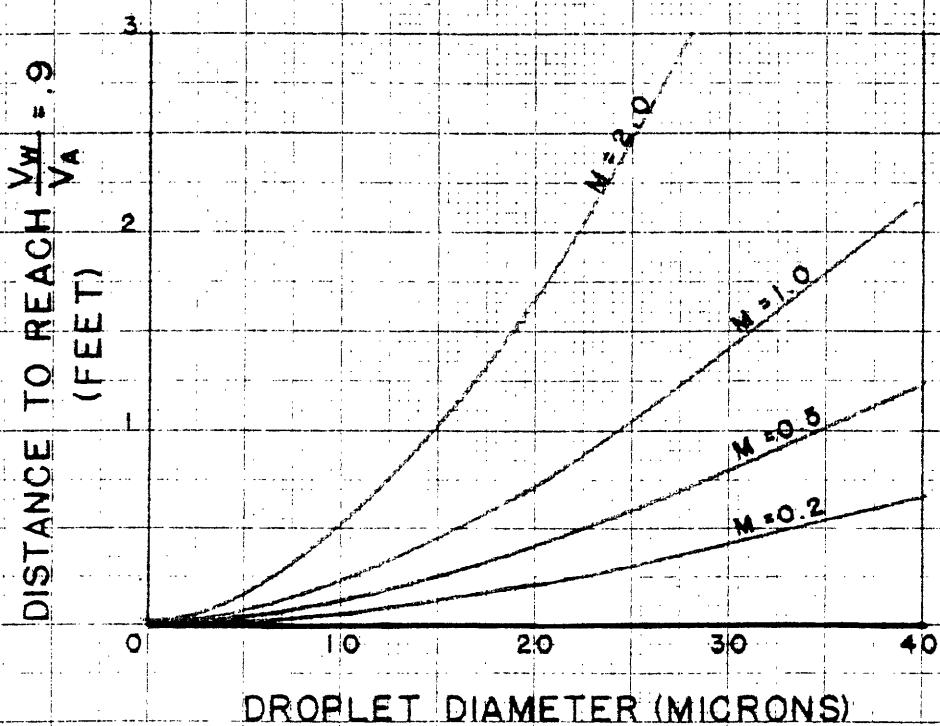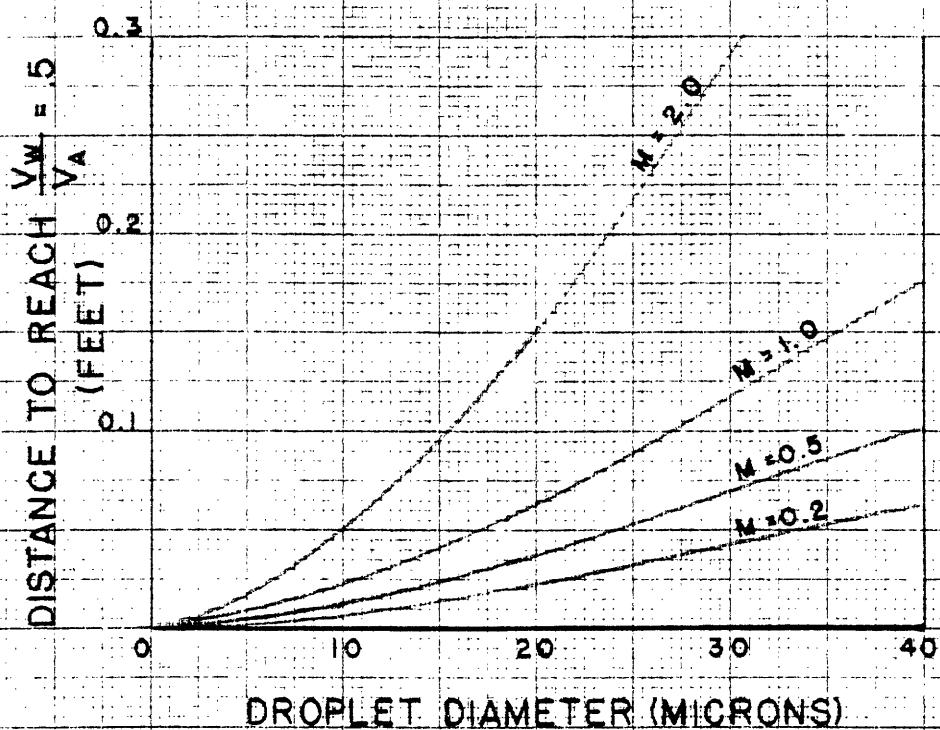

III. DISCONTINUITY ANALYSIS

Procedure

The example studied is the flow of an air-water mixture past two sections 1 and 2 in the flow. The problem is to determine the stream properties at section 2 as a function of the water velocity at 2, the water rate, and the stream properties at section 1.

The assumptions made are:

- (1) Constant area flow
- (2) Adiabatic--no change in stagnation temperature
- (3) No evaporation of water droplets
- (4) No change in temperature of droplets
- (5) Perfect gas relation holds for air.

The details of this analysis are given in the appendix. The general method of performing the analysis is given in reference (2).

Results

Values of $\frac{T_o}{T_{o*}}$, $\frac{T}{T^*}$, $\frac{P}{P^*}$, and $\frac{P_o}{P_{o*}}$ were calculated for $\frac{V_w}{V_a} = 0, 1$ for various water rates and Mach numbers. The star condition is a normalized condition corresponding to $\frac{V_w}{V_a} = 0$ and $M = 1$ and does not depend on the water rate. These values are tabulated in Tables IV through VIII. The guiding principle in using the tables is that $\frac{T_o}{T_{o*}}$ is constant in going between tables.


Figures V through X show the effect of droplet acceleration on stream properties assuming that at section 1, $\frac{V_w}{V_a} = 0$, and at section 2, $\frac{V_w}{V_a} = 1$ for various initial Mach numbers and water rates. The numbers on each curve indicate the water rate to air rate ratio, $\frac{w_w}{w_a}$, and the letter S on some branches of the curves indicate that a normal shock in the flow is necessary to reach these states.

Figures V through X are used in the following manner: Knowing the stream properties at section 1, the point of injection of the water, enter the required plot with the M_1 and $\frac{w_w}{w_a}$. Read on the ordinate the value of the ratio of the desired property at section 2 to that at section 1.

Conclusion

The plots given are easy to use and are correct within the assumptions. However, near choking conditions the air velocity increases very rapidly. It is erroneous to assume that the droplets will be able to accelerate with the stream in the absence of very large drag coefficients. Therefore, near choking conditions the plots will not give a correct answer to the variation of stream properties due to droplet acceleration. However, the value of M_1 where choking of the flow at section 2 is indicated is approximately correct.


FIGURE $\frac{M_1}{M_2}$
DISCONTINUITY

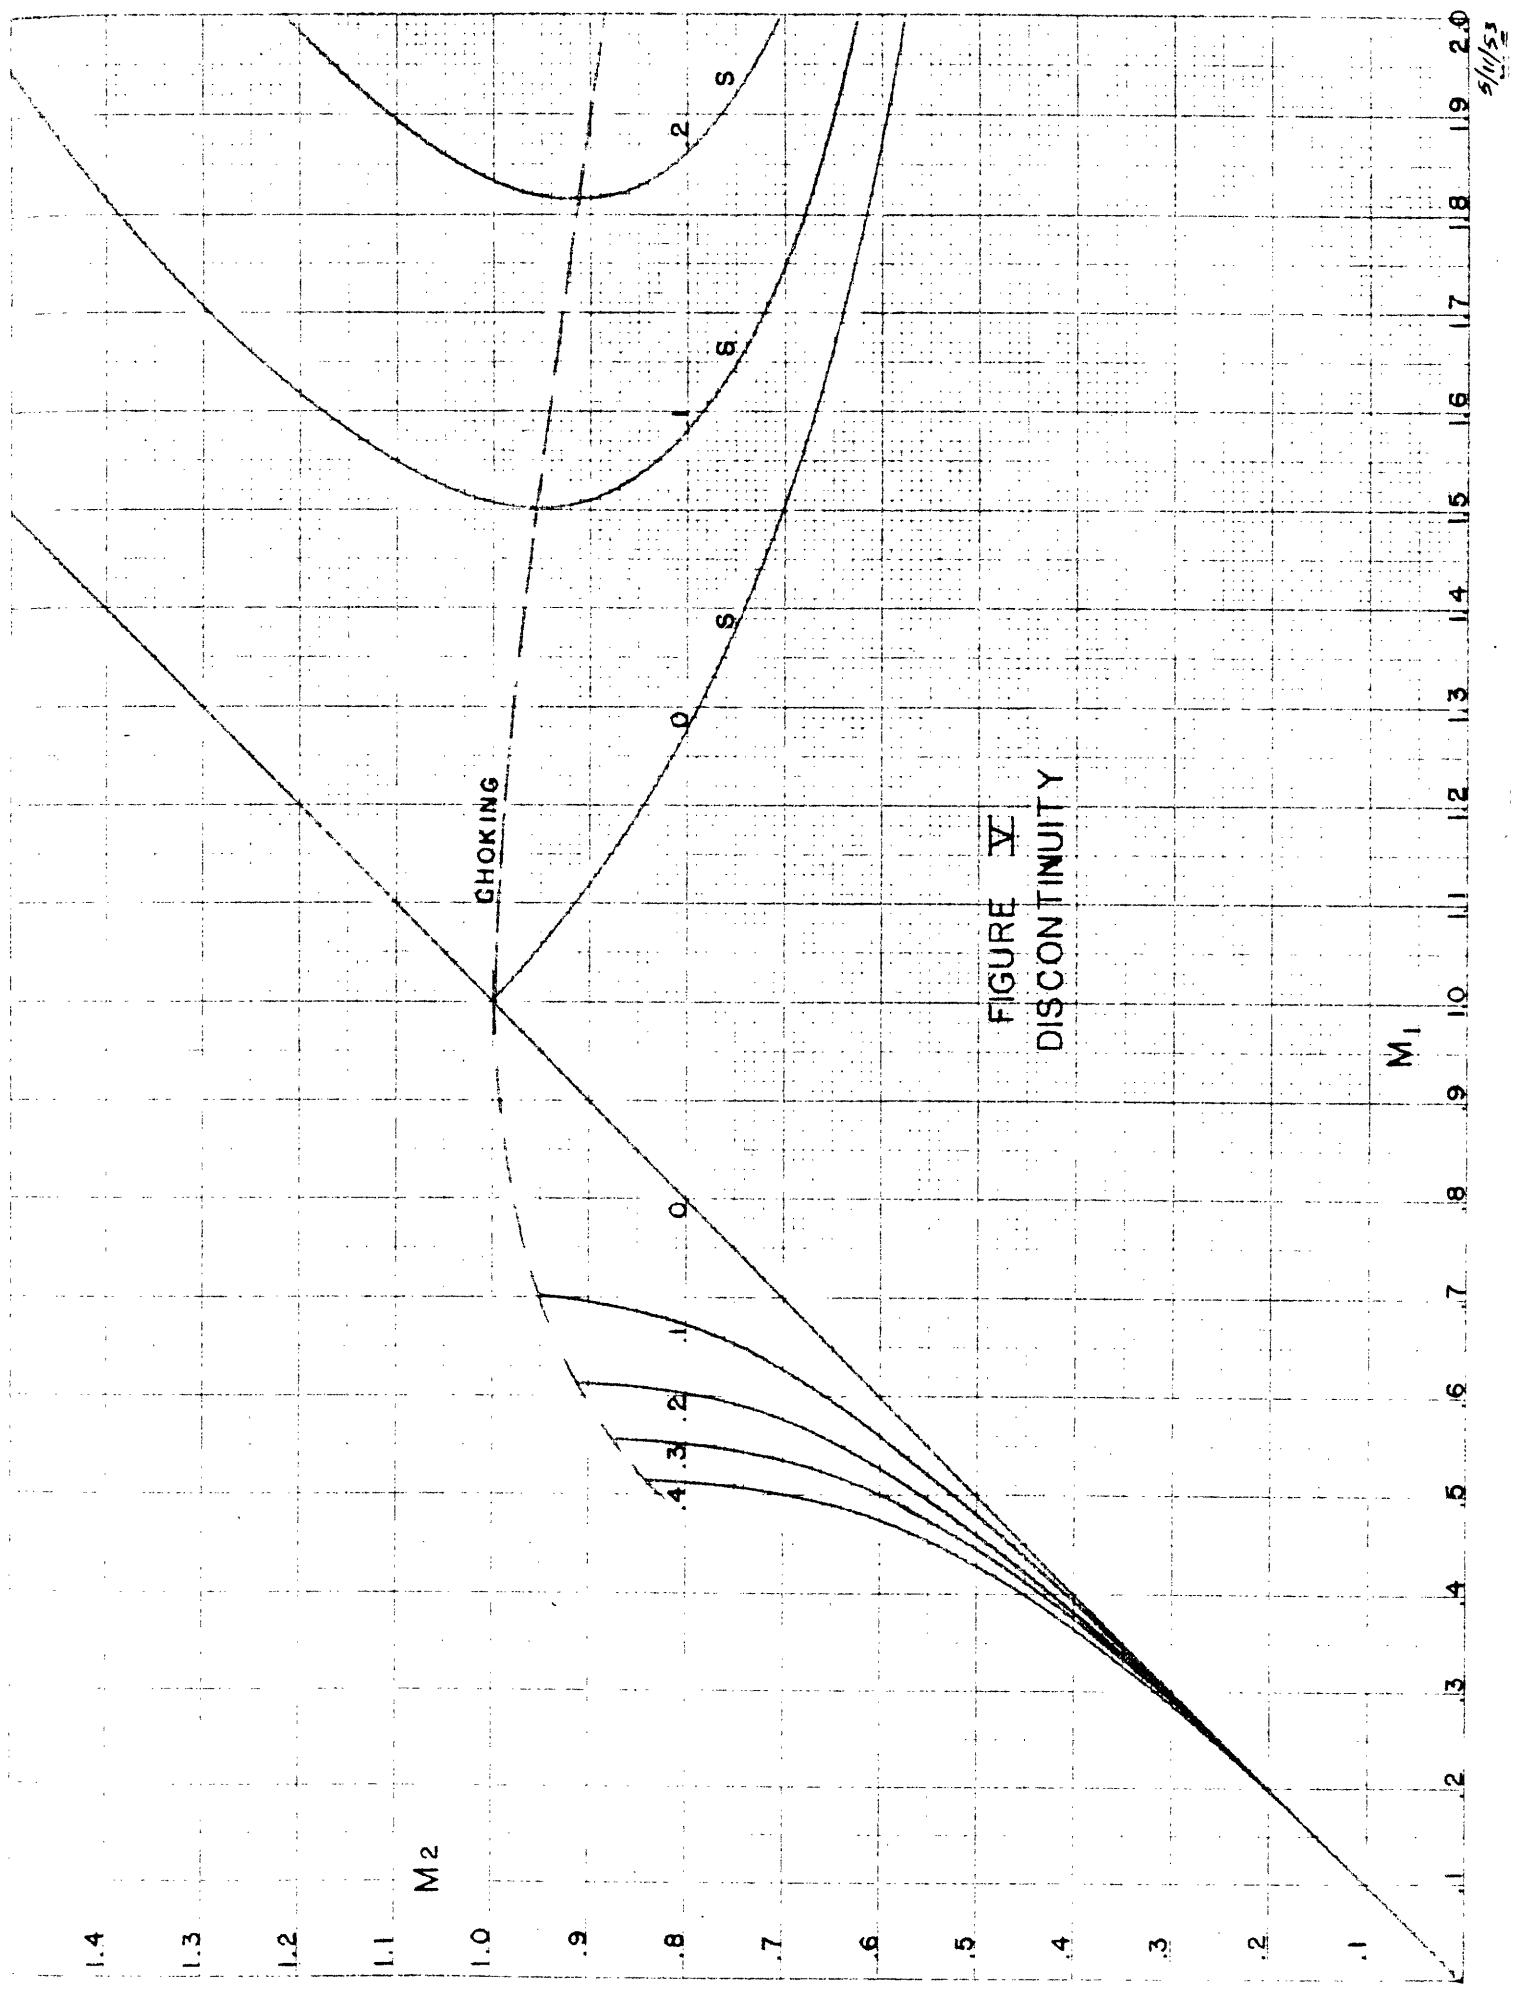

5/1/53


12

FIGURE XII
DISCONTINUITY

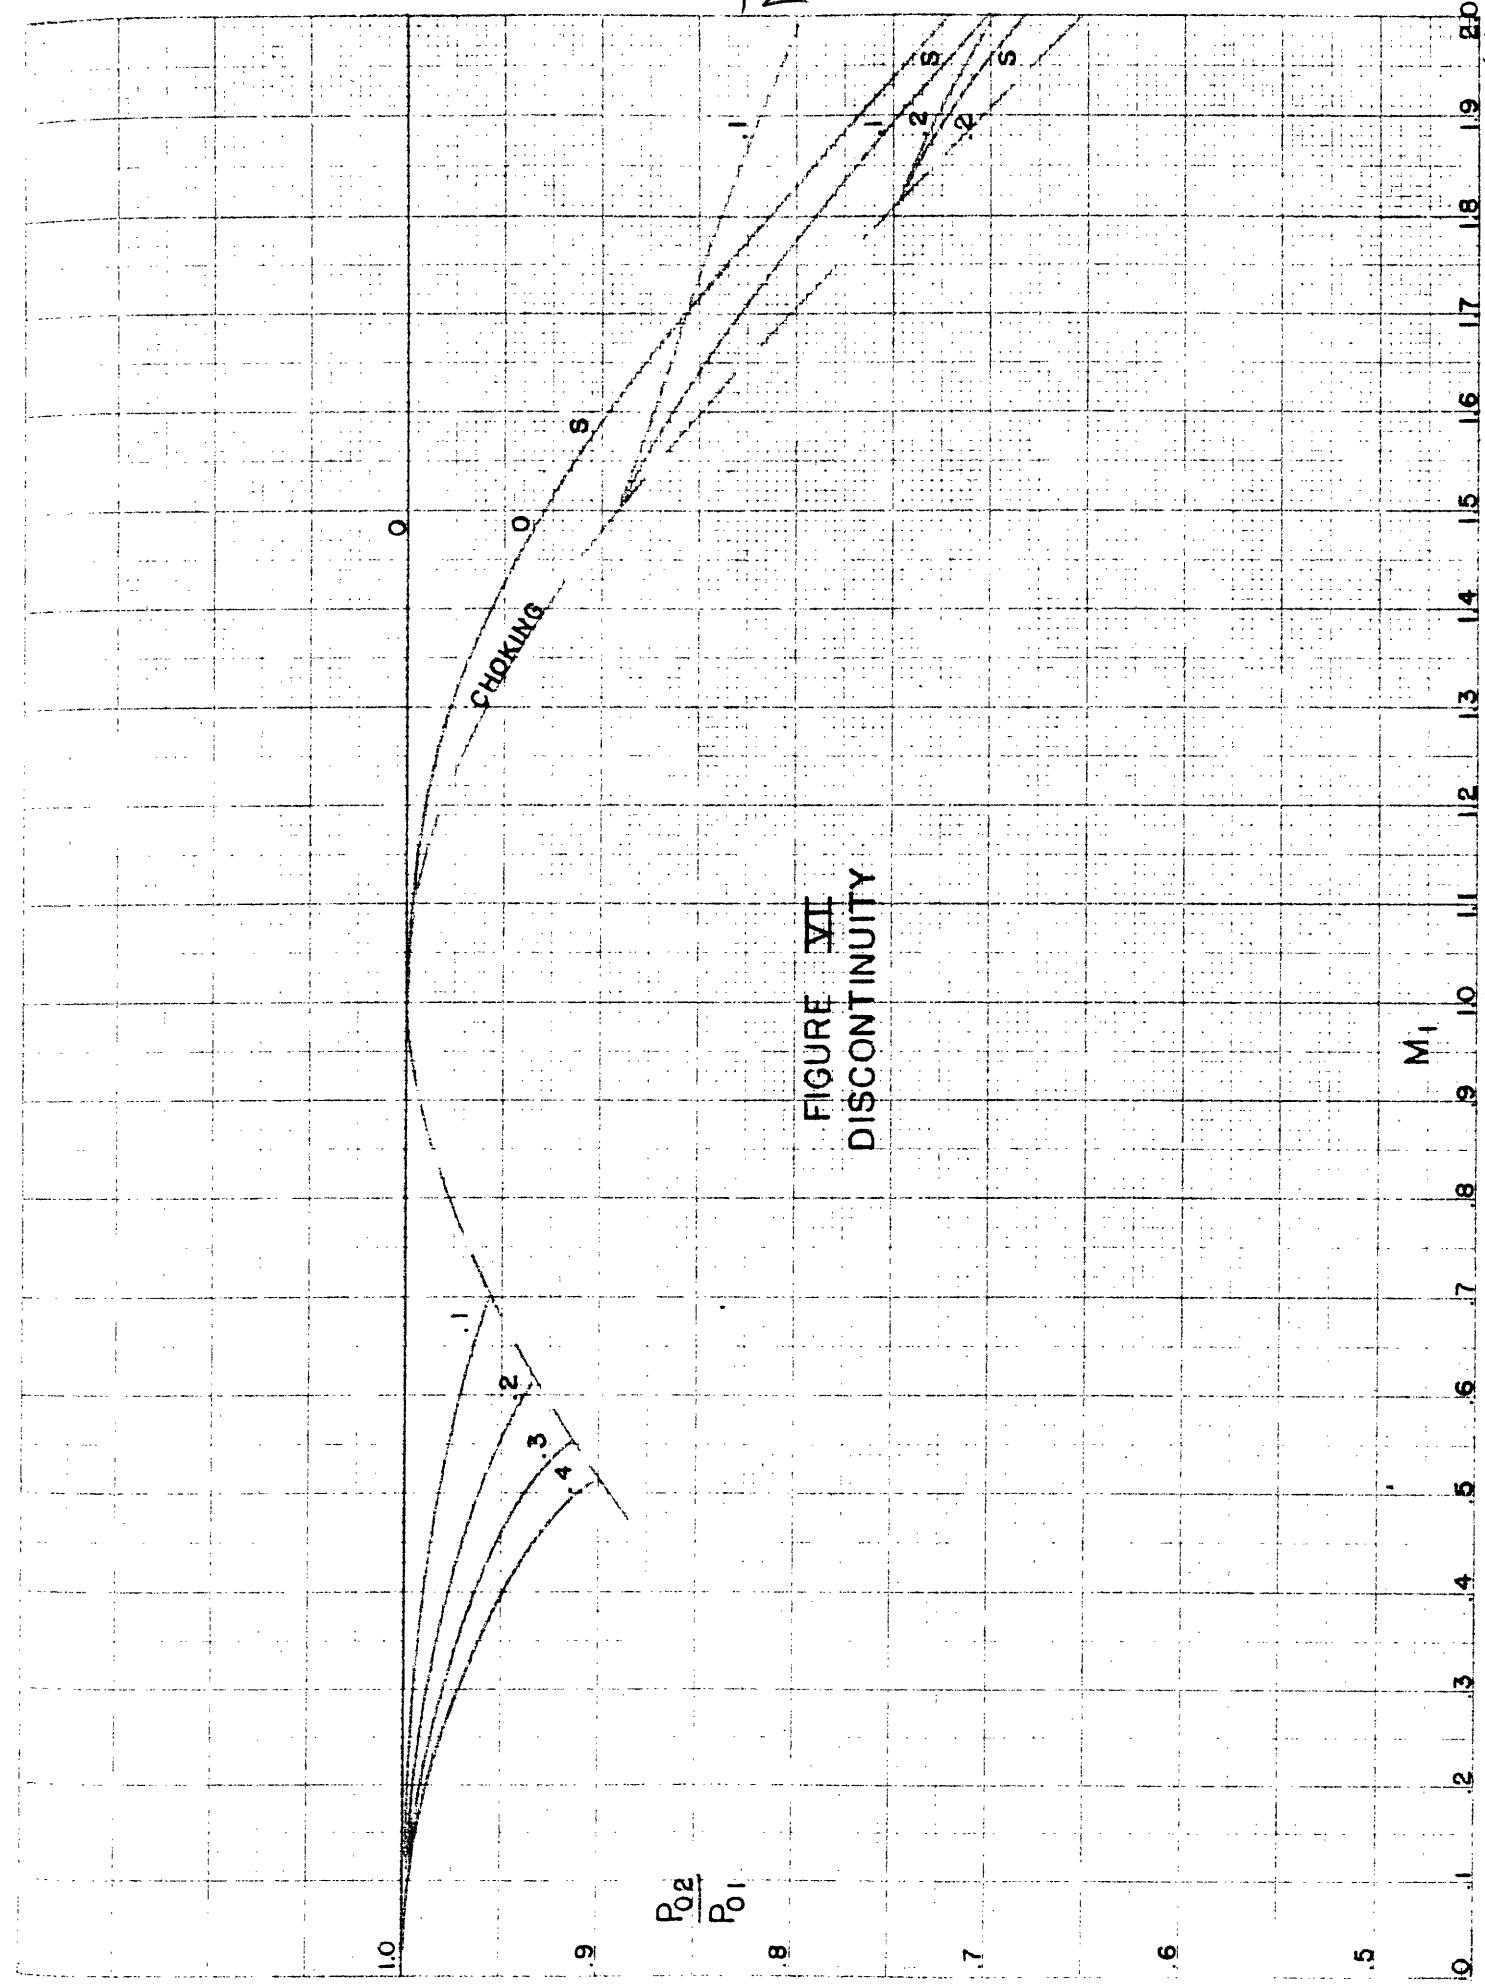

13

FIGURE VII
DISCONTINUITY

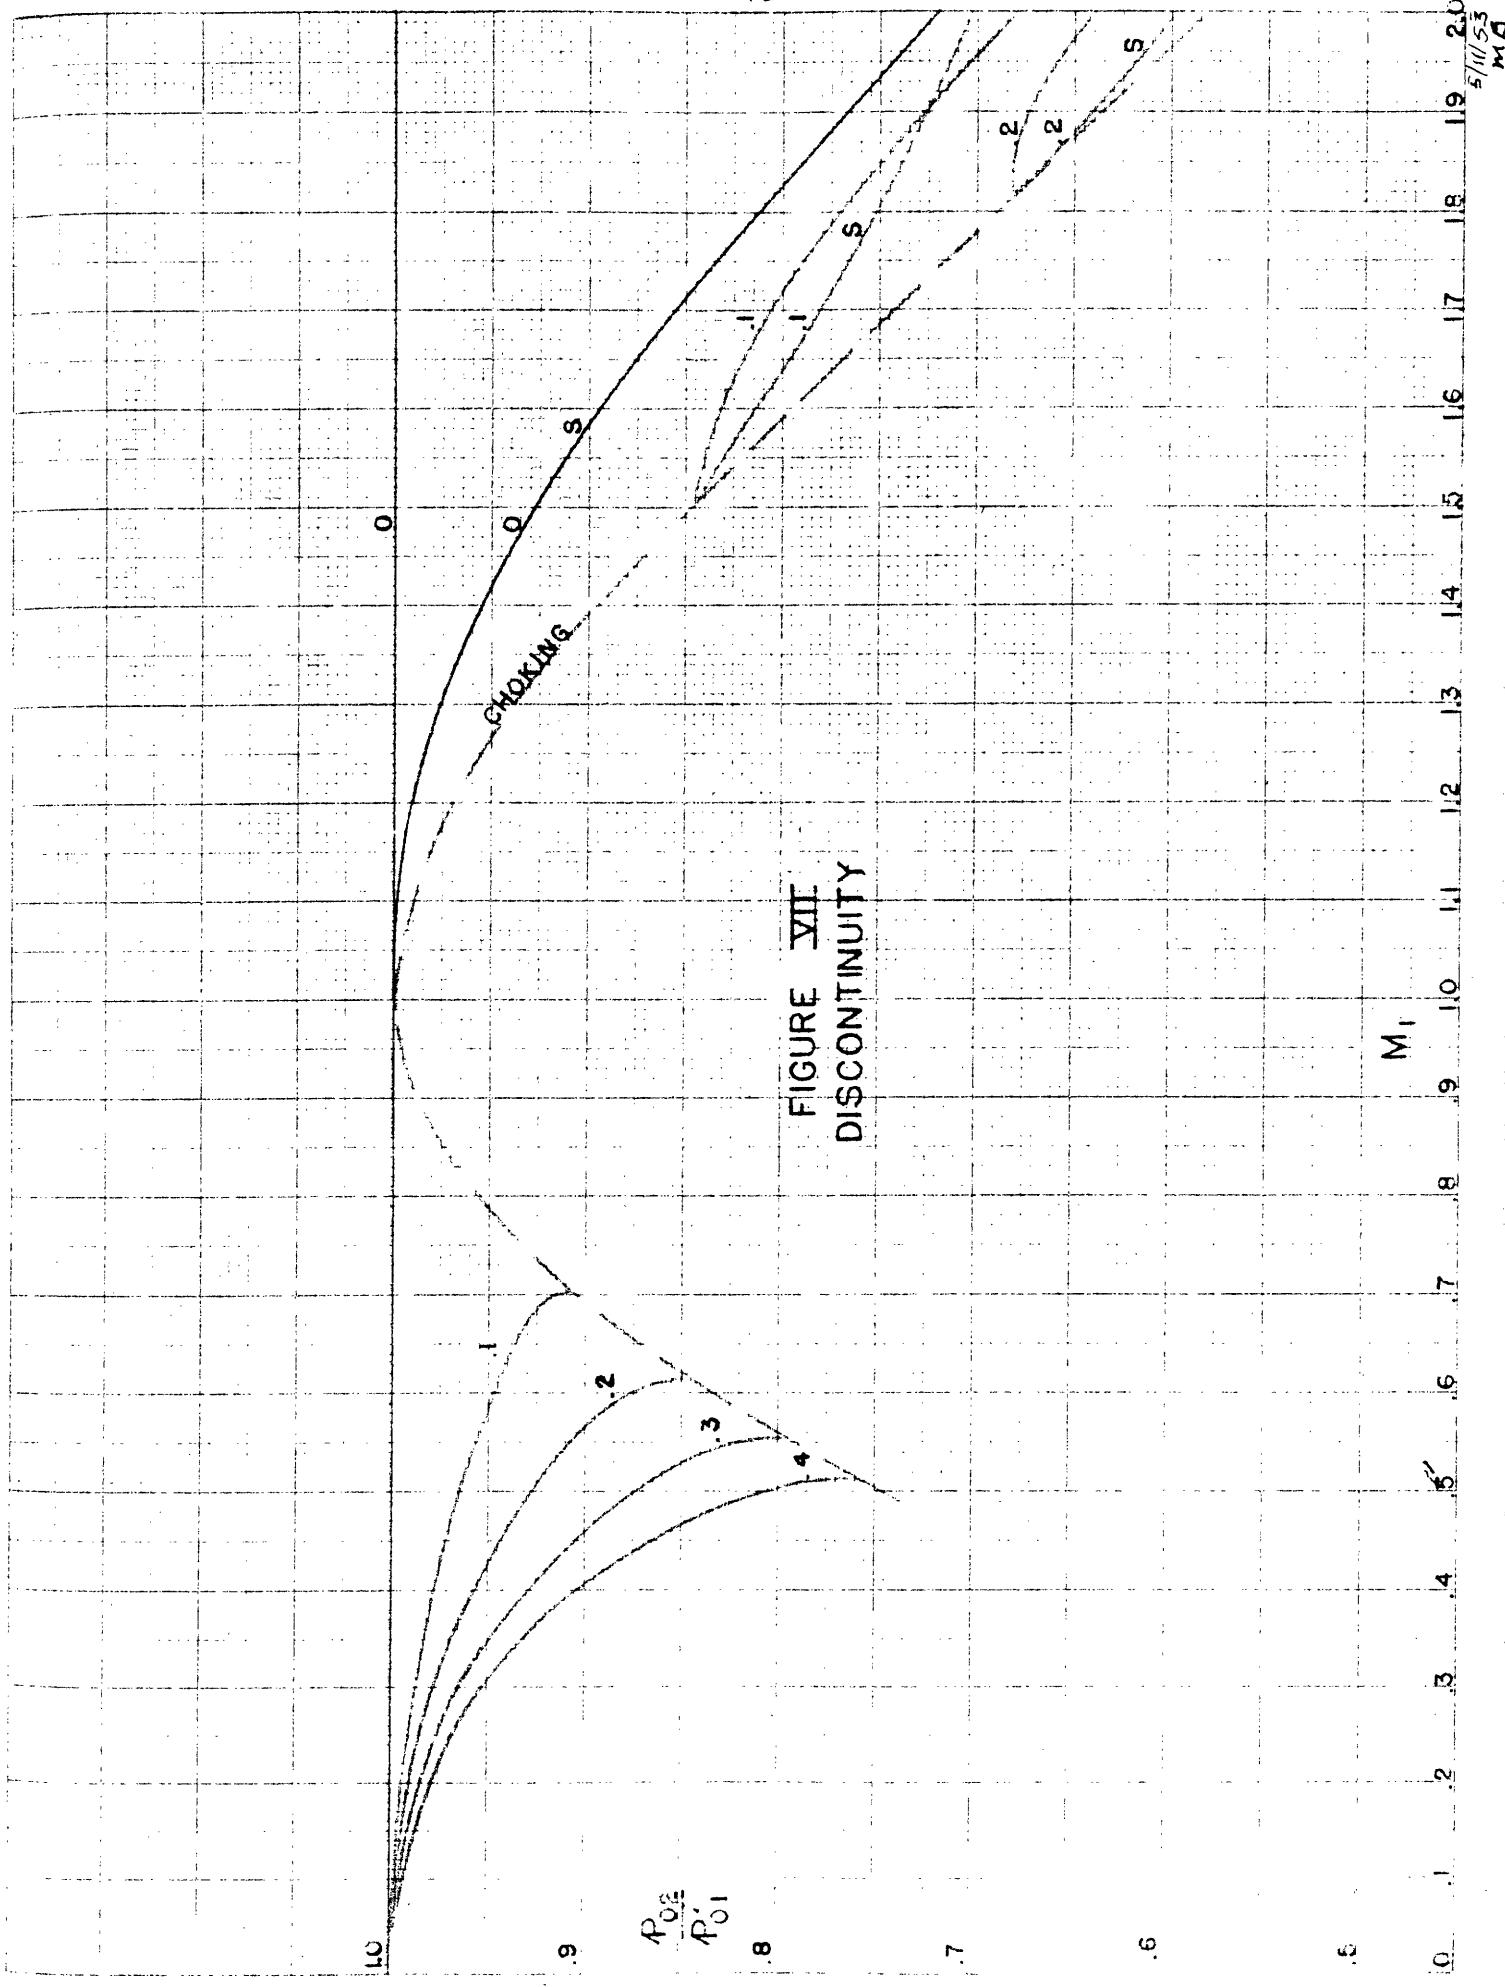





FIGURE VII
DISCONTINUITY

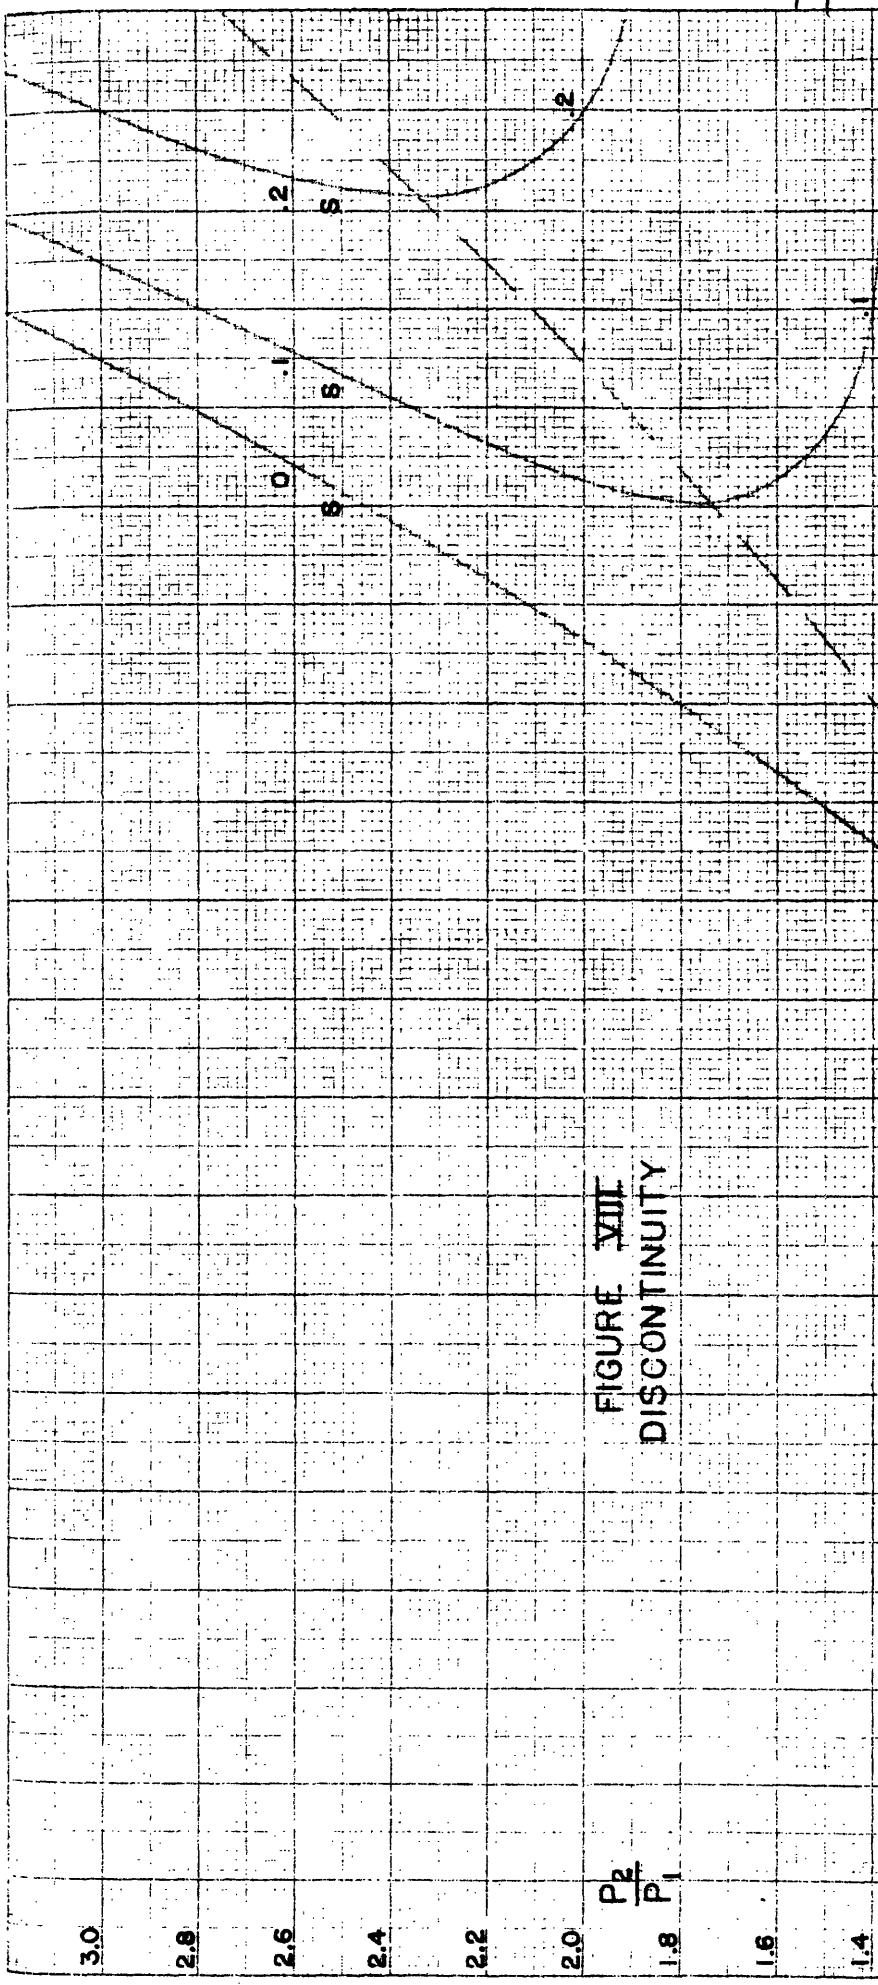

15


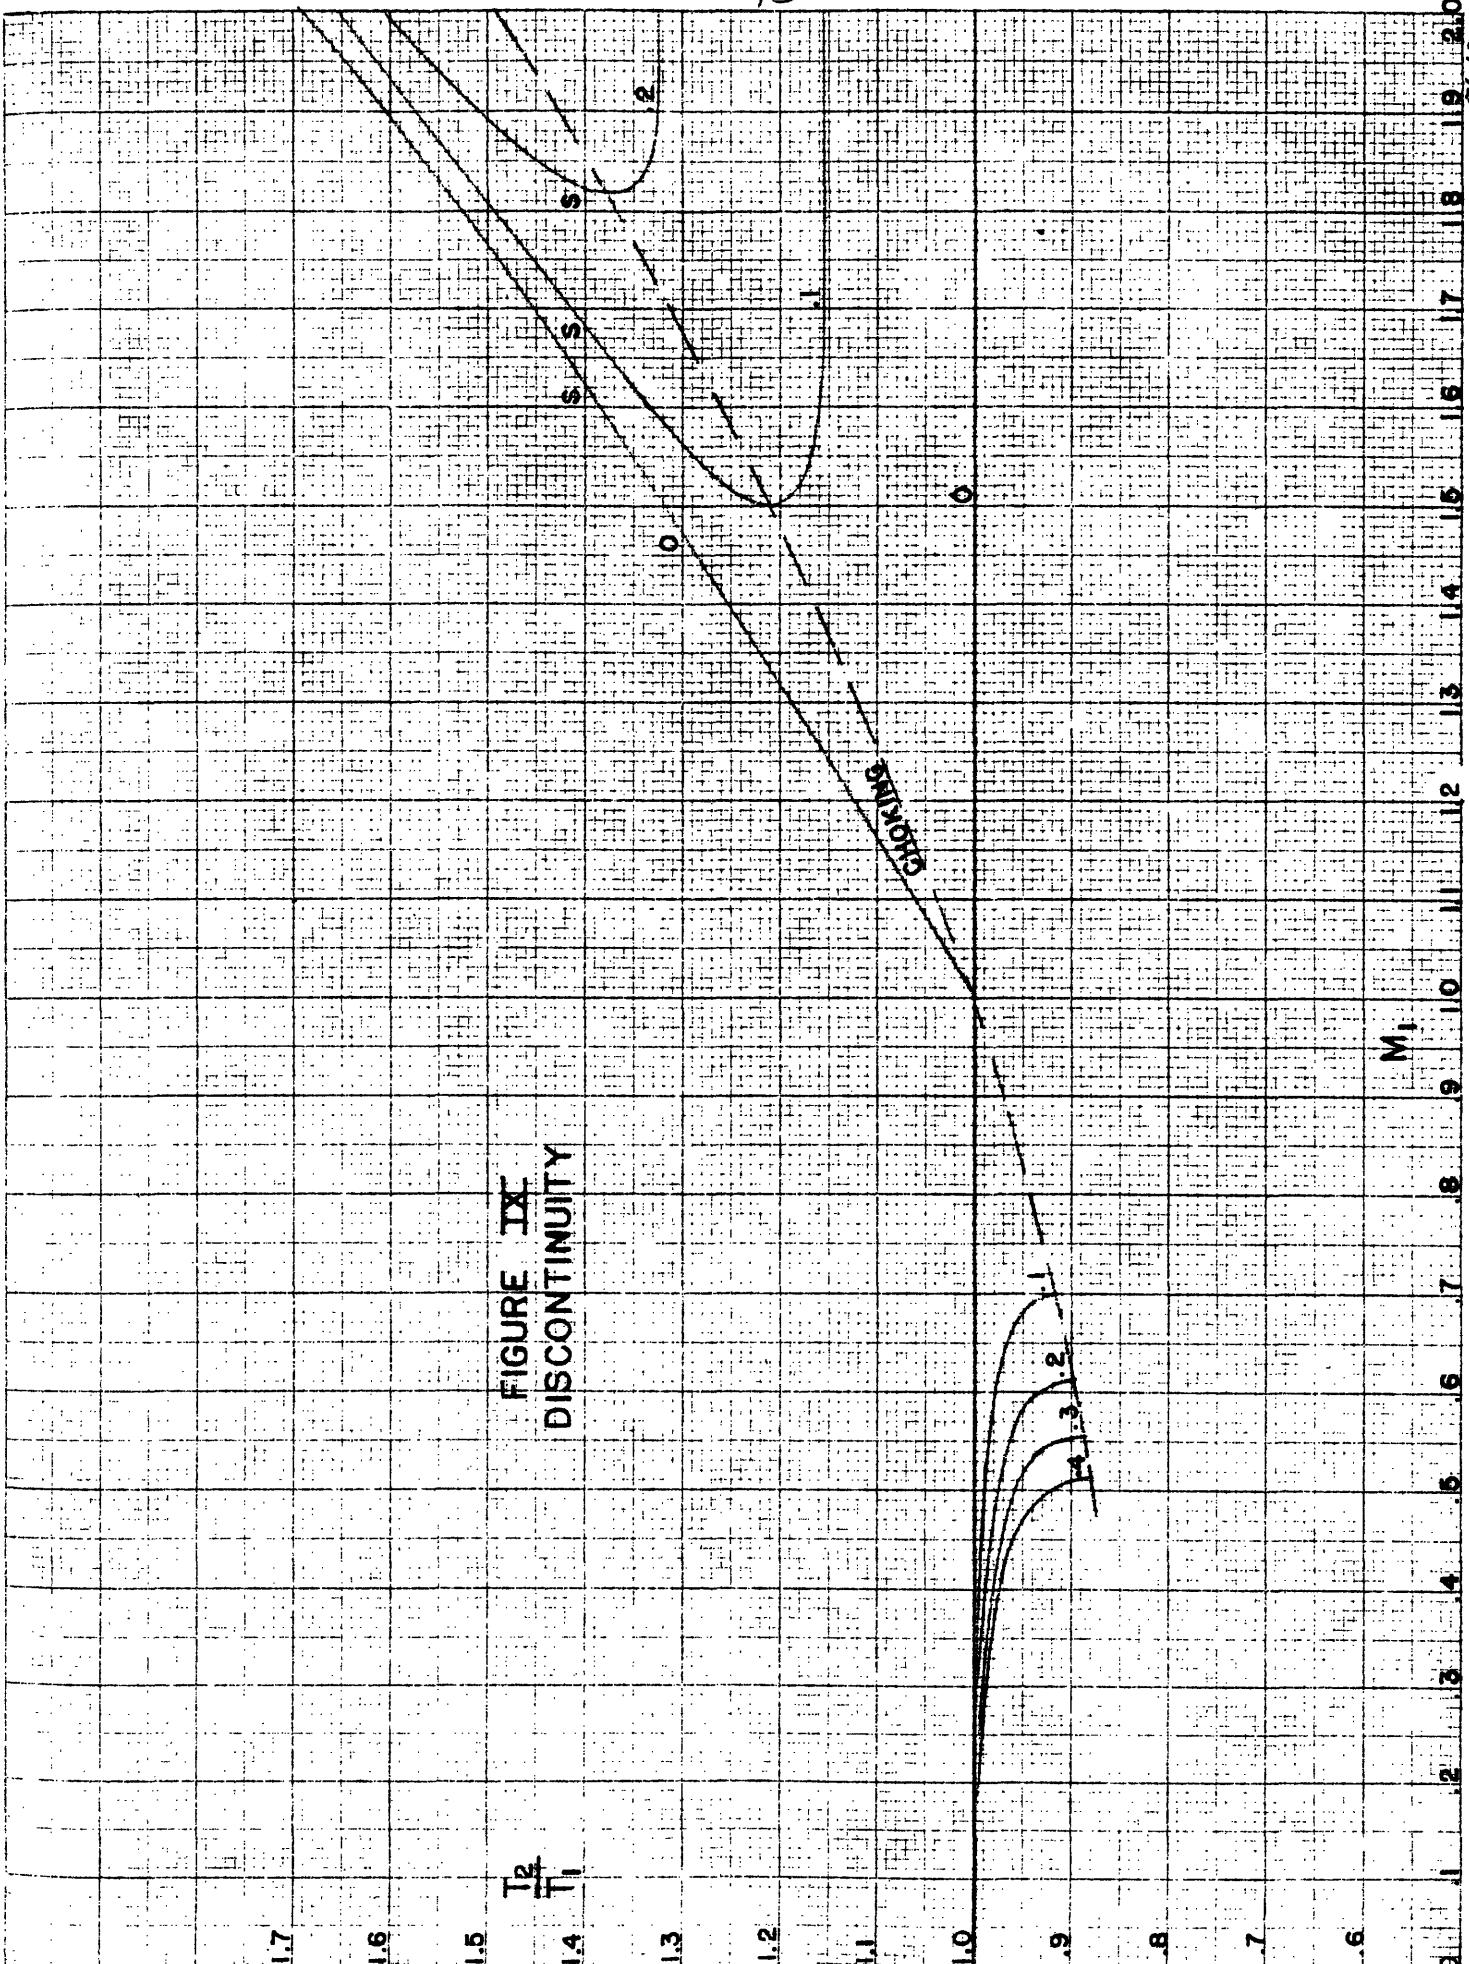


FIGURE IX
DISCONTINUITY

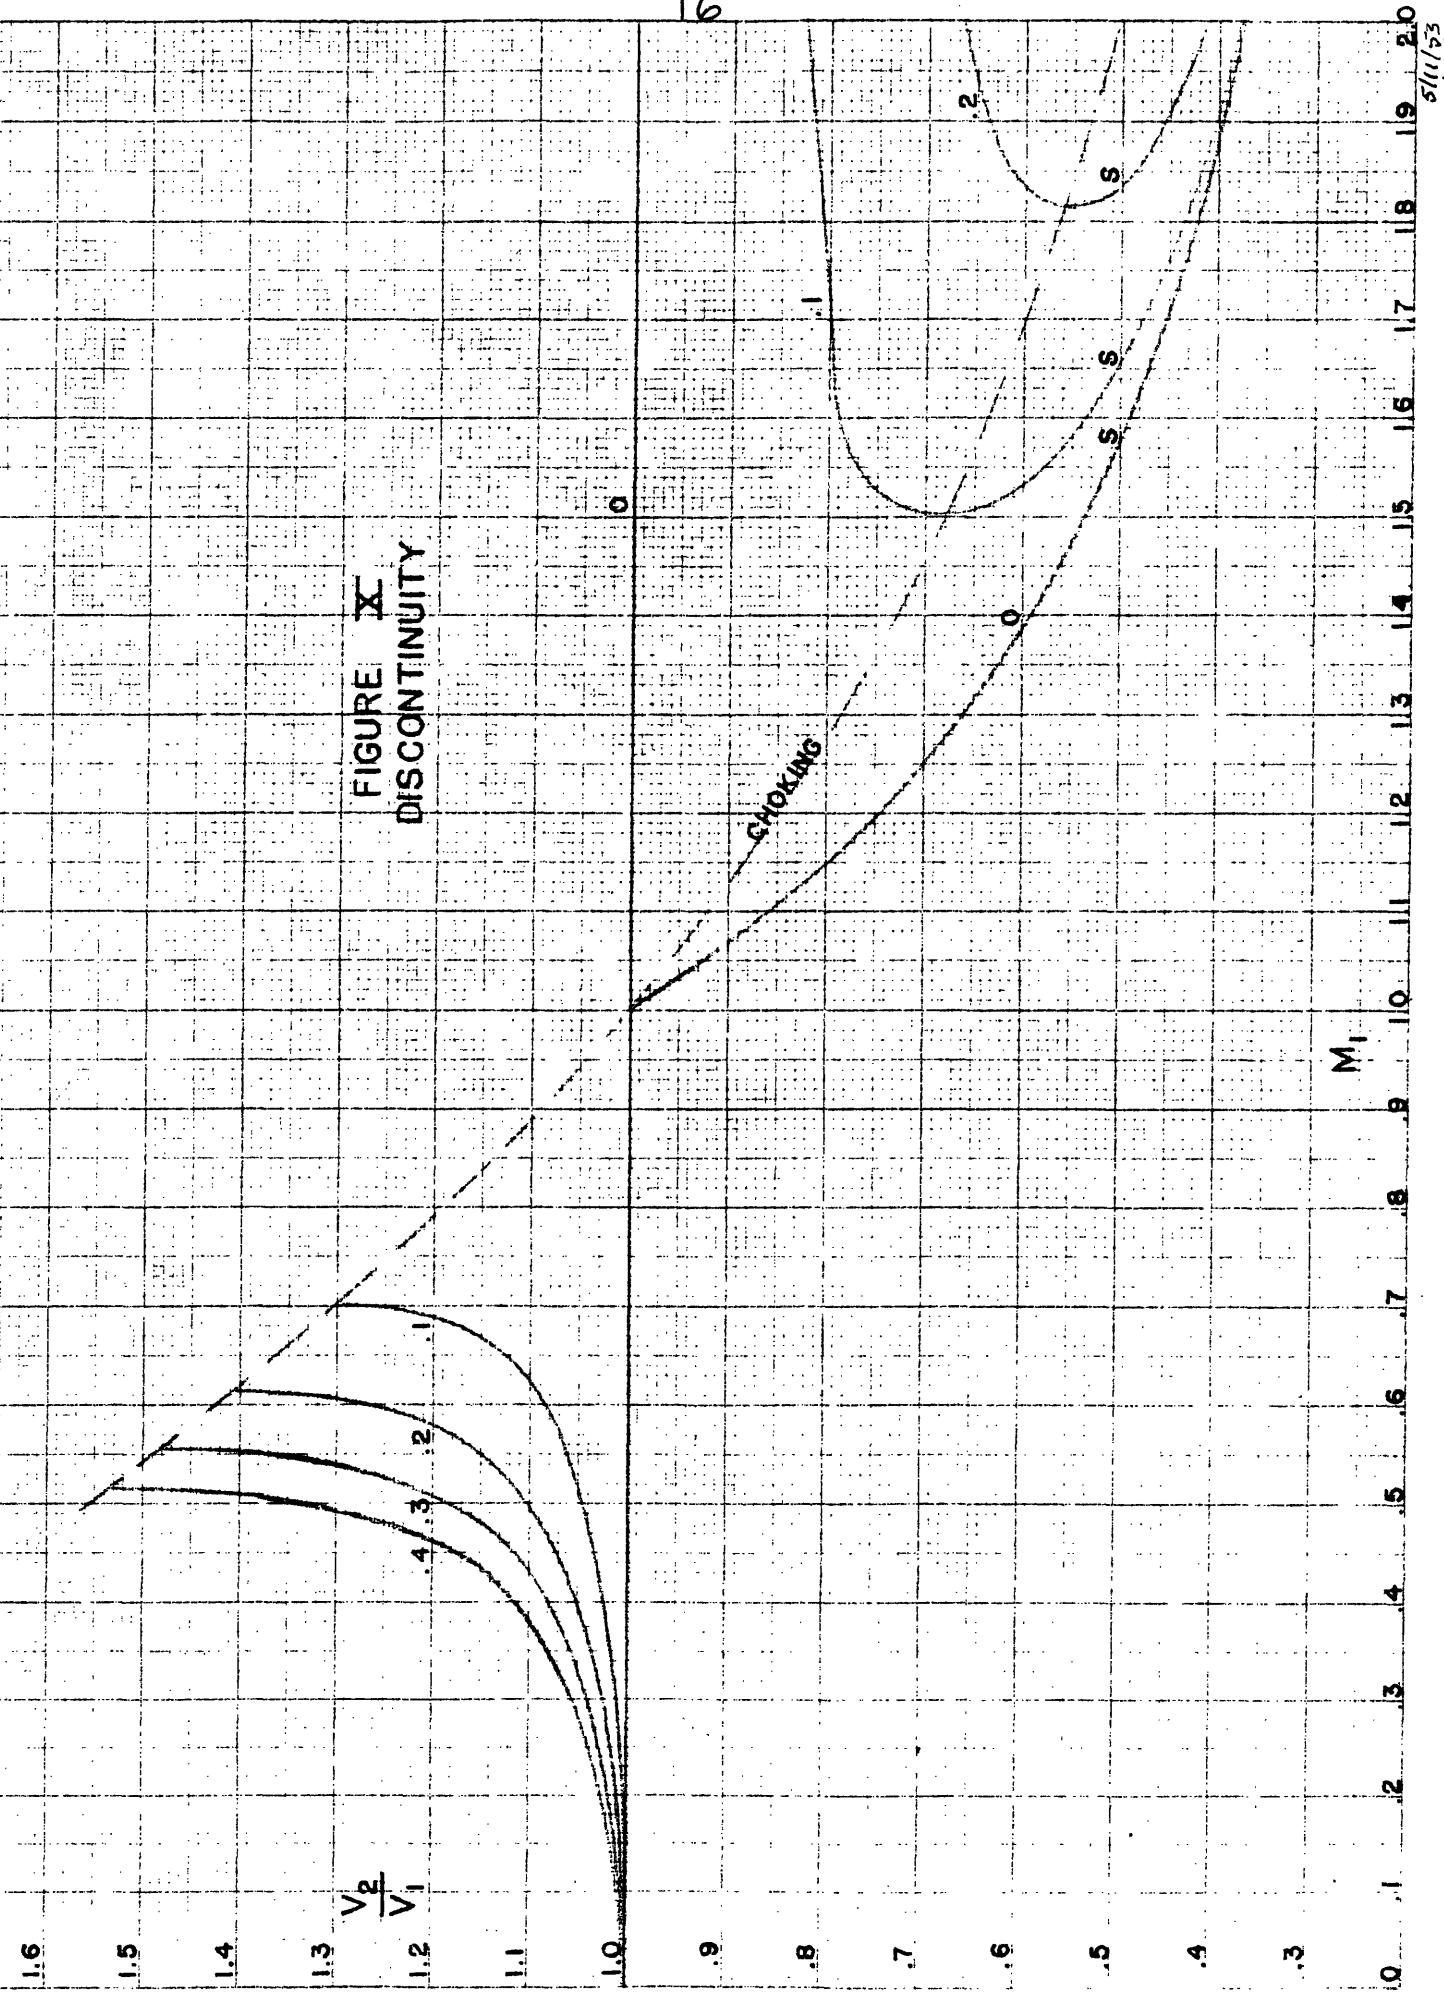

IV. MODIFIED FANNO LINE ANALYSIS

Procedure

The example studied is the flow of an air-water mixture in a pipe with wall friction and droplets striking the wall. The problem is, knowing the initial stream properties and friction factor, to determine the stream properties at any section downstream.

The assumptions made are:

- (1) Constant area flow
- (2) Adiabatic--no change in stagnation temperature
- (3) No evaporation of water droplets
- (4) No change in temperature of droplets
- (5) Perfect gas relation holds for air
- (6) For droplet entrained in air stream; $\frac{V_w}{V_a} = 1$
- (7) For droplet on the wall; $\frac{V_w}{V_a} = 0$
- (8) In each differential section an amount of water leaves the stream and hits the wall, and an equal amount of water leaves the wall and is picked up by the stream
- (9) That this amount of water is proportional to the length of section

The details of this analysis are given in the appendix. The general method of performing the analysis is given in reference (2).

Results

Values of $\left[4 \frac{f}{D} + K \right] L_{max}$, $\frac{P_o}{P_{o*}}$, $\frac{P_o}{P_{o*}}$, $\frac{P}{P*}$, $\frac{T}{T*}$, $\frac{V}{V*}$, and $\frac{F}{F*}$ were calculated for various water rates and Mach numbers. The star condition is a normalized condition corresponding to choking of the flow. These values,

to slide rule accuracy, are tabulated in Tables XII through XV and plotted in Figures XI through XVII. These figures show the effect of friction and droplet momentum exchange with the walls on the stream properties. The numbers on each curve indicate the water rate to air rate ratio, $\frac{w_w}{w_a}$.

The symbol K in the term $\left[4 \frac{f}{D} + K\right] L_{max}$ incorporates as a pseudo-frictional term the effect of momentum exchange of droplets with the wall. This term is a function of the water rate to air rate ratio, $\frac{w_w}{w_a}$, the duct diameter, and the droplet diameter and perhaps other stream properties. The nature of this function is not known. However, using the data of reference (3) for sand together with the low Mach number analysis described in the appendix, it appears that $K = .4 \frac{w_w}{w_a}$ for 1" diameter pipe and sand diameter of 200 μ and 450 μ . It appears that the constant of proportionality is slightly smaller for smaller sand diameters. The effect of duct diameter is not known.

Figures XI through XVII are used in the following manner: Knowing the initial stream properties enter Figure XI with the initial Mach number, M_1 , and $\frac{w_w}{w_a}$ and read off the value $\left[4 \frac{f}{D} + K\right] L_{max}$. Then knowing $\left[4 \frac{f}{D} + K\right]$ and the length of duct from the initial section 1 to any other section 2, calculate $\left[4 \frac{f}{D} + K\right] L_{1,2}$. Then calculate $\left[4 \frac{f}{D} + K\right] L_{max_2} = \left[4 \frac{f}{D} + K\right] L_{max_1} - \left[4 \frac{f}{D} + K\right] L_{1,2}$. Enter Figure XI with $\left[4 \frac{f}{D} + K\right] L_{max_2}$ and $\frac{w_w}{w_a}$ and read off M_2 . Then entering the desired plot of properties with M_1 , M_2 , and $\frac{w_w}{w_a}$, read off the value of the normalized property at sections 1 and 2. From this form the ratio of the property at 2 to that at 1. Knowing the value of the property at 1, the value at 2 can be calculated.

Figure XVII is used to determine the Mach number after a normal shock knowing the Mach number and $\frac{w_w}{w_a}$ just before the shock and assuming $\frac{V_w}{V_a} = 1$ on both sides of the shock. Enter the plot with initial M and $\frac{w_w}{w_a}$ to find initial

point. Follow across horizontally with constant $\frac{F}{F^*}$ until reaching the same $\frac{w_w}{w_a}$ curve. Read the value of M after the shock.

Conclusion

Provided more information can be obtained concerning the pseudo-frictional term, K, the plots given can be valuable for engineering use. This could well form the basis of a thesis to determine whether this simple model of the flow is correct and to correlate data in the field to two-component flows.


In addition, very near choking conditions this model of the flow is not correct since the air velocity increases very rapidly in a very short length. It is erroneous to assume that the droplets can accelerate with the stream in the absence of very large drag coefficients. Therefore, near choking conditions the plots will not give a correct answer to the variation of stream properties due to friction.

20

6/11/53
M.L.D.

FIGURE XI
FRICTION

$$(A_D + K) L_{MAX}$$

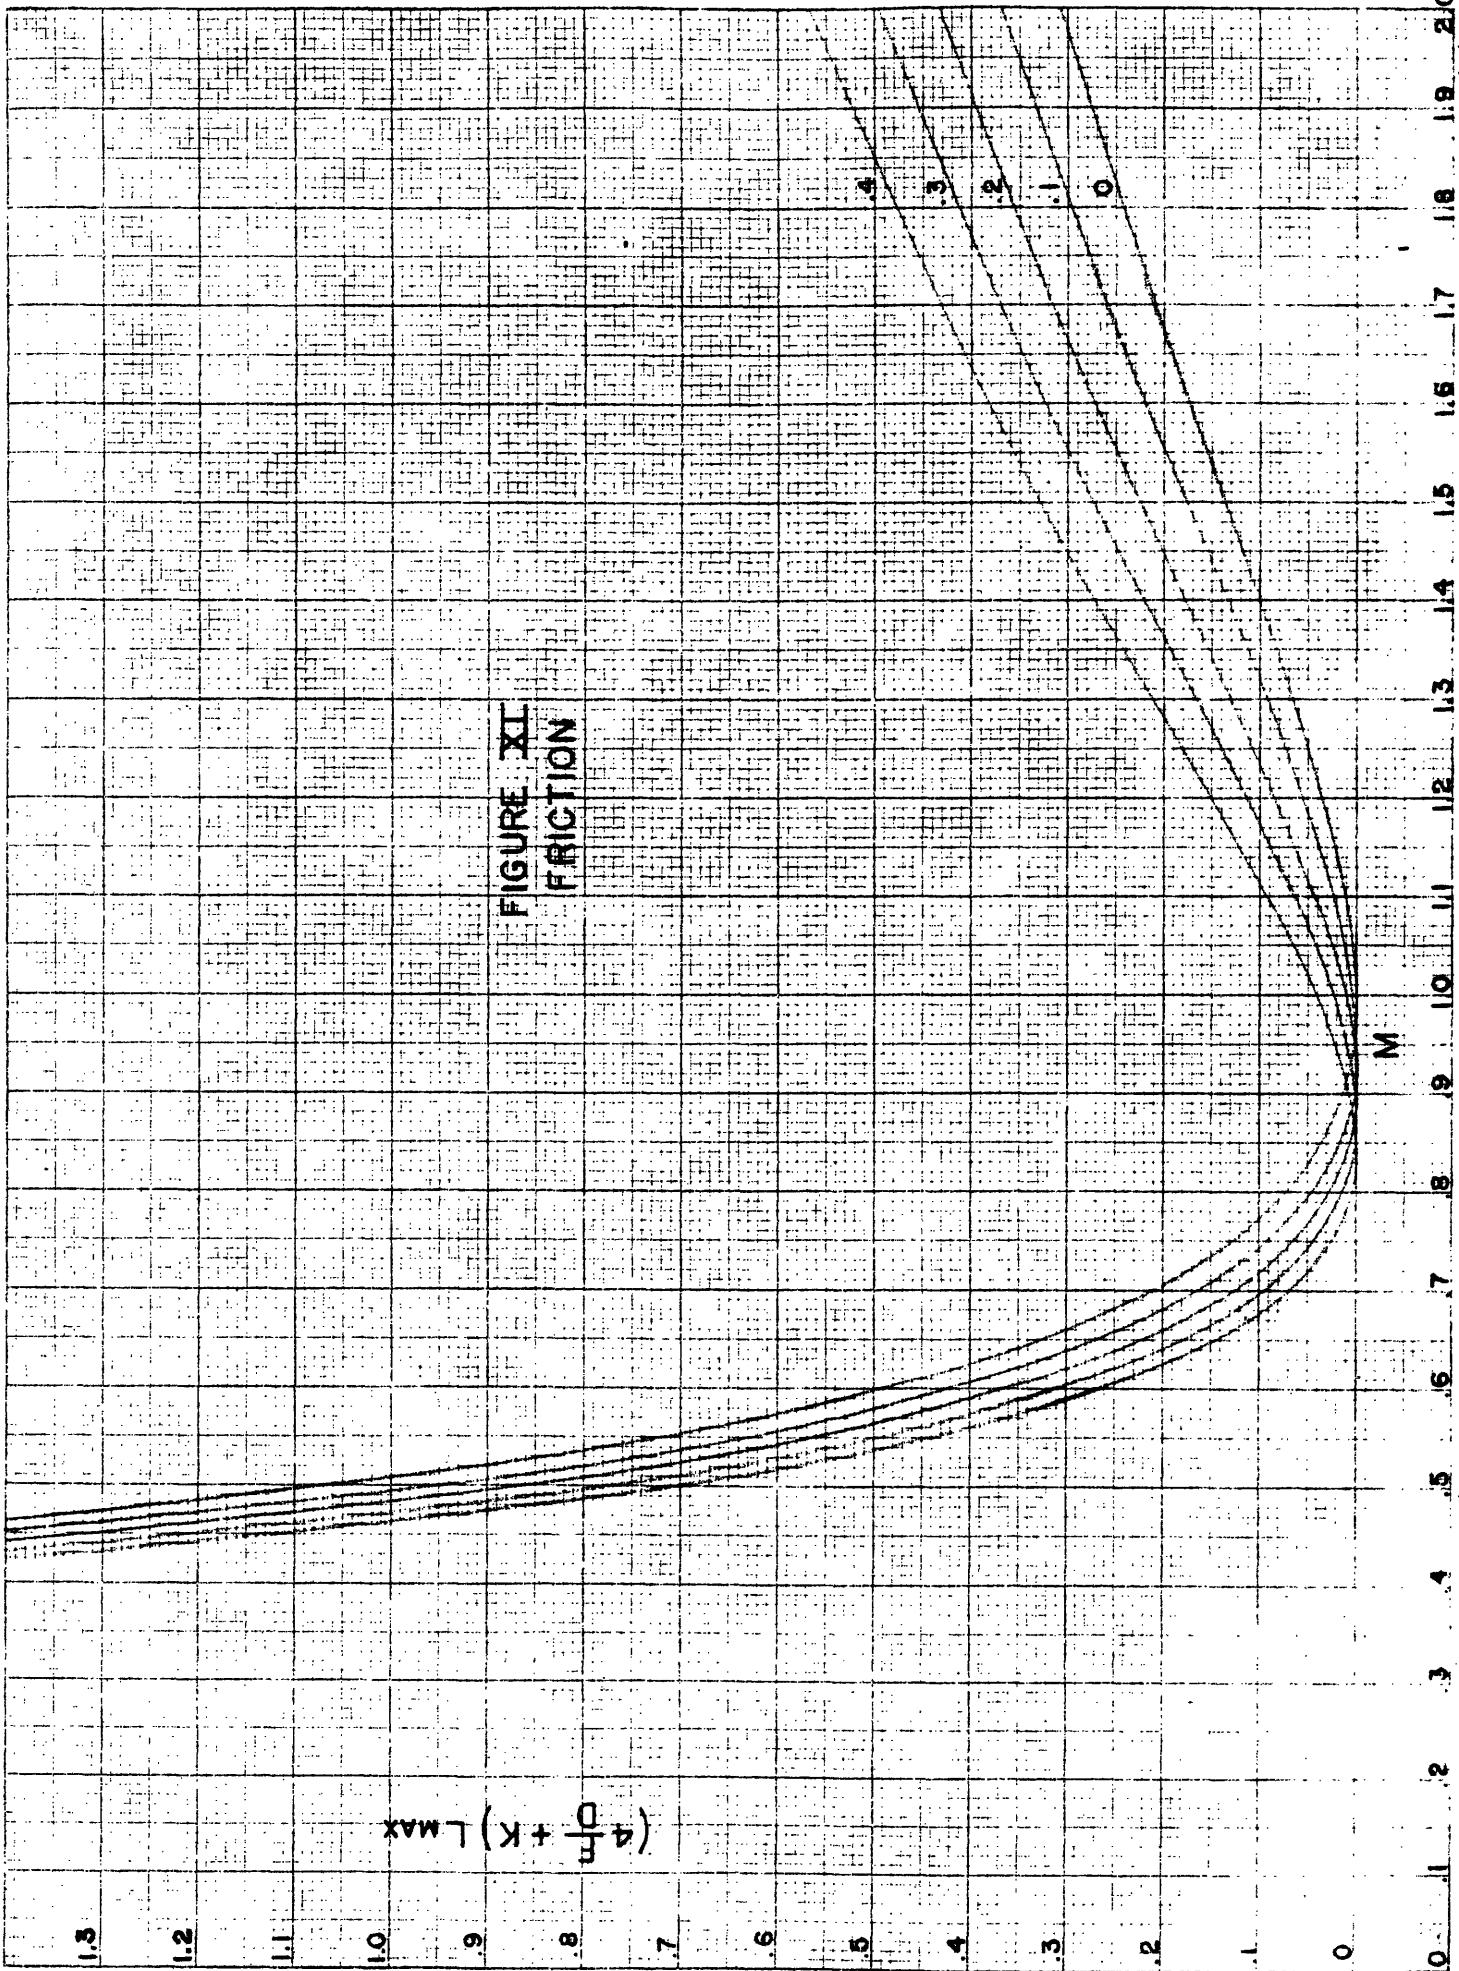


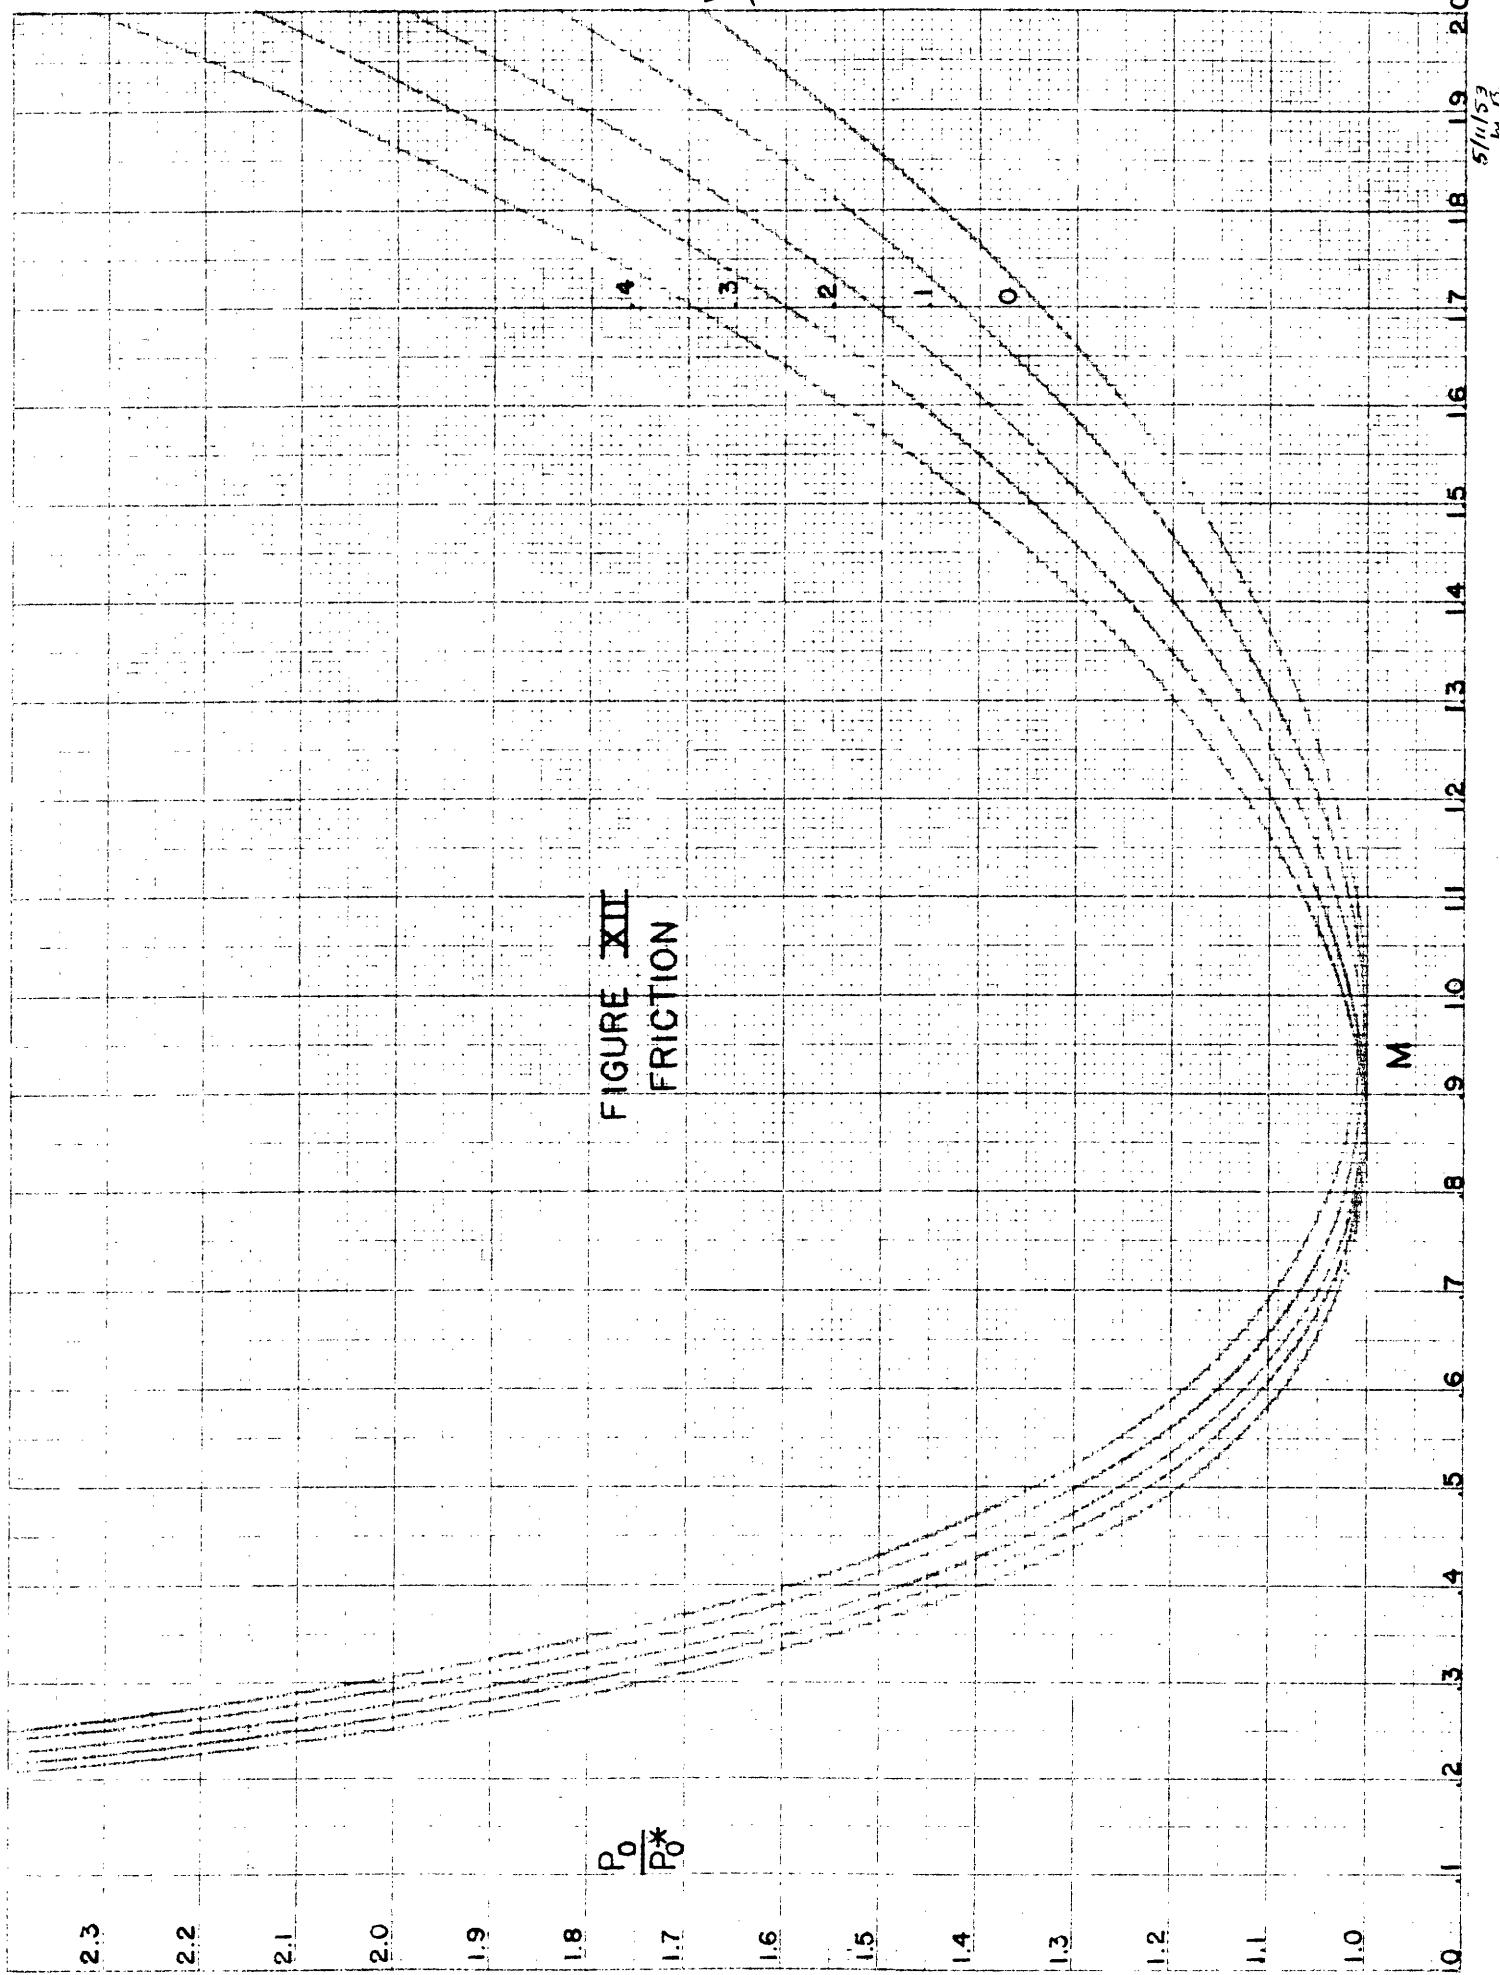



FIGURE XIII
FRICTION

$$\frac{P_0}{P_0^*}$$

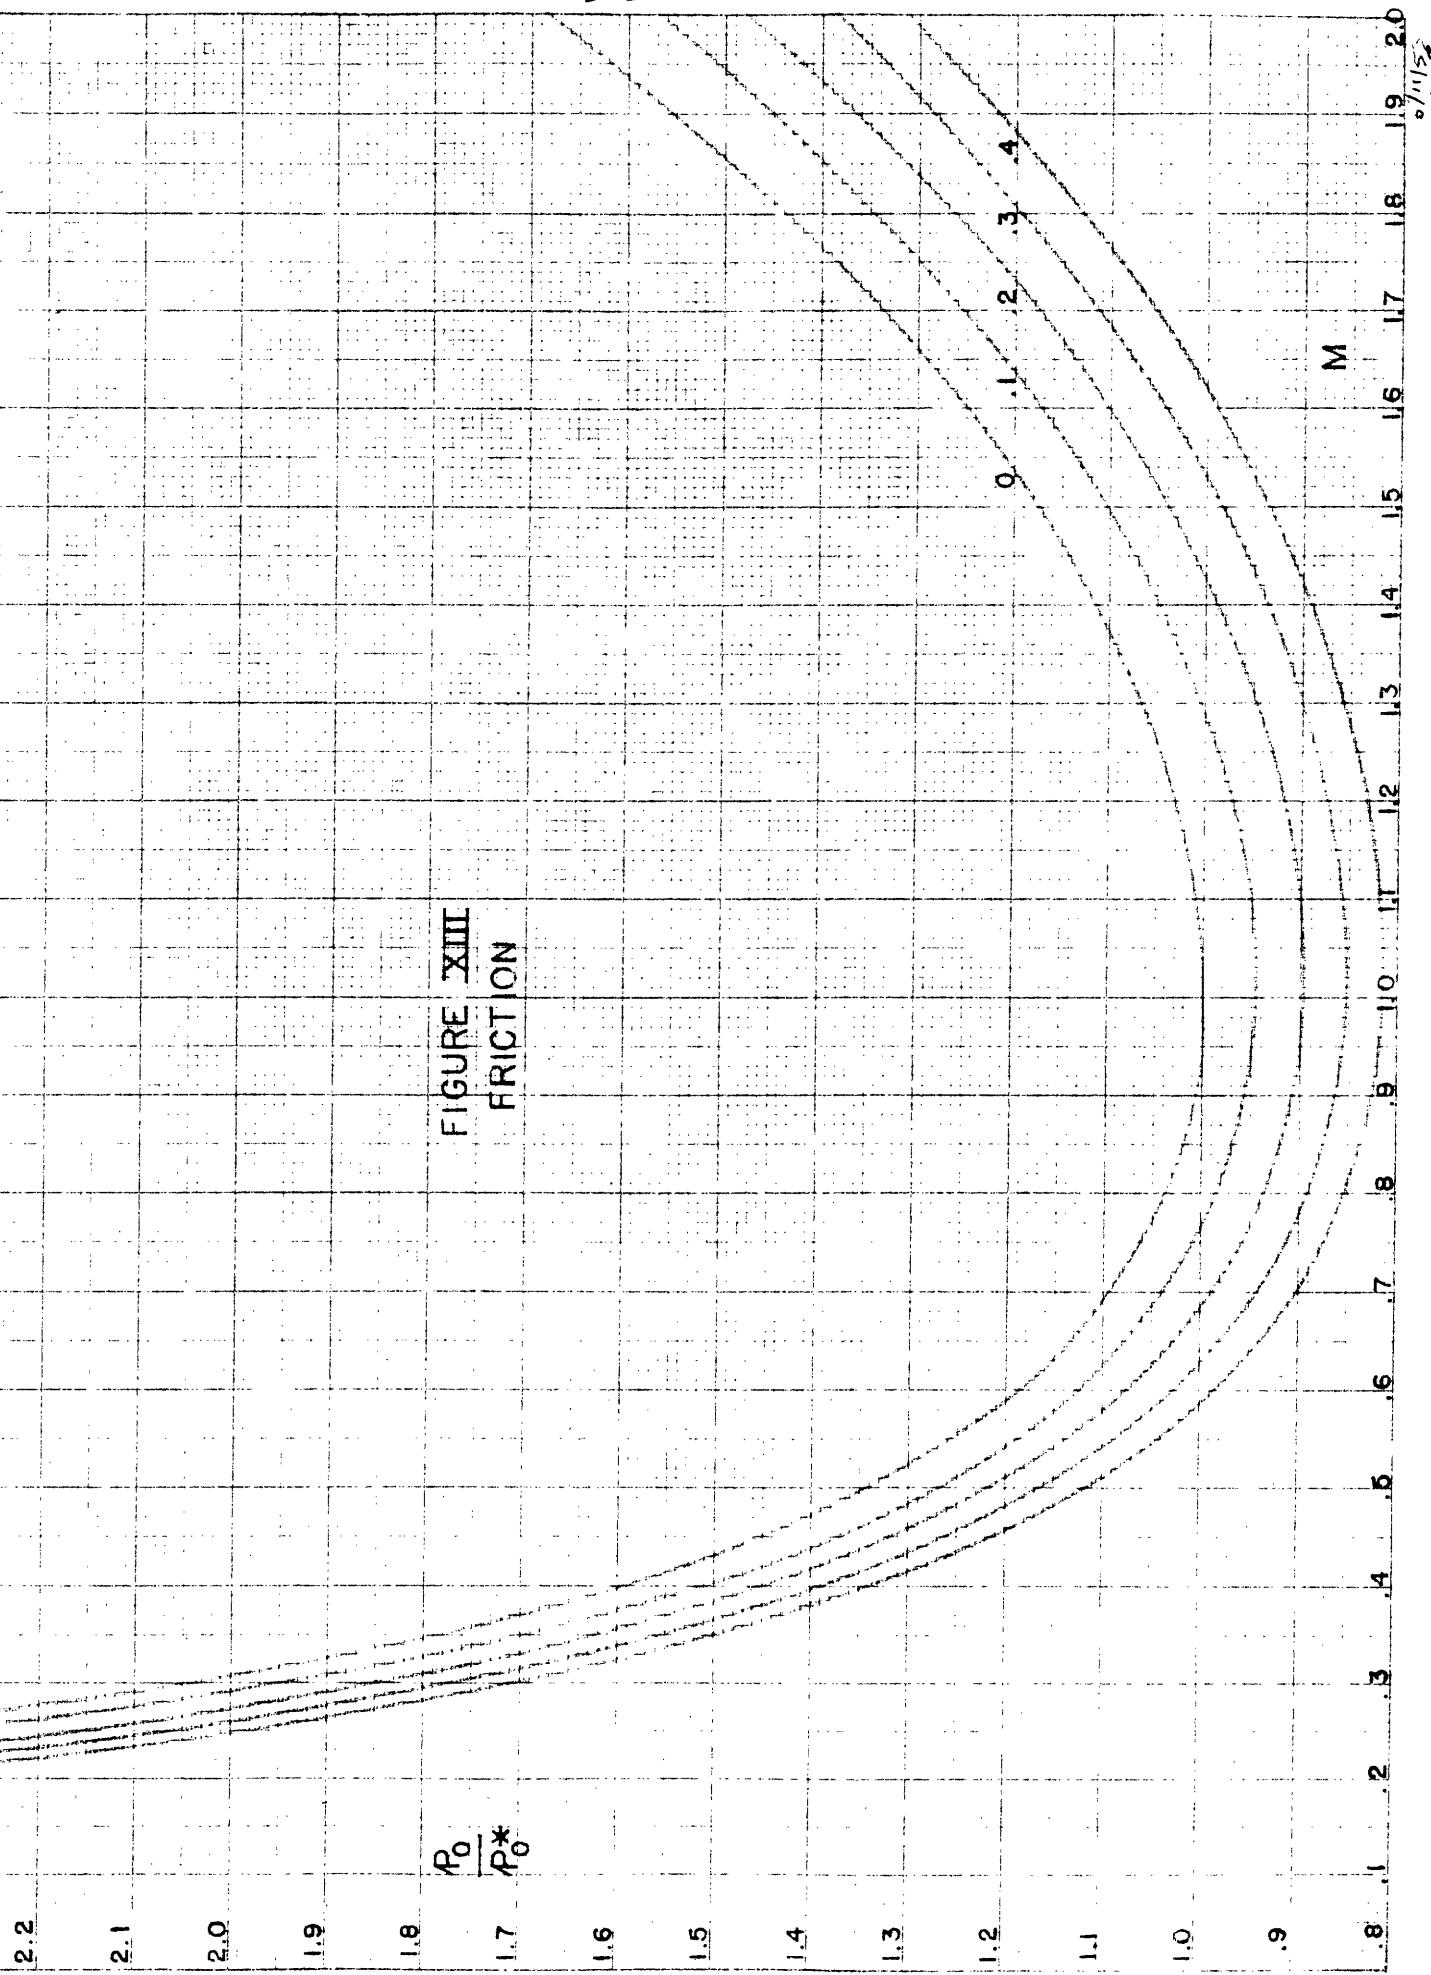

23

FIGURE XIV
FRICTION

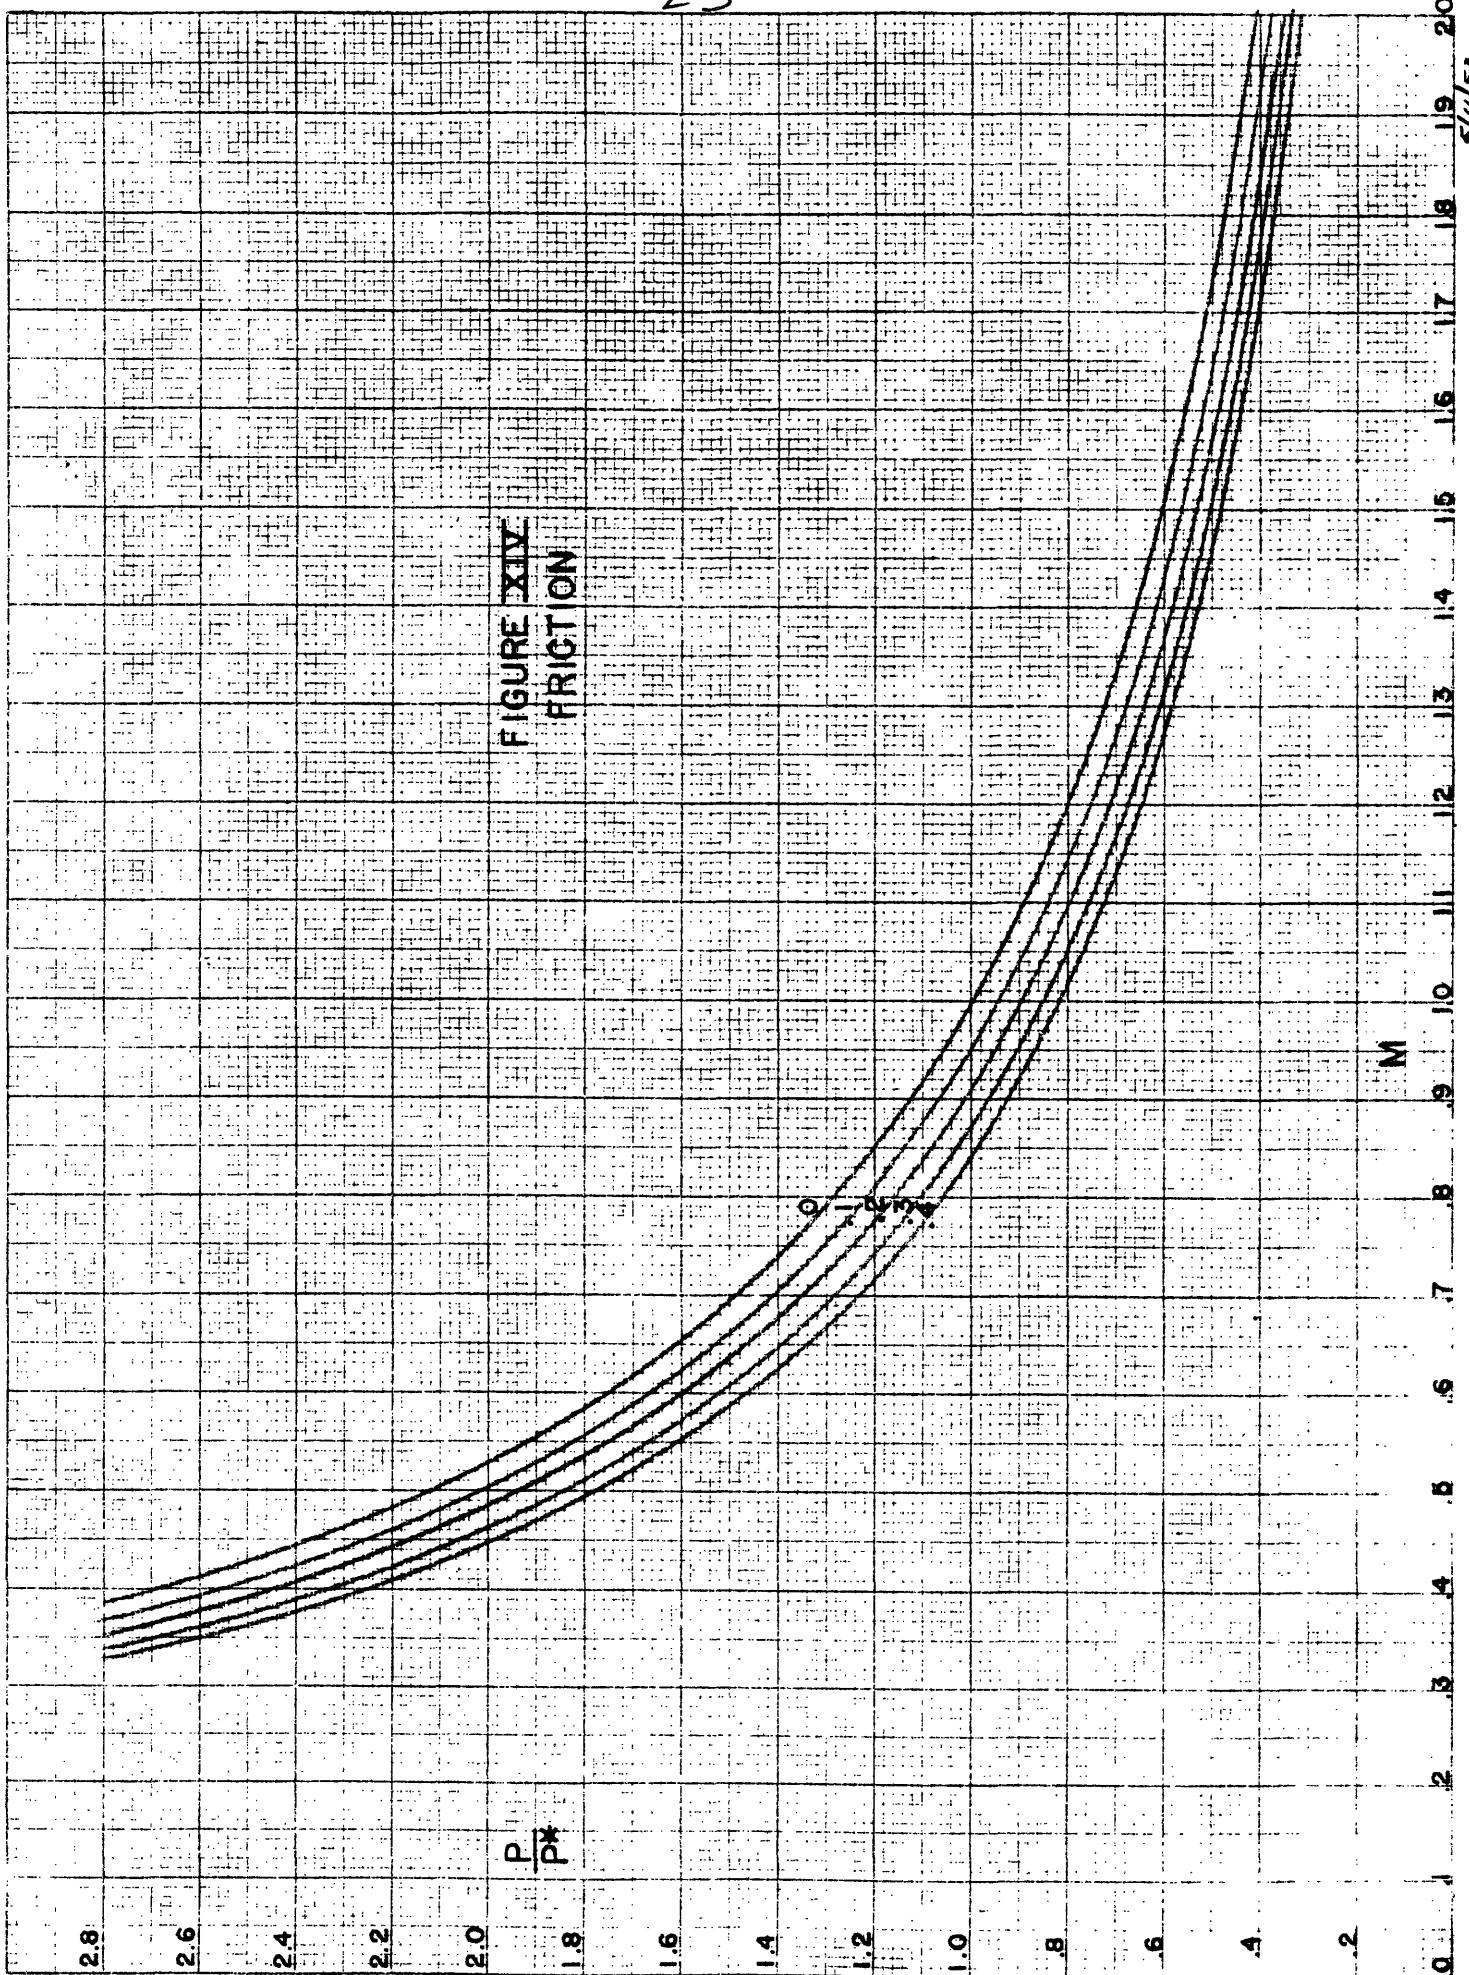

24


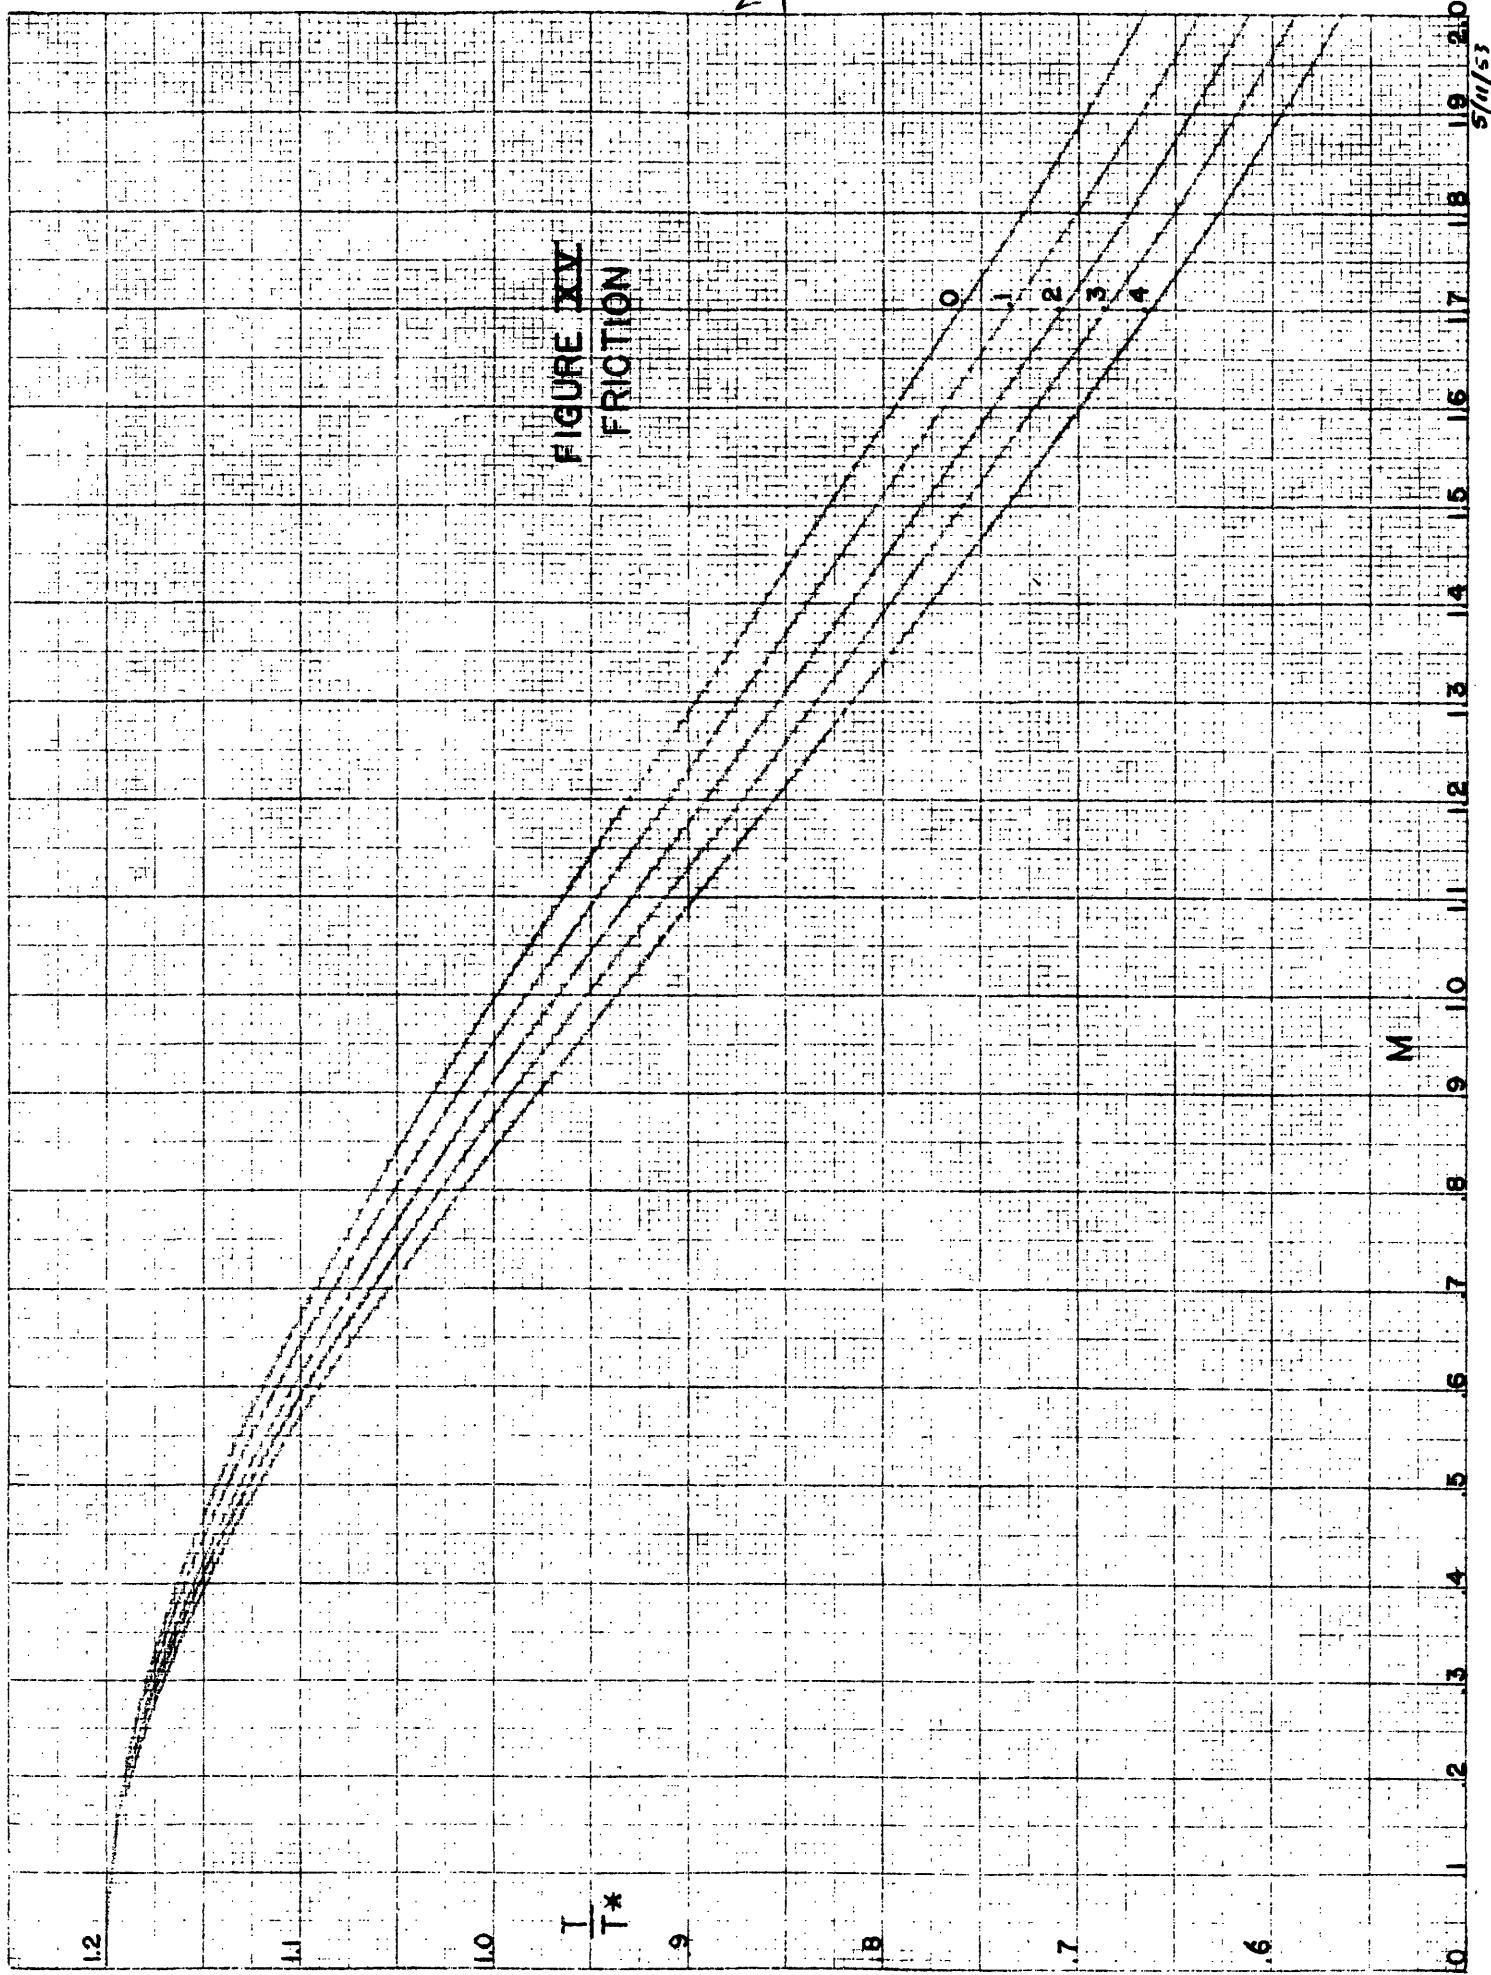


FIGURE 24
FRICTION


5/11/53

25

FIGURE XXVI
FRICTION

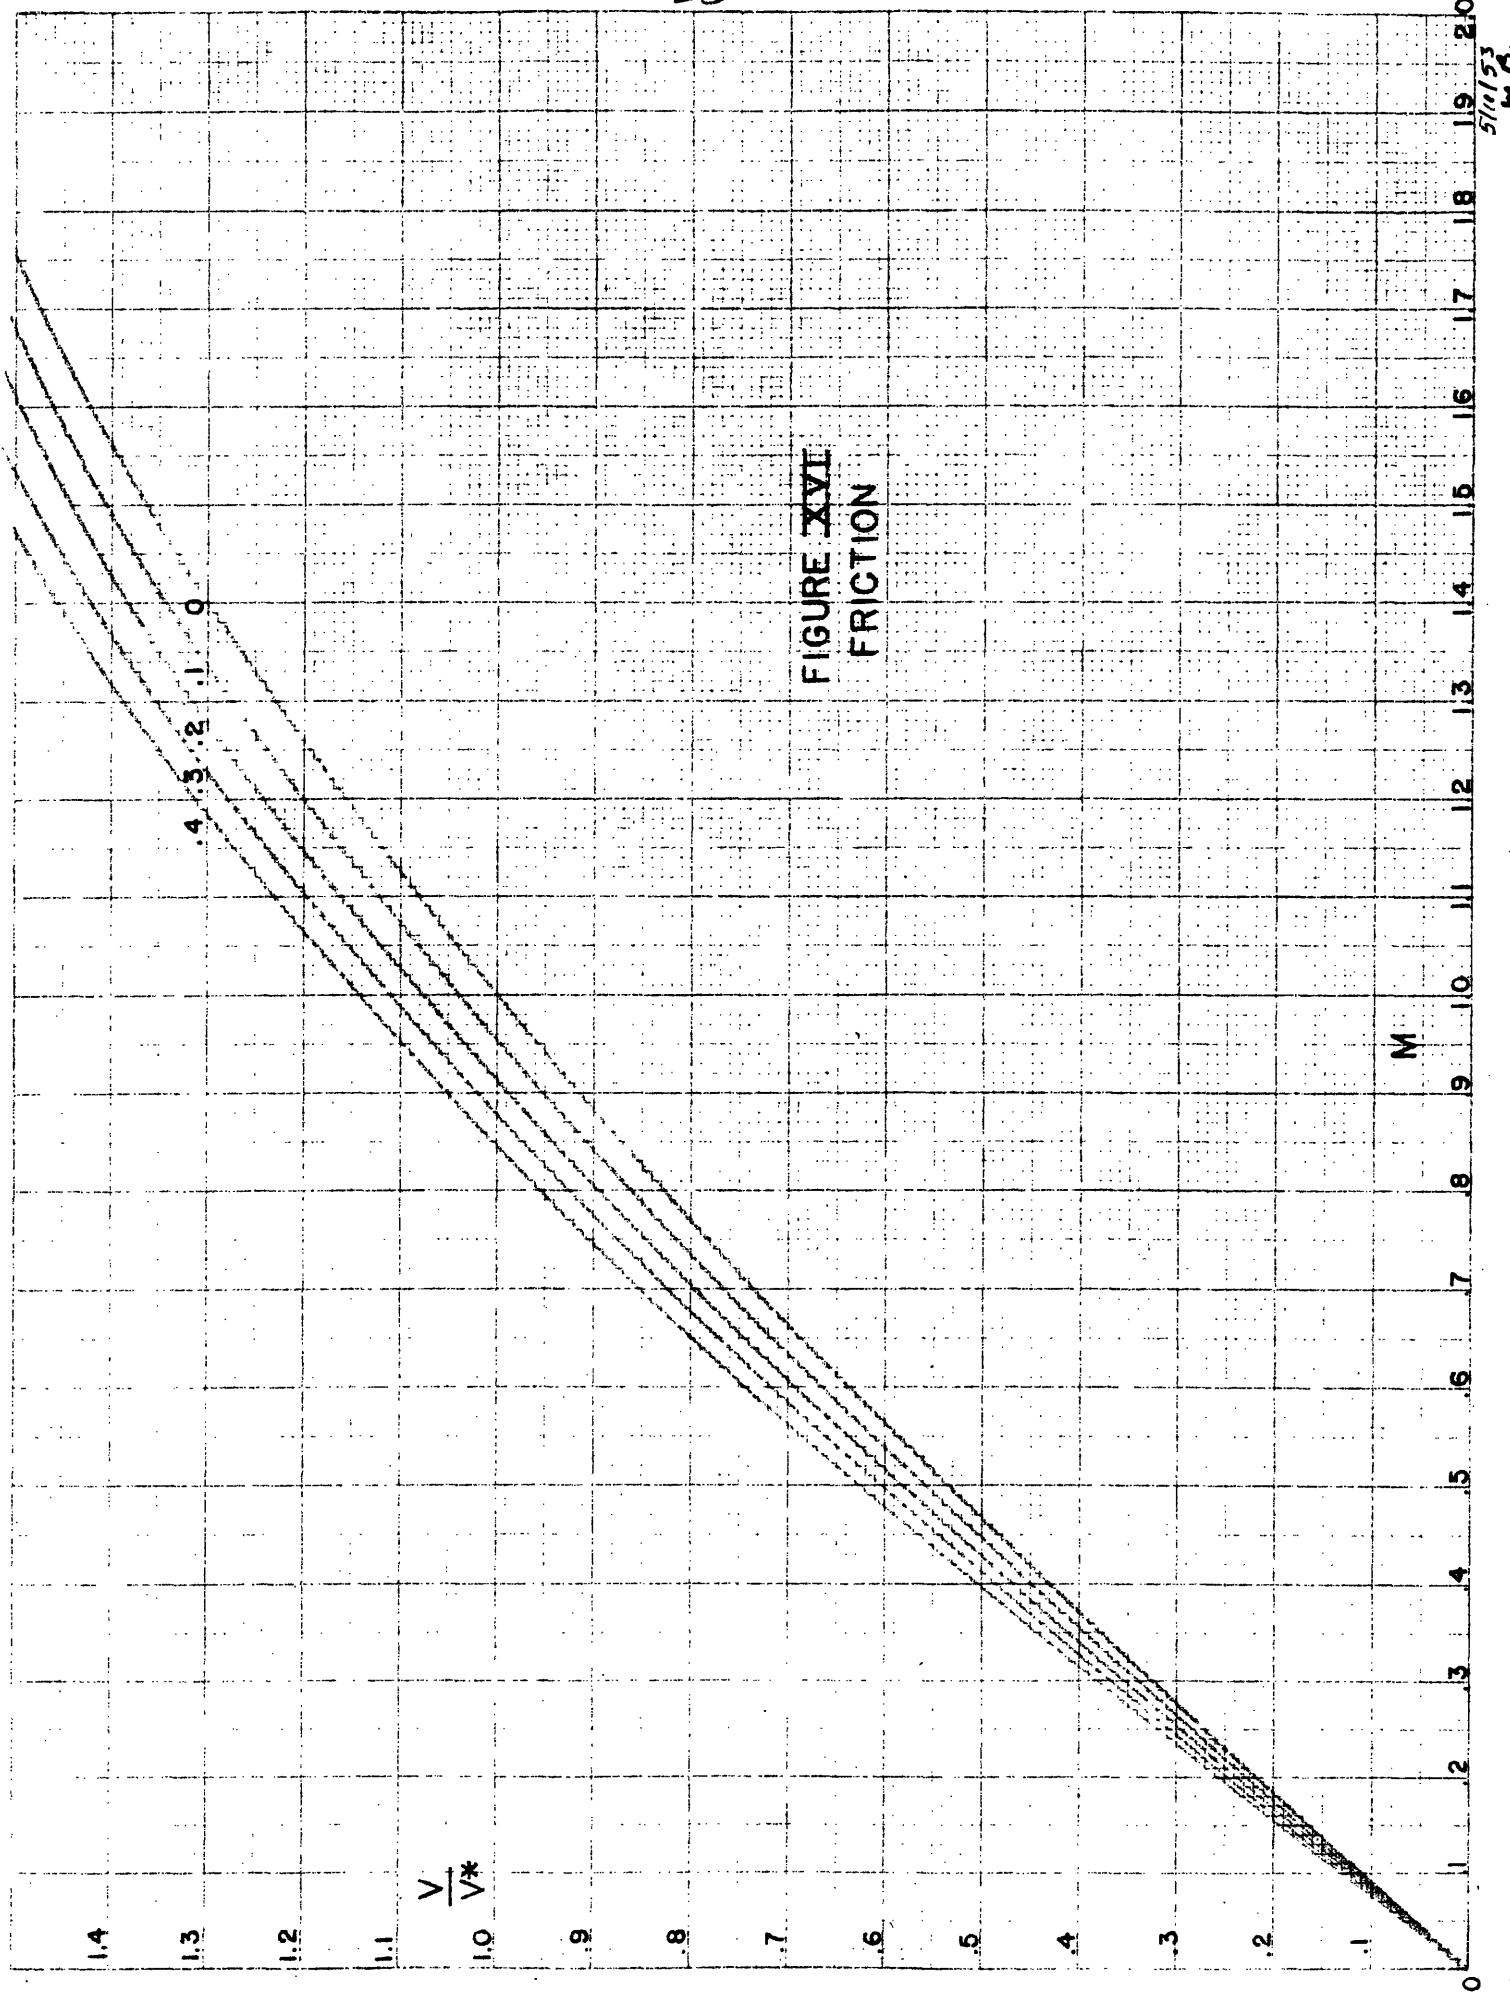

26

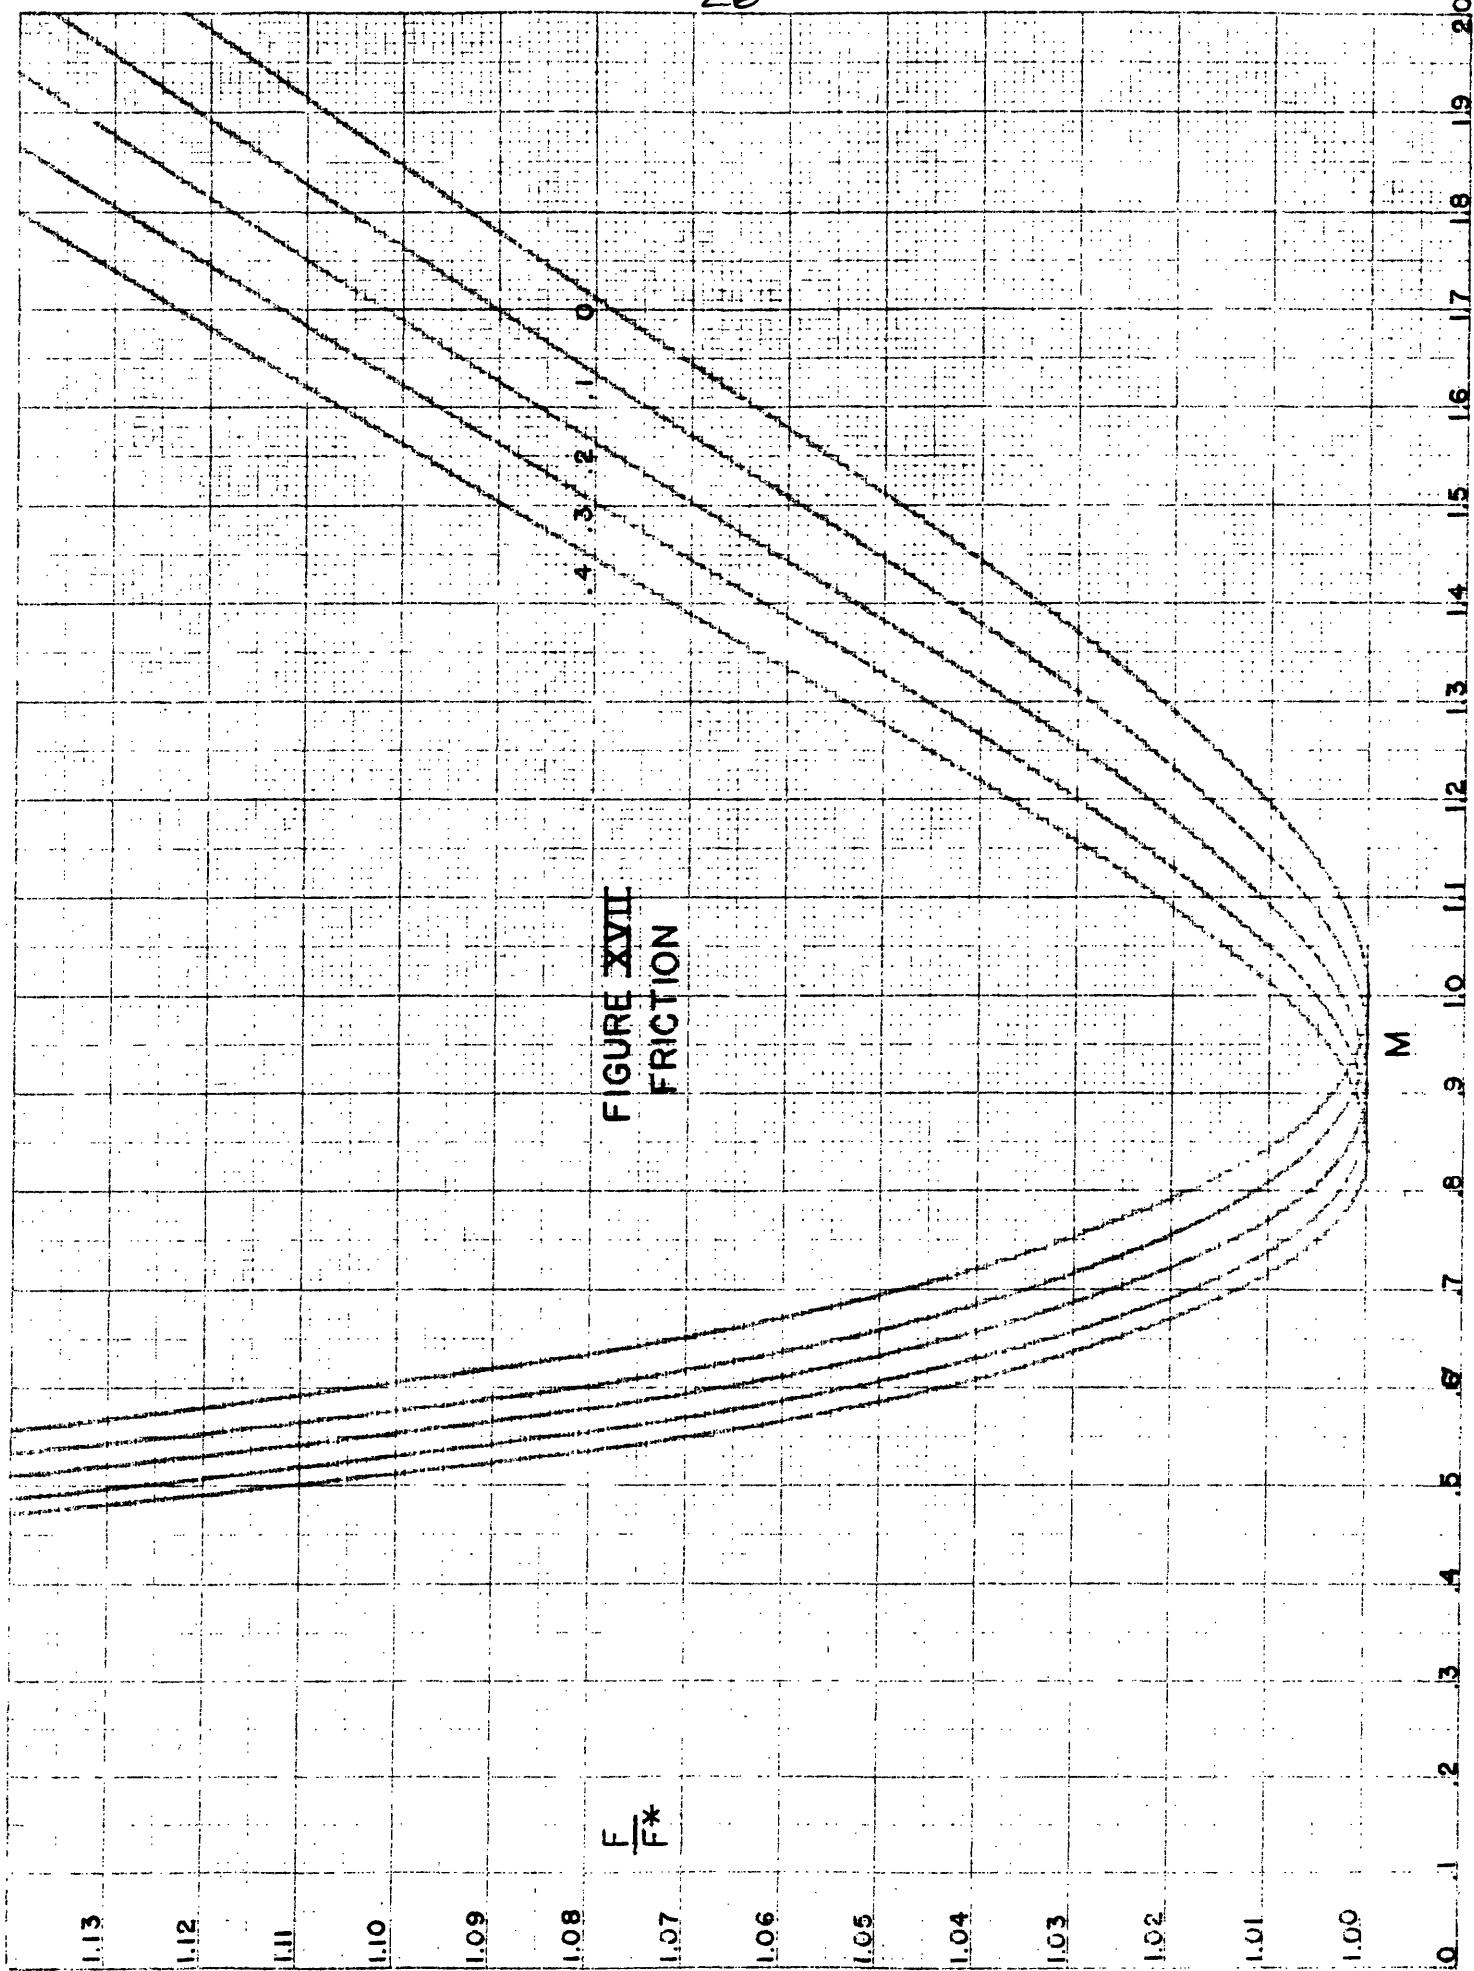

APPENDIX

SYMBOLS

- A = CROSS SECTIONAL AREA
 c = SPEED OF SOUND
 C_D = DRAG COEFFICIENT
 C_p = SPECIFIC HEAT AT CONSTANT PRESSURE
 D = HYDRAULIC DIAMETER OF DUCT
 d_w = DROPLET DIAMETER
 f = FRICTION COEFFICIENT OF DUCT
 F = IMPULSE FUNCTION ($P_A + P_A V^2$)
 h = SPECIFIC ENTHALPY
 k = RATIO OF SPECIFIC HEATS (C_p/C_v)
 L_{MAX} = MAXIMUM LENGTH OF DUCT FOR CHOKING FLOW
 M = MACH NUMBER
 m = MASS OF DROPLET
 P = STATIC PRESSURE
 $P_0^* P_0$ = ISENTROPIC STAGNATION PRESSURE
 R = REYNOLDS NUMBER
 T = TEMPERATURE (ABSOLUTE)
 T_0 = ISENTROPIC STAGNATION TEMPERATURE (ABSOLUTE)
 t = TIME
 V = VELOCITY
 w = MASS RATE OF FLOW
 X = DISTANCE ALONG DUCT
 ρ = MASS DENSITY
 ν = KINEMATIC VISCOSITY
 $(\cdot)^*$ = REFERS TO A NORMALIZED CHOKING CONDITION
 $(\cdot)_a$ = REFERS TO AIR
 $(\cdot)_w$ = REFERS TO WATER
 $(\cdot)_0$ = REFERS TO ISENTROPIC STAGNATION CONDITION
 $(\cdot)_1$ = REFERS TO SECTION 1
 $(\cdot)_2$ = REFERS TO SECTION 2
 $(\cdot)_R$ = REFERS TO CONDITION RELATIVE TO AIR

DROPLET TRAJECTORY- DETAILS OF ANALYSIS

INDIVIDUAL DROPLETS INJECTED INTO MOVING AIR STREAM

LET: $V_a = \text{CONSTANT}$

DEFINE: $V_R = V_a - V_w$ (FOR $V_a > V_w$)

$V_R = V_w - V_a$ (FOR $V_a < V_w$)

$$R_R = \frac{\rho_a d w V_R}{\mu_a}$$

FORCE EQUATION ON DROPLET

$$m \frac{d V_R}{d t} = - C_D \frac{\rho_a}{2} A V_R^2$$

$$\frac{d R_R}{C_D R_R^2} = - \frac{\mu_a A}{2 \rho_w m} dt$$

$$A = \frac{1}{4} \pi d w^2$$

$$m = \frac{1}{6} \rho_w \pi d w^3$$

$$\therefore \frac{d R_R}{C_D R_R^2} = - \frac{3}{4} \frac{\mu_a}{\rho_w d w} dt$$

$$t_{1,2} = \frac{4}{3} \frac{\rho_w d w}{\mu_a} \int_{R_{R2}}^{R_{R1}} \frac{d R_R}{C_D R_R^2} \quad (1)$$

$$\frac{d V_R}{d t} = V_R \frac{d V_R}{d X_R}$$

$$\therefore \frac{d R_R}{C_D R_R^2} = - \frac{\rho_a A}{2 m} d X_R$$

DROPLET TRAJECTORY - CON'T

$$\frac{dR_R}{C_D R_R} = -\frac{3}{4} \frac{P_a}{P_w dw} dX_R$$

$$X_{R1,2} = \frac{4}{3} \frac{P_w dw}{P_a} \int_{R_{R2}}^{R_{R1}} \frac{dR_R}{C_D R_R} \quad (2)$$

IN TERMS OF REAL DISTANCES

$$X_{1,2} = V_a t_{1,2} + X_{R1,2} \quad (3)$$

NOTE: IF $V_a > V_w$, X_R IS IN NEGATIVE DIRECTION

IN EQUATION (4) SIGN OF LAST TERM IS:

$$+ \text{ IF } V_a < V_w \\ - \text{ IF } V_a > V_w$$

$$\frac{X_{1,2}}{dw} \frac{P_a}{P_w} = \frac{4}{3} \left[\frac{P_a V_a dw}{M_a} \int_{R_{R2}}^{R_{R1}} \frac{dR_R}{C_D R_R^2} \pm \int_{R_{R2}}^{R_{R1}} \frac{dR_R}{C_D R_R} \right] \quad (4)$$

NORMALIZING EQUATION (4) SO THAT INITIALLY,
AT POINT 1, $V_R = V_a$; SO THAT:

$$V_w = 0 \text{ FOR } V_a > V_w \\ V_w = 2V_a \text{ FOR } V_a < V_w$$

LET THIS NORMALIZED POSITION BE POINT O, AND
ANY OTHER POINT DOWNSTREAM BE POINT X.

DROPLET TRAJECTORY - CON'T

$$\frac{x_{o,x}}{dw} \frac{P_a}{P_w} = \frac{4}{3} \left[\frac{V_a dw}{V_a} \left(\frac{dR_R}{C_0 R_R^2} \right) \pm \frac{V_a dw}{V_a} \left(\frac{dR_R}{C_0 R_R} \right) \right] \quad (5)$$

$\frac{V_a dw}{V_a}$
 $\frac{dR_R}{C_0 R_R^2}$
 $\frac{V_a dw}{V_a}$
 $\frac{dR_R}{C_0 R_R}$
 $\frac{V_a dw}{V_a}$

FOR ANY INJECTED V_w OTHER THAN THE NORMALIZED CONDITION:

$$\frac{x_{x_1, x_2}}{dw} \frac{P_a}{P_w} = \frac{x_{o,x_2}}{dw} \frac{P_a}{P_w} - \frac{x_{o,x_1}}{dw} \frac{P_a}{P_w} \quad (6)$$

$\frac{x_{o,x}}{dw} \frac{P_a}{P_w}$ HAS BEEN CALCULATED (TABLE III)

AND PLOTTED (FIGURES I AND II) FOR VALUES OF
 $\frac{V_a dw}{V_a}$ FROM 5 TO 2000 AND $\frac{V_{Rx}}{V_a}$ FROM .01 TO 1.

Table I

Values of $C_D = f(R)$ for spherical particles

R	C_D	$C_D R$	$C_D R^2$
0.1	240	24.0	2.4
0.2	120	24.0	4.8
0.3	80	24.0	7.2
0.5	49.5	24.8	12.4
0.7	36.5	25.6	17.9
1.0	26.5	26.5	26.5
2	14.4	28.8	57.6
3	10.4	31.2	93.7
5	6.9	34.5	173
7	5.4	37.8	265
10	4.1	41.0	410
20	2.55	51.0	1.02×10^3
30	2.00	60.0	1.80
50	1.50	75.0	3.75
70	1.27	89.0	6.23
100	1.07	107	10.7
200	0.77	154	3.08×10^4
300	.65	195	5.85
500	.55	275	13.75
700	.50	350	24.5
1000	.46	460	46.0
2000	.42	840	1.68×10^6
3000	.40	1200	3.60
5000	.385	1920	9.60
7000	.390	2730	19.1
10000	.405	4050	40.5
2×10^4	.45	9000	$.180 \times 10^9$
3	.47	14,200	.426
5	.49	24,500	1.23
7	.50	35,000	2.45
10	.48	48,000	4.8
2×10^5	.42	84,000	16.8×10^9

Table II

Values of $X = f(R)$, $Y = f(R)$

$$X = \int_R^{2 \times 10^5} \frac{dR}{C_D R^2}$$

$$Y = \int_0^R \frac{dR}{C_D R}$$

R	X	Y
2×10^5	0	17.947
1	1.09×10^{-5}	16.311
7×10^4	2.04×10^{-5}	15.570
5	3.18	14.876
3	5.82	13.764
2	9.42	12.856
1	21.52	11.066
7×10^3	3.23×10^{-4}	10.146
5	4.71	9.259
3	8.14	7.905
2	12.22	6.894
1	23.9	5.2119
700	3.27×10^{-3}	4.4573
500	4.40	3.8080
300	6.62	2.9316
200	8.88	2.3505
100	14.38	1.5585
70	1.809×10^{-2}	12.495×10^{-1}
50	2.214	10.038
30	2.979	7.038
20	3.704	5.2242
10	5.244	3.0242
7	6.161×10^{-2}	22.615×10^{-2}
5	7.077	17.070
3	8.67	10.966
2	10.00	7.628
1	12.50	4.0134

Table II - Cont.

R	X	Y
.7	.1387	28.655×10^{-3}
.5	.1517	20.697
.3	.1727	12.500
.2	.1900	8.333
.1	.2185	4.166
.05	.2472	20.83×10^{-4}
.01	.3142	4.166
.005	.3432	20.83×10^{-5}
10^{-3}	.4102	4.166
10^{-4}	.5062	4.166×10^{-6}
10^{-5}	.6022	4.166×10^{-7}
0	∞	0

Table III

Values of $Z = f \left(\frac{V_r}{V_a} \right)$ for various values of R_i

$$R_i = \frac{\rho_a V_a d_w}{\mu_a}$$

$$Z = \frac{X}{d_w} \quad \frac{\rho_a}{\rho_w}$$

$$\begin{cases} Z_1 \text{ for } V_w < V_a \\ Z_2 \text{ for } V_w > V_a \end{cases}$$

$R_i = 2000$

$R_i = 1000$

$\frac{V_r}{V_a}$	Z_1	Z_2	$\frac{V_r}{V_a}$	Z_1	Z_2
.50	.873	5.356	.70	.1672	2.1789
.35	2.210	8.709	.50	.3079	4.5507
.25	4.360	12.586	.30	2.5990	8.6782
.15	9.115	19.678	.20	4.8369	12.4654
.10	14.366	26.477	.10	11.2688	20.8527
.05	27.973	42.196	.07	15.6462	26.2113
.035	37.452	52.499	.05	20.7174	31.9361
.025	47.921	63.624	.03	30.5149	42.5335
.015	67.916	84.419	.02	39.9373	52.4396
.010	87.002	103.990	.01	60.1723	73.2610

Table III - Cont.

R _i = 700			R _i = 500		
$\frac{V_r}{V_a}$	z ₁	z ₂	$\frac{V_r}{V_a}$	z ₁	z ₂
.714	.1889	1.9199	.60	.3114	2.6479
.428	1.0921	5.1596	.40	1.0431	4.9288
.286	2.4263	8.0431	.20	3.6531	9.6503
.143	6.5026	14.2308	.14	5.7139	12.5349
.100	9.5525	18.1045	.10	8.0857	15.5617
.0714	13.0041	22.2111	.06	12.7845	21.0603
.0428	19.7424	29.7492	.04	17.3749	26.1343
.0286	26.2656	36.7560	.02	27.3457	36.6916
.0143	40.3420	51.4190	.014	33.3559	42.9050
.0100	48.7970	60.0771	.01	39.3871	49.0841
R _i = 300			R _i = 200		
$\frac{V_r}{V_a}$	z ₁	z ₂	$\frac{V_r}{V_a}$	z ₁	z ₂
.667	.1292	1.6784	.50	.4106	2.5220
.333	1.2729	4.9336	.35	.9878	3.9230
.233	2.3446	6.6291	.25	1.7400	5.3303
.167	3.6367	8.7762	.15	3.3796	7.7697
.100	6.2960	12.2353	.10	5.0706	9.9443
.0667	8.9535	15.3764	.05	8.8830	14.3432
.0333	14.8187	21.8281	.035	11.2261	16.8895
.0233	18.3842	25.5968	.025	13.5942	19.4055
.0167	21.9733	29.3339	.015	17.7545	23.7285
.01	28.2704	35.7936	.01	21.2558	27.3188

Table III - Cont.

$R_i = 100$

$R_i = 70$

$\frac{V_r}{V_a}$	z_1	z_2	$\frac{V_r}{V_a}$	z_1	z_2
.7	.0826	.9060	.714	.0504	.7054
.5	.2950	1.7738	.428	.3643	1.6191
.3	.9148	3.1935	.286	.7990	2.7374
.2	1.6395	4.4017	.143	1.9427	4.4677
.1	3.3990	6.7478	.100	2.6968	5.4249
.07	4.5198	8.0717	.0714	3.4775	6.3536
.05	5.6668	9.3667	.0428	4.8817	7.9204
.03	7.7063	11.5688	.0286	6.0782	9.2060
.02	9.4347	13.3863	.0143	8.3627	11.5870
.01	12.7206	16.7654	.01	9.6203	12.8861

$R_i = 50$

$R_i = 30$

$\frac{V_r}{V_a}$	z_1	z_2	$\frac{V_r}{V_a}$	z_1	z_2
.6	.1100	.9098	.667	.0481	.5317
.4	.3514	1.6348	.333	.3707	1.4408
.2	1.0845	2.9545	.233	.6358	1.9091
.14	1.5941	3.6672	.167	.9282	2.3494
.10	2.1307	4.3517	.100	1.4835	3.0674
.06	3.1138	5.4974	.0667	1.9708	3.6438
.04	3.9557	6.4284	.0333	2.9227	4.6922
.02	5.5710	8.1402	.0233	3.4553	5.2554
.014	6.4688	9.0687	.0167	3.9646	5.7858
.01	7.3247	9.9456	.01	4.7935	6.6365

Table III - Cont.

$R_i = 20$

$R_i = 10$

$\frac{V_r}{V_a}$	z_1	z_2	$\frac{V_r}{V_a}$	z_1	z_2
.50	.1173	.7038	.7	.0204	.2241
.35	.2602	1.0499	.5	.0688	.4199
.25	.4304	1.3681	.3	.2002	.7142
.15	.7747	1.8753	.2	.3331	.9359
.10	1.0849	2.2742	.1	.6181	1.3174
.05	1.7032	2.9890	.07	.7849	1.5148
.035	2.0520	3.3685	.05	.9476	1.6986
.025	2.3881	3.7256	.03	1.2166	1.9895
.015	2.9370	4.2964	.02	1.4416	2.2257
.01	3.3926	4.7632	.01	1.8159	2.6112

$R_i = 7$

$R_i = 5$

$\frac{V_r}{V_a}$	z_1	z_2	$\frac{V_r}{V_a}$	z_1	z_2
.714	.0115	.1594	.6	.0247	.1873
.428	.0789	.3895	.4	.0688	.3205
.286	.1585	.5581	.2	.1872	.5353
.143	.3436	.8396	.14	.2631	.6419
.100	.4562	.9827	.10	.3392	.7391
.0714	.5668	1.1145	.06	.4685	.8902
.0428	.7518	1.3214	.04	.5782	1.0111
.0286	.9077	1.4884	.02	.7626	1.2066
.0143	1.1680	1.7598	.01	.9511	1.4007

DISCONTINUITY ANALYSIS

EFFECT OF DROPLET ACCELERATION ON AIR STREAM

ASSUMPTIONS:

1. ADIABATIC - NO CHANGE IN STAGNATION TEMPERATURE
2. NO EVAPORATION OF WATER DROPLETS
3. NO CHANGE IN TEMPERATURE OF WATER DROPLETS
4. PERFECT GAS RELATION HOLDS FOR AIR

CONTINUITY:

$$\frac{w_a}{A} = P_a V_a = \sqrt{\frac{K}{R}} \sqrt{\frac{P_1}{T_1}} M_1 = \sqrt{\frac{K}{R}} \sqrt{\frac{P_2}{T_2}} M_2$$

$$\therefore \frac{M_2}{M_1} = \frac{P_1}{P_2} \sqrt{\frac{T_2}{T_1}}$$

MOMENTUM:

$$P_1 + \frac{w_a}{A} V_{a1} + \frac{w_w}{A} V_{w1} = P_2 + \frac{w_a}{A} V_{a2} + \frac{w_w}{A} V_{w2}$$

$$P_1 + \left[1 + \frac{w_w}{w_a} \frac{V_{w1}}{V_{a1}} \right] P_{a1} V_{a1} = P_2 + \left[1 + \frac{w_w}{w_a} \frac{V_{w2}}{V_{a2}} \right] P_{a2} V_{a2}$$

BUT: $PV^2 = KPM^2$

$$\therefore \frac{P_2}{P_1} = \frac{1 + \left(1 + \frac{w_w}{w_a} \frac{V_{w1}}{V_{a1}} \right) KM_1^2}{1 + \left(1 + \frac{w_w}{w_a} \frac{V_{w2}}{V_{a2}} \right) KM_2^2}$$

ENERGY:

$$h_{a01} + \frac{w_w}{w_a} h_{w01} = h_{a02} + \frac{w_w}{w_a} h_{w02}$$

$$T_1 C_p a + \left[1 + \frac{w_w}{w_a} \frac{V_{w1}^2}{V_{a1}^2} \right] \frac{V_{a1}^2}{2} = T_2 C_p a + \left[1 + \frac{w_w}{w_a} \frac{V_{w2}^2}{V_{a2}^2} \right] \frac{V_{a2}^2}{2}$$

$$\text{BUT: } V^2 = M^2 C^2 = KRTM^2 ; \quad \frac{KR}{2C_p} = \frac{K-1}{2}$$

DISCONTINUITY ANALYSIS - CON'T

$$\therefore \frac{T_2}{T_1} = \frac{1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}^2}{V_{a1}^2} \right) M_1^2}{1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}^2}{V_{a2}^2} \right) M_2^2}$$

DEFINE: $T_0 \equiv T \left[1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}^2}{V_a^2} \right) M^2 \right]$

COMBINING:

$$\frac{T_{02}}{T_{01}} = 1 = \frac{M_2^2}{M_1^2} \frac{\left[1 + \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}}{V_{a1}} \right) K M_1^2 \right]^2}{\left[1 + \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}^2}{V_{a2}^2} \right) K M_2^2 \right]^2} \frac{\left[1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}^2}{V_{a2}^2} \right) M_2^2 \right]}{\left[1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}^2}{V_{a1}^2} \right) M_1^2 \right]}$$

NORMALIZING ALL EQUATIONS TO * CONDITION

WHERE; $\frac{V_{ur}}{V_a} = 0 ; M = 1$

$$\frac{T_0}{T_0^*} = \frac{M^2 \left[1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}^2}{V_a^2} \right) M^2 \right]}{\left[1 + K \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}^2}{V_a^2} \right) M^2 \right]^2} \quad 2(K+1)$$

$$\frac{T}{T^*} = \frac{(K+1)}{2 \left[1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}^2}{V_a^2} \right) M^2 \right]}$$

$$\frac{P}{P^*} = \frac{K+1}{\left[1 + K \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}^2}{V_a^2} \right) M^2 \right]}$$

ISENTROPIC STAGNATION CONDITIONS:

1. ASSUMING DROPLETS DECELERATE ISENTROPICALLY.

$$P_0 = P \left[1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}^2}{V_a^2} \right) M^2 \right]^{\frac{K}{K-1}}$$

$$\therefore \frac{P_0}{P_0^*} = \frac{\left[1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}^2}{V_a^2} \right) M^2 \right]^{\frac{K}{K-1}}}{\left[1 + K \left(1 + \frac{w_{ur}}{w_a} \frac{V_{ur}^2}{V_a^2} \right) M^2 \right]} \quad \frac{2^{\frac{K}{K-1}}}{[K+1]^{1/K-1}}$$

DISCONTINUITY ANALYSIS - CON'T

2. ASSUMING DROPLETS ARE NOT DECELERATED

$$\rho_0 = P \left[1 + \frac{K-1}{2} M^2 \right]^{\frac{K}{K-1}}$$

$$\therefore \frac{\rho_0}{\rho_0^*} = \frac{\left[1 + \frac{K-1}{2} M^2 \right]^{\frac{K}{K-1}}}{\left[1 + K \left(1 + \frac{w_w}{w_a} \frac{V_w}{V_a} \right) M^2 \right]} \frac{2^{\frac{K}{K-1}}}{[K+1]^{\frac{K}{K-1}}}$$

VALUES OF $\frac{T_0}{T_0^*}$, $\frac{\rho_0}{\rho_0^*}$, $\frac{P}{P_a}$, $\frac{T}{T_a}$ ARE TABULATED IN TABLES IV THROUGH VIII FOR M FROM 0 TO 2;

$$\frac{w_w}{w_a} = .1, .2, .3, .4; \quad \frac{V_w}{V_a} = 0 \text{ AND } 1; \quad K=1.4.$$

$$\text{VALUES OF } M_2, \frac{\rho_{02}}{\rho_{01}}, \frac{\rho_{02}}{\rho_{01}}, \frac{P_2}{P_1}, \frac{T_2}{T_1}, \frac{V_2}{V_1}$$

ARE PLOTTED VS M_1 IN FIGURES IV THROUGH X

AND M_2 IS TABULATED VS M_1 IN TABLE IX FOR M_1 FROM 0 TO 2; $\frac{w_w}{w_a} = 0, .1, .2, .3, .4$; $K=1.4$;

$$\text{ASSUMING } \frac{V_{w1}}{V_{a1}} = 0 \text{ AND } \frac{V_{w2}}{V_{a2}} = 1.$$

Table IV
Discontinuity Analysis

For all values of $\frac{w_w}{w_a}$, $\frac{V_w}{V_a} = 0$, Perfect Gas, K = 1.4

M	$\frac{T_o}{T_{o^*}}$	$\frac{P_o}{P_{o^*}}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$
0	0	1.2679	2.4000	1.2000
.10	.04678	1.2591	2.3669	1.1976
.20	.17355	1.2346	2.2727	1.1905
.30	.34686	1.1985	2.1314	1.1788
.35	.43894	1.1779	2.0487	1.1713
.40	.52903	1.1566	1.9608	1.1628
.42	.56376	1.1480	1.9247	1.1591
.44	.59748	1.1394	1.8882	1.1553
.46	.63007	1.1308	1.8515	1.1513
.48	.66139	1.1224	1.8147	1.1471
.50	.69136	1.1140	1.7778	1.1429
.52	.71990	1.1059	1.7410	1.1384
.54	.74695	1.0979	1.7043	1.1339
.56	.77248	1.09010	1.6678	1.1292
.58	.79647	1.08255	1.6316	1.1244
.60	.81892	1.07525	1.5957	1.1194
.62	.83982	1.06821	1.5603	1.1144
.64	.85920	1.06146	1.5253	1.1091
.66	.87709	1.05502	1.4908	1.10383
.68	.89350	1.04890	1.4569	1.09842
.70	.90850	1.04310	1.4235	1.09290
.72	.92212	1.03764	1.3907	1.08727
.74	.93442	1.03253	1.3585	1.08155
.76	.94546	1.02776	1.3270	1.07573
.78	.95528	1.02337	1.2961	1.06982

Table IV - Cont.

M	$\frac{T_0}{T_0^*}$	$\frac{P_0}{P_0^*}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$
.50	.96394	1.01934	1.2658	1.06383
.52	.97152	1.01569	1.2362	1.05775
.54	.97807	1.0124	1.2073	1.05160
.56	.98363	1.00951	1.1791	1.04537
.58	.98828	1.00698	1.1515	1.03907
.90	.99207	1.00485	1.1246	1.03270
.92	.99506	1.00310	1.09842	1.02627
.94	.99729	1.00174	1.07285	1.01978
.96	.99883	1.00077	1.04792	1.01324
.98	.99972	1.00019	1.02364	1.00664
1.00	1.00000	1.00000	1.00000	1.00000
1.05	.99838	1.00121	.94358	.98320
1.10	.99392	1.00486	.89086	.96618
1.15	.98721	1.01092	.84166	.94899
1.20	.97872	1.01941	.79576	.93168
1.25	.96886	1.03032	.75294	.91429
1.30	.95798	1.04365	.71301	.89686
1.40	.93425	1.07765	.64102	.86207
1.50	.90928	1.1215	.57831	.82759
1.60	.88419	1.1756	.52356	.79365
1.70	.85970	1.2402	.47563	.76046
1.80	.83628	1.3159	.43353	.72816
1.90	.81414	1.4033	.39643	.69686
2.00	.79339	1.5031	.36364	.66667

Table V
Discontinuity Analysis

$$\frac{w_w}{w_a} = .1, \quad \frac{v_w}{v_a} = 1, \quad \text{Perfect Gas, } K = 1.4$$

M	$\frac{T_o}{T_{o^*}}$	$\frac{P_o}{P_{o^*}}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$
0	0	1.2679	2.400	1.2000
.10	.04666	1.2583	2.3636	1.1974
.20	.17186	1.2315	2.2607	1.1895
.30	.33983	1.1918	2.1079	1.1767
.35	.42738	1.1667	2.0191	1.1685
.40	.51176	1.1482	1.9255	1.1592
.42	.54392	1.1391	1.8873	1.1552
.44	.57493	1.1302	1.8488	1.1510
.46	.60467	1.1215	1.8101	1.1466
.48	.63305	1.1127	1.7715	1.1421
.50	.65999	1.10413	1.7329	1.1374
.52	.68543	1.09584	1.6944	1.1326
.54	.70934	1.08786	1.6562	1.1277
.56	.73172	1.07994	1.6184	1.1226
.58	.75254	1.07233	1.5810	1.1173
.60	.77183	1.06504	1.5440	1.1119
.62	.78960	1.05830	1.5076	1.1064
.64	.80590	1.05154	1.4717	1.1008
.66	.82075	1.04524	1.4364	1.0951
.68	.83421	1.03937	1.4018	1.0892
.70	.84634	1.03399	1.3678	1.0832
.72	.85717	1.02872	1.3346	1.0772
.74	.86679	1.02433	1.3020	1.0710
.76	.87523	1.02002	1.2702	1.0647
.78	.88258	1.01586	1.2391	1.0583

Table V - Cont.

M	$\frac{T_o}{T_{o^*}}$	$\frac{P_o}{P_{o^*}}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$
.80	.88889	1.01261	1.2087	1.0519
.82	.89422	1.00946	1.1791	1.0454
.84	.89863	1.00679	1.1502	1.0388
.86	.90218	1.00467	1.1220	1.0321
.88	.90494	1.00301	1.09460	1.0253
.90	.90695	1.00156	1.06790	1.0185
.92	.90828	1.00058	1.04191	1.0116
.94	.90896	1.00014	1.01663	1.0047
.96	.90906	1.000016	.99204	.9977
.98	.90862	1.00045	.96813	.9907
1.00	.90768	1.00119	.94488	.9836
1.05	.90344	1.00512	.88960	.9658
1.10	.89694	1.01148	.83816	.9477
1.15	.88870	1.02078	.79034	.9295
1.20	.87914	1.03245	.74590	.9113
1.25	.86861	1.04708	.70459	.8930
1.30	.85741	1.06413	.66619	.8748
1.40	.83386	1.10657	.59725	.8385
1.50	.80988	1.1601	.53751	.8027
1.60	.78636	1.2252	.48559	.7677
1.70	.76380	1.3023	.44032	.7336
1.80	.74250	1.3921	.40069	.7006
1.90	.72259	1.4954	.36589	.6688
2.00	.70410	1.6133	.33520	.6383

Table VI
Discontinuity Analysis

$$\frac{w_w}{w_a} = .2, \quad \frac{V_w}{V_a} = 1, \quad \text{Perfect Gas}, \quad K = 1.4$$

M	$\frac{T_o}{T_{o^*}}$	$\frac{P_o}{P_{o^*}}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$
0	0	1.2679	2.4000	1.2000
.10	.04654	1.2574	2.3603	1.1971
.20	.17020	1.2285	2.2489	1.1886
.30	.33301	1.18695	2.0848	1.1746
.35	.41630	1.1637	1.9904	1.1657
.40	.49538	1.1402	1.8916	1.1556
.42	.52517	1.1308	1.8513	1.1513
.44	.55370	1.1216	1.8110	1.1467
.46	.58087	1.11245	1.7706	1.1420
.48	.60660	1.10357	1.7303	1.1371
.50	.63083	1.09486	1.6901	1.1321
.52	.65353	1.08649	1.6503	1.1269
.54	.67468	1.07839	1.6109	1.1215
.56	.69429	1.07056	1.5719	1.1160
.58	.71237	1.06307	1.5334	1.1104
.60	.72894	1.05592	1.4955	1.1046
.62	.74405	1.04919	1.4583	1.0986
.64	.75773	1.04278	1.4217	1.0926
.66	.77004	1.03691	1.3858	1.0864
.68	.78104	1.03133	1.3507	1.0801
.70	.79078	1.02624	1.3164	1.0737
.72	.79933	1.02155	1.2828	1.0672
.74	.80676	1.01731	1.2500	1.0606
.76	.81312	1.01362	1.2180	1.0539
.78	.81848	1.01031	1.1869	1.0471

Table VI - Cont.

M	$\frac{T_o}{T_o^*}$	$\frac{P_o}{P_o^*}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$
.80	.82292	1.00744	1.1565	1.0402
.82	.82648	1.00503	1.1270	1.0333
.84	.82923	1.00311	1.09819	1.0262
.86	.83124	1.00164	1.07022	1.0191
.88	.83255	1.00066	1.04303	1.0119
.90	.83322	1.00012	1.01660	1.0047
.92	.83330	1.00005	.99094	.9974
.94	.83284	1.00046	.96601	.9900
.96	.83189	1.00182	.94181	.9827
.98	.83050	1.00264	.91832	.9752
1.00	.82869	1.00443	.89552	.9677
1.05	.82265	1.01096	.84146	.9489
1.10	.81482	1.02041	.79135	.9299
1.15	.80567	1.03276	.74493	.9109
1.20	.79556	1.04801	.70192	.8918
1.25	.78478	1.06619	.66207	.8727
1.30	.77359	1.08732	.62513	.8537
1.40	.75067	1.1386	.55908	.8161
1.50	.72793	1.2022	.50209	.7792
1.60	.70601	1.2787	.45276	.7433
1.70	.68528	1.3689	.40989	.7085
1.80	.66591	1.4737	.37249	.6751
1.90	.64797	1.5940	.33971	.6429
2.00	.63143	1.7313	.31075	.6122

Table VII

Discontinuity Analysis

$$\frac{w_w}{w_a} = .3, \quad \frac{V_w}{V_a} = 1, \quad \text{Perfect Gas}, \quad K = 1.4$$

M	$\frac{T_o}{T_o^*}$	$\frac{P_o}{P_o^*}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$
0	0	1.2679	2.4000	1.2000
.10	.04642	1.2566	2.3571	1.1969
.20	.16856	1.2255	2.2371	1.1876
.30	.32642	1.1813	2.0622	1.1726
.35	.40567	1.1570	2.9625	1.1630
.40	.47982	1.1325	1.8587	1.1521
.42	.50743	1.1227	1.8167	1.1474
.44	.53370	1.1133	1.7747	1.1425
.46	.55853	1.1041	1.7327	1.1374
.48	.58187	1.09502	1.6909	1.1322
.50	.60368	1.08630	1.6495	1.1268
.52	.62394	1.07779	1.6084	1.1212
.54	.64266	1.06976	1.5679	1.1154
.56	.65985	1.06202	1.5279	1.1095
.58	.67554	1.05466	1.4886	1.1035
.60	.68977	1.04767	1.4500	1.0973
.62	.70258	1.04119	1.4121	1.0910
.64	.71404	1.03511	1.3750	1.0845
.66	.72421	1.02950	1.3387	1.0779
.68	.73314	1.02440	1.3032	1.0712
.70	.74091	1.01972	1.2686	1.0644
.72	.74758	1.01550	1.2349	1.0575
.74	.75321	1.01184	1.2020	1.0504
.76	.75788	1.00864	1.1700	1.0433
.78	.76166	1.00600	1.1389	1.0361

Table VII - Cont.

M	$\frac{T_o}{T_{o^*}}$	$\frac{P_o}{P_{o^*}}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$
.80	.76460	1.00375	1.10865	1.0288
.82	.76677	1.00205	1.07925	1.0214
.84	.76822	1.00091	1.05070	1.0140
.86	.76902	1.00018	1.02299	1.0065
.88	.76922	1.00010	.99610	.9989
.90	.76888	1.00035	.99610	.9912
.92	.76803	1.00116	.94472	.9836
.94	.76673	1.00255	.92019	.9758
.96	.76502	1.00435	.89642	.9680
.98	.76293	1.00673	.87339	.9602
1.00	.76053	1.00955	.85106	.9524
1.05	.75326	1.01890	.79826	.9327
1.10	.74460	1.03136	.74948	.9128
1.15	.73495	1.04701	.70444	.8930
1.20	.72462	1.06582	.66284	.8731
1.25	.71386	1.08781	.62439	.8533
1.30	.70288	1.1130	.58884	.8337
1.40	.68086	1.1734	.52549	.7949
1.50	.65942	1.2475	.47105	.7571
1.60	.63906	1.3361	.42409	.7205
1.70	.62002	1.4400	.38340	.6852
1.80	.60239	1.5606	.34799	.6513
1.90	.58617	1.6990	.31703	.6190
2.00	.57131	1.8568	.28986	.5882

Table VIII

Discontinuity Analysis

$$\frac{w_w}{w_a} = .4, \quad \frac{v_w}{v_a} = 1, \quad \text{Perfect Gas}, \quad K = 1.4$$

M	$\frac{T_o}{T_{o^*}}$	$\frac{P_o}{P_{o^*}}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$
0	0	1.2679	2.4000	1.2000
.10	.04630	1.2557	2.3539	1.1966
.20	.16744	1.2243	2.2288	1.1867
.30	.32002	1.1759	2.0401	1.1705
.35	.39547	1.1505	1.9353	1.1602
.40	.46502	1.1252	1.8270	1.1485
.42	.49063	1.1153	1.7834	1.1435
.44	.51482	1.10562	1.7398	1.1383
.46	.53753	1.09624	1.6964	1.1329
.48	.55871	1.08711	1.6534	1.1273
.50	.57835	1.07831	1.6107	1.1215
.52	.59644	1.06985	1.5686	1.1155
.54	.61301	1.06182	1.5272	1.1094
.56	.62807	1.05427	1.4864	1.1031
.58	.64168	1.04704	1.4464	1.0967
.60	.65388	1.04035	1.4071	1.0901
.62	.66473	1.03418	1.3688	1.0834
.64	.67430	1.02842	1.3313	1.0765
.66	.68265	1.02320	1.2947	1.0695
.68	.68984	1.01848	1.2590	1.0624
.70	.69596	1.01431	1.2242	1.0552
.72	.70107	1.01064	1.1904	1.0479
.74	.70524	1.00751	1.1576	1.0405
.76	.70853	1.00494	1.1257	1.0329
.78	.71102	1.00289	1.09466	1.0253

Table VIII - Cont.

M	$\frac{T_o}{T_o^*}$	$\frac{P_o}{P_o^*}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$
.80	.71277	1.00143	1.06458	1.0176
.82	.71383	1.00047	1.03542	1.0099
.84	.71427	1.00002	1.00714	1.0020
.86	.71414	1.00019	.97975	.9941
.88	.71349	1.00084	.95320	.9862
.90	.71237	1.00208	.92750	.9782
.92	.71082	1.00385	.90261	.9701
.94	.70891	1.00616	.87852	.9539
.96	.70665	1.00900	.85521	.9539
.98	.70408	1.01238	.83264	.9457
1.00	.70124	1.01633	.81081	.9375
1.05	.69317	1.02851	.75928	.9169
1.10	.68402	1.04415	.71183	.8963
1.15	.67415	1.06314	.66813	.8757
1.20	.66382	1.08560	.62788	.8552
1.25	.65325	1.1115	.59077	.8348
1.30	.64262	1.1410	.55653	.8146
1.40	.62161	1.2108	.49570	.7748
1.50	.60147	1.2958	.44362	.7362
1.60	.58258	1.3970	.39883	.6990
1.70	.56507	1.5154	.36012	.6633
1.80	.54899	1.6526	.32651	.6292
1.90	.53428	1.8101	.29707	.5968
2.00	.52087	1.9898	.27149	.5660

Table IX
Discontinuity Analysis

Values of $M_2 = f(M_1, \frac{w_w}{w_a})$, Perfect Gas, $K = 1.4$

M_1	.1	.2	.3	.4
.2	.201	.203	.204	.205
.25	.252	.254	.257	.260
.30	.304	.308	.312	.317
.31	.315	.319	.324	.328
.32	.325	.331	.336	.342
.33	.336	.342	.348	.354
.34	.346	.353	.360	.367
.35	.356	.364	.372	.380
.36	.367	.376	.384	.393
.37	.378	.387	.397	.407
.38	.388	.398	.408	.421
.39	.399	.410	.423	.437
.40	.411	.422	.436	.452
.41	.422	.433	.449	.467
.42	.433	.447	.464	.484
.43	.444	.458	.478	.502
.44	.454	.472	.493	.520
.45	.467	.486	.510	.542
.46	.478	.498	.526	.562
.47	.489	.512	.542	.586
.48	.500	.526	.560	.612
.49	.513	.541	.581	.645
.50	.525	.557	.603	.687

Table IX - Cont.

M_1	.1	.2	.3	.4
.51	.537	.573	.626	.745
.516				.845
.52	.549	.589	.651	
.53	.563	.607	.683	
.54	.575	.625	.718	
.55	.588	.644	.770	
.557			.877	
.56	.601	.665		
.57	.614	.688		
.58	.629	.716		
.59	.642	.744		
.60	.657	.782		
.61	.673	.847		
.614		.913		
.62	.688			
.63	.707			
.64	.725			
.65	.743			
.66	.765			
.67	.789			
.68	.827			
.69	.855			
.70	.925			
.702		.953		

Table IX - Cont.

M_2 for $\frac{w_w}{w_a} = .1$

M_1	Shock	Shockless
1.50	.953	.953
1.52	.870	1.050
1.54	.842	1.085
1.56	.817	1.123
1.58	.793	1.158
1.60	.782	1.177
1.62	.769	1.200
1.64	.756	1.227
1.66	.745	1.250
1.68	.734	1.270
1.70	.723	1.294
1.72	.716	1.310
1.74	.707	1.330
1.76	.700	1.349
1.78	.692	1.369
1.80	.685	1.389

M_2 for $\frac{w_w}{w_a} =$

M_1	.1		.2	
	Shock	Shockless	Shock	Shockless
1.815			.913	.913
1.82	.677	1.406	.877	.948
1.84	.669	1.426	.825	1.010
1.86	.663	1.444	.800	1.045
1.88	.656	1.463	.779	1.077
1.90	.649	1.482	.761	1.106
1.92	.643	1.500	.748	1.131
1.94	.638	1.520	.736	1.153
1.96	.633	1.537	.725	1.175
1.98	.628	1.553	.715	1.193
2.00	.624	1.571	.706	1.210

MODIFIED FANNO LINE ANALYSIS

FRictional, Adiabatic, Constant-Area.

ASSUMPTIONS:

1. ADIABATIC - NO CHANGE IN STAGNATION TEMPERATURE
2. NO EVAPORATION OF WATER DROPLETS
3. NO CHANGE IN TEMPERATURE OF WATER DROPLETS
4. PERFECT GAS RELATION HOLDS FOR AIR
5. FOR DROPLET ENTRAINED IN AIR STREAM; $\frac{V_{w_r}}{V_a} = 1$
6. FOR DROPLET ON THE WALL; $\frac{V_{w_r}}{V_a} = 0$
7. IN EACH DIFFERENTIAL SECTION, LENGTH dx , AN AMOUNT OF WATER, $d\omega_1$, LEAVES THE STREAM AND HITS THE WALL. IN ADDITION AN AMOUNT OF WATER, $d\omega_2$, LEAVES THE WALL AND IS PICKED UP BY THE STREAM.

CONTINUITY:

$$\rho V = \text{CONSTANT}$$

$$\frac{dP}{P} + \frac{dV}{V} = 0 \quad (1)$$

EQUATION OF STATE:

$$P = \rho R T$$

$$\frac{dP}{P} = \frac{d\rho}{\rho} + \frac{dT}{T} \quad (2)$$


DEFINITION OF M:

$$M^2 = \frac{V^2}{C^2} = \frac{V^2}{KRT}$$

$$\frac{dM^2}{M^2} = \frac{dV^2}{V^2} - \frac{dT}{T} \quad (3)$$

MODIFIED FANNO LINE ANALYSIS - CON'T

ENERGY:

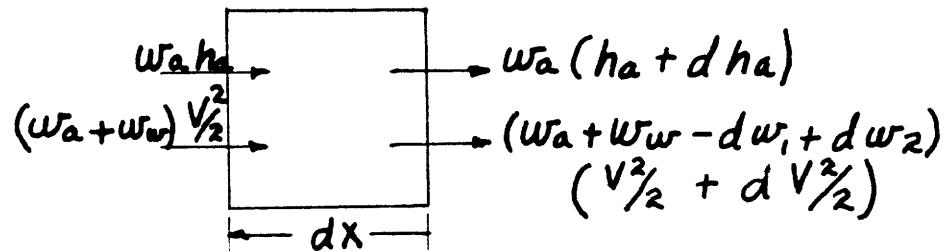

$$0 = w_a d h_a + (w_a + w_w) \frac{d V^2}{2} - (dw_1 - dw_2) \left(\frac{V^2}{2} + \frac{d V^2}{2} \right)$$

DROPPING 2ND ORDER DIFFERENTIAL TERM AND REARRANGING; NOTING THAT:

$$d h_a = C_p a d T ,$$

$$\frac{V^2}{2} = M^2 \frac{K R T}{2} ,$$

$$\frac{K R}{2 C_p} = \frac{K-1}{2} ,$$

$$dw_1 - dw_2 = dw_w$$


$$0 = \frac{dT}{T} + \frac{\frac{K-1}{2} \left(1 + \frac{w_w}{w_a} \right) M^2}{1 + \frac{K-1}{2} \left(1 + \frac{w_w}{w_a} \right) M^2} \frac{dM^2}{M^2} + \frac{\frac{K-1}{2} M^2 d \left(\frac{w_w}{w_a} \right)}{1 + \frac{K-1}{2} \left(1 + \frac{w_w}{w_a} \right) M^2} \quad (4)$$

IN STEADY STATE WITH WATER ON THE WALLS,
ASSUME THE FILM THICKNESS IS CONSTANT WITH
TIME AT ANY SECTION AND THE FILM VELOCITY
IS NEGIGIBLE.

$$\therefore d \left(\frac{w_w}{w_a} \right) = 0$$

MODIFIED FANNO LINE ANALYSIS - CON'T

MOMENTUM:

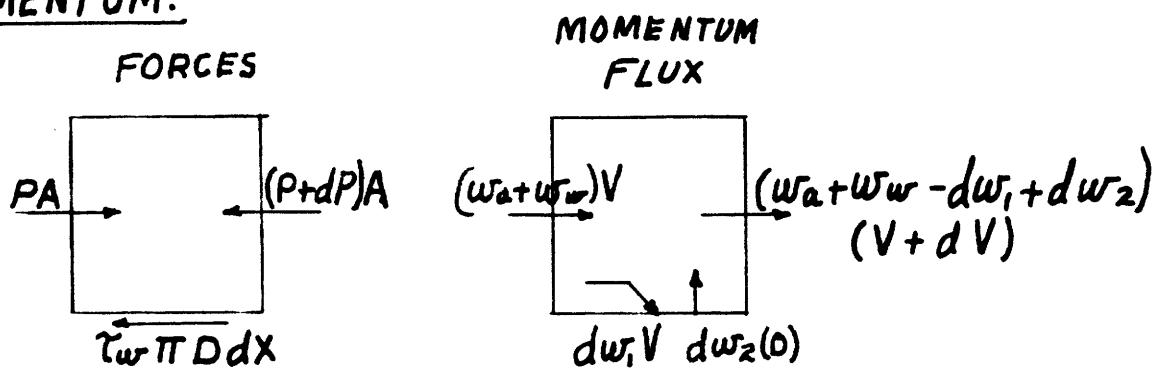

$$-AdP - \tau_w \pi D dx = (w_a + w_{ur})dV + dw_2 V - (dw_1 - dw_2)dV$$

$$-\frac{dP}{P} - \frac{4\pi}{P} \frac{dx}{D} = \left(1 + \frac{w_{ur}}{w_a}\right) \frac{\rho V^2}{2P} \frac{dV^2}{V^2} + 2 \frac{dw_2}{w_a} \frac{\rho V^2}{2P}$$

DEFINE:

$$f = \frac{\tau_w}{\frac{1}{2} \rho V^2} = \frac{\tau_w}{\frac{1}{2} K P M^2}$$

$$\therefore \frac{dP}{P} + \left(1 + \frac{w_{ur}}{w_a}\right) \frac{KM^2}{2} \frac{dV^2}{V^2} + \frac{KM^2}{2} \left[4f \frac{dx}{D} + 2 \frac{dw_2}{w_a} \right] = 0 \quad (5)$$

ASSUME THAT IN ANY SPECIFIC CASE THE AMOUNT OF WATER PICKED UP BY THE STREAM FROM THE WALLS IS PROPORTIONAL TO THE LENGTH.

$$\therefore 2 \frac{dw_2}{w_a} = K dx$$

RESULTS OF SIMULTANEOUS SOLUTION OF EQUATIONS (1) THROUGH (5) ARE PRESENTED IN TABLE X

MODIFIED FANNO LINE ANALYSIS - CON'T

TABLE X

COEFFICIENTS OF FRICTION TERM, $[4\frac{f}{D} + K] dx$

$\frac{dM^2}{M^2}$	$\frac{KM^2 \left[1 + \frac{\kappa-1}{2} \left(1 + \frac{w_w}{w_a} \right) M^2 \right]}{1 - \left(1 + \frac{w_w}{w_a} \right) M^2}$
$\frac{dT}{T}$	$- \frac{K \left(\frac{\kappa-1}{2} \right) \left(1 + \frac{w_w}{w_a} \right) M^4}{1 - \left(1 + \frac{w_w}{w_a} \right) M^2}$
$\frac{dV^2}{V^2} = -2 \frac{dP}{P}$	$\frac{KM^2}{1 - \left(1 + \frac{w_w}{w_a} \right) M^2}$
$\frac{dP}{P}$	$- \frac{\frac{KM^2}{2} \left[1 + (\kappa-1) \left(1 + \frac{w_w}{w_a} \right) M^2 \right]}{1 - \left(1 + \frac{w_w}{w_a} \right) M^2}$

INTEGRATION OF EQUATIONS:

WHEN: $x=0 ; M^2 = M^2$

$x=L_{MAX} ; M^2 = \frac{1}{1 + \frac{w_w}{w_a}}$ [CHOKING (*) CONDITION]

$$\int_0^{L_{MAX}} \left[4\frac{f}{D} + K \right] dx = \int_{M^2}^{\frac{1}{1 + \frac{w_w}{w_a}}} \frac{1 - \left(1 + \frac{w_w}{w_a} \right) M^2}{KM^4 \left[1 + \frac{\kappa-1}{2} \left(1 + \frac{w_w}{w_a} \right) M^2 \right]} dM^2$$

RESULTS OF INTEGRATION AND INTEGRAL RELATIONS
ARE GIVEN IN TABLE XI

MODIFIED FANNO LINE ANALYSIS - CON'T

TABLE XI

FORMULAS IN INTEGRAL FORM

$$\left[\frac{f}{D} + K \right] L_{MAX} = \left(1 + \frac{w_{ur}}{w_a} \right) \left[\frac{1 - (1 + \frac{w_{ur}}{w_a}) M^2}{K(1 + \frac{w_{ur}}{w_a}) M^2} + \frac{(K+1)}{2K} \ln \frac{(K+1)(1 + \frac{w_{ur}}{w_a}) M^2}{2 \left[1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \right) M^2 \right]} \right]$$

$$\frac{T}{T^*} = \frac{K+1}{2 \left[1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \right) M^2 \right]}$$

$$\frac{V}{V^*} = \frac{\rho^*}{\rho} = M \sqrt{1 + \frac{w_{ur}}{w_a}} \sqrt{\frac{K+1}{2 \left[1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \right) M^2 \right]}}$$

$$\frac{P}{P^*} = \frac{1}{M \sqrt{1 + \frac{w_{ur}}{w_a}}} \sqrt{\frac{K+1}{2 \left[1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \right) M^2 \right]}}$$

$$\frac{F}{F^*} = \frac{1}{M \sqrt{1 + \frac{w_{ur}}{w_a}}} \frac{\left[1 + K \left(1 + \frac{w_{ur}}{w_a} \right) M^2 \right]}{\sqrt{2(K+1) \left[1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \right) M^2 \right]}}$$

ASSUMING DROPLETS DECELERATE ISENTROPICALLY:

$$\frac{P_o}{P_o^*} = \frac{1}{M \sqrt{1 + \frac{w_{ur}}{w_a}}} \left[\frac{2 \left[1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \right) M^2 \right]}{(K+1)} \right]^{\frac{K+1}{2(K-1)}}$$

ASSUMING DROPLETS DO NOT DECELERATE:

$$\frac{P_o}{P_o} = \frac{\left(\frac{2}{K+1} \right)^{\frac{K+1}{2(K-1)}}}{M \sqrt{1 + \frac{w_{ur}}{w_a}}} \frac{\left[1 + \frac{K-1}{2} M^2 \right]^{\frac{K}{K-1}}}{\sqrt{1 + \frac{K-1}{2} \left(1 + \frac{w_{ur}}{w_a} \right) M^2}}$$

MODIFIED FANNO LINE ANALYSIS - CON'T

VALUES OF $[4\frac{f}{D} + K]L_{MAX}$; $\frac{P_0}{P_0^*}$; $\frac{P_0}{P_D^*}$; $\frac{P}{P^*}$; $\frac{I}{T^*}$; $\frac{V}{V^*}$; $\frac{F}{F^*}$;

ARE GIVEN FOR VALUES OF M FROM 0 TO 2;

$\frac{w_w}{w_a} = .1, .2, .3, .4$; $K=1.4$; IN TABLES XII THROUGH XV AND PLOTTED IN FIGURES XI THROUGH XVII.

MODIFIED FANNO LINE - LOW VELOCITY ANALYSIS

ASSUME: $M^2 \ll 1 ; \frac{P_2}{P_1} \approx 1$

$$\left[4\frac{f}{D} + K\right]L_{1,2} \approx \frac{1}{KM_1^2} - \frac{1}{KM_2^2} + \left(\frac{K+1}{2K}\right)\left(1 + \frac{w_{ur}}{w_a}\right) \ln \frac{M_1^2}{M_2^2}$$

$$\frac{P_1}{P_2} \approx \frac{M_2}{M_1}$$

$$\therefore \left[4\frac{f}{D} + K\right]L_{1,2} \approx \frac{1}{KM_1^2} \left[1 - \left(\frac{P_2}{P_1}\right)^2\right] - \left(1 + \frac{w_{ur}}{w_a}\right) \left(\frac{K+1}{2K}\right) \left[1 - \left(\frac{P_2}{P_1}\right)^2 + \dots\right]$$

$$1 - \left(\frac{P_2}{P_1}\right)^2 \approx \frac{K \left[4\frac{f}{D} + K\right]L_{1,2}}{\left[\frac{1}{M_1^2} - \left(1 + \frac{w_{ur}}{w_a}\right) \left(\frac{K+1}{2K}\right)\right]} \approx M_1^2 K \left[4\frac{f}{D} + K\right]L_{1,2}$$

$$\frac{P_2}{P_1} \approx 1 - \frac{1}{2} M_1^2 K \left[4\frac{f}{D} + K\right]L_{1,2} + \dots$$

$$\therefore \frac{P_1 - P_2}{P_1} \approx \frac{1}{2} M_1^2 K \left[4\frac{f}{D} + K\right]L_{1,2}$$

$$\text{ALSO } \frac{P_{o1} - P_{o2}}{P_{o1}} \approx \frac{1}{2} M_1^2 K \left[4\frac{f}{D} + K\right]L_{1,2}$$

Table XII

Frictional, Adiabatic, Constant Area Flow

Perfect Gas, K = 1.4, $\frac{w_w}{w_a} = .1$

M	$\left[\frac{4f}{D} + K \right] L_{max}$	$\frac{P_o}{P_o^*}$	$\frac{p_o}{p_o^*}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$	$\frac{V}{V^*} = \frac{\rho^*}{\rho}$
0	∞	∞	∞	∞	1.200	0
.1	66.8	5.54	5.53	10.40	1.197	.1147
.2	14.24	2.91	2.82	5.19	1.190	.2286
.3	5.15	1.958	1.940	3.45	1.177	.340
.4	2.186	1.531	1.511	2.563	1.159	.450
.5	.978	1.298	1.271	2.030	1.137	.558
.6	.425	1.149	1.127	1.675	1.112	.663
.7	.1651	1.067	1.040	1.419	1.083	.764
.8	.0472	1.020	.983	1.221	1.052	.860
.9	.00480	1.001	.955	1.070	1.019	.951
1.0	.00288	1.001	.946	.946	.984	1.041
1.1	.0231	1.017	.951	.844	.948	1.122
1.2	.0565	1.049	.970	.758	.911	1.201
1.3	.0948	1.097	1.003	.687	.875	1.276
1.4	.1370	1.152	1.049	.624	.839	1.348
1.5	.1784	1.229	1.103	.570	.803	1.411
1.6	.2201	1.315	1.171	.522	.768	1.470
1.7	.260	1.420	1.253	.481	.734	1.530
1.8	.297	1.538	1.345	.444	.701	1.581
1.9	.333	1.670	1.448	.410	.669	1.630
2.0	.366	1.834	1.572	.381	.638	1.676

Table XIII

Frictional, Adiabatic, Constant-Area Flow

Perfect Gas, K = 1.4, $\frac{w_w}{w_a} = .2$

M	$\left[4\frac{f}{D} + K\right]L_{max}$	$\frac{P_o}{P_o^*}$	$\frac{P_o}{P_o^*}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$	$\frac{V}{V^*} = \frac{\rho^*}{\rho}$
0	∞	∞	∞	1.200	0	
.1	66.2	5.29	5.28	1.197	.1201	
.2	14.10	2.70	2.69	1.189	.2388	
.3	4.95	1.871	1.850	1.175	.356	
.4	2.062	1.471	1.442	1.156	.470	
.5	.888	1.252	1.215	1.132	.583	
.6	.367	1.123	1.076	1.105	.691	
.7	.1276	1.047	.989	1.074	.794	
.8	.0282	1.010	.936	1.040	.893	
.9	.000323	1.001	.907	1.005	.989	
1.0	.01108	1.008	.898	.968	1.078	
1.1	.0421	1.029	.902	.930	1.162	
1.2	.0842	1.071	.919	.892	1.243	
1.3	.1304	1.124	.949	.854	1.318	
1.4	.1781	1.199	.988	.816	1.386	
1.5	.2252	1.287	1.040	.779	1.451	
1.6	.271	1.392	1.105	.743	1.513	
1.7	.314	1.502	1.178	.709	1.569	
1.8	.355	1.649	1.263	.675	1.621	
1.9	.395	1.810	1.362	.643	1.672	
2.0	.431	1.989	1.479	.612	1.719	

Table XIV
Frictional, Adiabatic, Constant-Area Flow

Perfect Gas, K = 1.4, $\frac{w_w}{w_a} = .3$

M	$\left[4\frac{f}{D} + K\right]L_{max}$	$\frac{P_o}{P_o^*}$	$\frac{P_o}{P_o^*}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$	$\frac{V}{V^*} = \frac{\rho^*}{\rho}$
0	∞	∞	∞	1.200	0	
.1	65.8	5.12	5.10	1.197	.1246	
.2	13.84	2.61	2.59	1.188	.2486	
.3	4.80	1.807	1.782	1.173	.371	
.4	1.943	1.430	1.384	1.152	.489	
.5	.810	1.228	1.165	1.127	.605	
.6	.313	1.107	1.029	1.097	.716	
.7	.0964	1.034	.947	1.064	.823	
.8	.01430	1.006	.895	1.029	.925	
.9	.001172	1.001	.866	.991	1.022	
1.0	.0236	1.016	.856	.952	1.112	
1.1	.0647	1.048	.858	.913	1.199	
1.2	.1152	1.097	.874	.873	1.279	
1.3	.1682	1.163	.900	.834	1.355	
1.4	.222	1.248	.940	.795	1.422	
1.5	.274	1.346	.986	.757	1.489	
1.6	.325	1.458	1.043	.721	1.551	
1.7	.372	1.603	1.112	.685	1.608	
1.8	.416	1.765	1.191	.651	1.658	
1.9	.457	1.938	1.281	.619	1.704	
2.0	.495	2.153	1.388	.588	1.750	

Table XV

Frictional, Adiabatic, Constant-Area Flow

Perfect Gas, $K = 1.4$, $\frac{w_w}{w_a} = .4$

M	$\left[\frac{4f}{D} + K \right] L_{\max}$	$\frac{P_o}{P_o^*}$	$\frac{P_o}{P_o^*}$	$\frac{P}{P^*}$	$\frac{T}{T^*}$	$\frac{V}{V^*} = \frac{\rho^*}{\rho}$
0	∞	∞	∞	∞	1.200	0
.1	65.5	4.95	4.92	9.25	1.197	.1290
.2	13.58	2.53	2.49	4.60	1.187	.2583
.3	4.65	1.747	1.716	3.05	1.171	.384
.4	1.840	1.393	1.333	2.263	1.149	.507
.5	.734	1.188	1.118	1.788	1.122	.627
.6	.265	1.084	.989	1.470	1.090	.741
.7	.0703	1.027	.909	1.240	1.055	.850
.8	.00524	1.001	.856	1.065	1.018	.956
.9	.00645	1.003	.827	.927	.978	1.053
1.0	.0406	1.021	.818	.818	.938	1.148
1.1	.0917	1.062	.819	.726	.896	1.232
1.2	.1496	1.127	.833	.651	.855	1.313
1.3	.2105	1.199	.856	.586	.815	1.389
1.4	.270	1.295	.893	.531	.775	1.461
1.5	.328	1.409	.935	.483	.736	1.522
1.6	.381	1.542	.990	.442	.699	1.583
1.7	.431	1.700	1.059	.406	.663	1.641
1.8	.479	1.880	1.130	.373	.629	1.691
1.9	.522	2.080	1.210	.343	.597	1.739
2.0	.563	2.32	1.312	.318	.566	1.782

BIBLIOGRAPHY

- (1) Lapple, C. E. and Shepard, C. B., "Calculation of Particle Trajectories," INDUSTRIAL AND ENGINEERING CHEMISTRY, May 1940, pp. 605-617.
- (2) Shapiro, A. H. and Hawthorne, W. R., "The Mechanics and Thermodynamics of Steady, One-Dimensional Gas Flow," JOURNAL OF APPLIED MECHANICS, December 1947, pp. A-317 to A-336.
- (3) Pinkus, O., "Pressure Drops in the Pneumatic Conveyance of Solids," JOURNAL OF APPLIED MECHANICS, December 1952, pp. 425-431.