



COMPOSITION OF SYNGAS PRODUCED BY GASIFICATION OF AGRICULTURAL RESIDUE BRIQUETTES

Daniela TASMA, Tănase PANAIT, Krisztina UZUNEANU,
Cătălin MOCANU, Raluca-Cristina BUȚURCĂ

"Dunărea de Jos" University of Galati
email: dtasma@ugal.ro

ABSTRACT

This paper summarizes the results of an experimental study on the gasification of briquettes made from different agricultural residues. There were investigated the effects of operating parameters such as temperature and excess air ratio both with a direct influence on the composition of syngas and the heating value. The results indicate that the concentrations of N₂, CO₂ and CH₄ increase with the increase in excess air ratio, while the concentrations of H₂ and CO decrease. The heating value of the syngas was found to decrease with the increase in excess air ratio.

KEYWORDS: gasification, agricultural residues, excess air ratio, syngas

1. Introduction

The use of biomass to provide partial substitution of fossil fuels has an additional importance as concerns global warming since biomass combustion has the potential to be CO₂ neutral. This is particularly the case with regard to agricultural residues or energy plants periodically planted and harvested. During their growth, these plants have removed CO₂ from the atmosphere for photosynthesis and released it again during combustion [1].

Agricultural residues have acquired considerable importance as biofuels for domestic cooking, industrial process heating, electrical power generation, and are used directly as well as in briquetted form for a variety of energy end uses [2].

Biomass gasification is a thermal conversion of solid biomass to gaseous fuel, into which the energy stored in the biomass is converted to calorific value of the produced gas.

The fuel gas obtained from gasification is called syngas, and has the following major components: carbon monoxide CO, hydrogen H₂, carbon dioxide CO₂, and small fractions of methane CH₄. The fraction of each component gas in syngas is known to vary with the type of biomass, the initial moisture

content of the feedstock, particle size, operating temperature, and excess air ratio [3].

This paper presents the syngas composition resulted from the gasification of the briquettes made from agricultural residues. The results indicate that the concentrations of H₂ and CO decrease with the increase in excess air ratio, while the concentrations of N₂, CO₂ and CH₄ increase. The syngas composition is found to be similar to those reported by other researchers [4].

2. Experimental procedure

The gasification process consists of drying, pyrolysis or devolatilization, combustion or oxidation and gasification or reduction [5]. These processes are largely dependent on the parent biomass composition, moisture content, local stoichiometry, reactivity of biomass, and gasifier design [6].

Briquettes made of agricultural residues were used in the experiments. The elemental and proximate analyses of the fuels are listed in Table 1 where it can be seen that the sawdust briquettes have the highest carbon content and the lowest ash content, while the reed briquettes have the highest ash content. The briquettes obtained from 50% sawdust and 50% corn stalk have the highest content of oxygen.

Table 1. Fuel properties

Fuel sample	Reed briquettes	Sawdust briquettes	Sawdust 50% + corn stalk 50% briquettes	Sawdust 50% + wheat straw 50% briquettes
Ultimate analysis (% of dry fuel with ash)				
C	52.4	53.3	49.41	50.63
H	5.91	6.28	5.90	6.12
N	0.65	1.91	0.43	0.53
S	0.0	0.0	0.0	0.0
O	33.55	35.75	40.73	38.08
A	7.85	2.77	3.54	4.64
Proximate analysis (% of wet fuel)				
Fixed Carbon	29	24.85	22.60	20.30
Volatile matter	56.70	66.55	67.40	70.10
Ash	7.30	2.60	3.30	4.40
Moisture	7	6	6.70	5.20

3. Results and discussions

The variation in the composition of the syngas produced syngas is studied by varying the different operating conditions. The operating conditions in this study are gasification temperature and excess air ratio. The main components of the syngas are CO, H₂, N₂, CO₂, H₂O and CH₄. The molar fractions of these

components were measured before the second air injection. Table 2 presents the molar composition of syngas produced through gasification of sawdust briquettes, gasification temperature and excess air ratio. The influence of temperature on syngas composition is illustrated in Figure 1. The molar fraction of the CO₂ increases with the decrease of excess air ratio.

Table 2. Molar composition of syngas produced by gasification of sawdust briquettes

Temperature [°C]	Excess air ratio	CO ₂	CO	H ₂	CH ₄	N ₂	NH ₃	H ₂ O	LHV
700	0.33	0.0638	0.253	0.1950	0.0049	0.4518	0.0011	0.0304	5.47
750	0.27	0.0344	0.311	0.2286	0.0039	0.4018	0.0011	0.0193	6.53
800	0.23	0.0168	0.3465	0.2511	0.0029	0.3704	0.0011	0.0112	7.18
850	0.22	0.008	0.3648	0.2641	0.002	0.3538	0.0011	0.0063	7.52
900	0.21	0.0039	0.3735	0.271	0.0014	0.3456	0.0011	0.0036	7.68

The molar fraction of CO is the most significant contribution to the heating value of the syngas, its value increasing with the gasification temperature.

The increase of the gasification temperature causes a linearly decrease of the N₂ molar fraction.

The useful energy content in the syngas can be quantified by the syngas heating value. Figure 1 shows the variation of lower heating value against temperature.

It is evident that the lower heating value increases with the increase of temperature.

The lower heating value of the syngas ranges from 5.47 MJ/Nm³ to 7.68 MJ/Nm³.

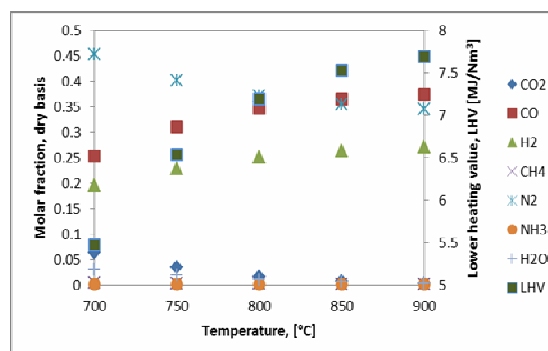


Fig. 1. Influence of the temperature on syngas composition for sawdust briquettes

Figure 2 presents the variation of H₂ molar fraction as a function of the gasification temperature for all briquettes made from agricultural residues. As can be seen, the increase in temperature causes an increase of the H₂ molar fraction.

The highest content of the H₂ in the syngas was obtained by gasification of briquettes made from sawdust 50% + wheat straw 50%. The minimum value of the H₂ molar fraction was obtained by gasification of sawdust briquettes.

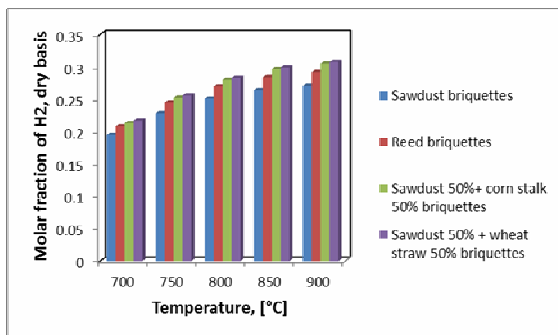


Fig. 2. Variation of molar fractions of H₂ with temperature

The molar fraction of H₂ has an important contribution in the calculating of syngas heating value.

Figure 3 shows the variation of the CO₂ molar fractions with temperature. It can be observed that the increase in temperature decreases the CO₂ content in the syngas.

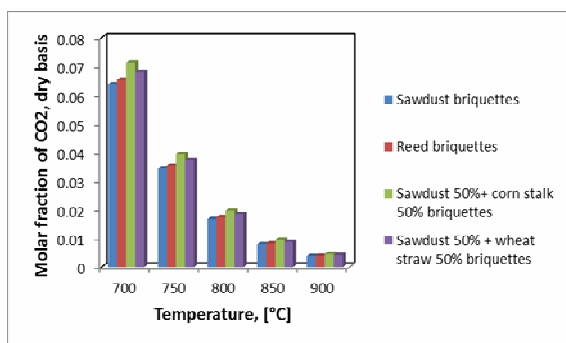


Fig. 3. Variation of molar fractions of CO₂ with temperature

Figure 4 shows the variation of the CO molar fractions with temperature.

The increase in temperature increases the CO content in the syngas. The highest content of the CO in the syngas was obtained by gasification of briquettes made from sawdust 50% + corn stalk 50%.

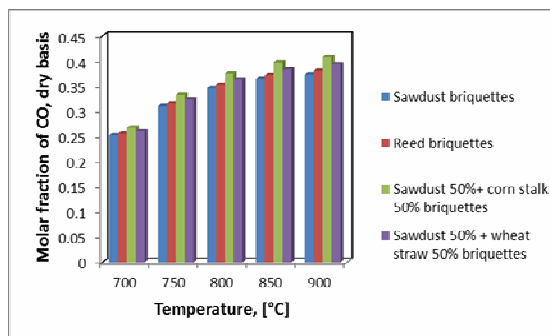


Fig. 4. Variation of molar fractions of CO with temperature

Figure 5 presents the variation of CH₄ with temperature. The molar fraction of CH₄ is very low and this decreases with the increase of the temperature. The highest concentration of CH₄ was obtained for gasification of sawdust 50%+wheat straw 50% briquettes.

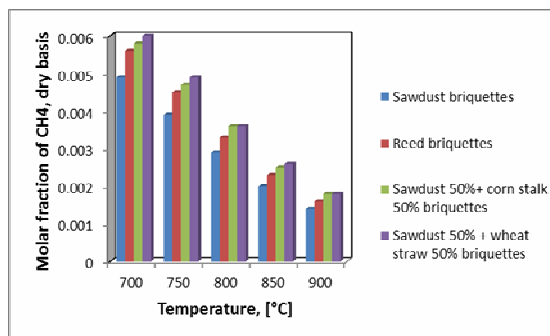


Fig. 5. Variation of molar fractions of CH₄ with temperature

5. Conclusions

The syngas composition is strongly influenced by temperature and excess air ratio. An increase in temperature resulted in an increase in the concentrations of H₂ and CO and a lower CO₂ production.

The highest content of the H₂ in the syngas was obtained by gasification of sawdust 50% + wheat straw 50% briquettes for an excess air ratio $\lambda=0.18$ and a temperature equivalent with 900°C. The minimum value of the H₂ molar fraction was obtained by gasification of sawdust briquettes for an excess air ratio $\lambda=0.33$ and a temperature equivalent with 700°C.

The highest contents of the CO and CO₂ in the syngas were obtained by gasification of briquettes made from sawdust 50% + corn stalk 50%.



The molar fraction of CH₄ is very low and this decreases with the increase of the temperature.

The lower heating value of the syngas was found to decrease with the increase in excess air ratio.

Acknowledgements

The work of this paper was supported by Project SOP HRD – EFICIENT 61445/2009 and SOP HRD – TOP ACADEMIC 76822.

References

- [1]. J. Werther, M. Saenger, E.-U. Hartge, T. Ogada, Z. Siagi - *Combustion of agricultural residues*, Progress in Energy and Combustion Science, (2000), Vol. 26, pg. 1–27.
- [2]. A. Kumar, P. Purohit, S. Rana, T. C. Kandpal - *An approach to the estimation of the value of agricultural residues used as biofuels*, Biomass and Bioenergy, (2002), Vol. 22 , pg. 195 – 203
- [3]. S. M. Atnaw, S. A. Sulaiman, S. Yusup - *Prediction of Calorific Value of Syngas Produced from Oil-Palm Fronds Gasification*,. 3rd National Postgraduate Conference, Tronoh. (2011).
- [4]. J.F. González, S. Román, D. Bragado, M. Calderón - *Investigation on the reactions influencing biomass air and air/steam gasification for hydrogen production*, Fuel Processing Technology, (2008), Vol. 89, pg. 764 – 772.
- [5]. K. Jaojaruek, S. Jarunghammachote, M. K. B. Gratuito, H. Wongsuwan, S. Homhual - *Experimental study of wood downdraft gasification for an improved producer gas quality through an innovative two-stage air and premixed air/gas supply approach*, Bioresource Technology. 2011, p.doi:10.1016/j.biortech.2010.12.024.
- [6]. P. C. Roy, A. Datta, N. Chakraborty - *Modelling of a downdraft biomass gasifier with finite rate kinetics in the reduction zone*, International Journal of Energy Research, (2009), Vol. 33, pg. 833-851.