



### **EuroTeV High Bandwidth Wall Current Monitor**

Alessandro D'Elia AB-BI-PI 1

## **Acknowledgements**

We acknowledge the support of the European Community-Research Infrastructure Activity under the FP6 “Structuring the European Research Area” programme (CARE, contract number RII3-CT-2003-506395)




# **EuroTeV High Bandwidth Wall Current Monitor**

**Alessandro D'Elia  
AB-BI-PI**

# Wall Current Monitors

Wall Current Monitors (WCM) are commonly used to observe the time profile and spectra of a particle beam by detecting its image current.

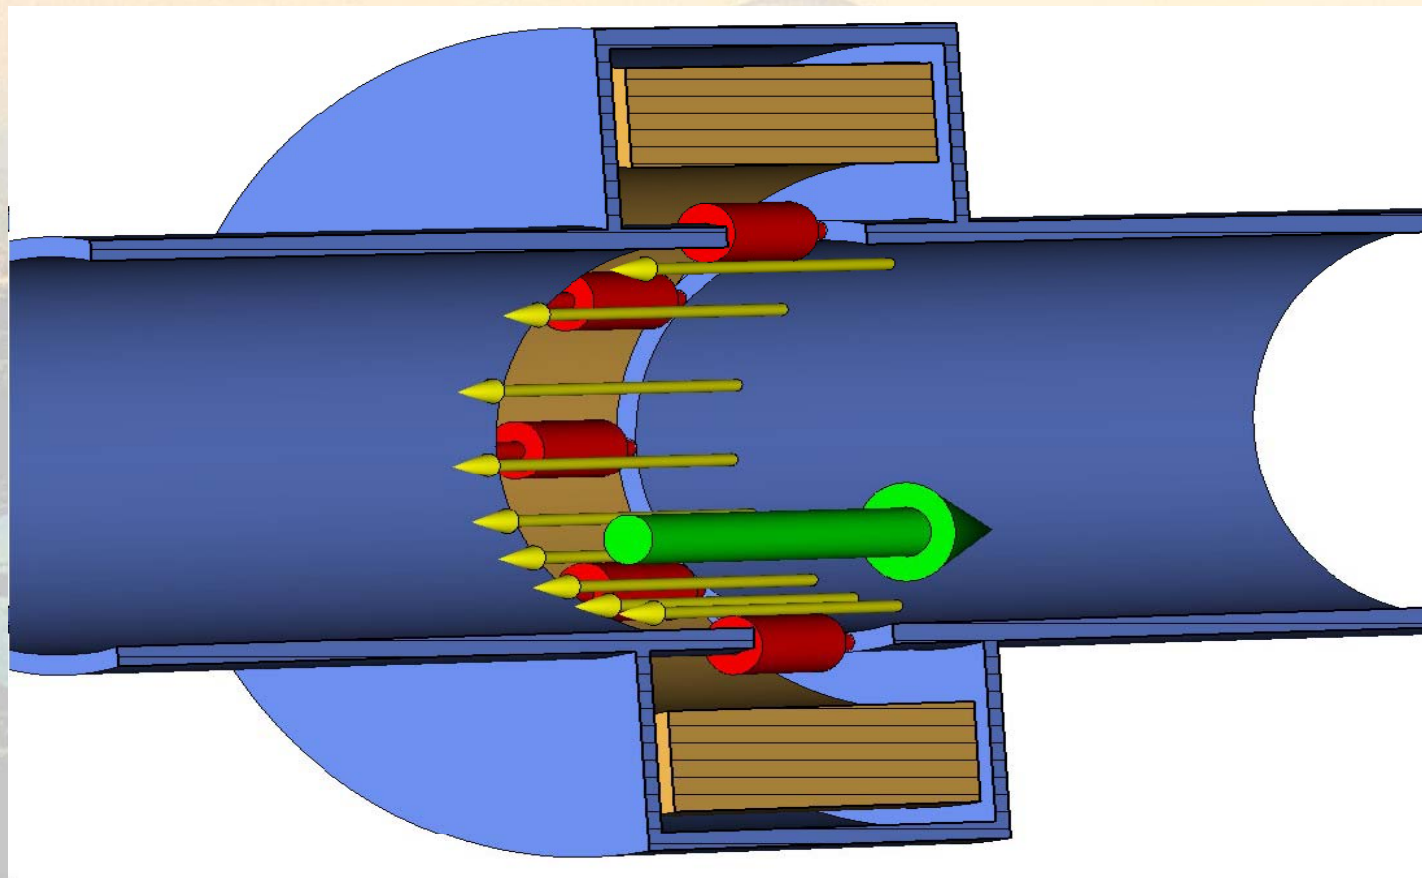

# The “initial” aim

The 3<sup>rd</sup> generation of CLIC Test Facility (CTF3) foresees a beam formed by bunches separated of

$\Delta_b = 67 \text{ ps}$   $\longrightarrow$  **WCM h. f. cut-off = 20 GHz**

for a total pulse duration of





$\tau_r = 1.54 \text{ } \mu\text{s}$   $\longrightarrow$  **WCM l. f. cut-off = 100 kHz**

Furthermore

Bake out temperature:	150 C
Operating temperature:	20 C
Vacuum:	$10^{-9}$ Torr

100kHz-20GHz WB signal transmission over 10-20m.


# The gap resonances

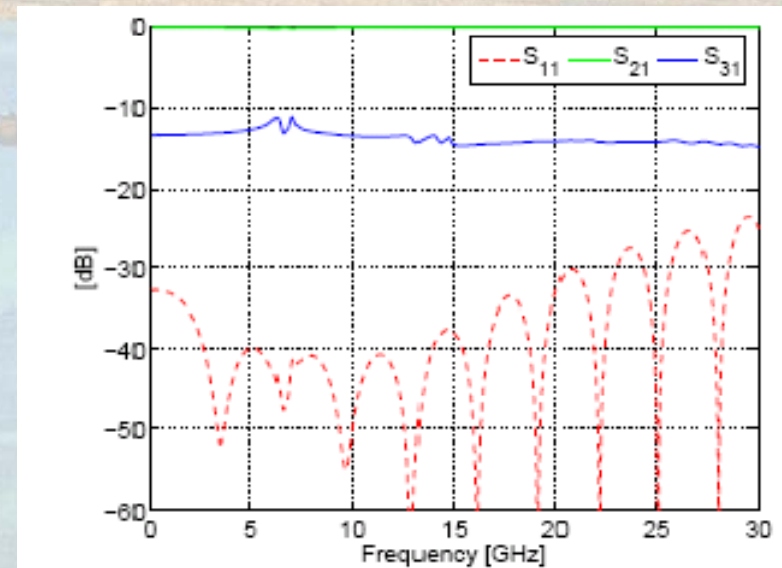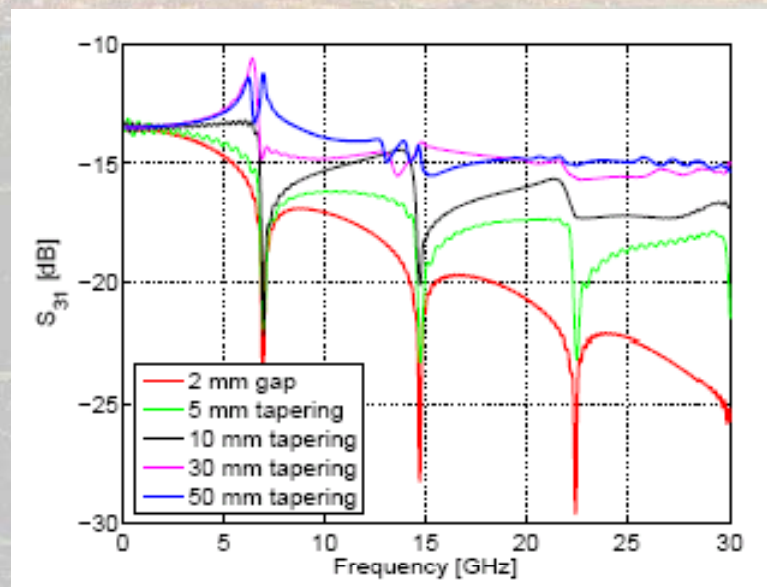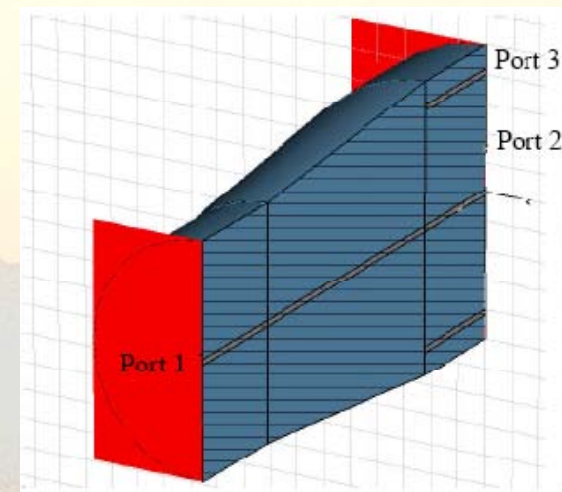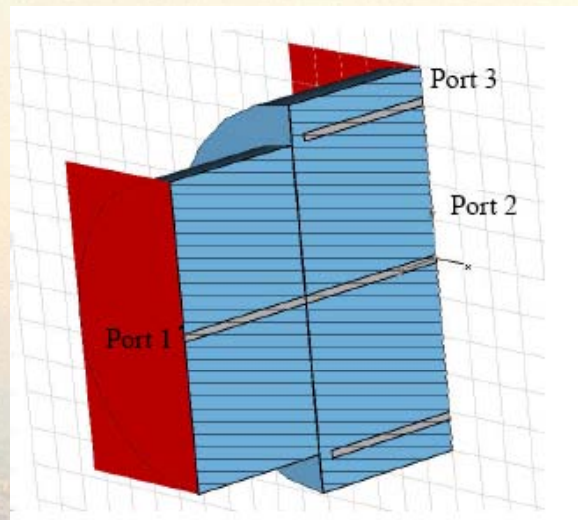

With the courtesy of Tom Kroyer ("A Structure for a Wide Band Wall Current Monitor", AB-Note-2006-040 RF)

# A more accurate study of the gap resonances

The resonances due to the cross section changing are “**structural**”!!!! You cannot delete them, you can only try to reduce them!

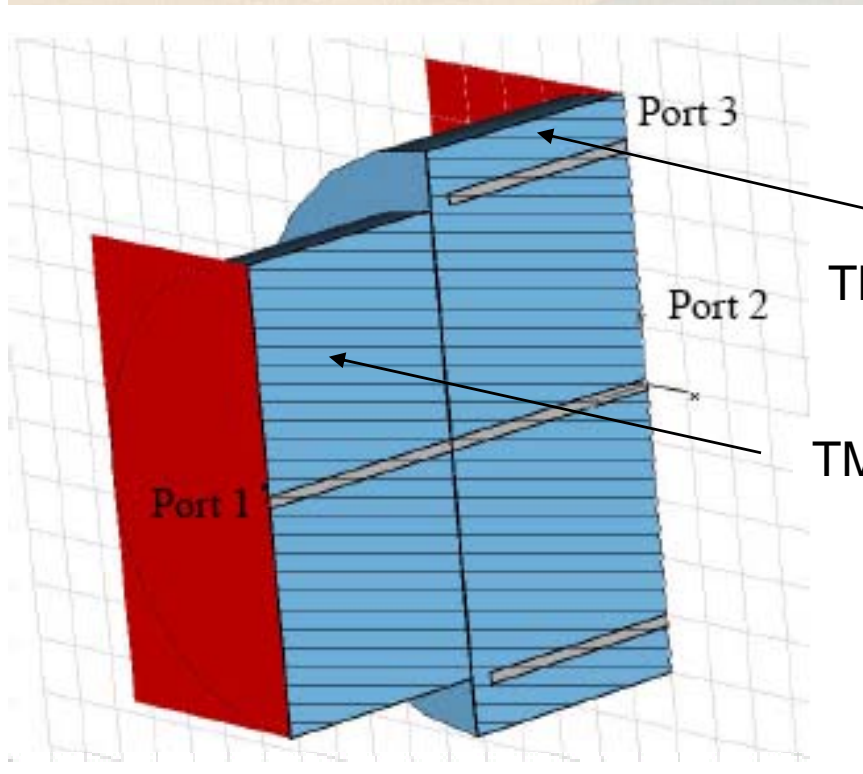

TM01 cut-off  $\cong$  24GHz

TM01 cut-off  $\cong$  6.9GHz



The TM01, with the frequency of about 6.9GHz will be trapped between the two coaxial

# Feedthrough resonances

When the distance between two feedthroughs becomes equal to the free space wavelength, the first azimuthal resonance appears in the structure

$$F = \frac{c}{2\pi(\bar{r}/n)} \quad n = \text{number of feedthrough}$$



With  $n = 4$ , one has  $F = 8.3 \text{ GHz}$

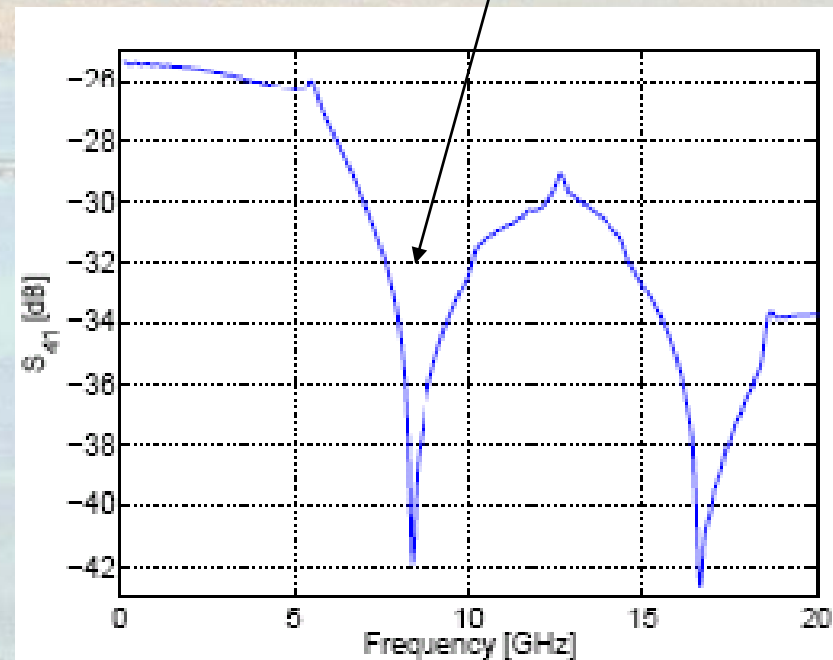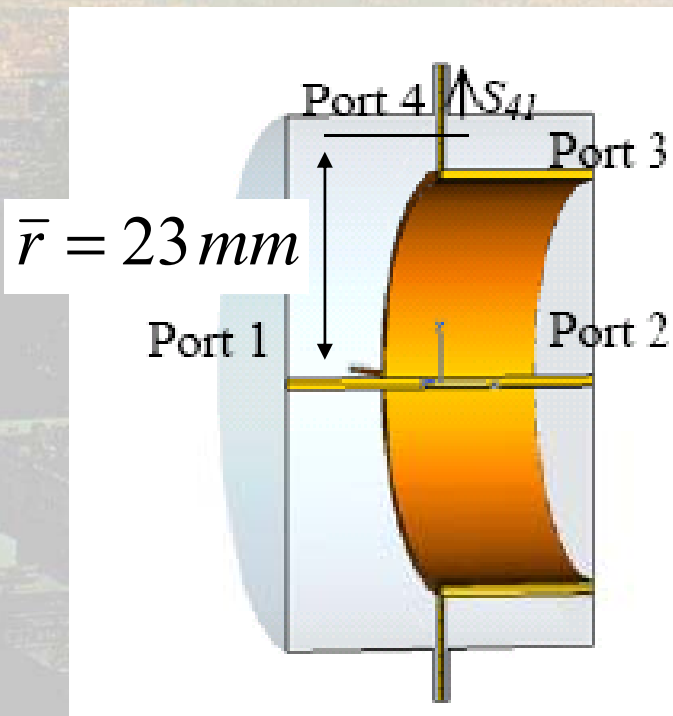




# The whole structure

Therefore to have 16 feedthroughs means to push the previous resonance to  $\approx 33$  GHz

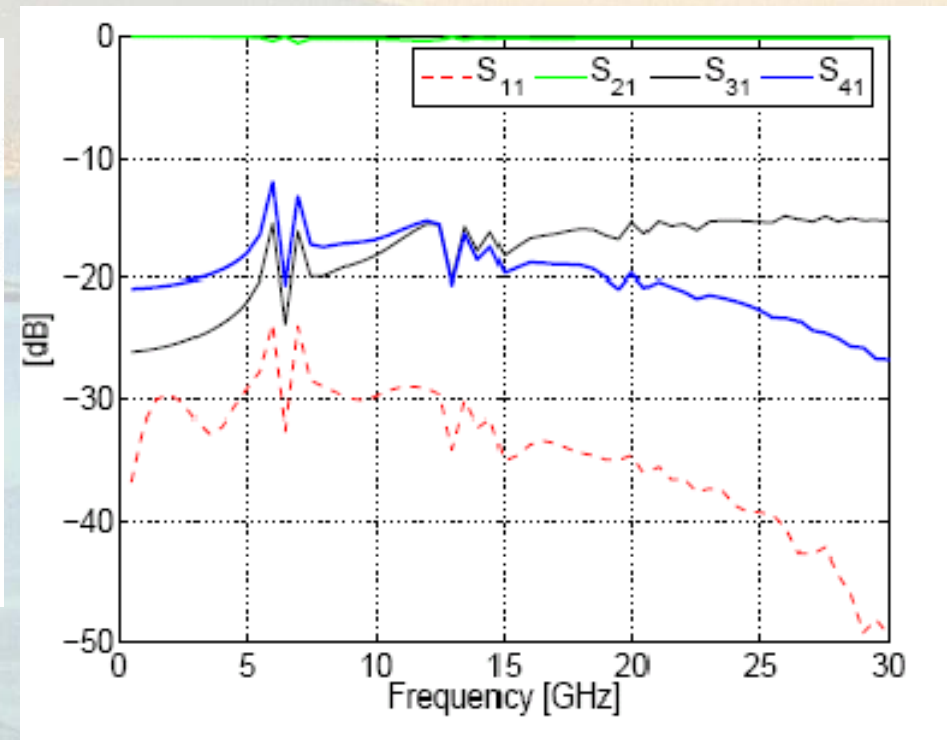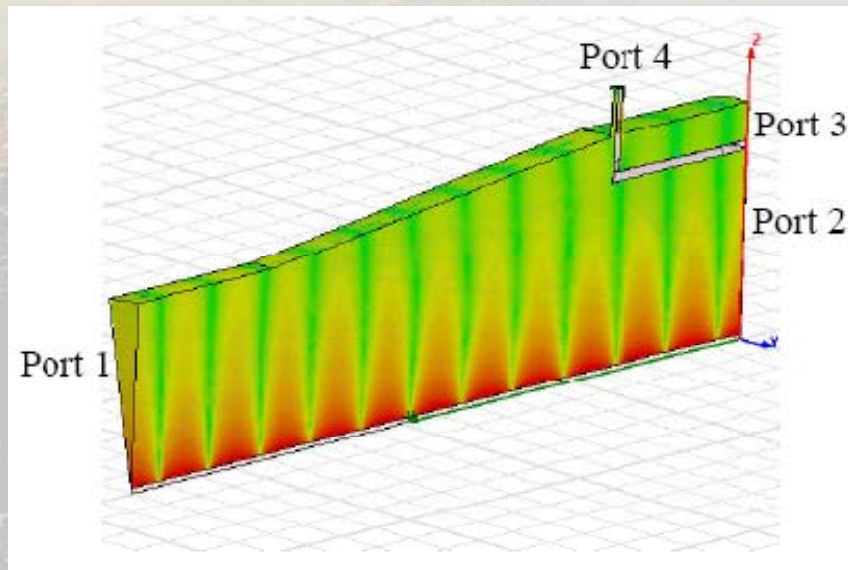


# The effect of feedthrough's on the TM<sub>01</sub> resonance

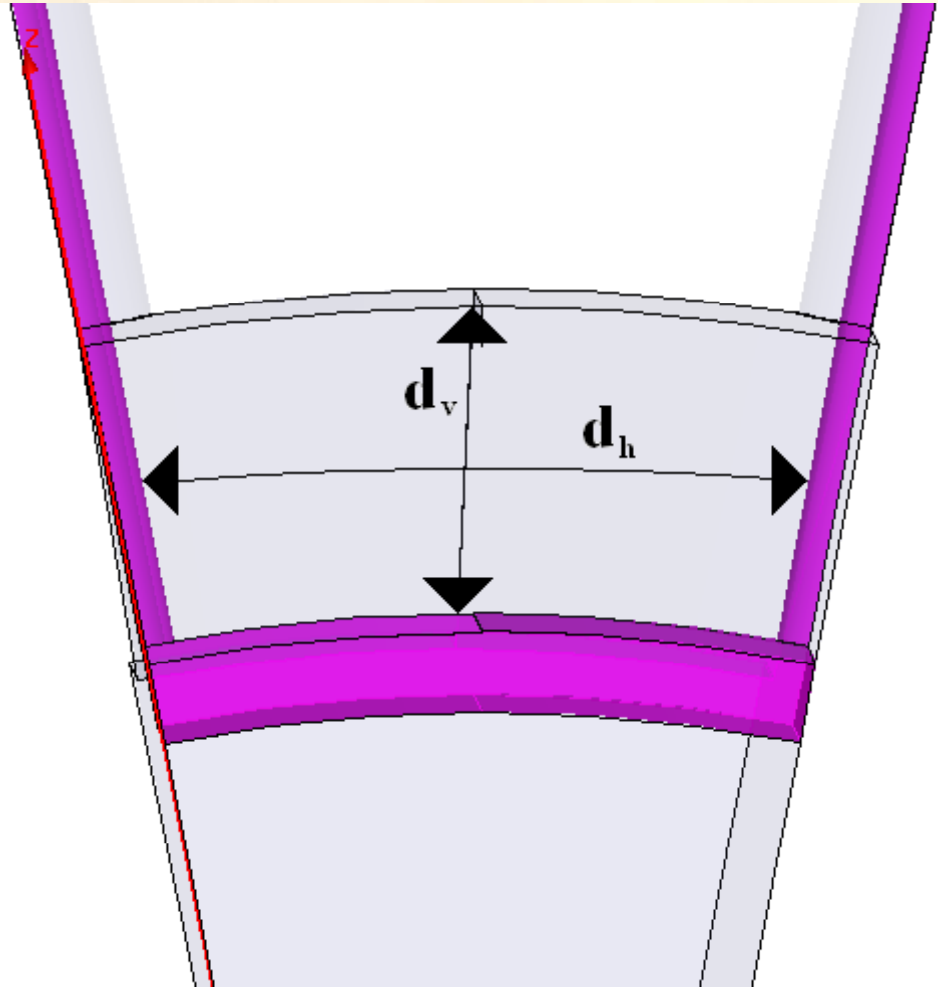

In the transversal plane you have either for vertical or horizontal directions that

$$\lambda_{\text{TM01}} \gg \begin{cases} d_h \\ d_v \end{cases}$$

# The effect of feedthrough's

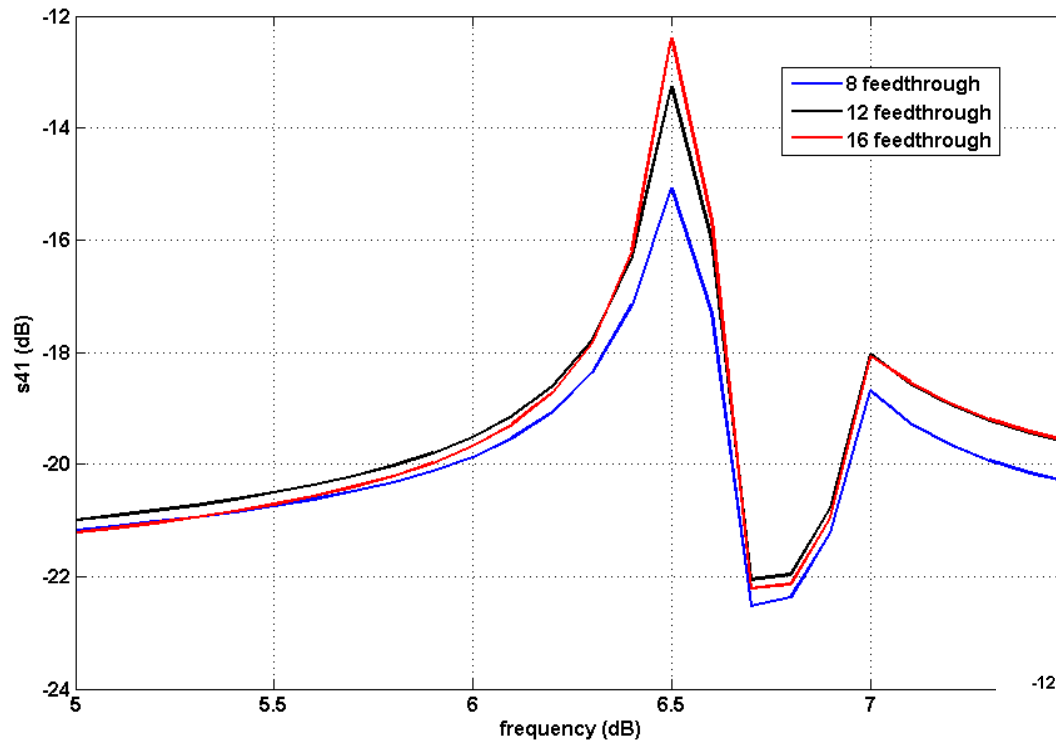


In order to reduce this enhancement, would have to happen that the distance between two feedthrough's should be at least equal to one half of the resonant mode wavelength

$$d_h = \frac{2\pi}{n} \bar{r} = \frac{\lambda_{TM01}}{2}$$

Indeed for a structure having  $\bar{r} = 22\text{mm}$

$\lambda_{TM01} = c/6.9\text{GHz} = 43\text{mm}$  **The optimum is for  $n=6$**

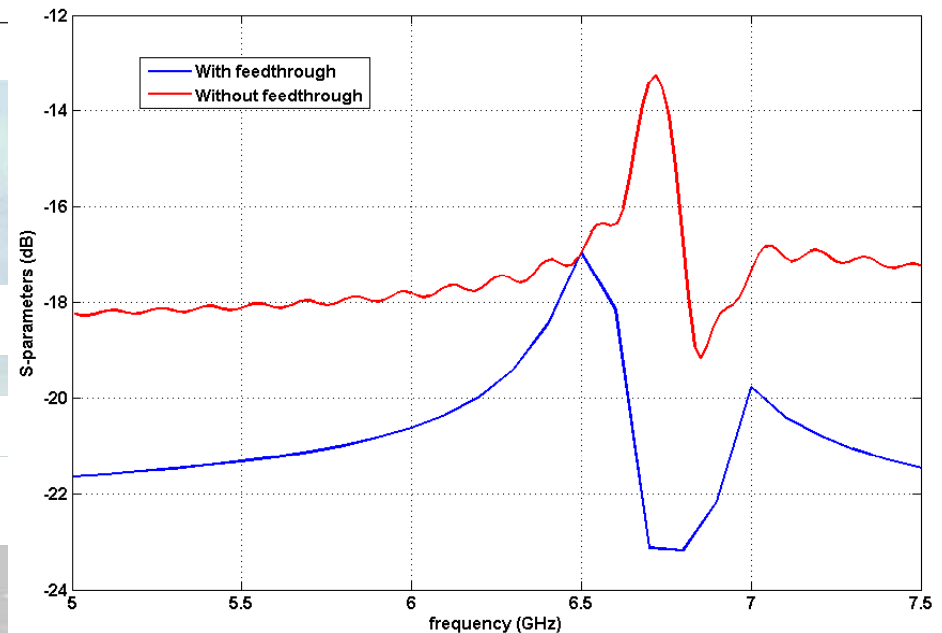

# Some consideration


The two requirements concerning the feedthrough resonances and the effect of the feedthrough enhancement on the gap resonances are in **conflict**:

Feedthrough resonances

$$F = \frac{c}{d_h}$$

Gap resonance enhancement

$$d_h = \frac{2\pi}{n} \bar{r} = \frac{\lambda_{\text{TM01}}}{2}$$



$d_h$  has to be, on the one hand, as small as possible, on the other hand, at least equal to one half of the TM01 wavelength

# Three possible solutions found

1.




Number of feedtroughs	16
Whole foreseen length	50-60cm
Frequency range of the 3dB signal	2Ghz-20GHz

2.

	Low freq	High freq
Number of feedtroughs	4	12
Whole foreseen length	$\cong 70\text{cm}$	
Frequency range staying in the 3dB	100kHz-20GHz (except $\cong 5.7\text{GHz}-6.2\text{GHz}$ )	


3.

Number of feedtroughs	8
Whole foreseen length	$\cong 50\text{cm}$
Frequency range staying in the 3dB	6.2GHz-20GHz

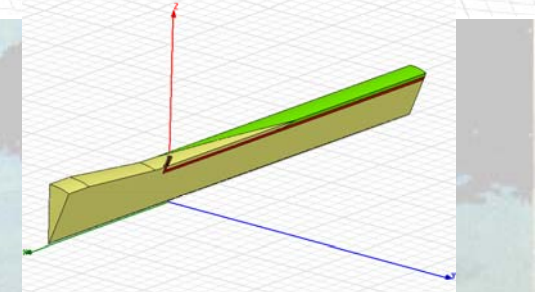
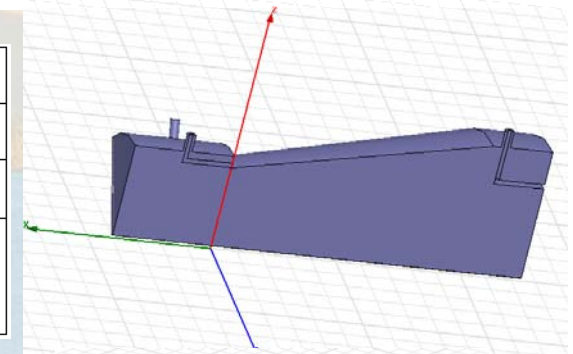
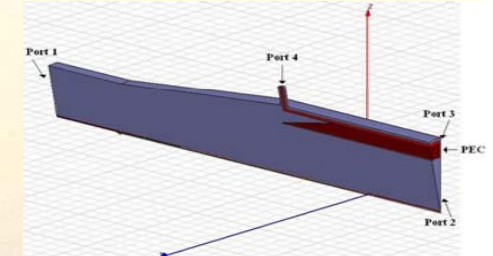


The last two structures present an aperture reduction of 15% and 30%, respectively. For that reason the first one has been chosen.

# The chosen structure

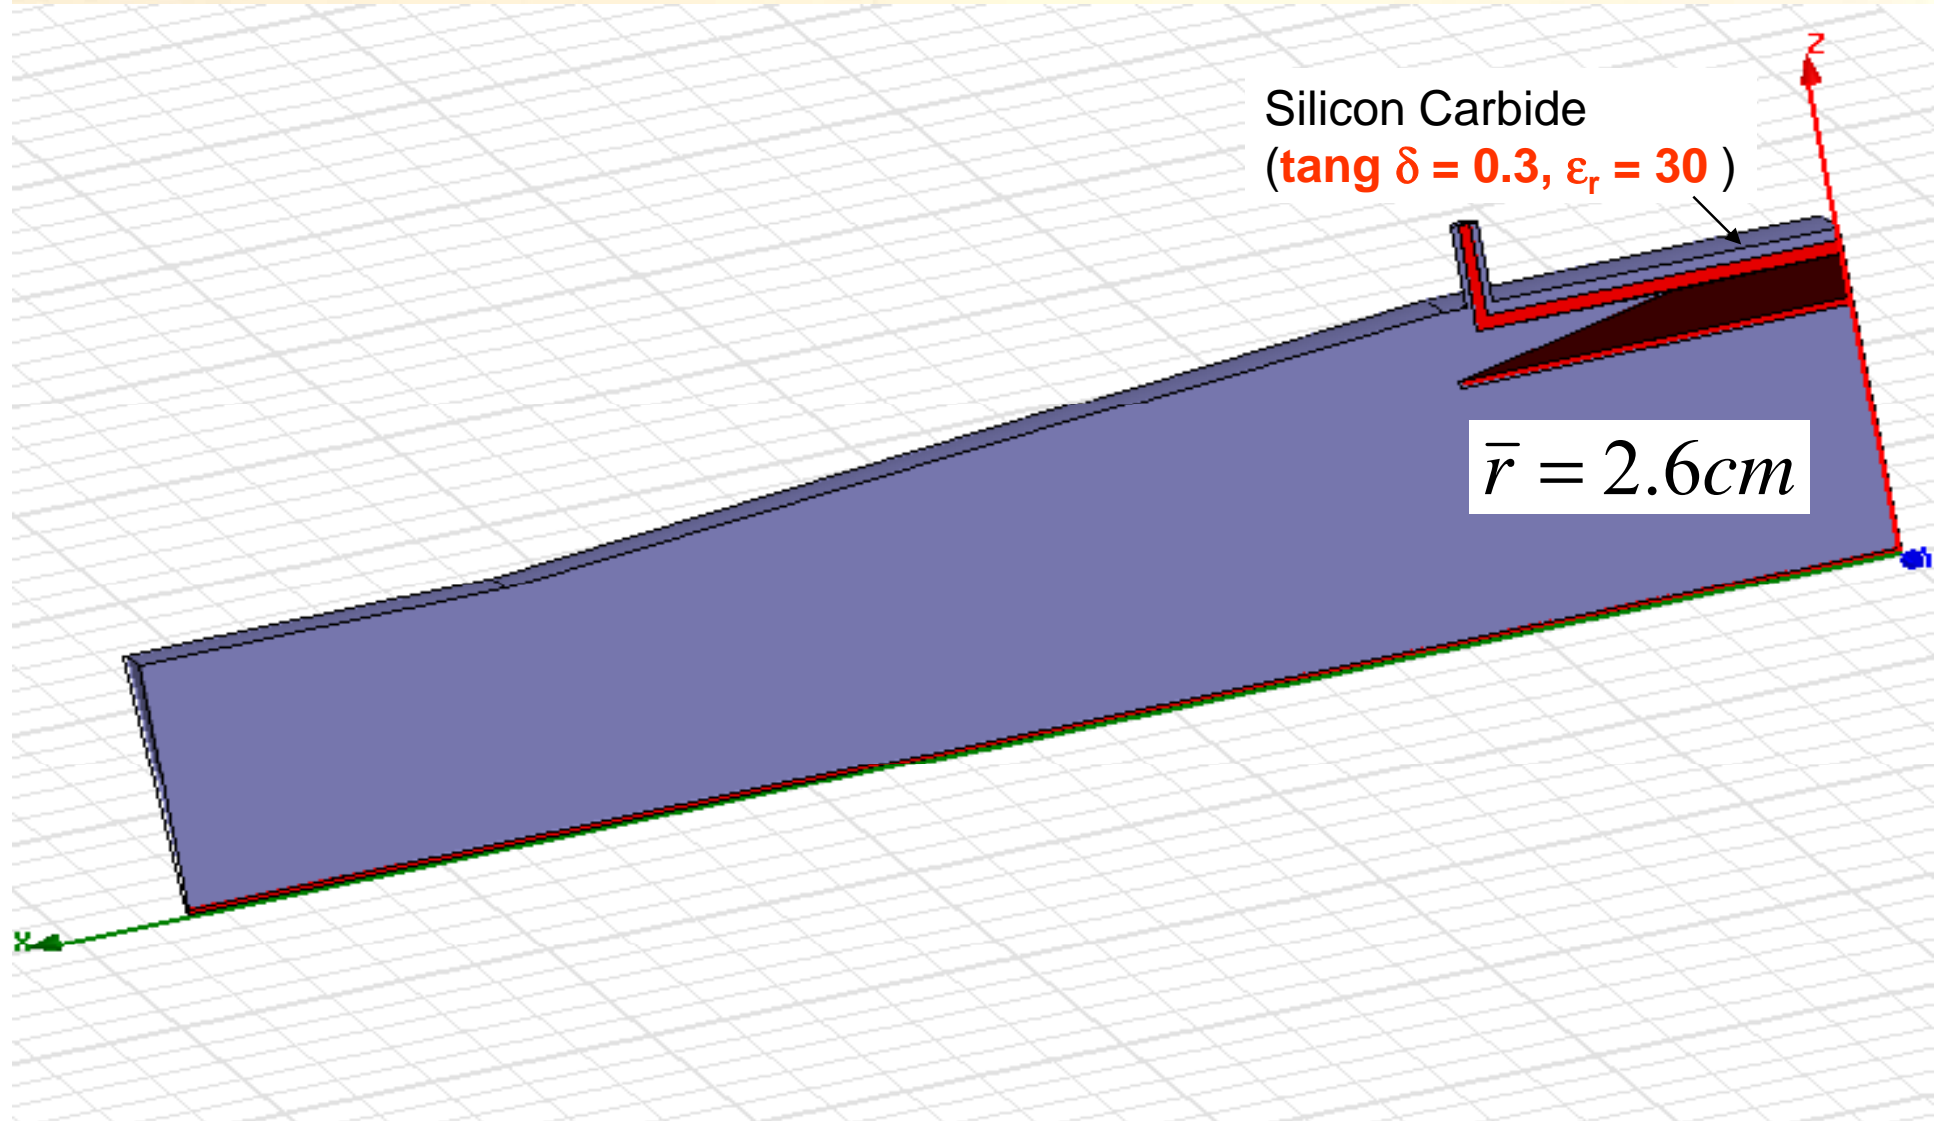

# Some geometrical details

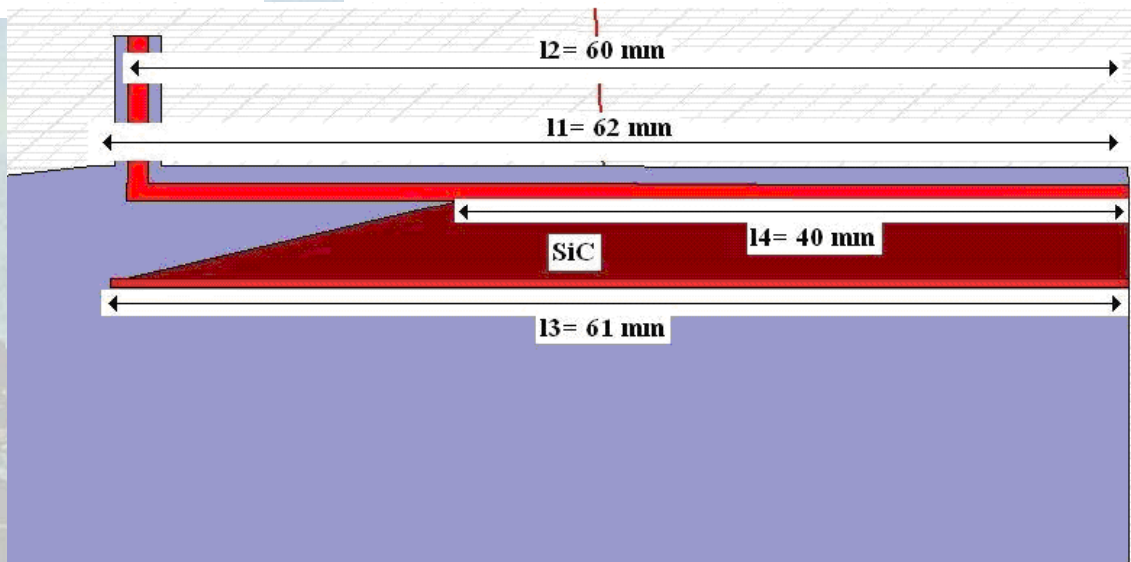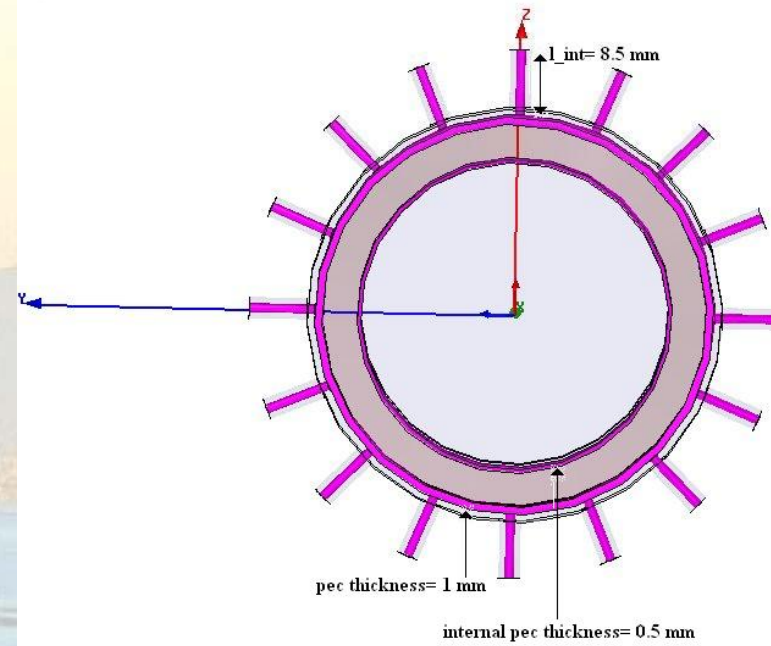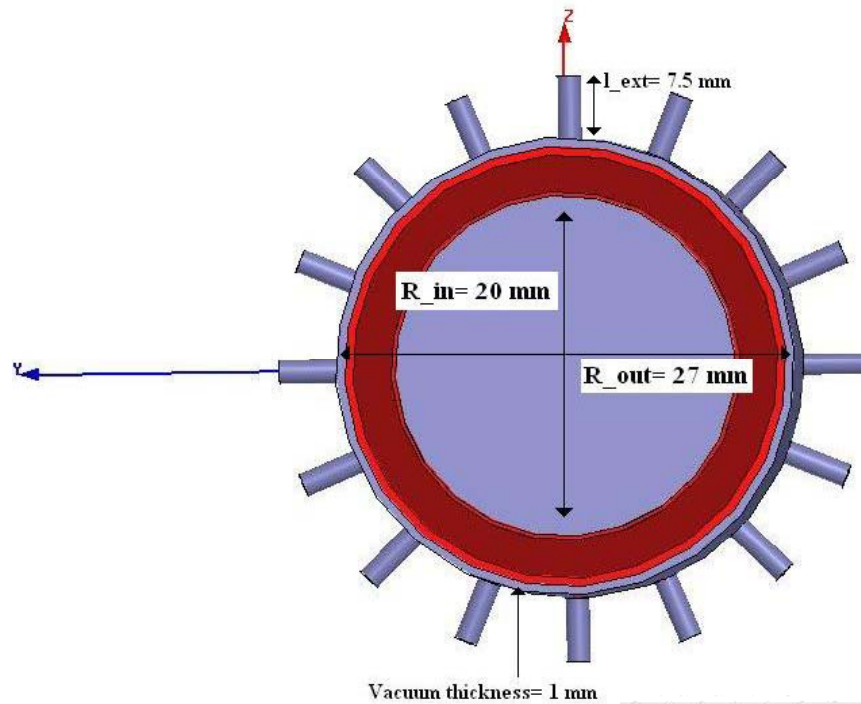


# S-parameters


29 May 2007


Ansoft Corporation  
XY Plot 1  
HFSSDesign1

10:48:26

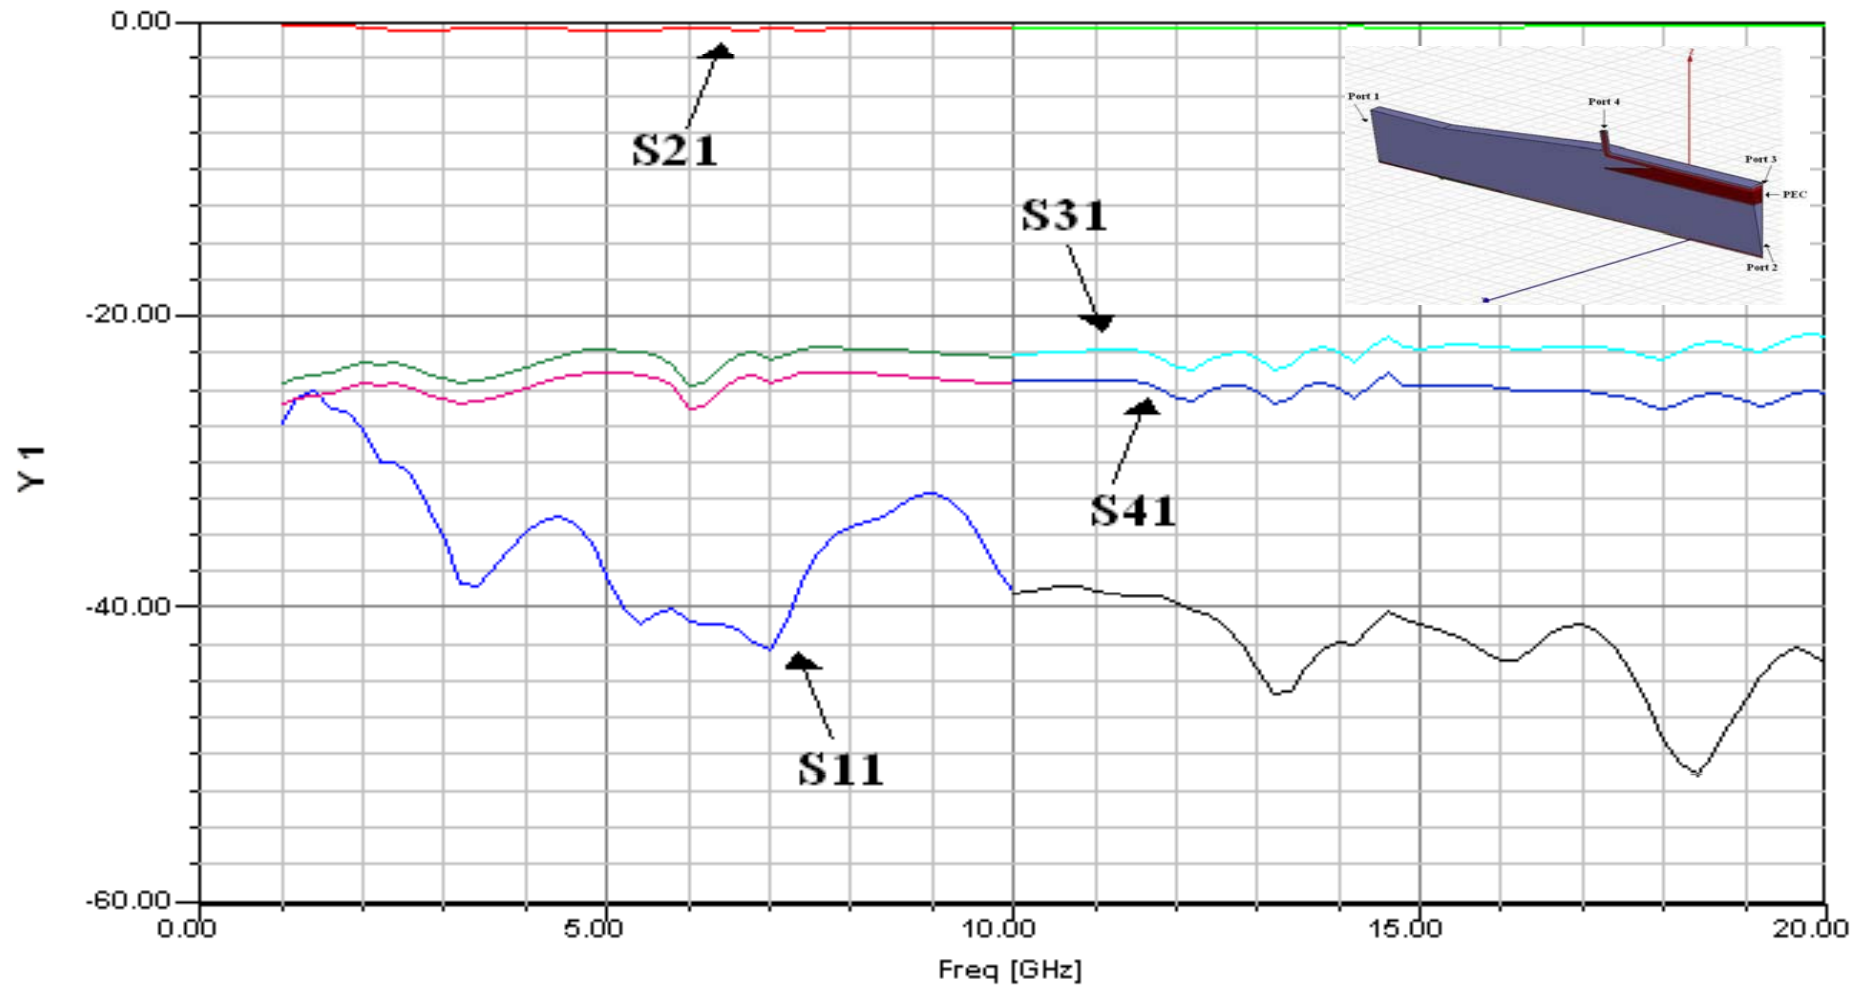




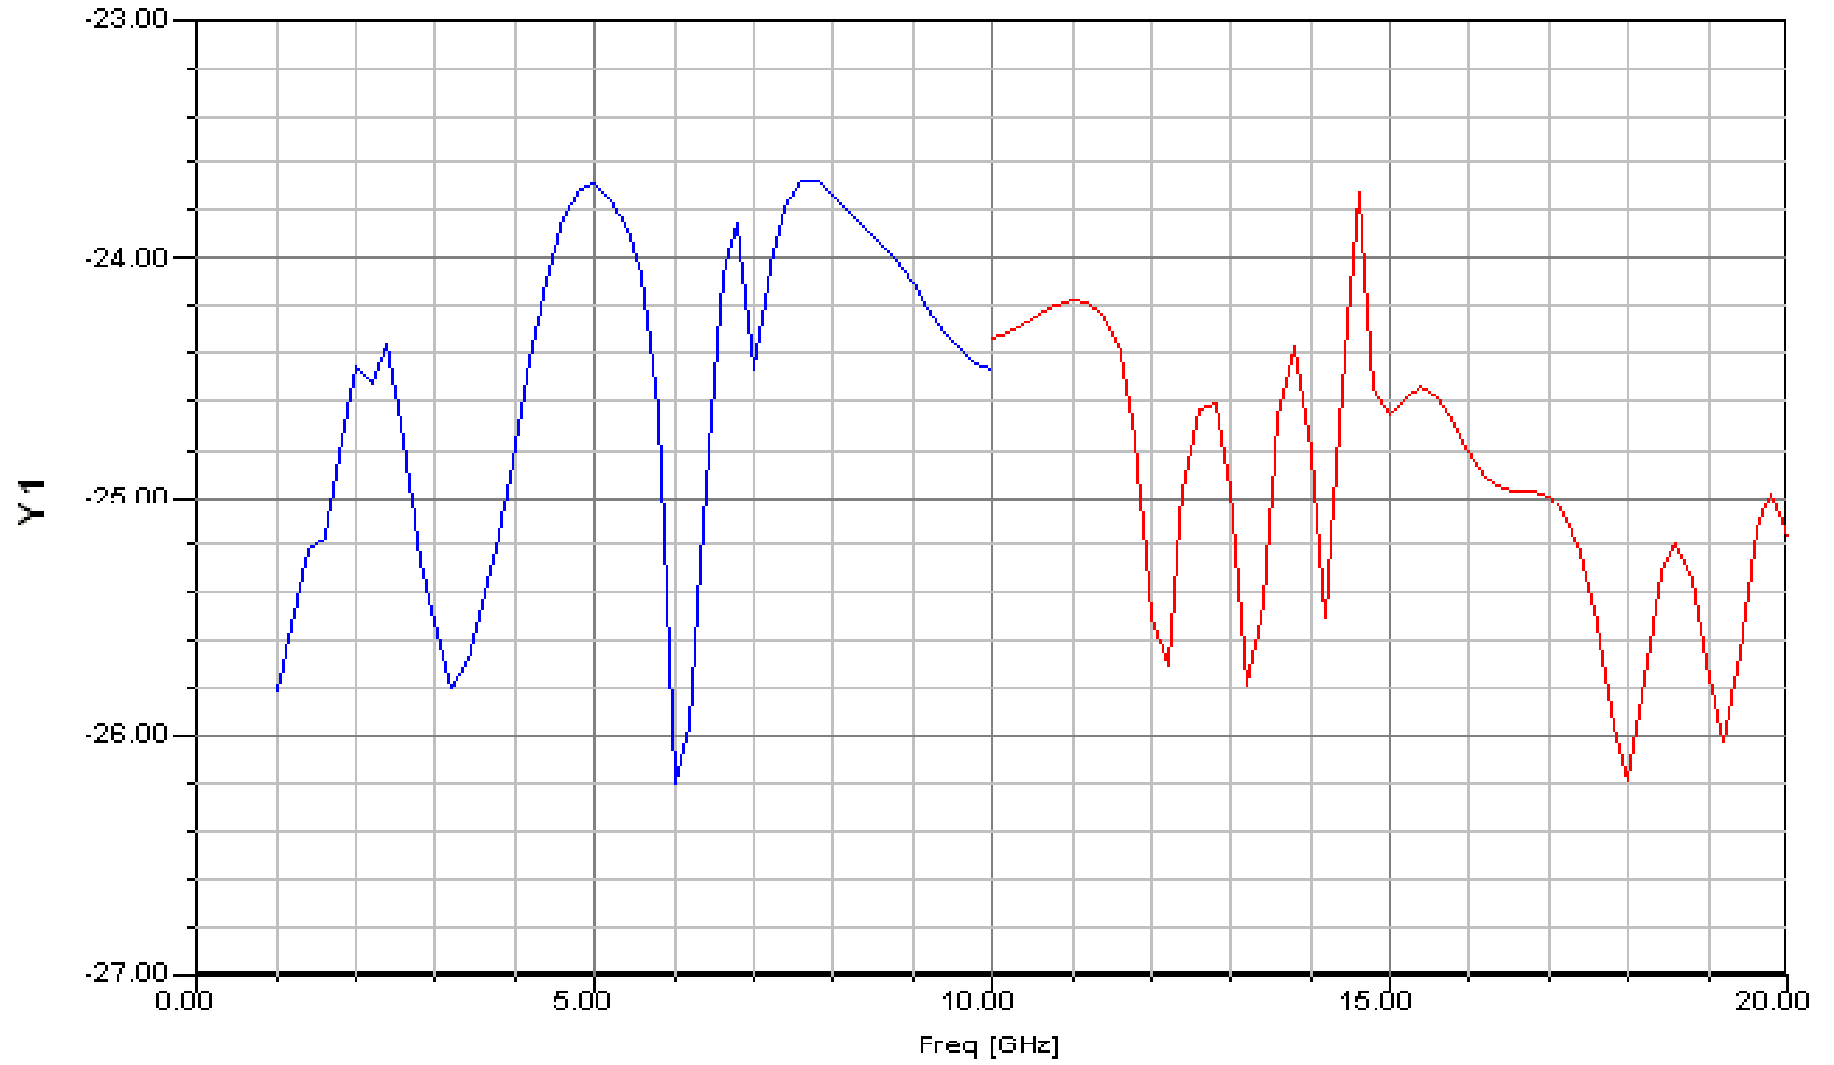

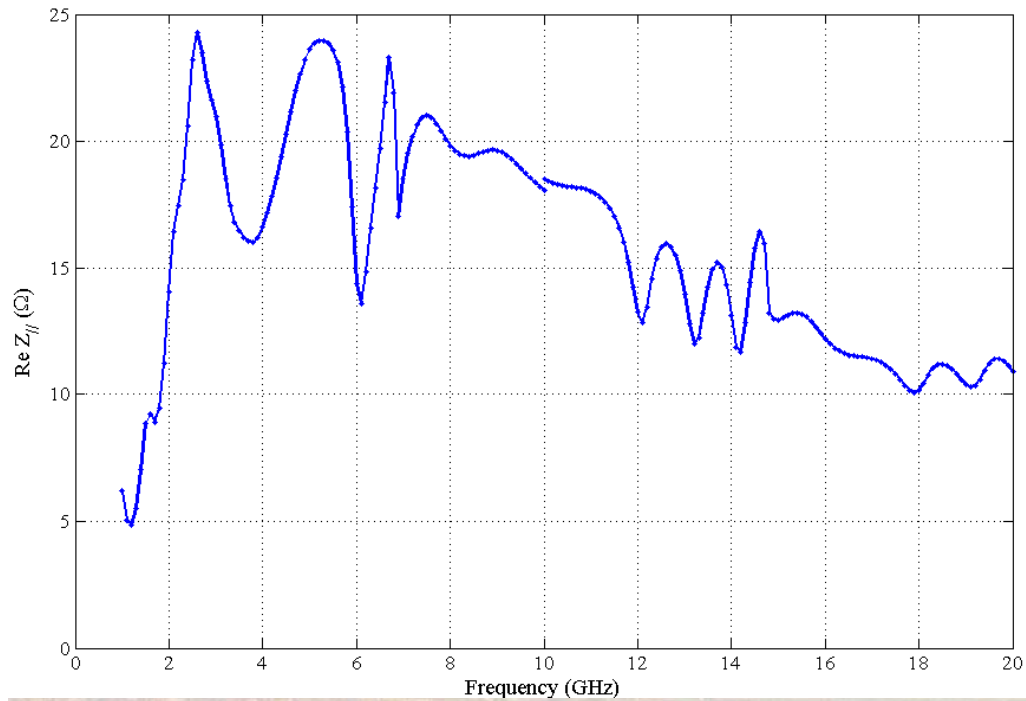


**Longitudinal coupling impedance: Real part**


**Longitudinal coupling impedance: Imaginary part**

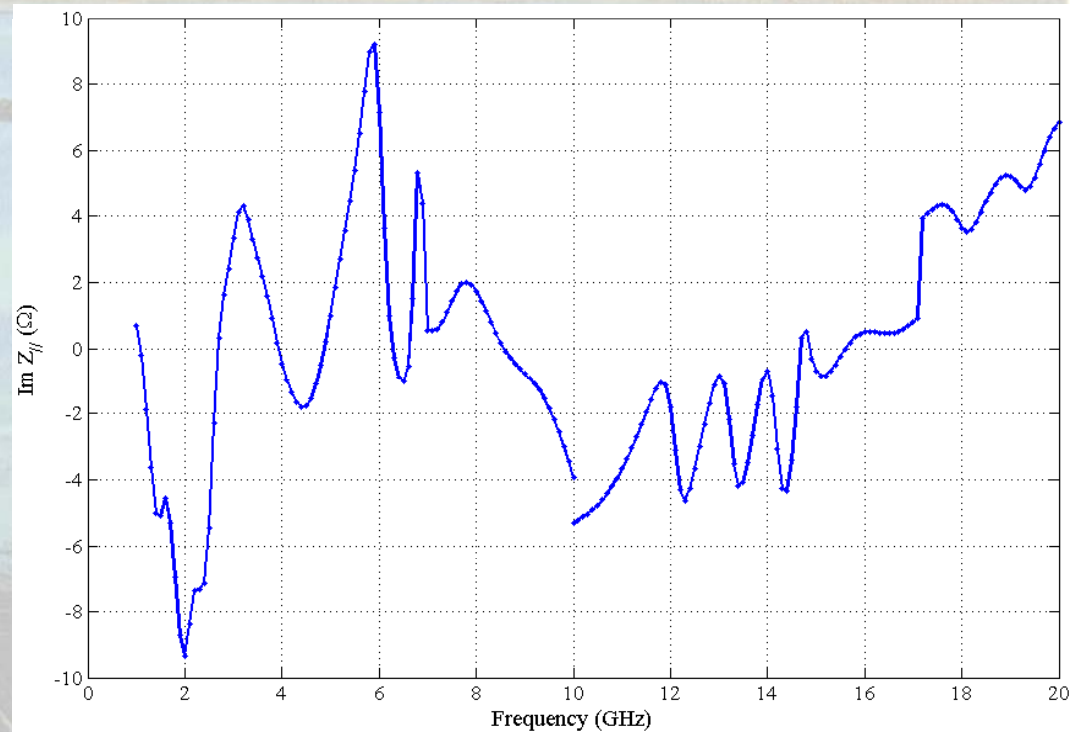

# The real structure (1)

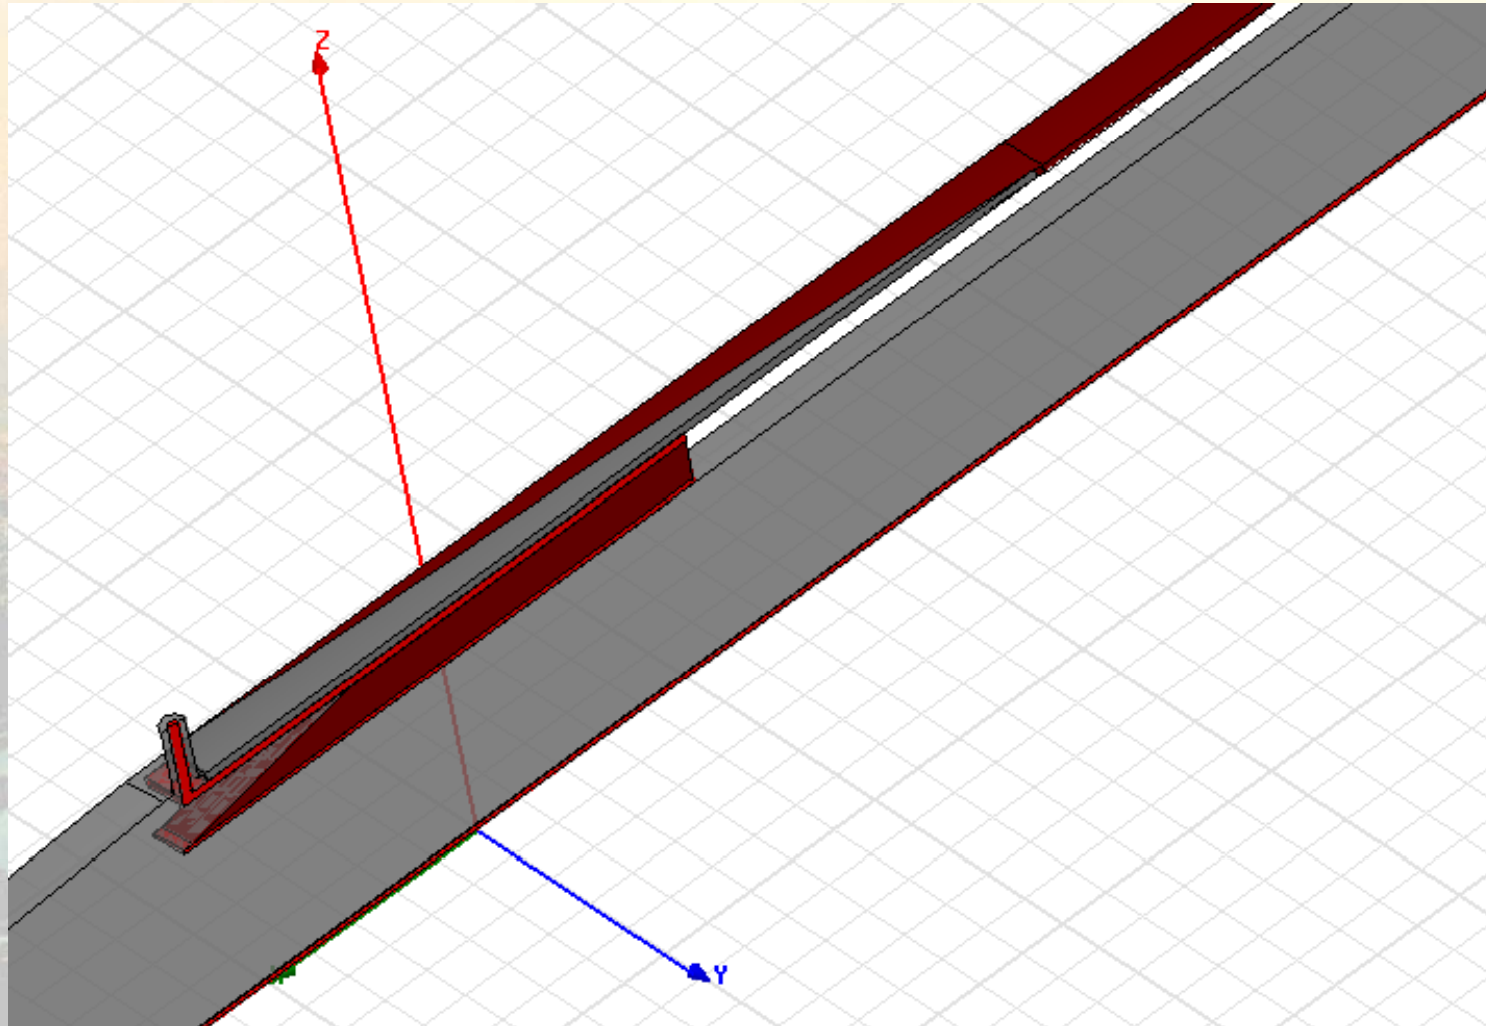





# The real structure (2)

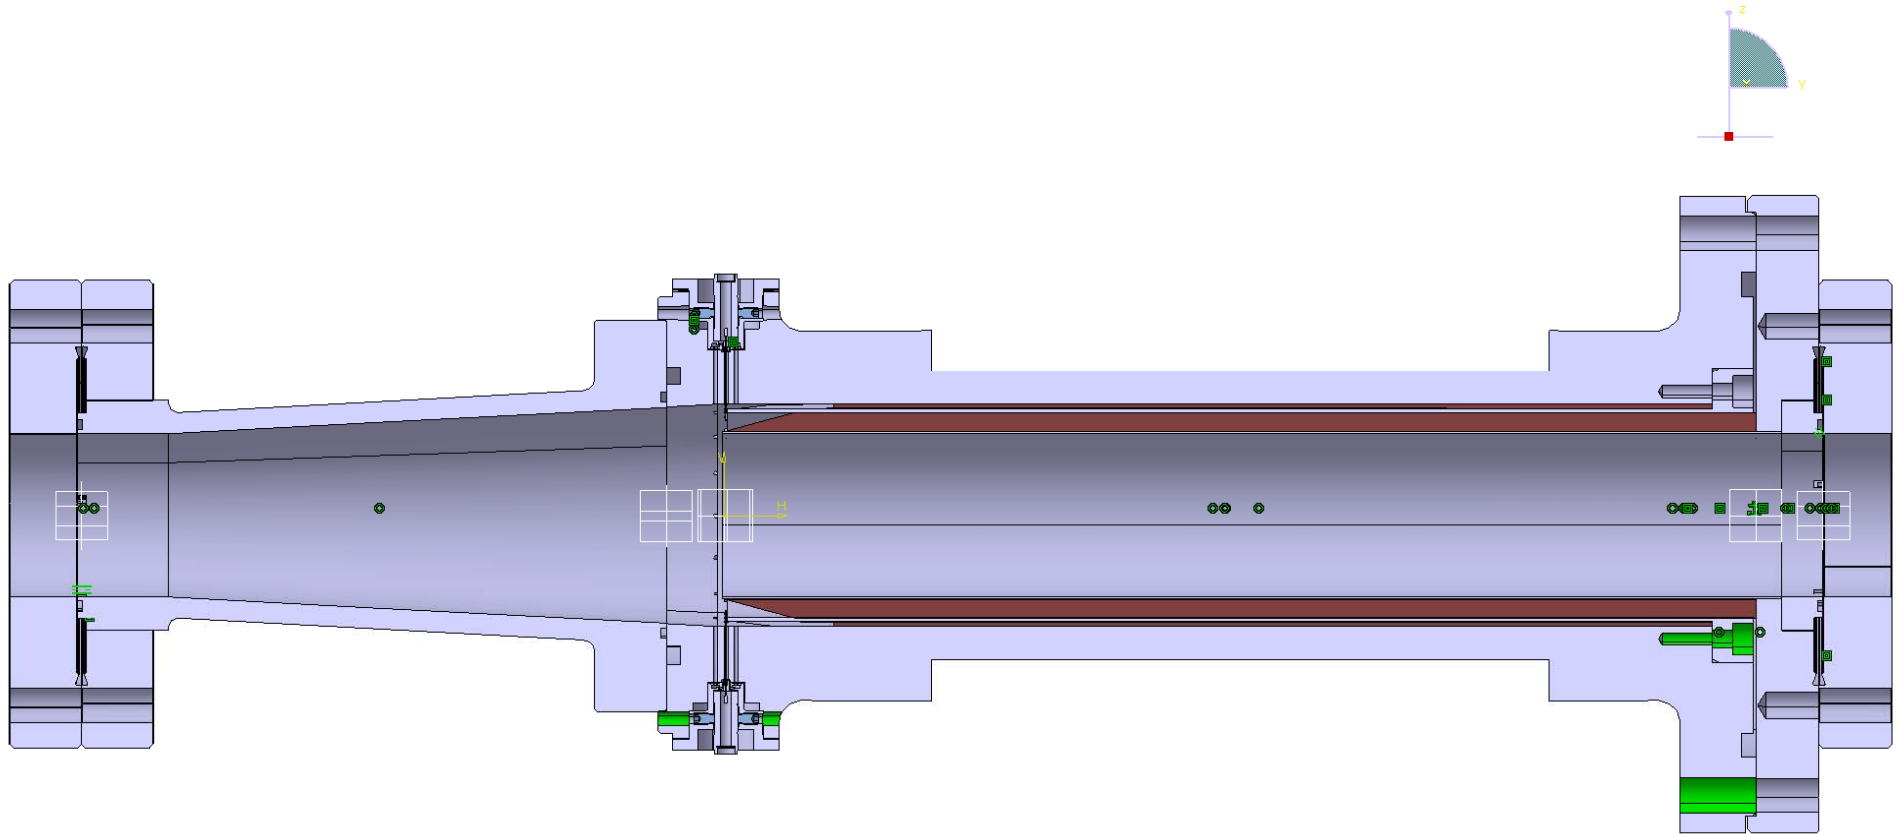


With the courtesy of Vincent Maire

# Transmission at the feedthrough

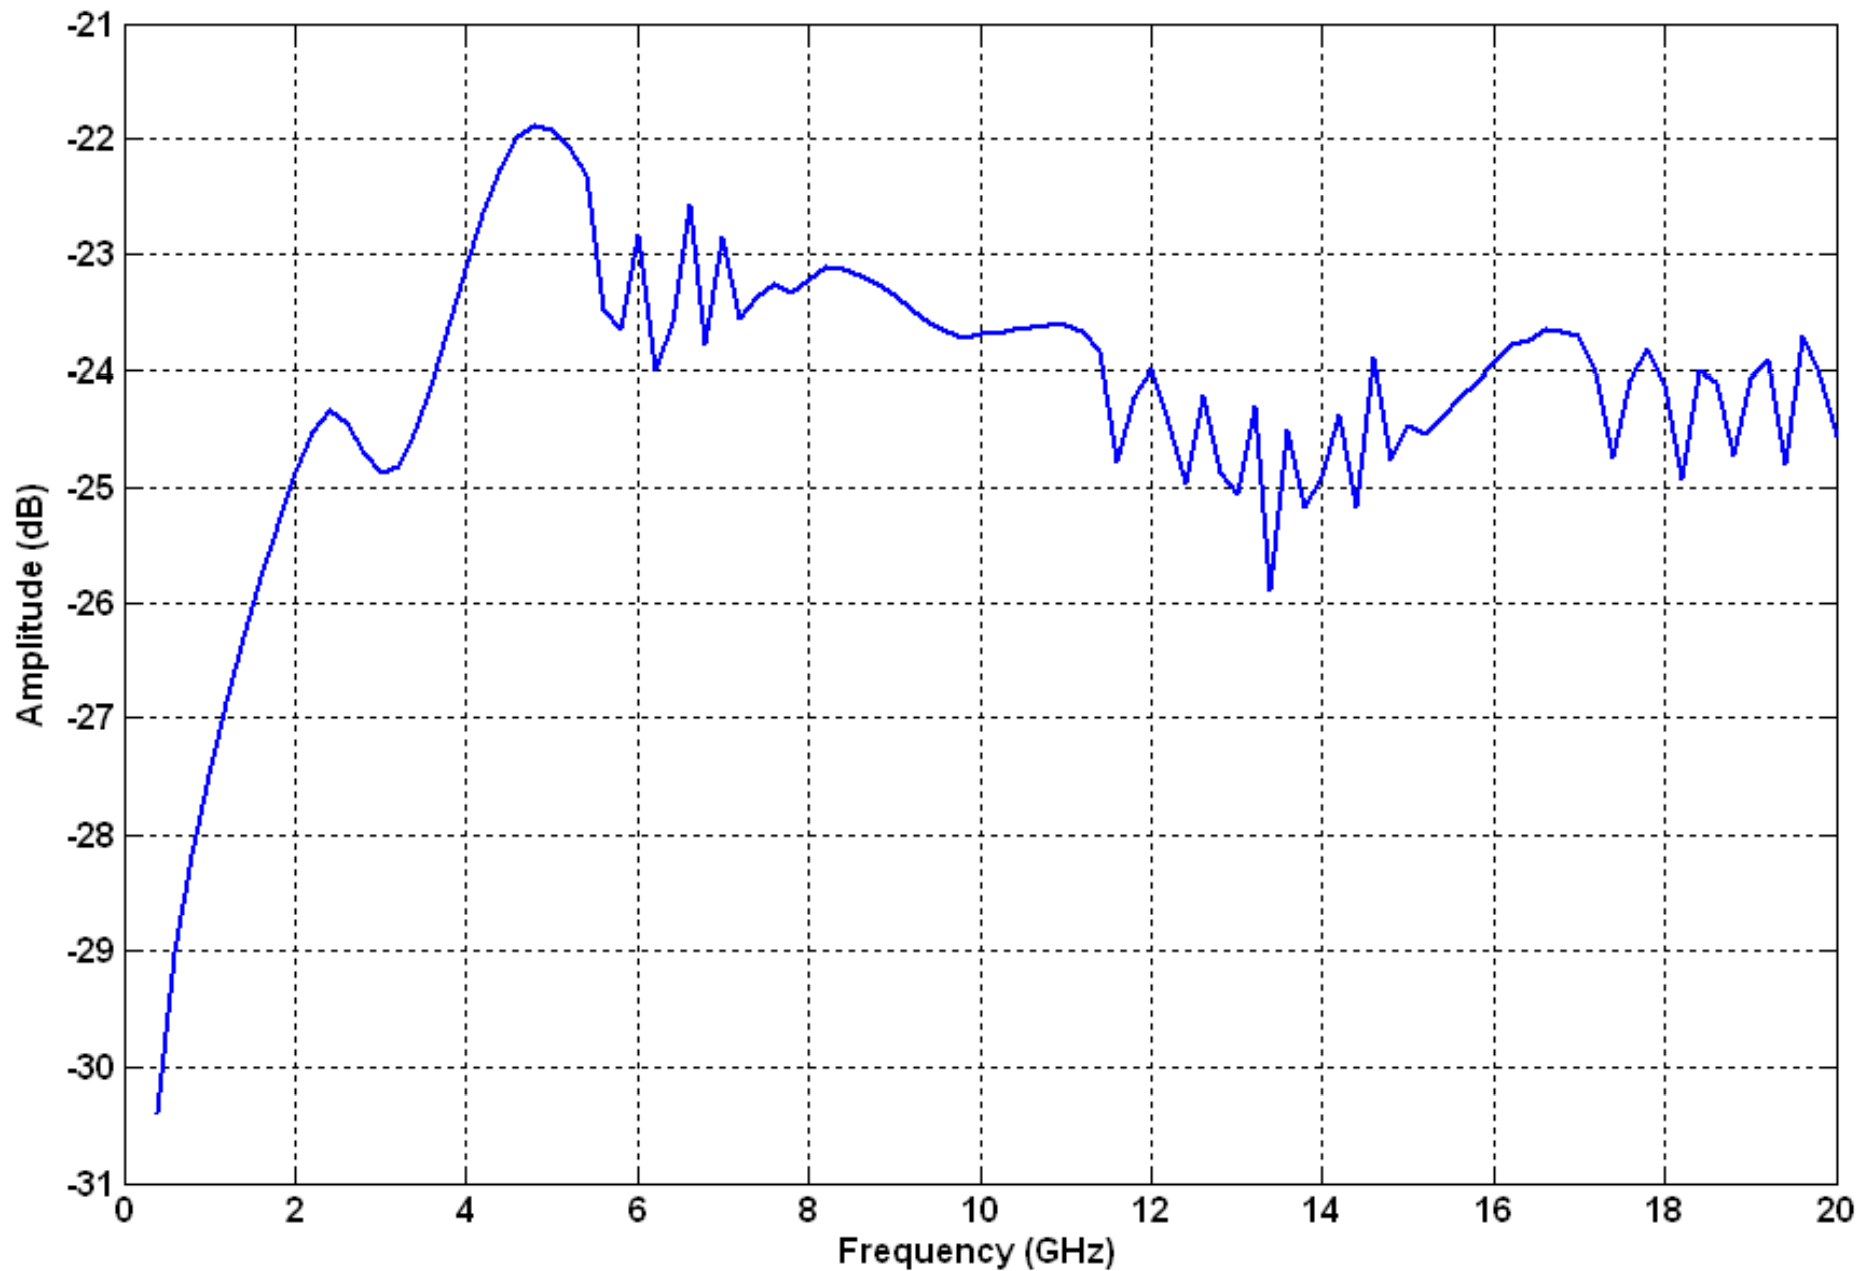

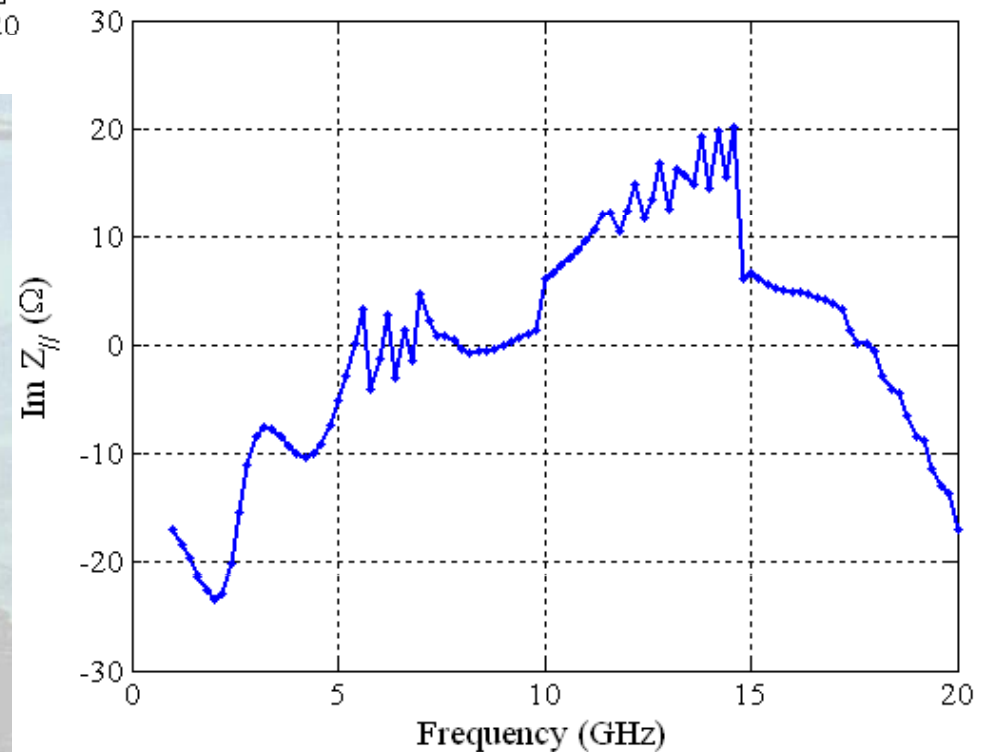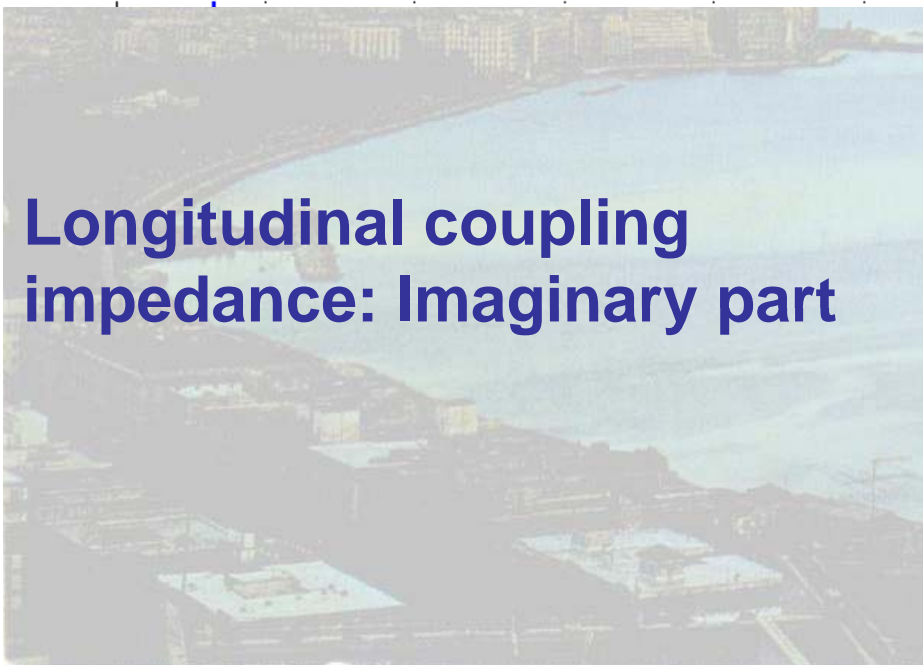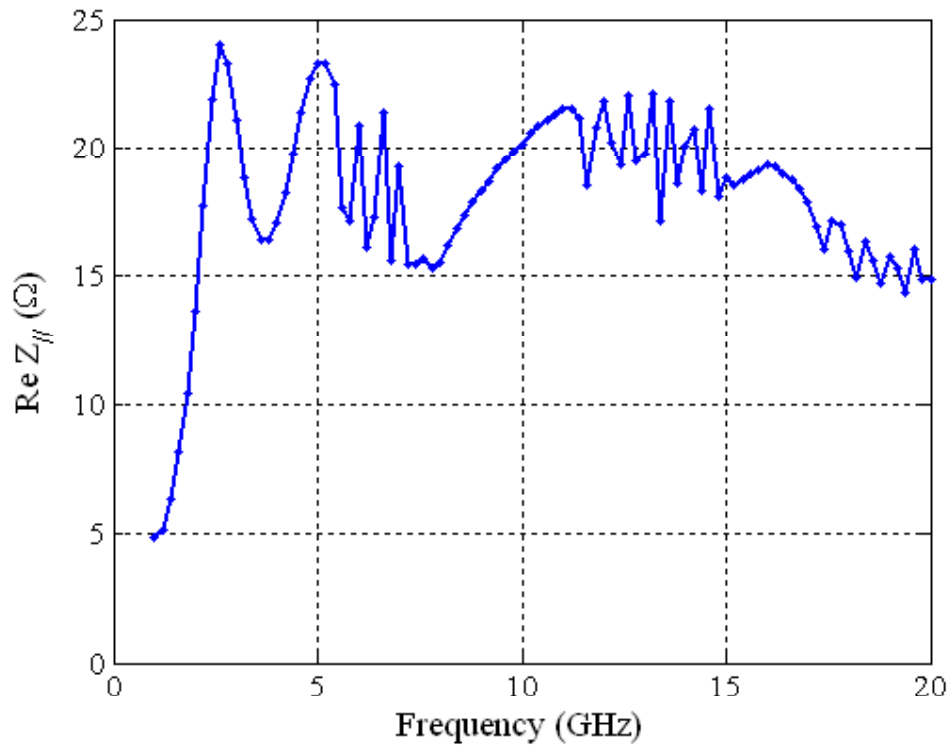


# Feedthrough positioning (1)

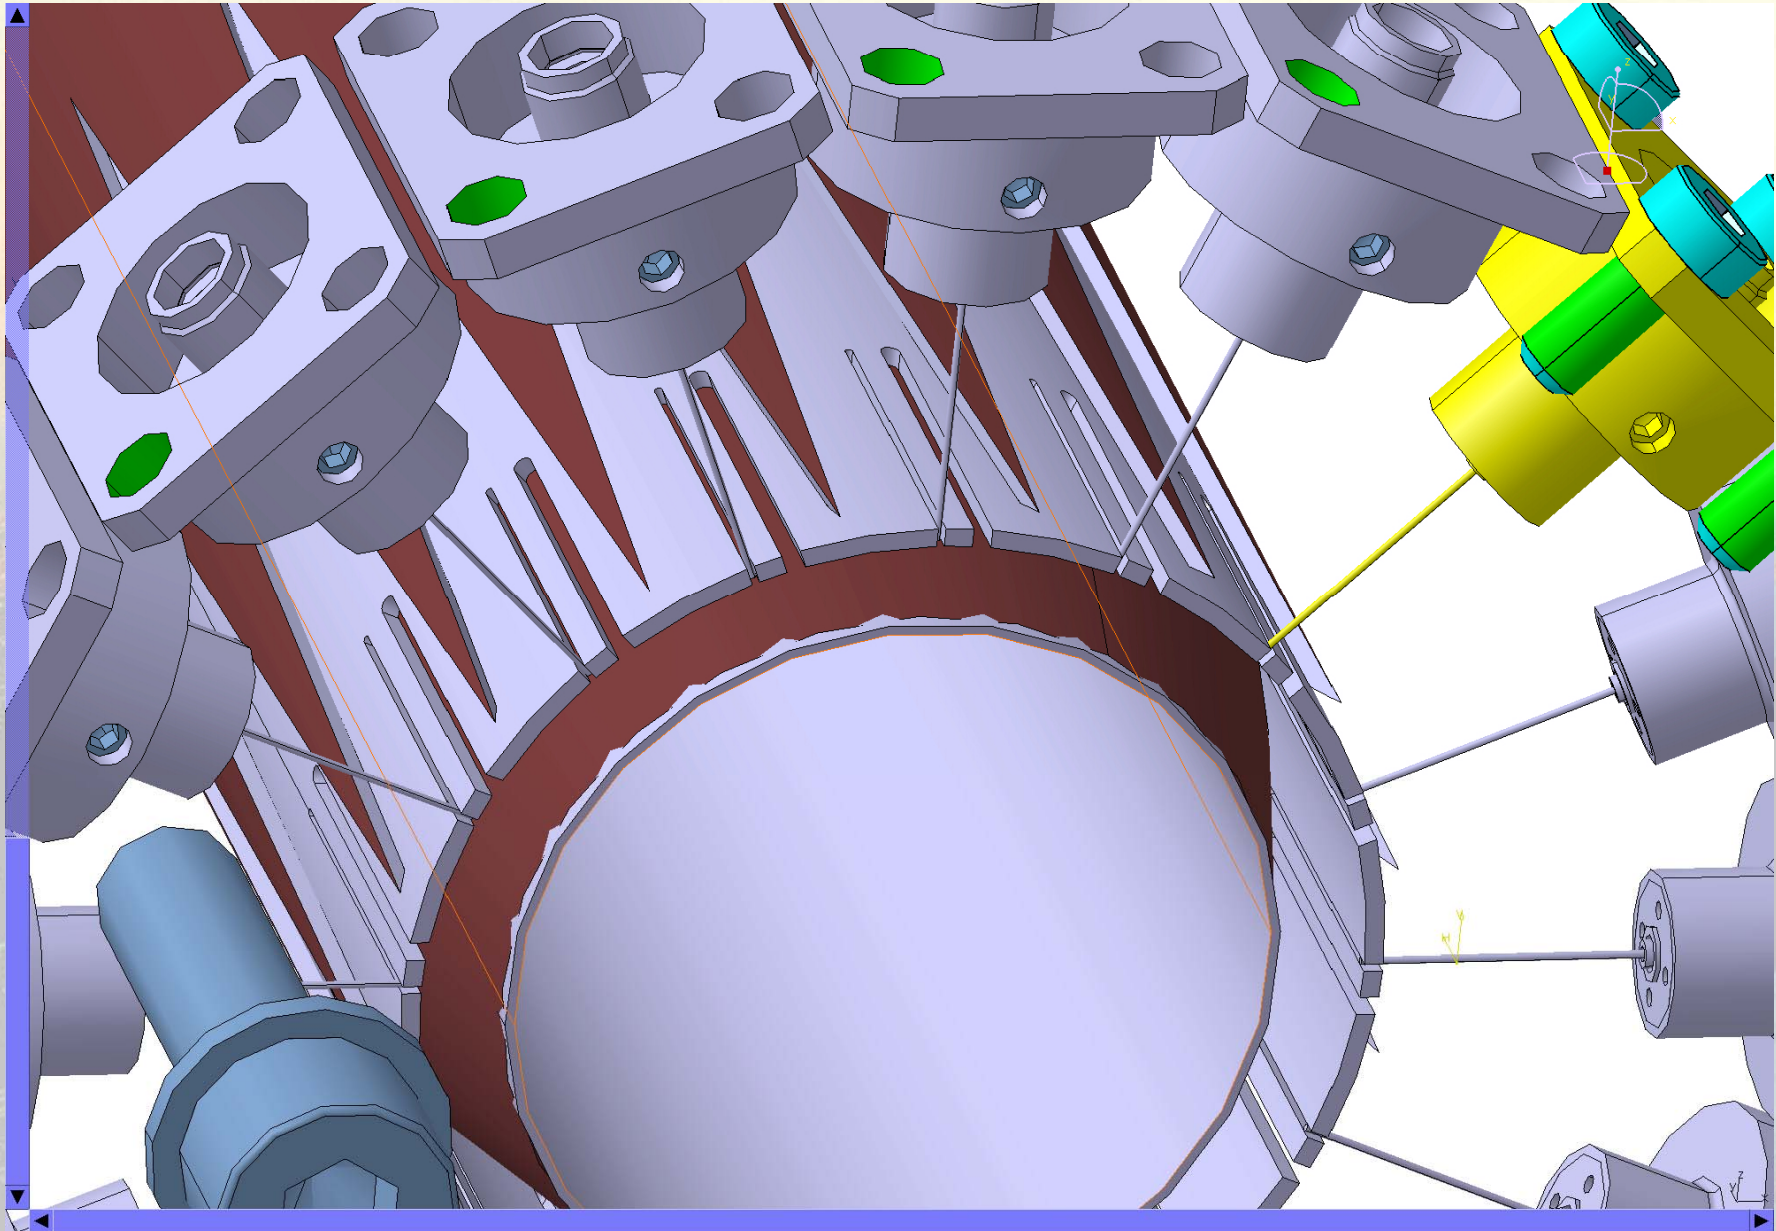

With the courtesy of Vincent Maire

# Feedthrough positioning (2)



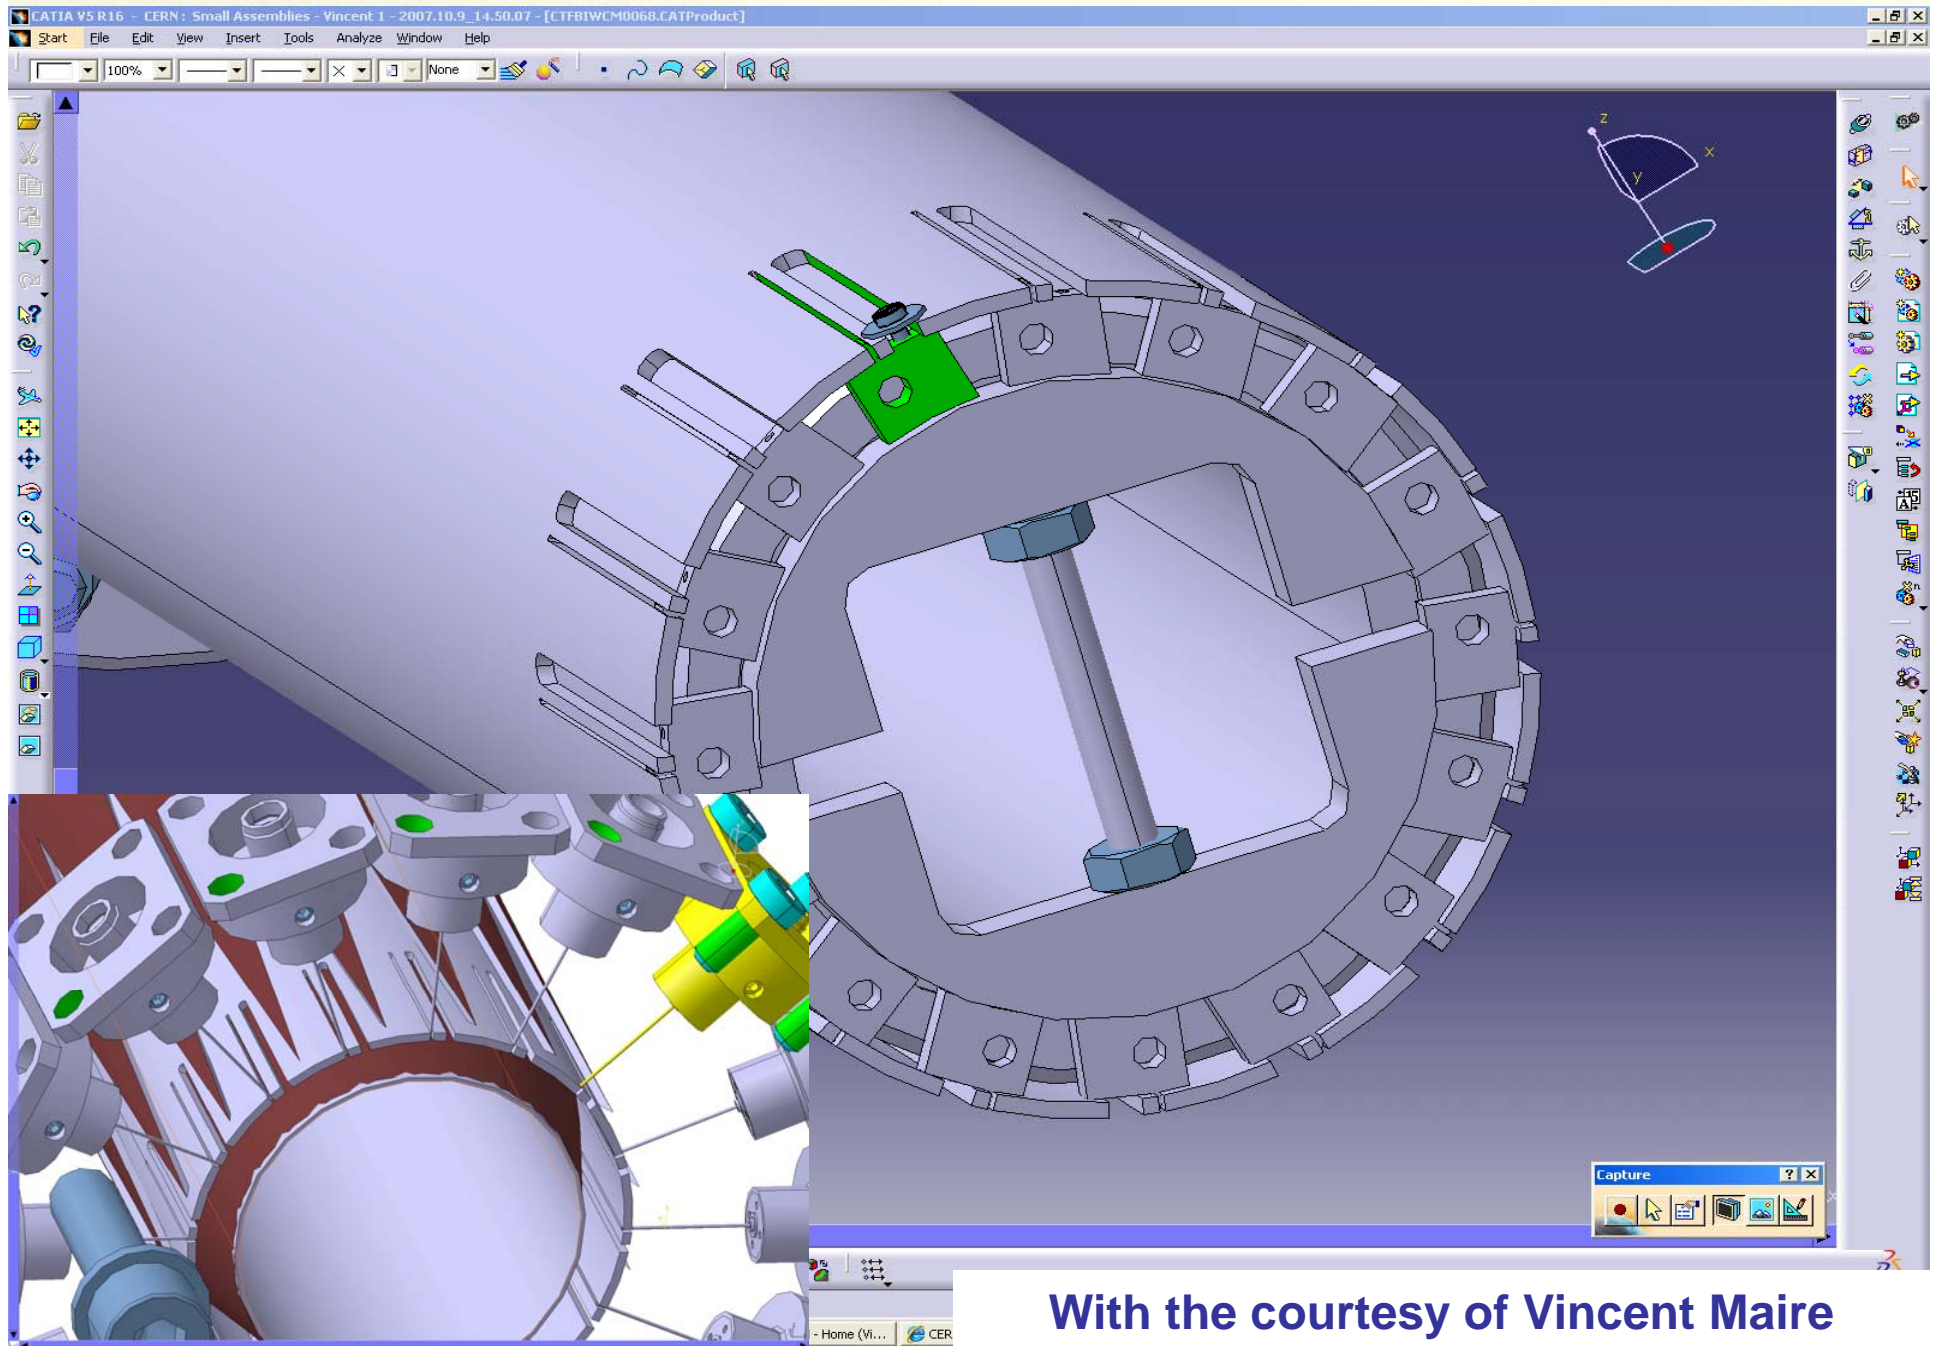


With the courtesy of Vincent Maire





# Misalignment problems

With the courtesy of Vincent Maire

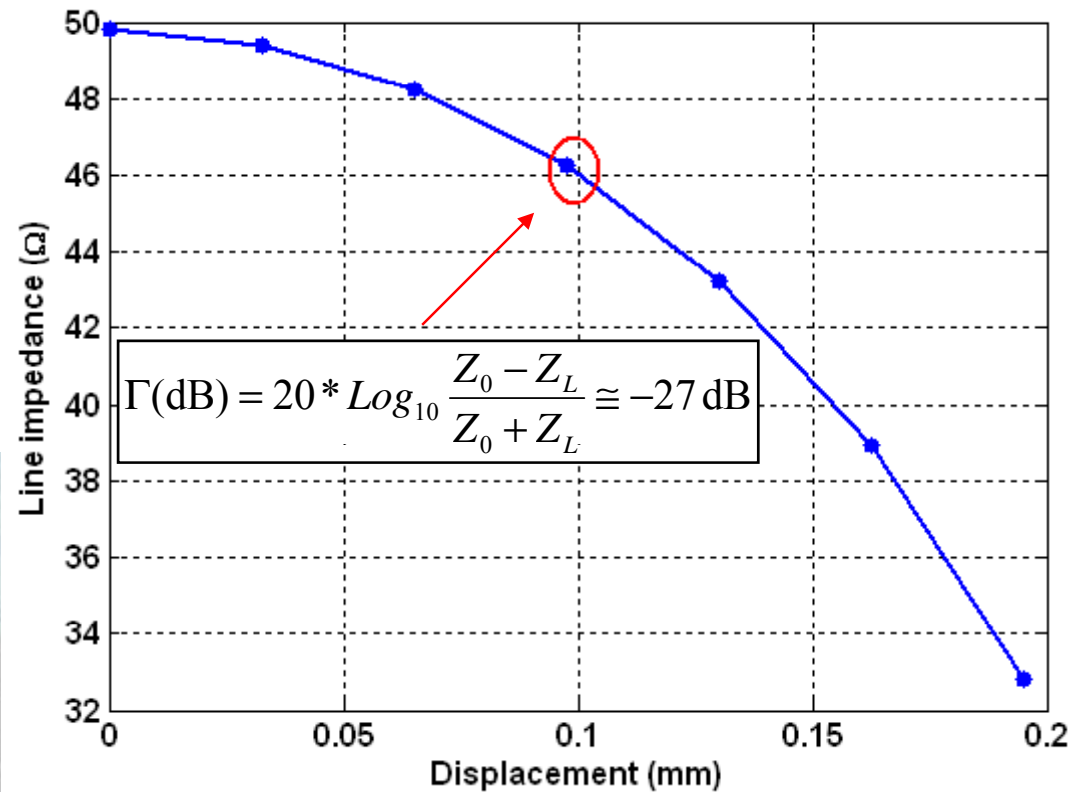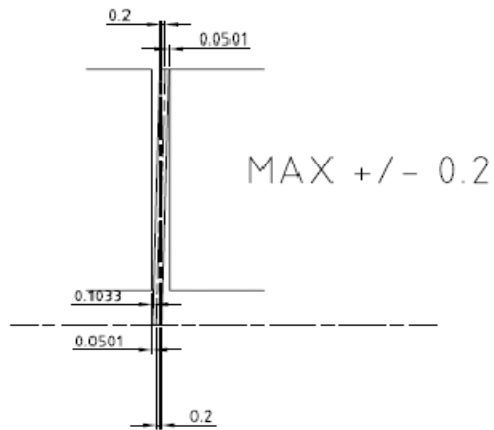
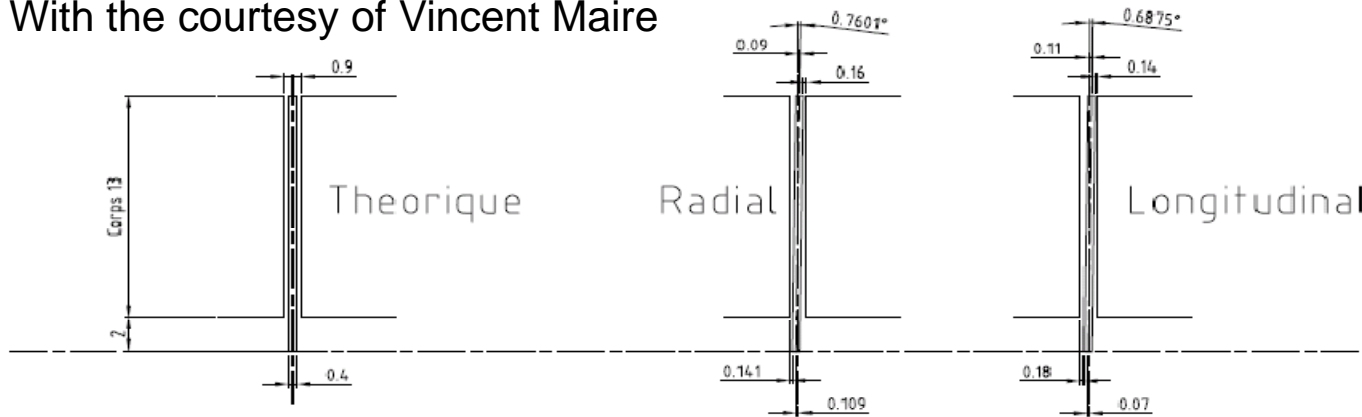





# Really do we need **100kHz** low freq cut-off? Let's make some numerical experiment

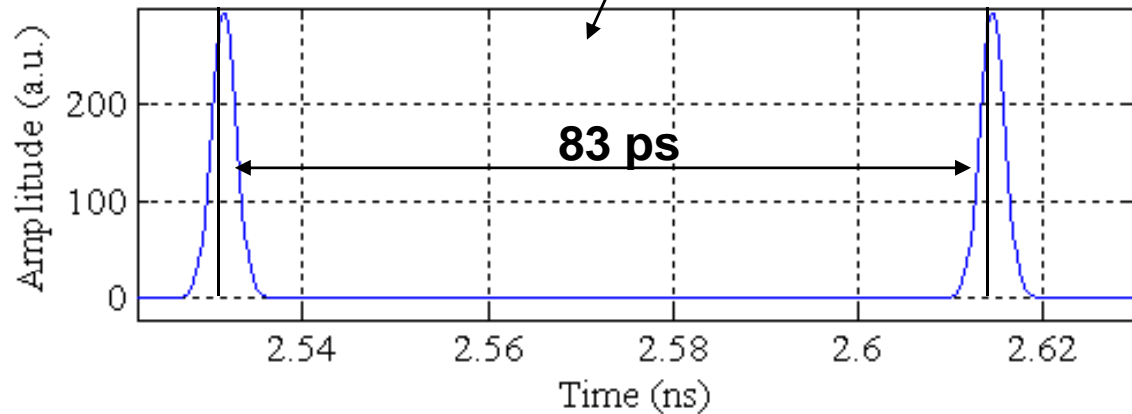
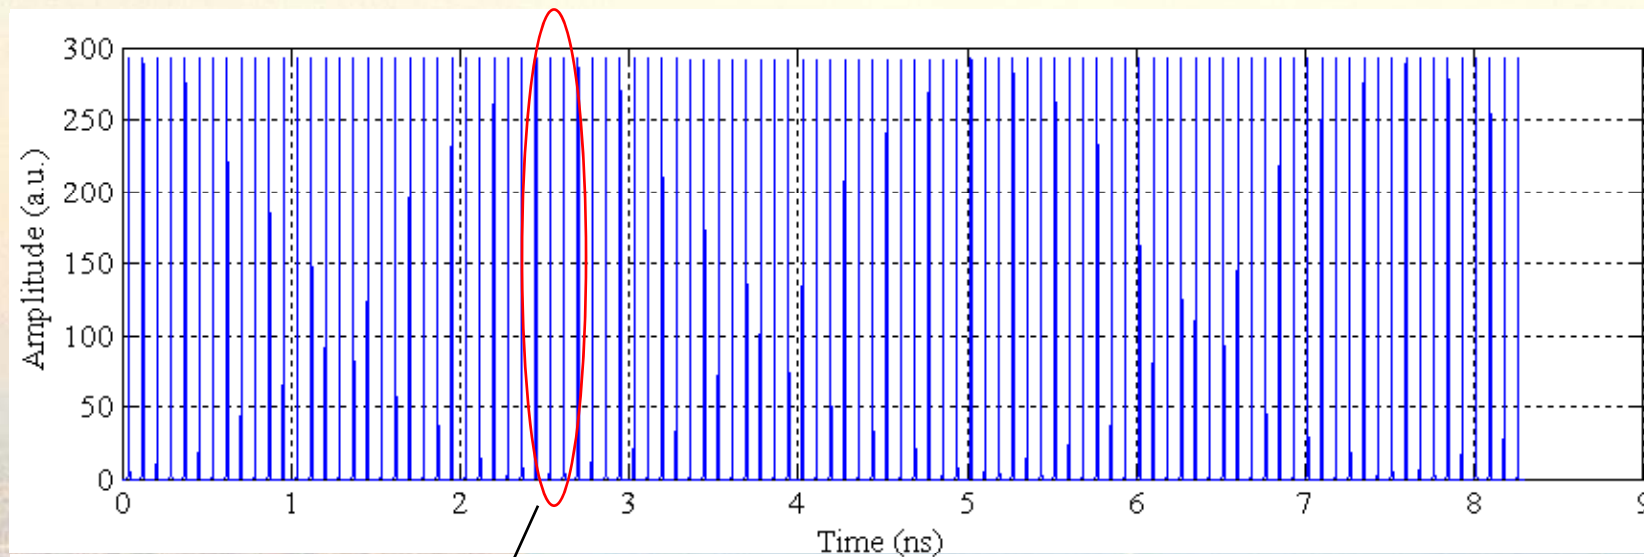


**Bunch separation = 83ps**  
**RMS bunch length = 13.3ps**  
**Train duration = 8.3ns**  
**Nb of bunches = 100**  
**Peak current = 293A**

# Let's apply a perfect low pass filter

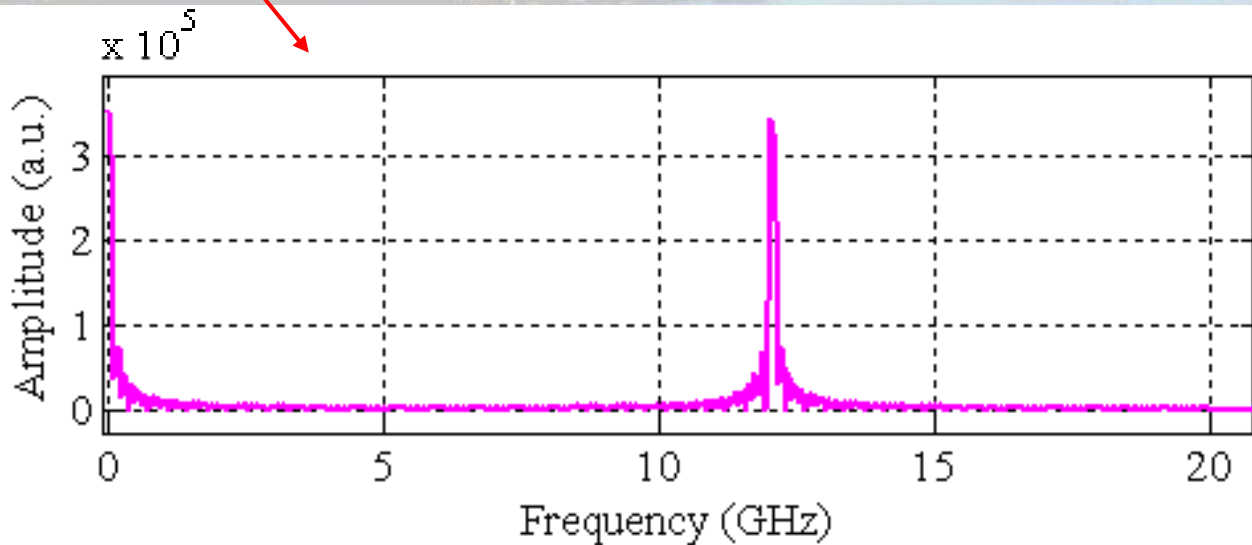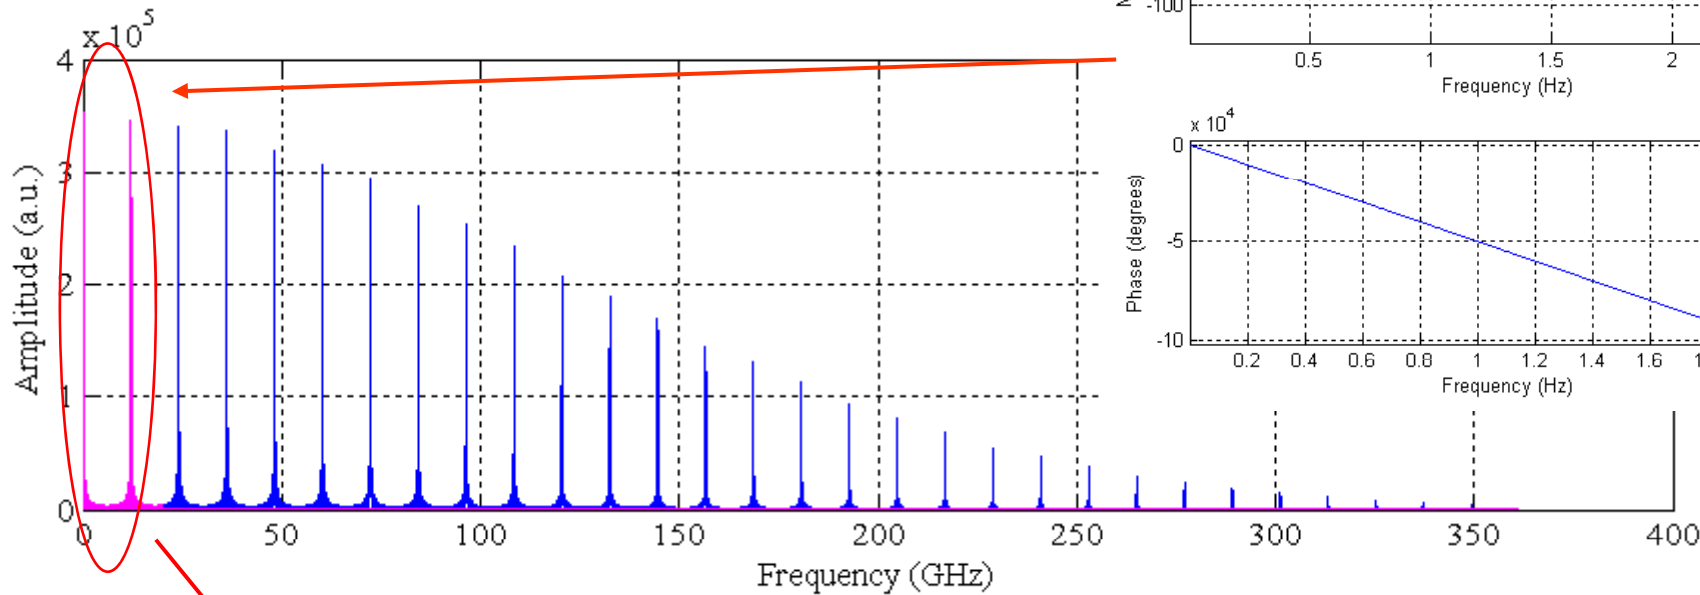

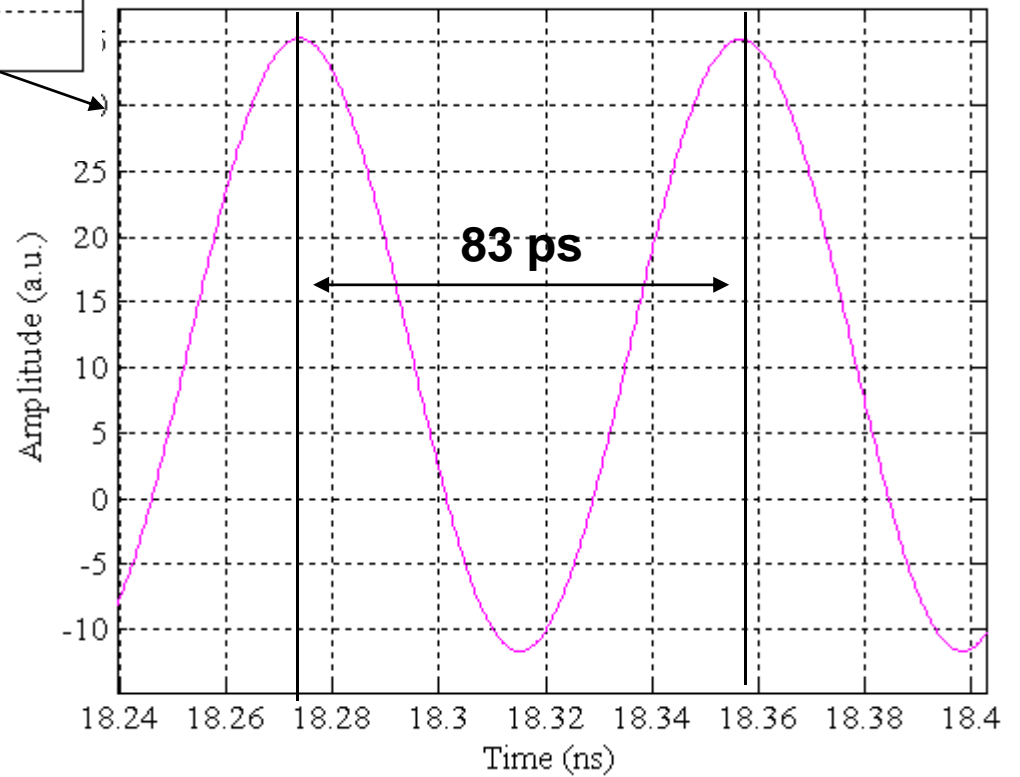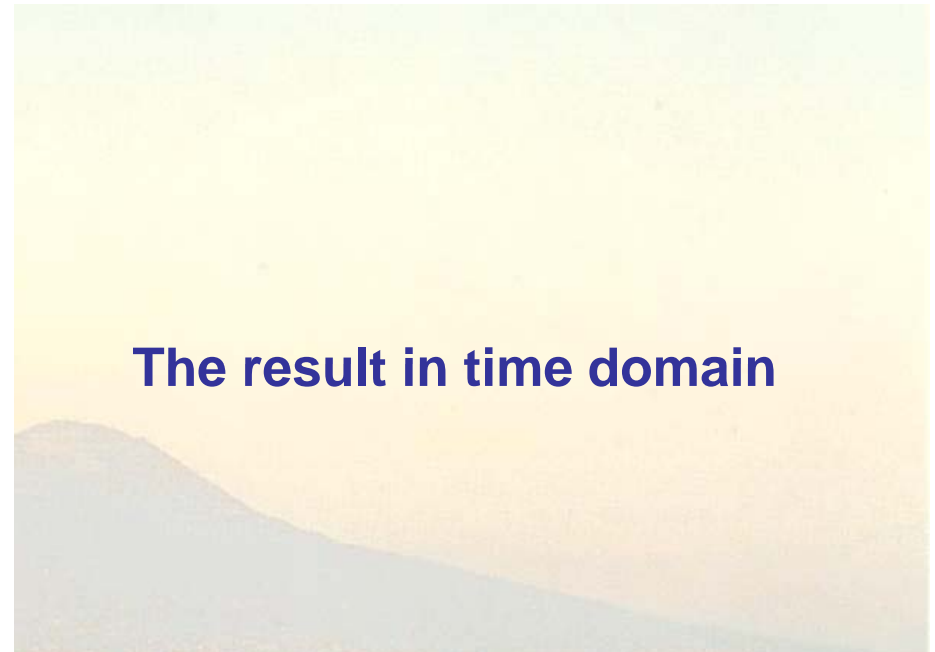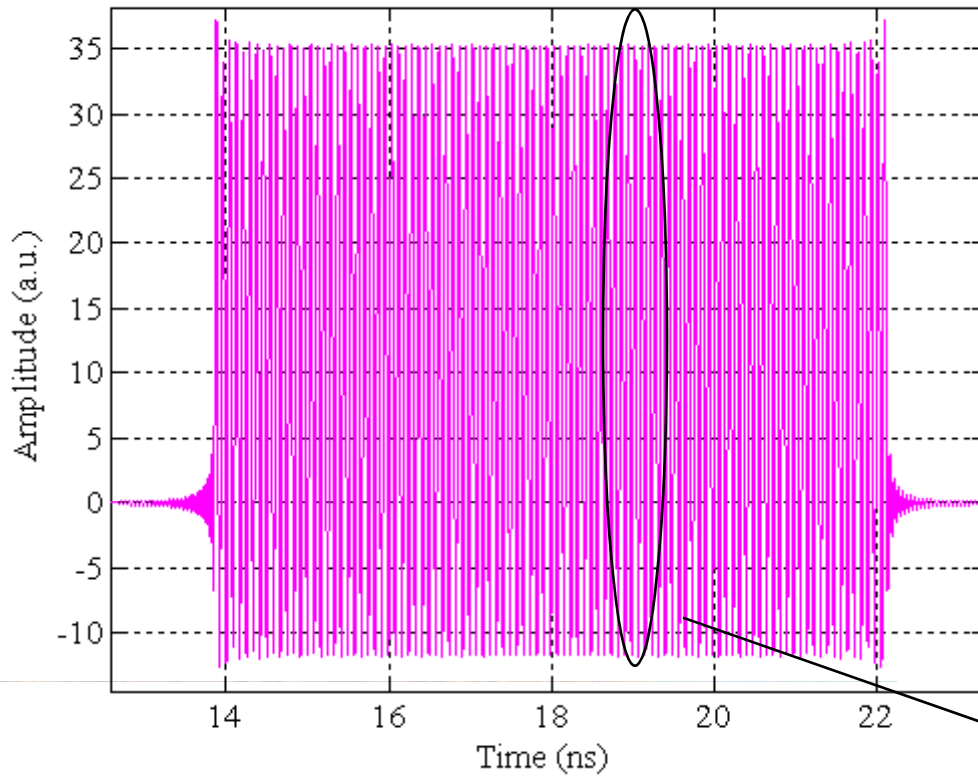


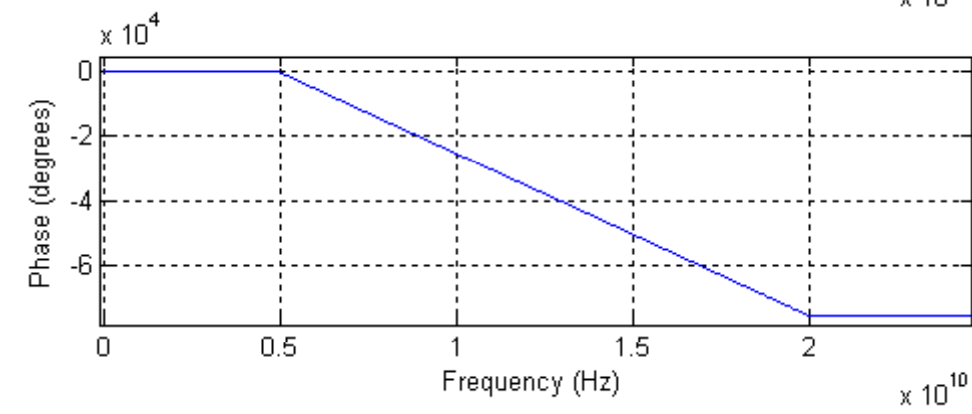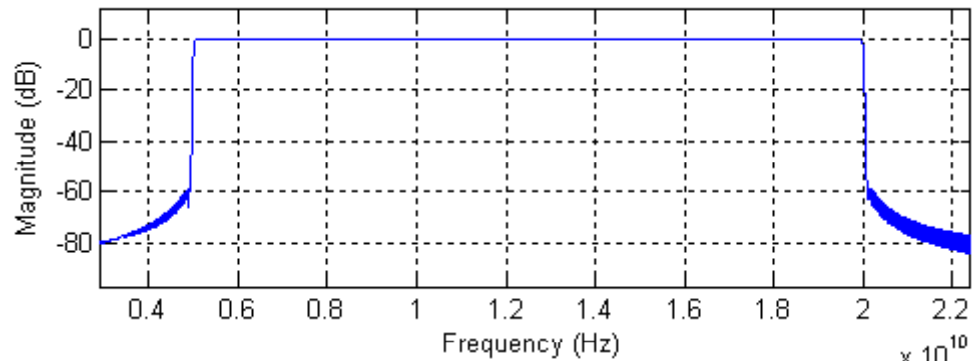


Let's apply, to the same signal as before, a filter having


Low freq cut-off= 5GHz

High freq cut-off= 20GHz


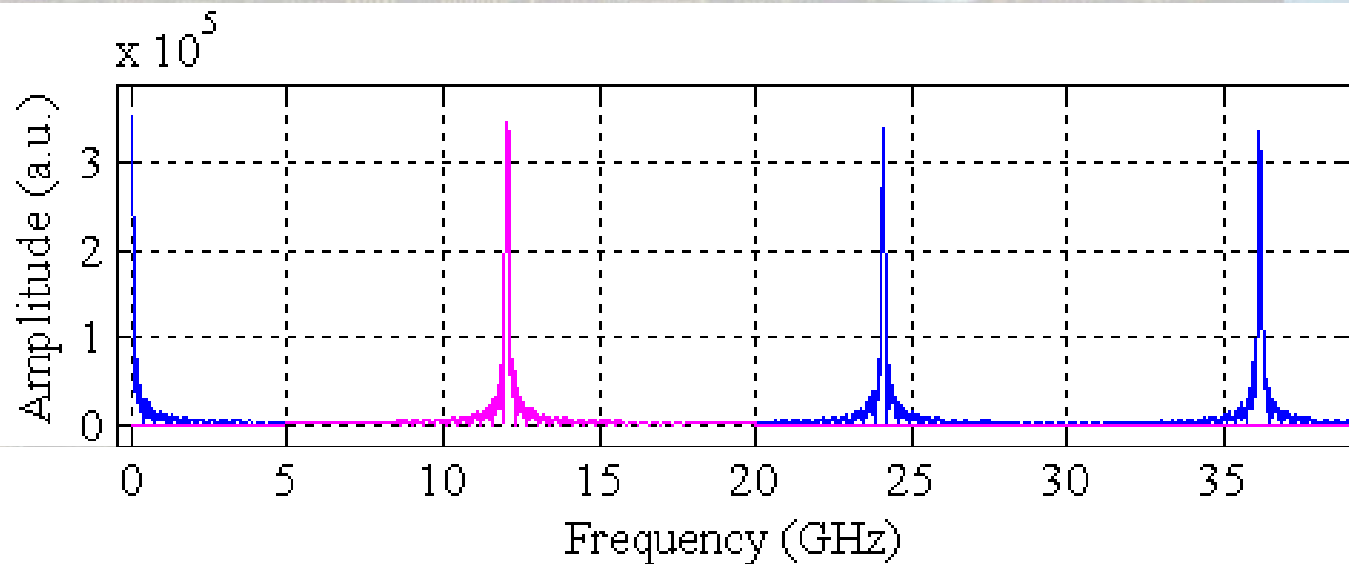


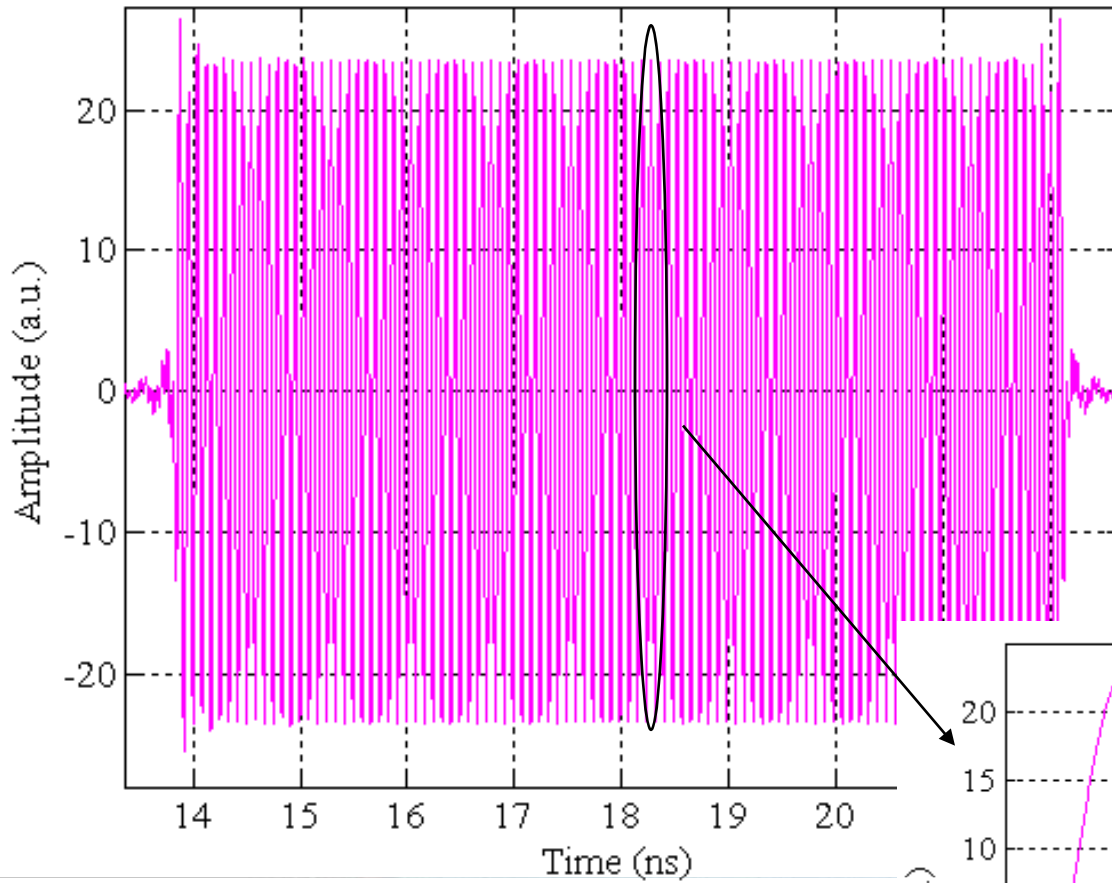


**It seems that nothing changes!!!!**

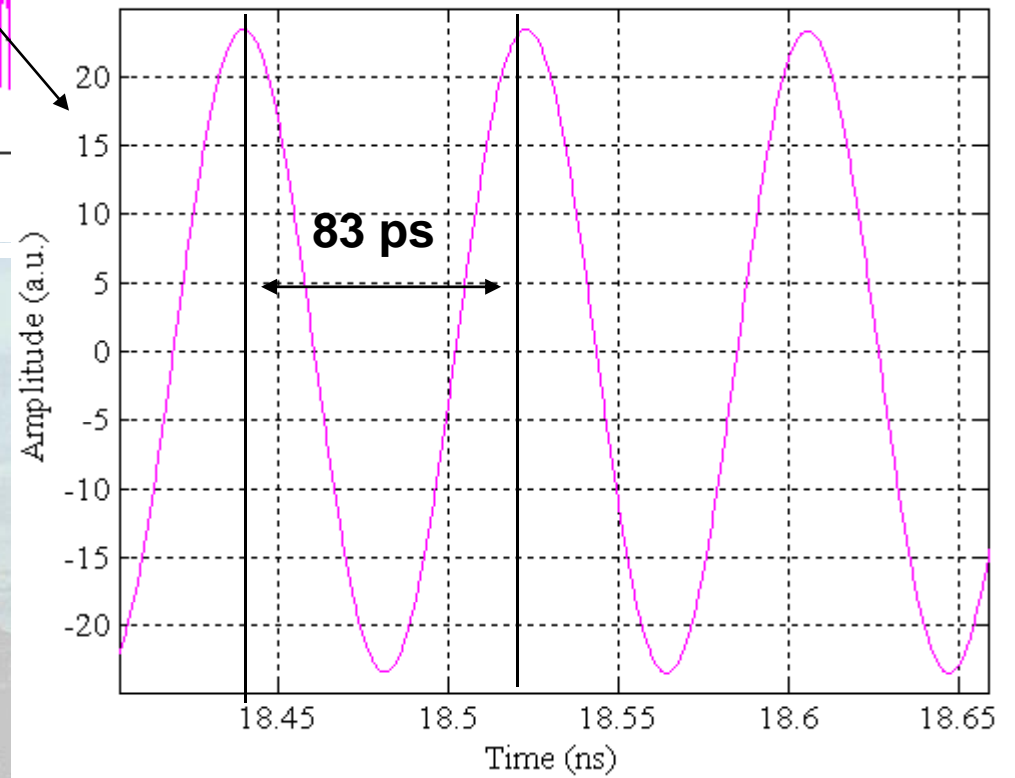




# An interesting exercise

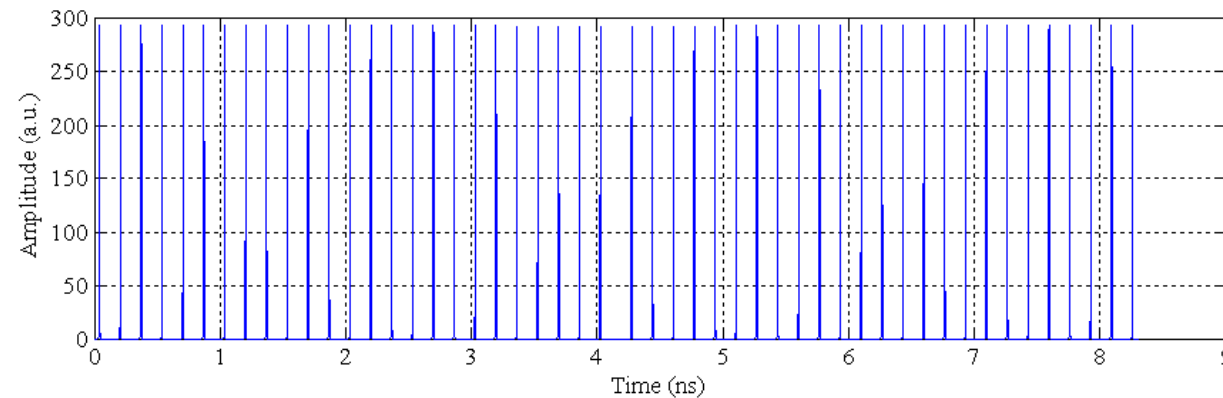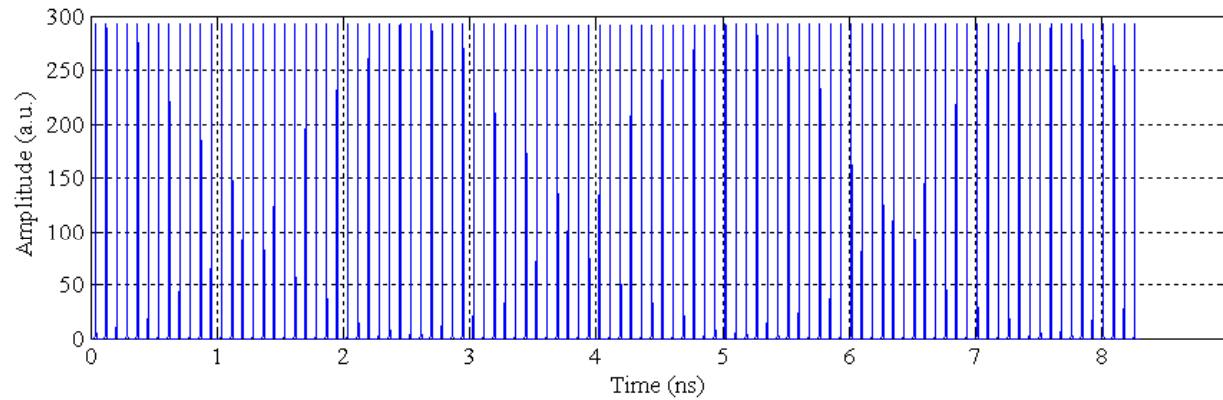

**Same condition of before, but some bunches are missed (about 50%)**


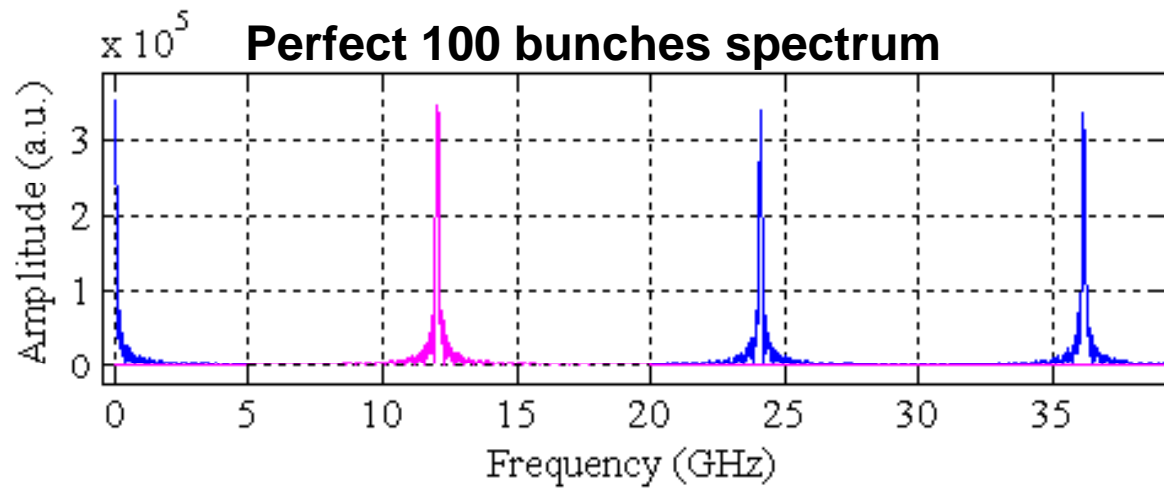


**Because of the different, larger, bunch spacing, in the spectrum some new peaks appear at lower frequencies**

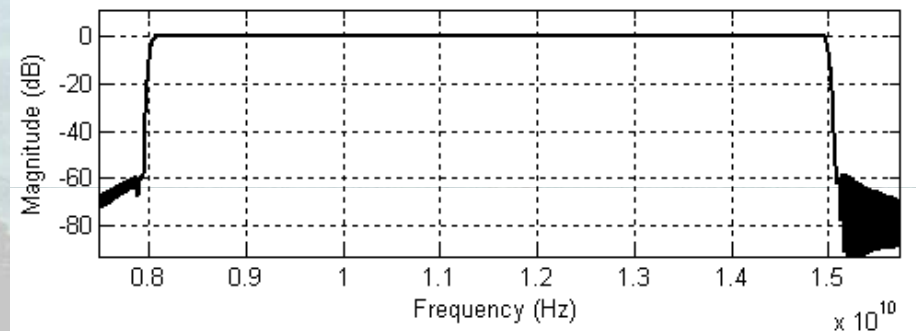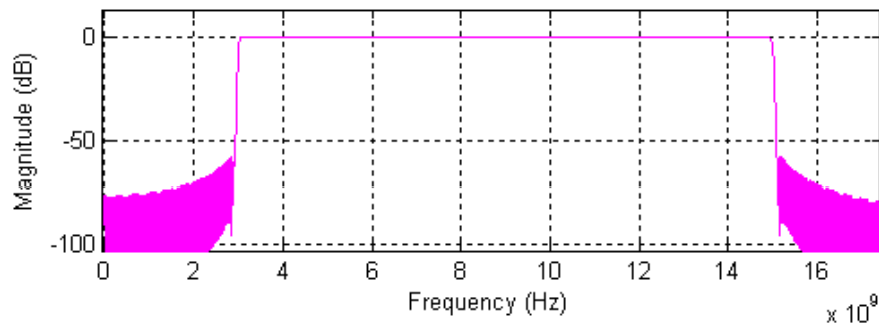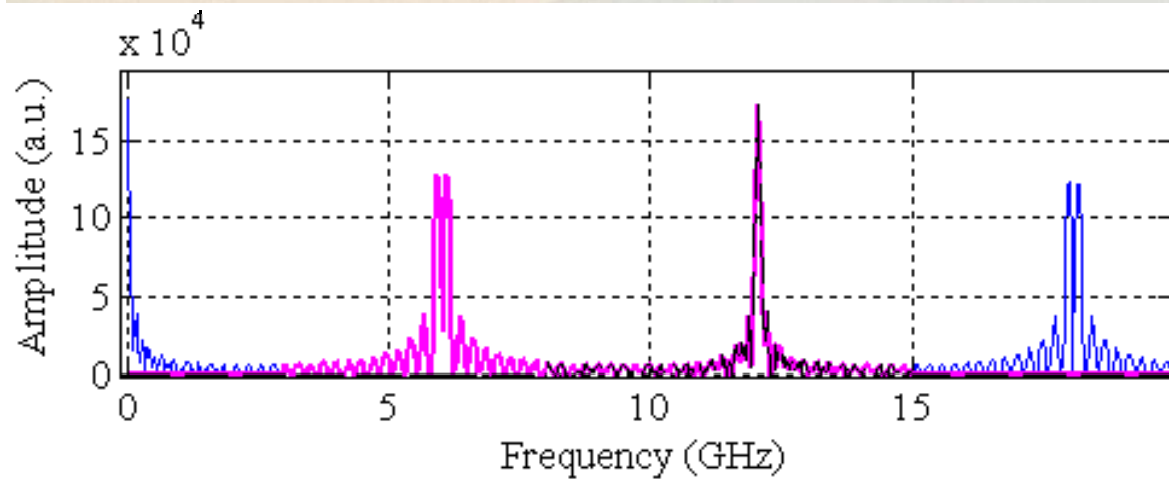




# Original signal

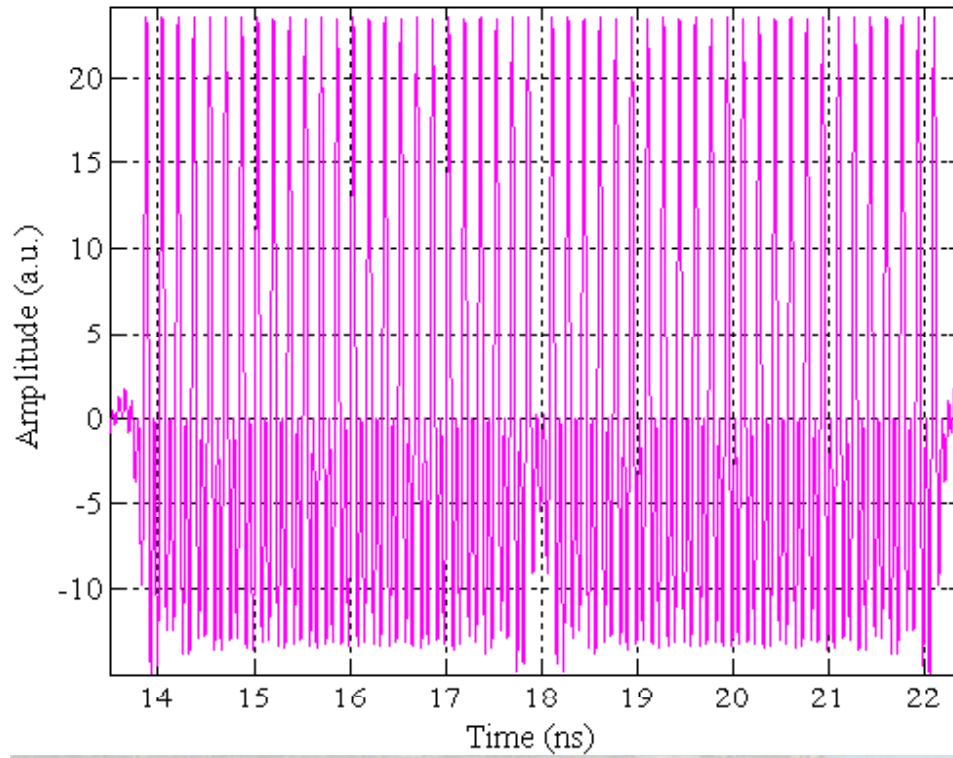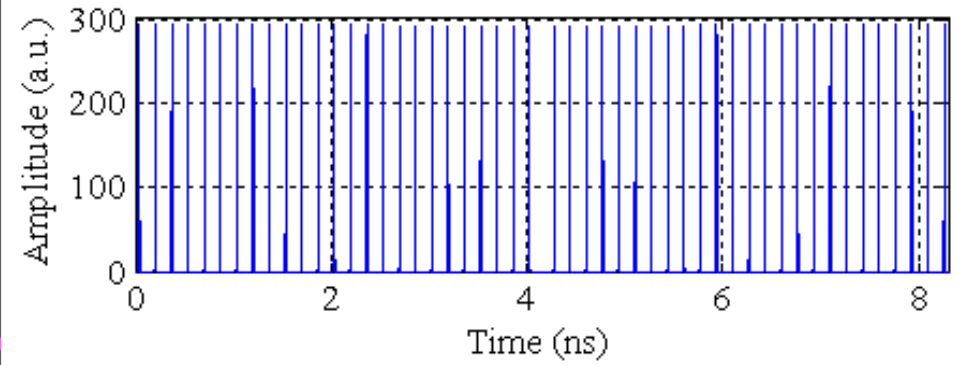

**Correct signal recovering!!!**





**Wrong signal recovering!!!**

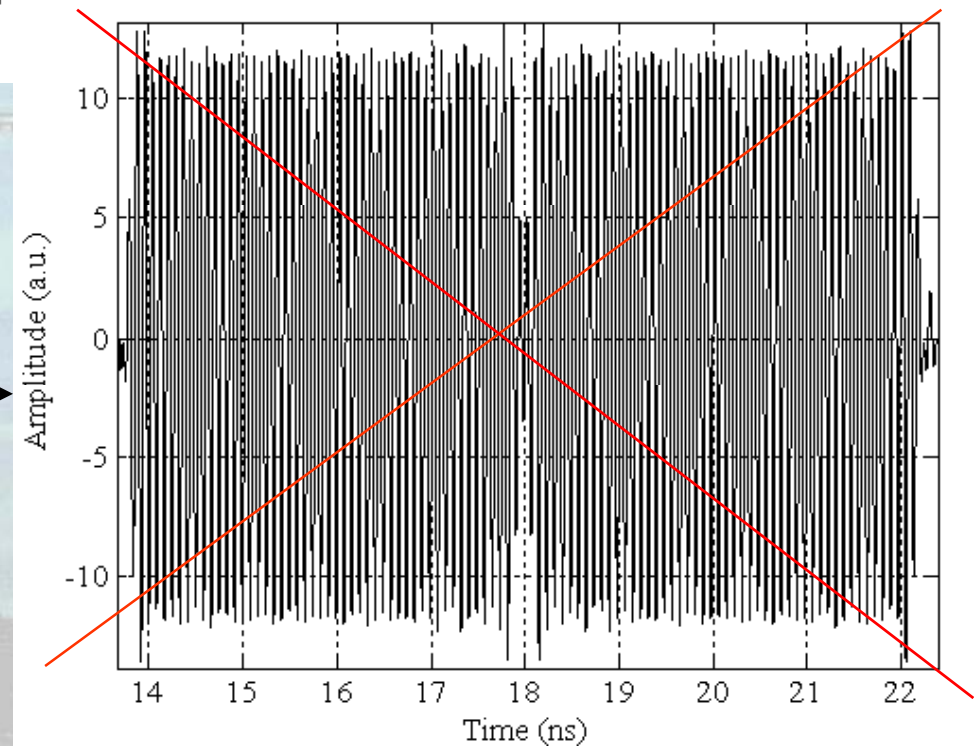

# Some consideration

If some bunches are missed, we need a proper low frequency cut-off in order to solve the larger bunch spacing appearing in the spectrum like new peaks at lower frequencies. Therefore the low frequency cut-off should be settled up in relation to the maximum expected missed bunch ratio.


# Applying the WCM "real" signal

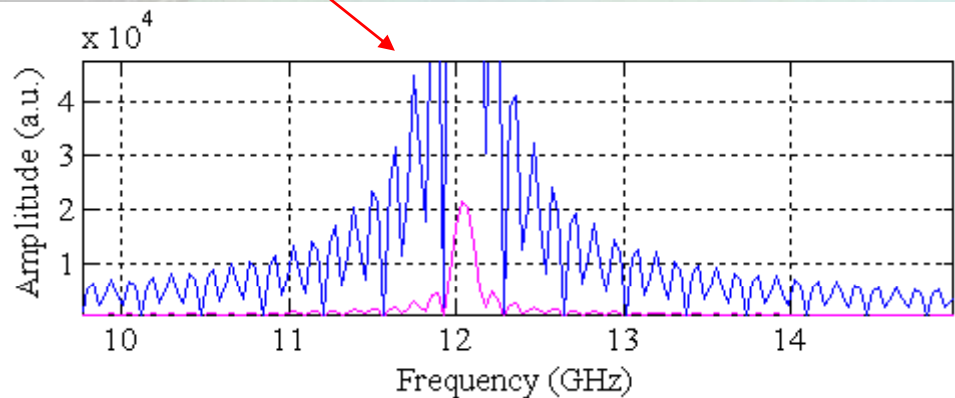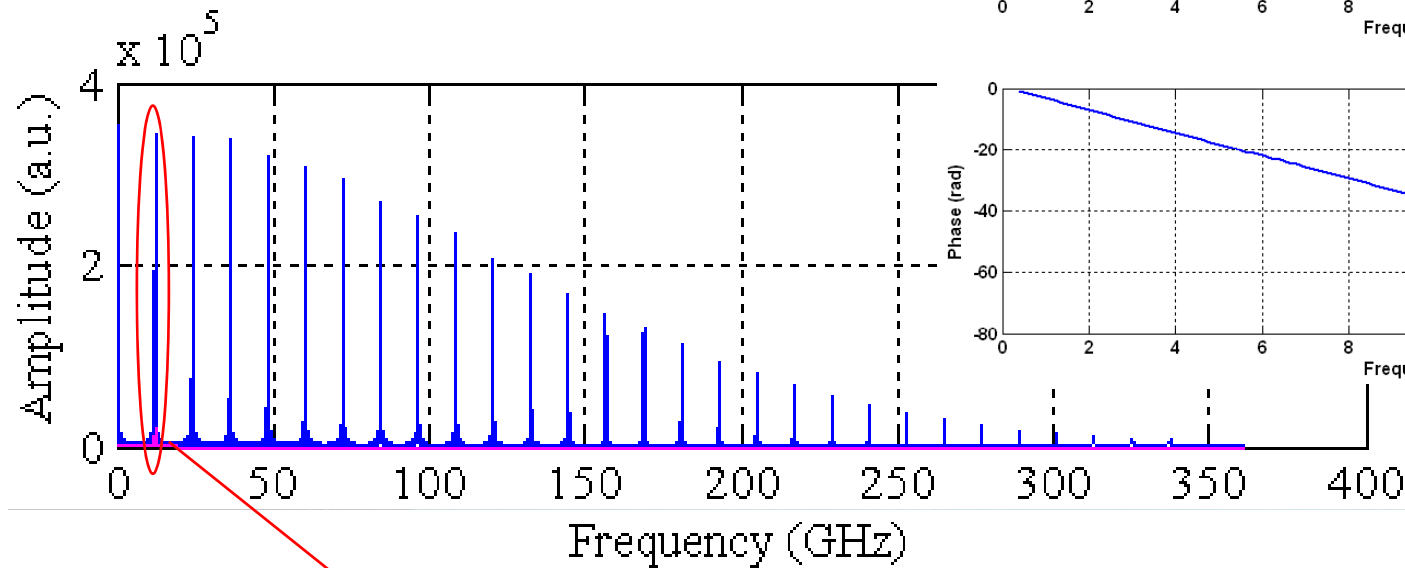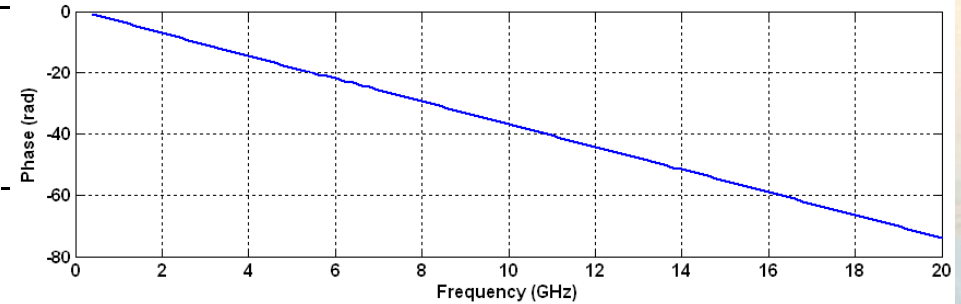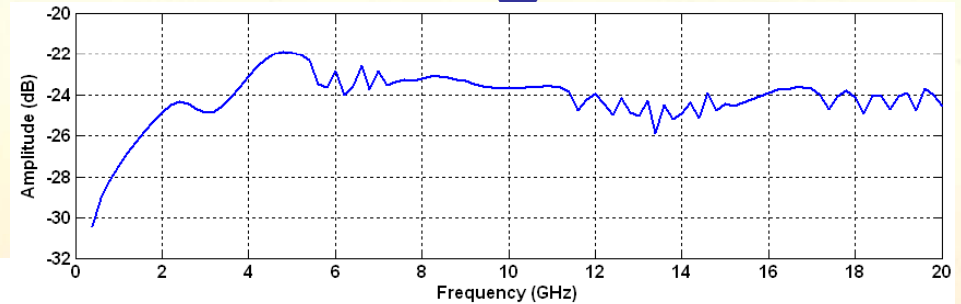


Low freq cut-off  $\cong$  2GHz




500 ps  $\cong$  6 bunches missed  
(Or 30 by compensating  
down to 400 MHz)

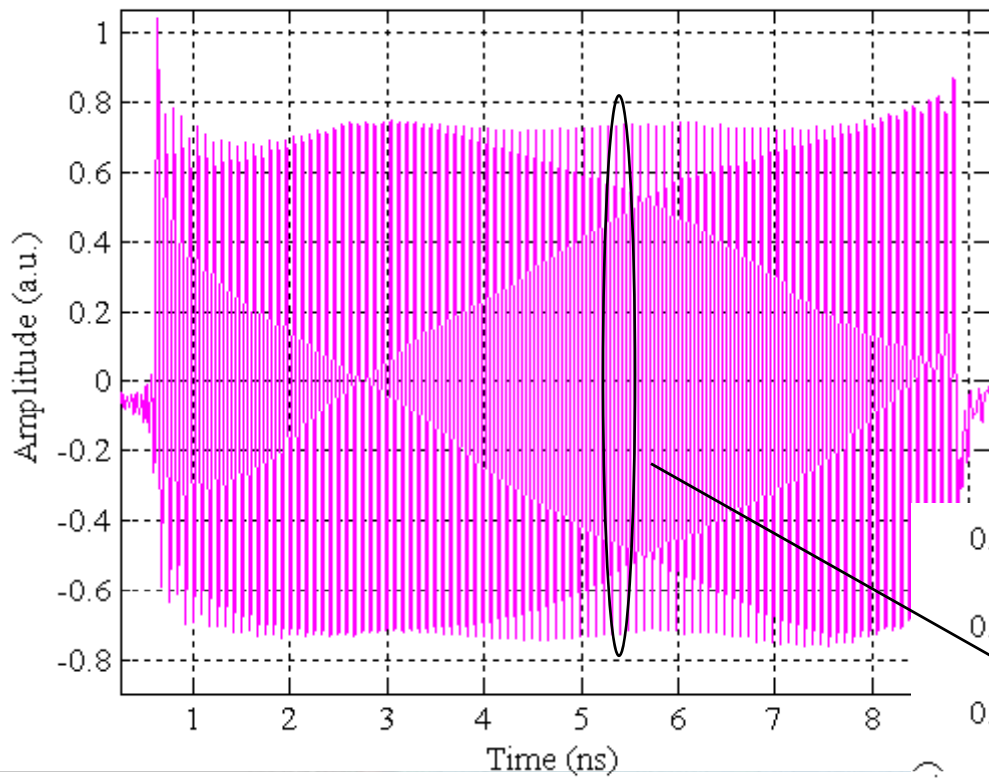

The result in time domain


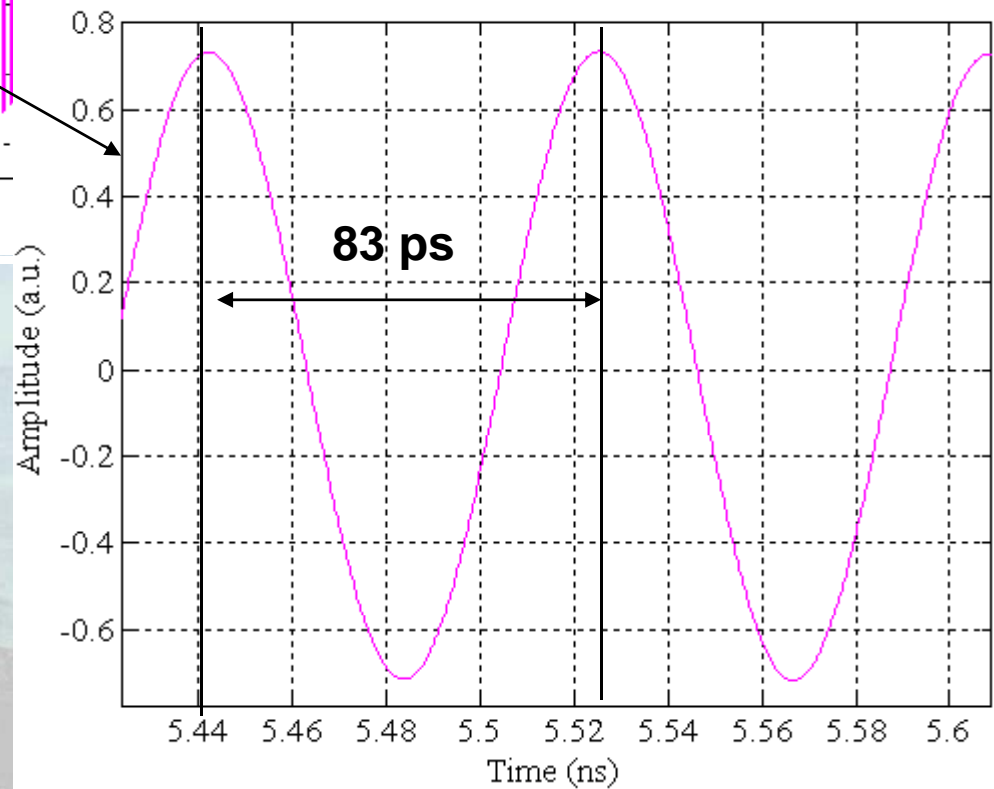






## A last academic exercise

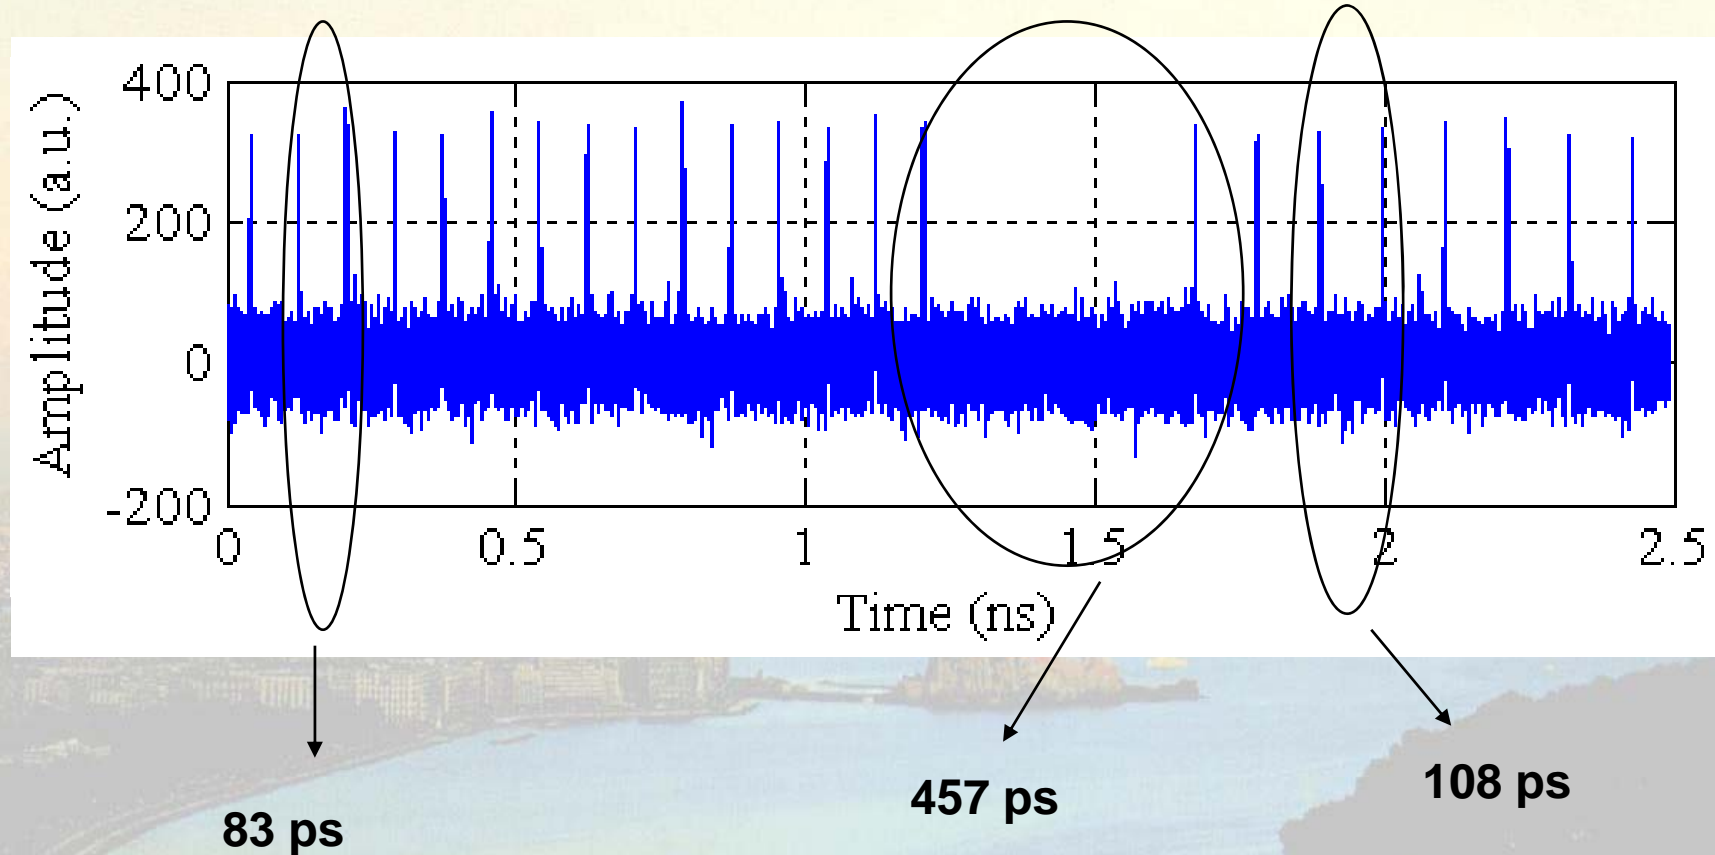


**RMS bunch length = 13.3ps**  
**Train duration = 2.5ns**  
**Nb of bunches = 23**  
**Peak current = 293A**

Just to have more fun it has been added also a random noise level of about 10% with respect to the signal amplitude

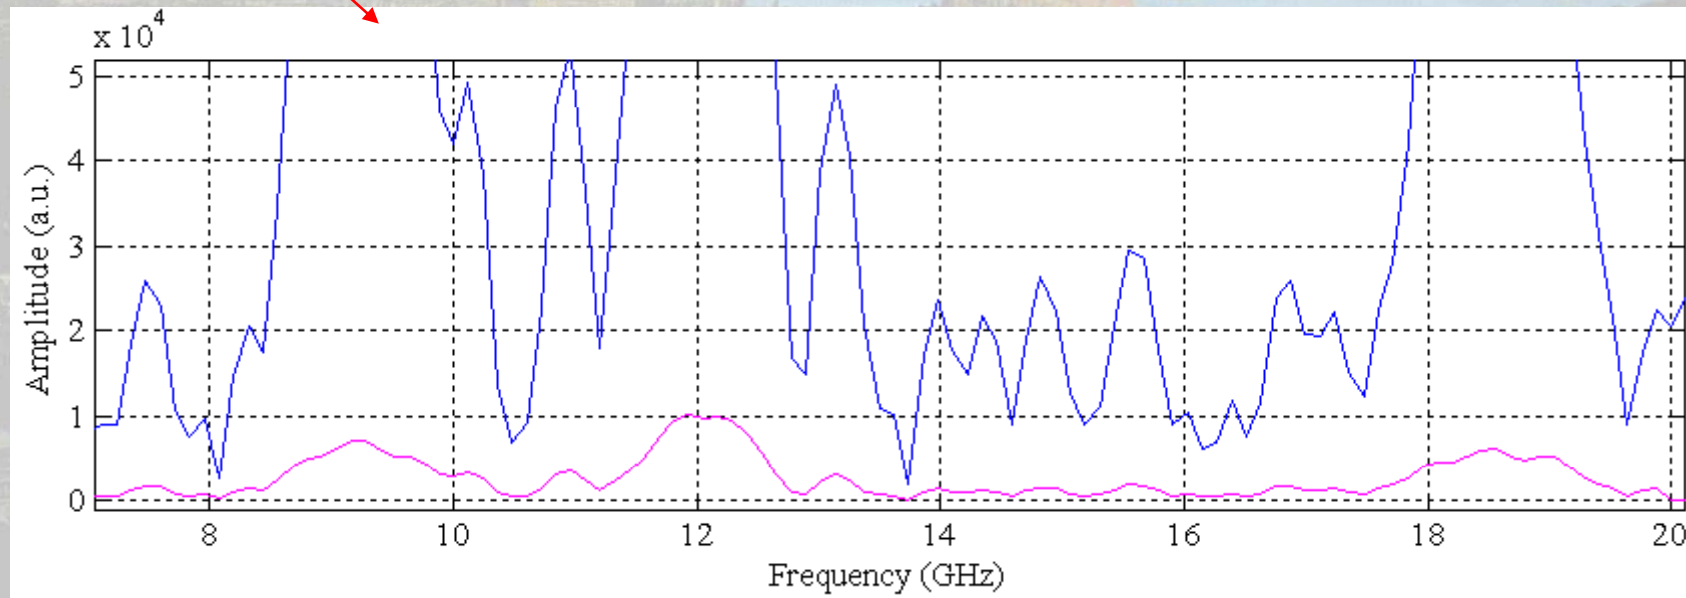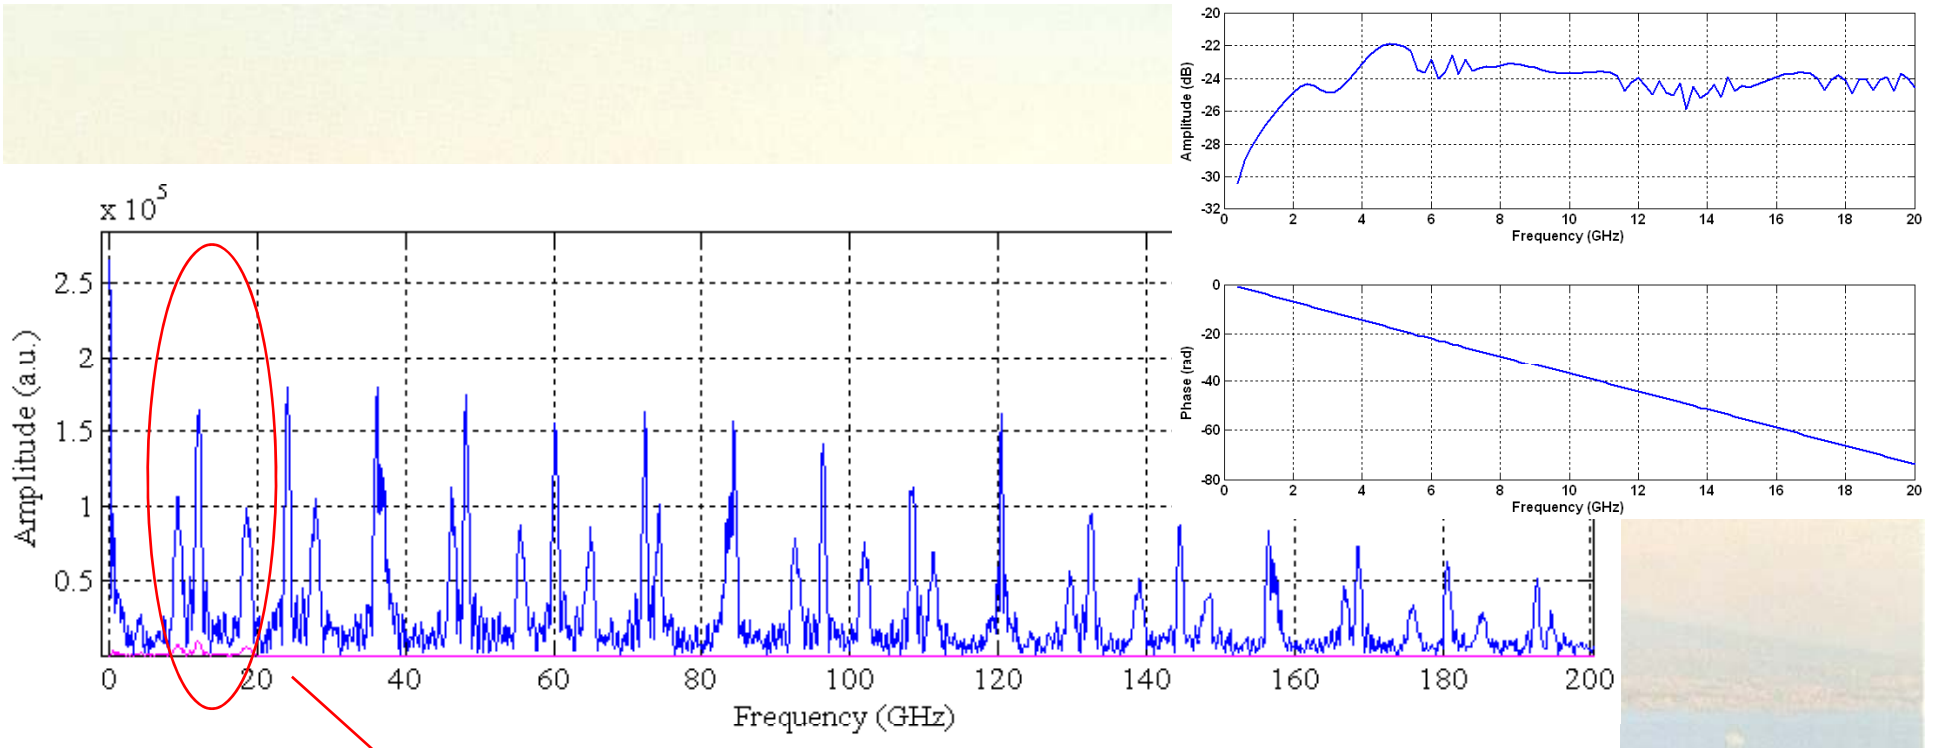

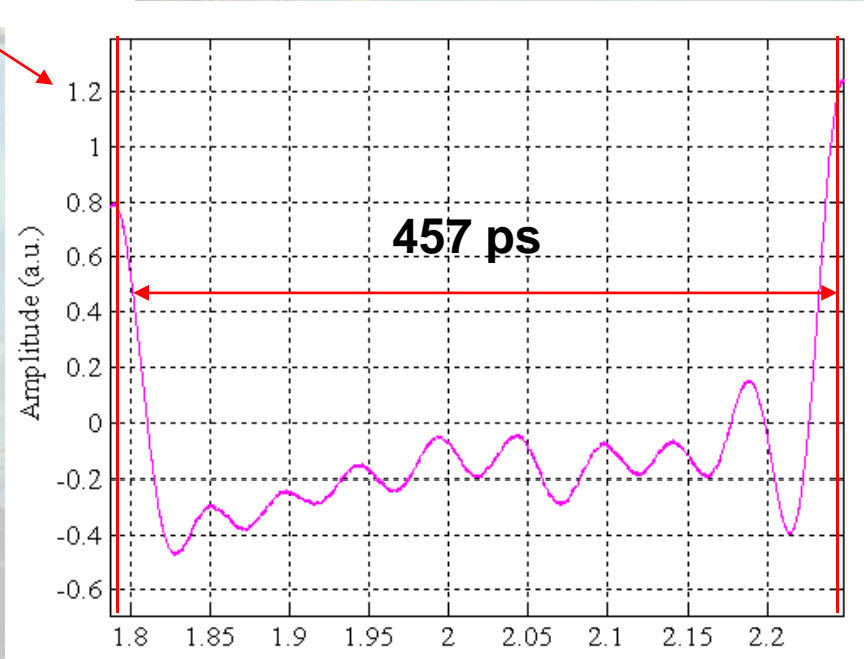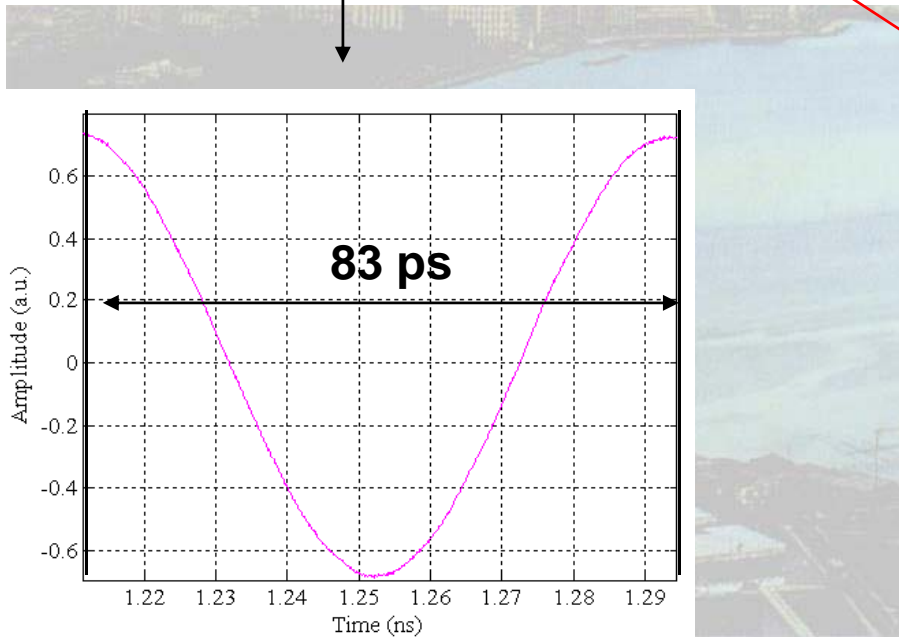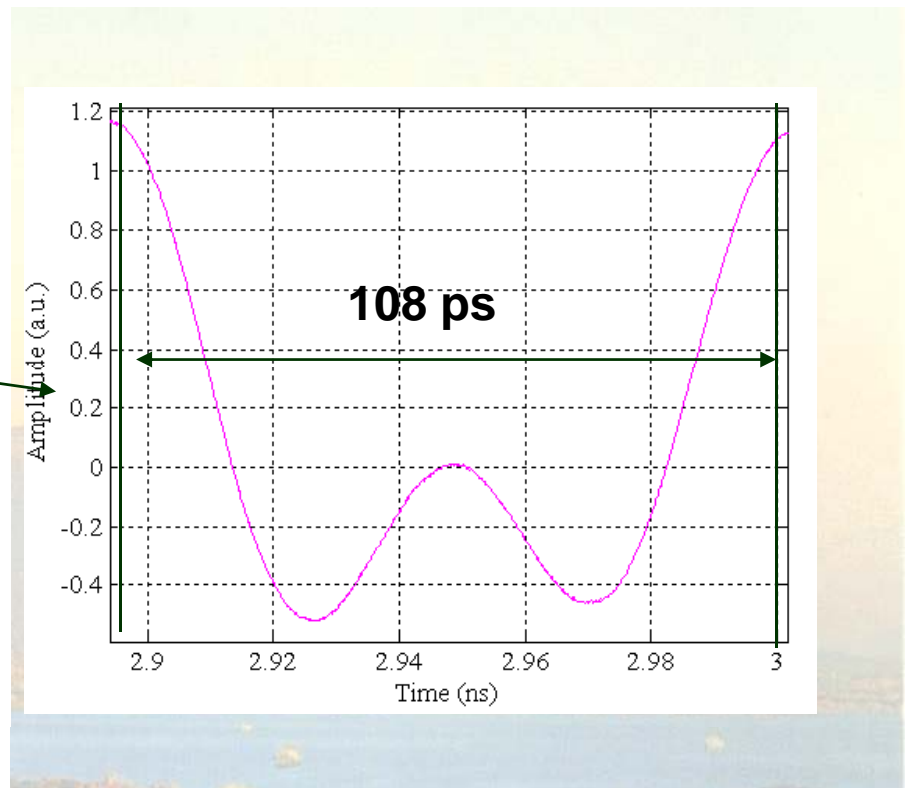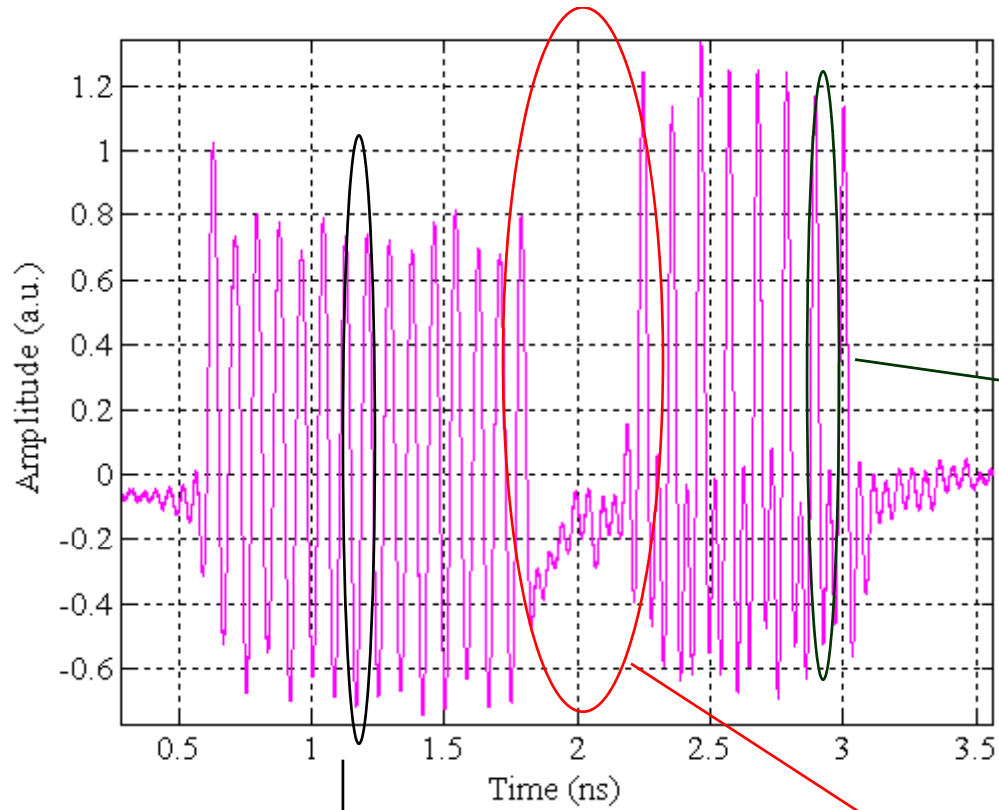

# Measurements on the existing design

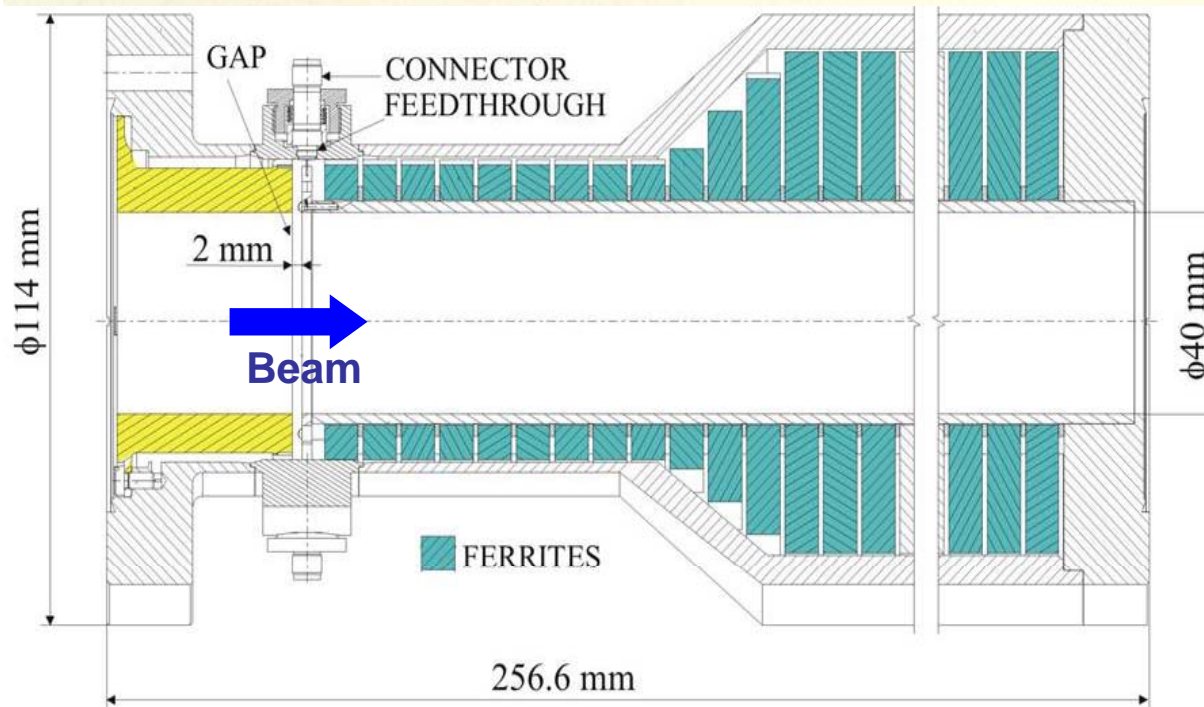


The existing design is based on a previous design for the CTF2  
( $63 \text{ MHz} \leq \text{bandwidth} \leq 10 \text{ GHz}$ )

but


- Bigger volume of ferrite in order to lower the l. f. cut-off to 100 kHz
- The miniature feedthrough modified in order to extend their bandwidth beyond 20 GHz



# Experimental setup and testbench

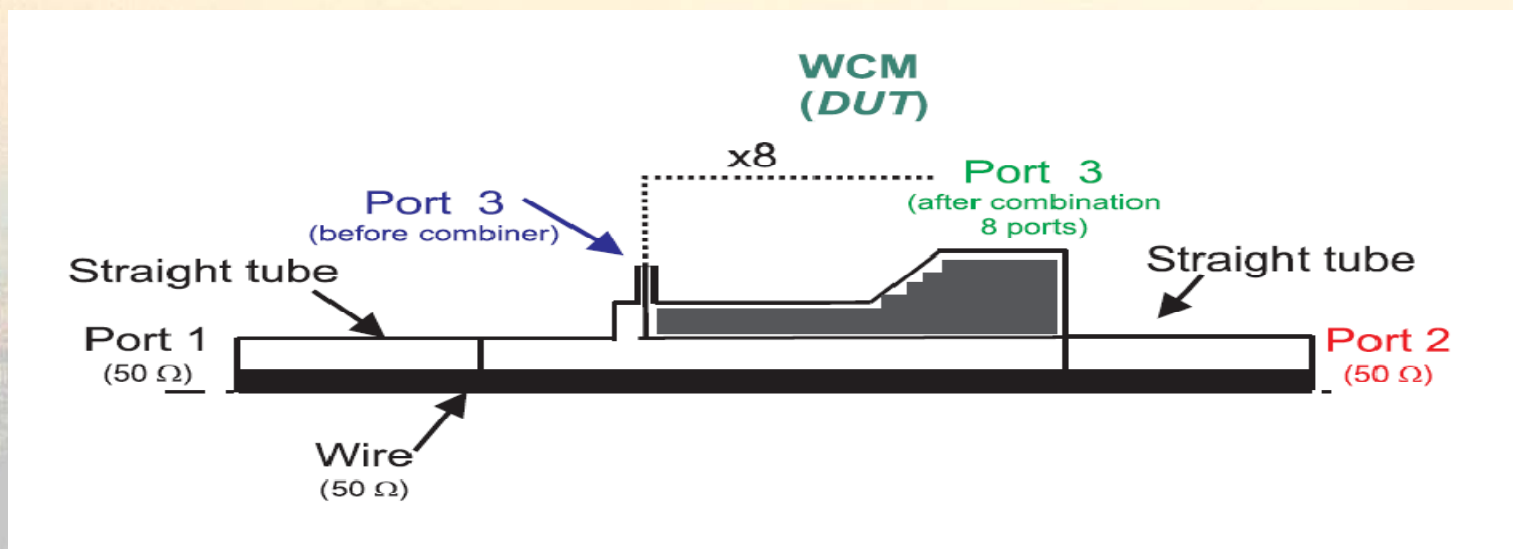


# Old measurements (March 2006)

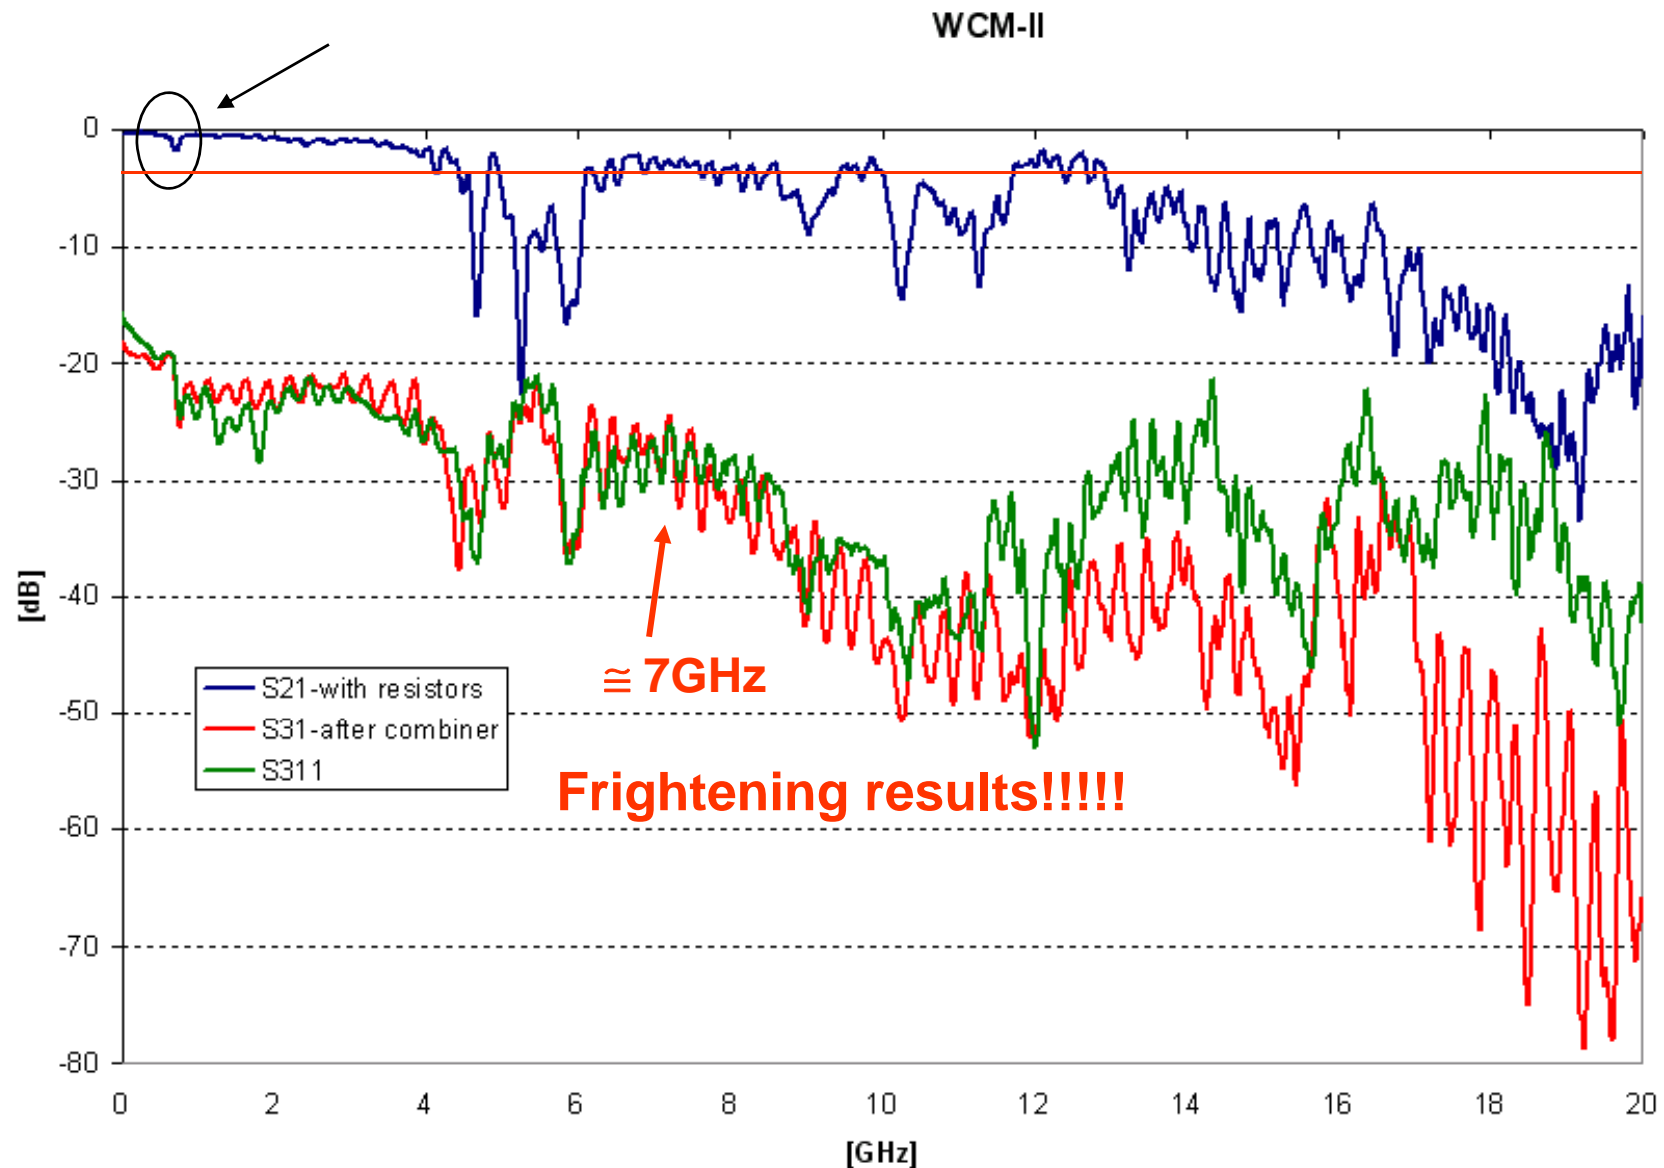


With the courtesy of Lars Soby and Ivan Podadera

# New measurements (November 2006)


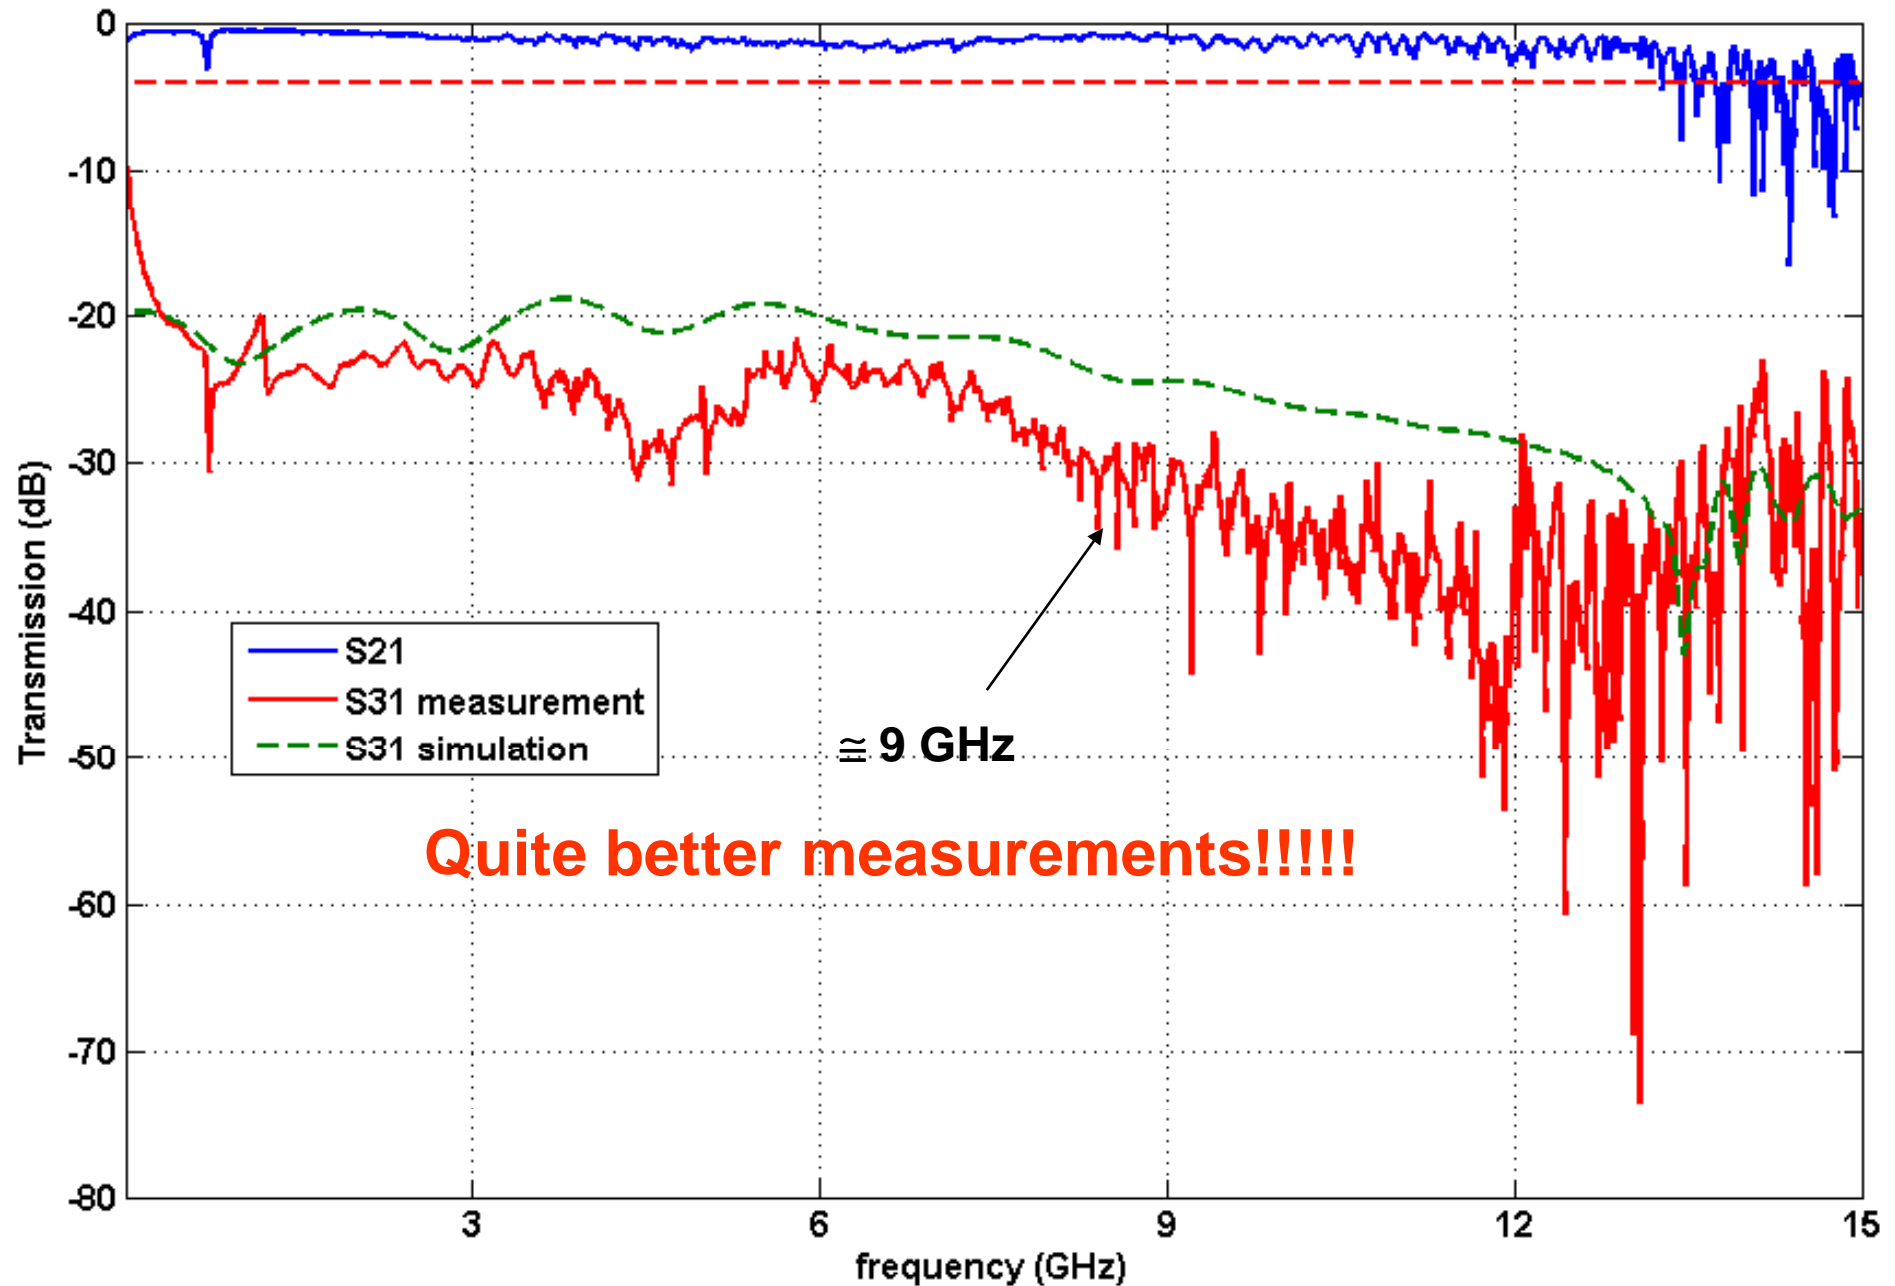


# What was wrong?

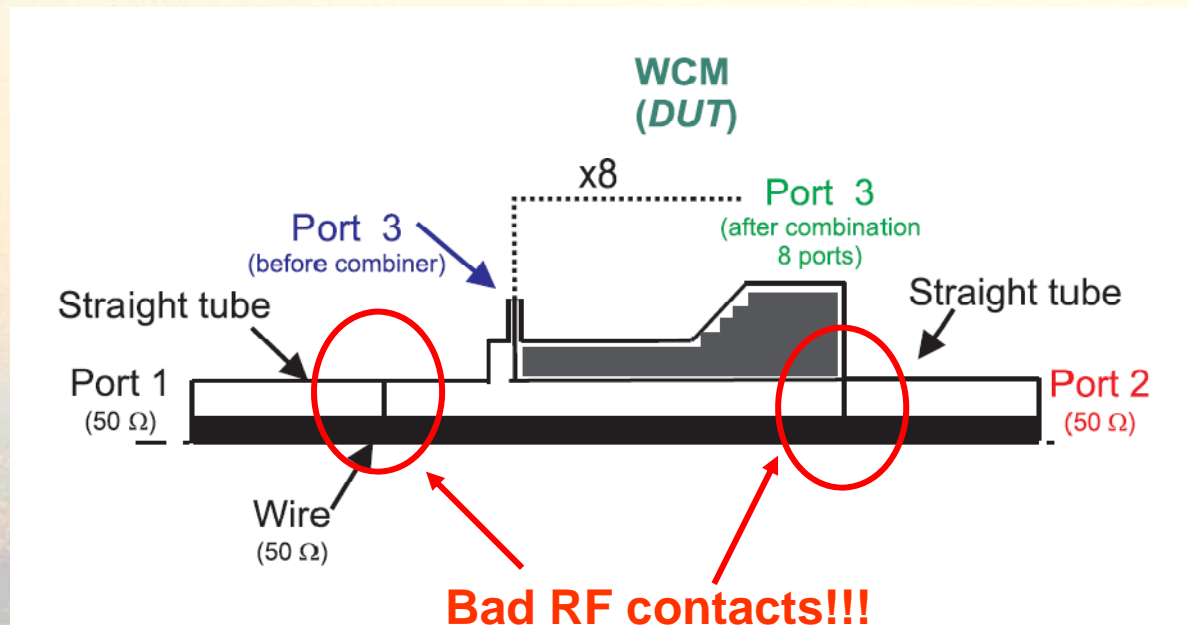

The experimental setup showed very bad RF contacts between WCM and the two external straight tubes. In order to improve the contacts some pasty stripes of conducting material has been used.... Unfortunately it cannot be used in vacuum....

For frequencies higher than 12 GHz strong reflections occur because of the adapting cone are not enough smoothed.

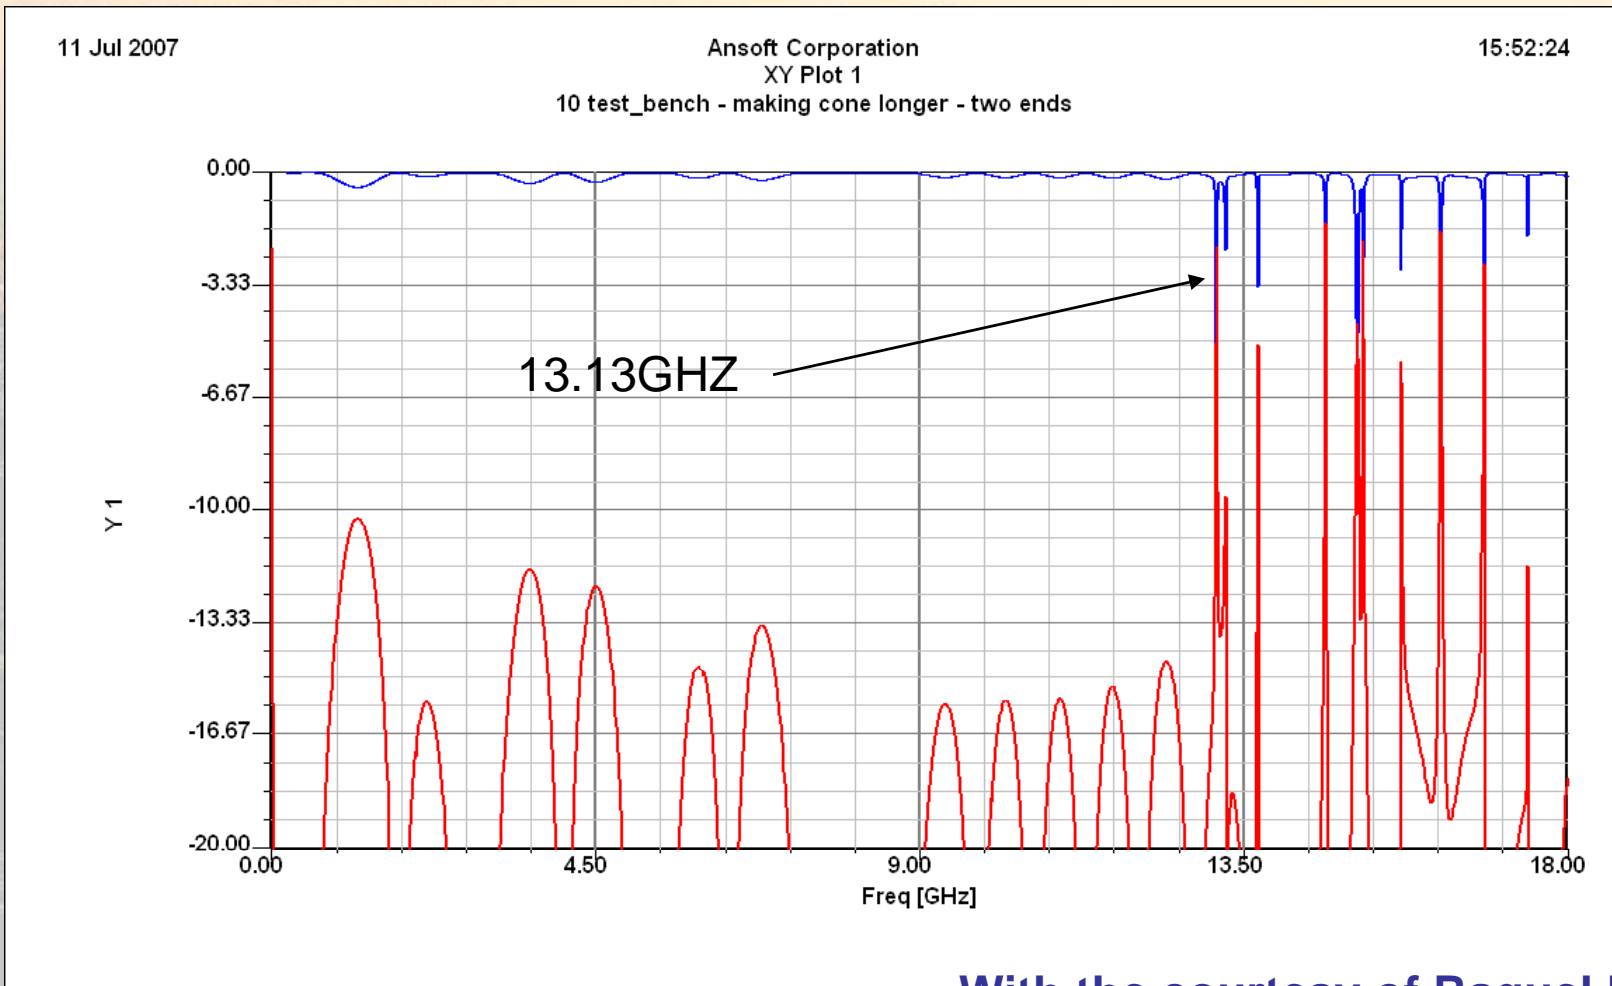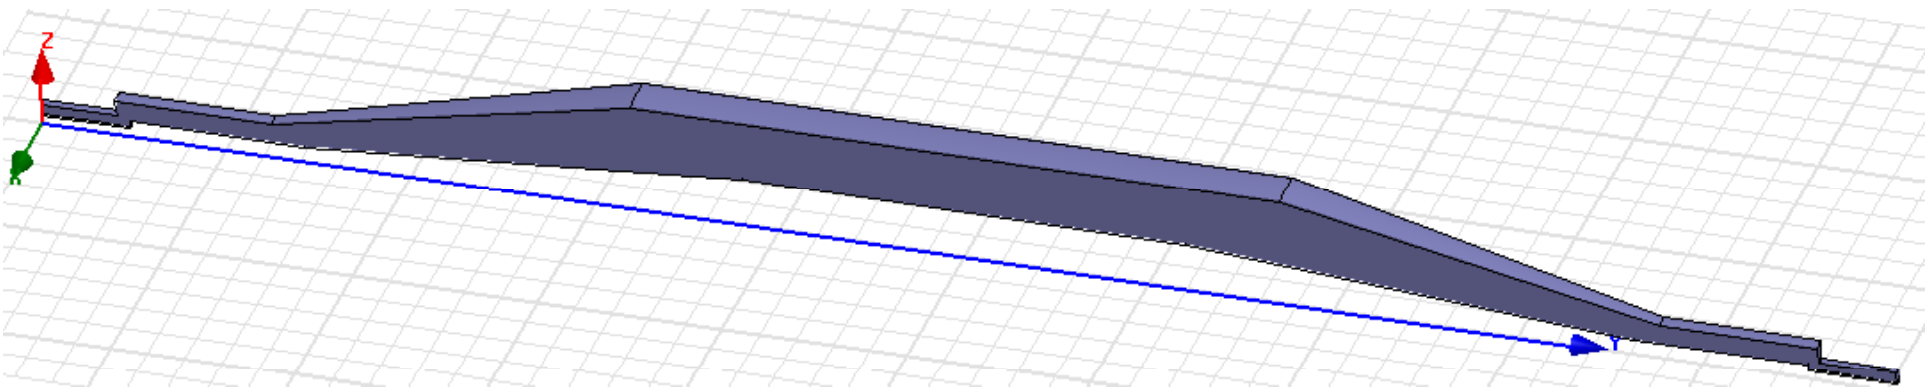

With the courtesy of Raquel Fandos


# By making the transitions longer the resonances get less dramatic

17 Jul 2007

Ansoft Corporation  
XY Plot 1  
03 L200

09:01:04

L=200mm

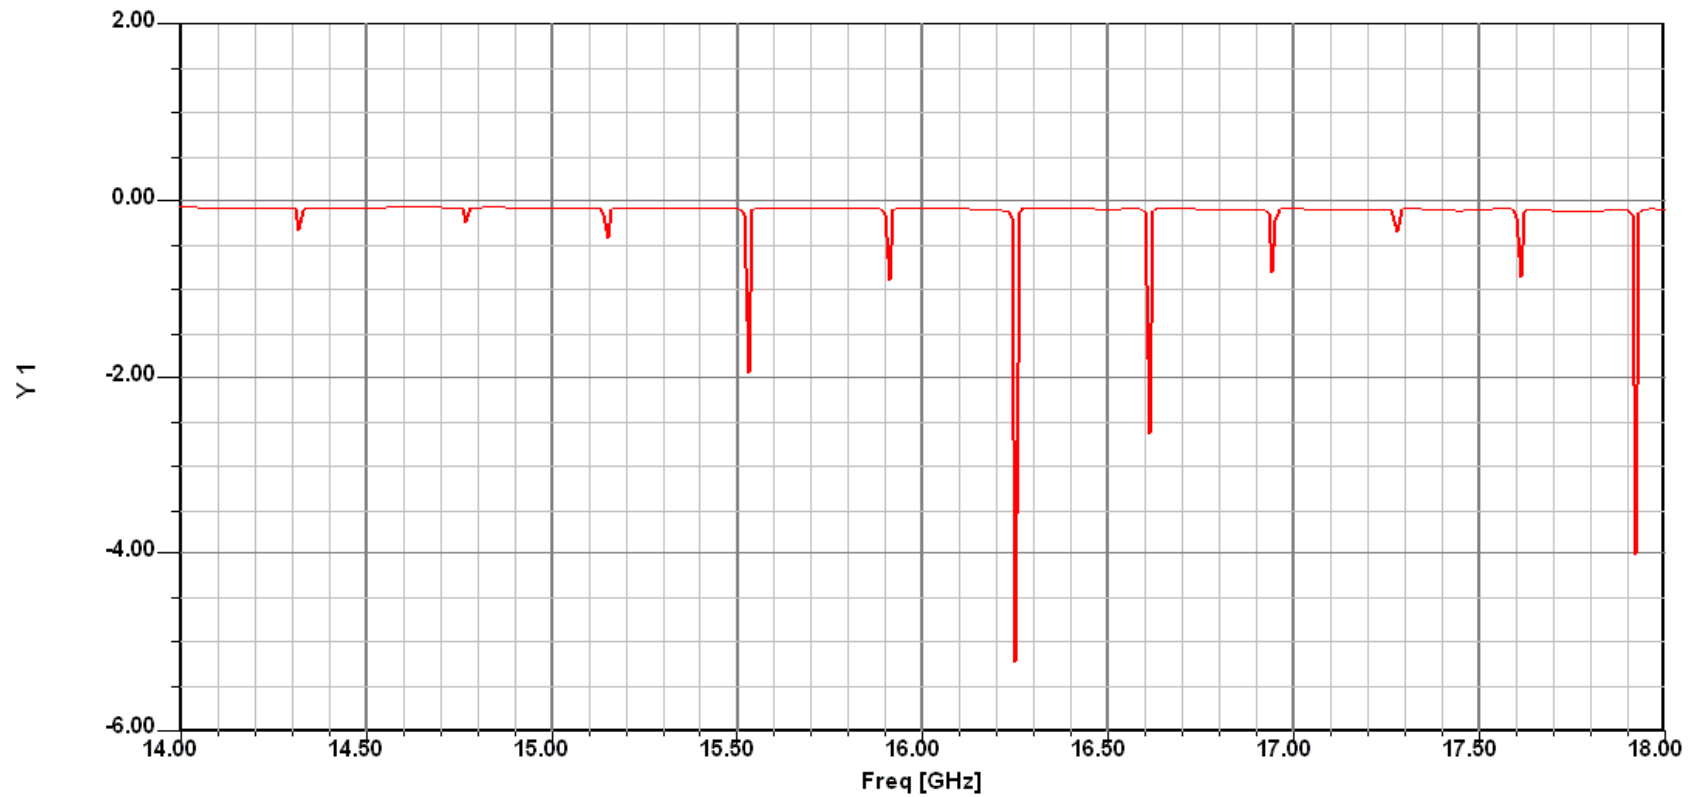

With the courtesy of Raquel Fandos

# Conclusions and outlooks

- WCM specifications has been reviewed in a more critical way, showing less stringent constraints
- The e-m design is accomplished, giving pretty good results
- At the end of the next week the mechanical designs will be sent to the mechanical workshop to start the machining and the assembling
- The testbench has been improved
- On December the first measurements and the characterization are foreseen