

Chapter 3. Computer-Assisted Prototyping of Advanced Microsystems

Academic and Research Staff

Professor Dimitri A. Antoniadis, Professor Duane S. Boning, Professor Anantha P. Chandrakasan, Professor Carl V. Thompson, Professor Donald E. Troxel, Thomas J. Lohman, Michael B. McIlrath

Graduate Students

Yonald Chery, Aaron E. Gower, Brian Lee, Zachary Lee, William P. Moyne, Manuel Perez, Debashis Saha, Matthew D. Verminski

Technical and Support Staff

Francis M. Doughty

3.1 Advanced Modeling and Computational Prototyping

Sponsor

Defense Advanced Research Projects Agency
Contract DABT 63-95-C-0088

3.1.1 Modeling of Interconnect Reliability

Project Staff

Yonald Chery, Professor Carl V. Thompson, Professor Donald E. Troxel

Recent research has demonstrated interconnect failure due to electromigration effect to be strongly dependent not only on current density but also on metal film crystal grain size distribution and geometries of interconnect patterns. This type of failure is manifest as a depletion of interconnect metal forming a "void" (open-circuit) or an accumulation possibly forming a "short" to neighboring interconnect.

Our research work focuses on:

1. Developing abstract, physically-based, microstructural interconnect failure models to more accurately predict electromigration induced failure.
2. Electromigration Reliability for Network Interconnect (ERNI), our prototype computer-aided design tool based on these abstracted microstructurally based models.

A release of ERNI 2.0 is expected during spring 1998 with extensions supporting hierarchical designs and utilizing higher performance circuit simulation engines. This release will incorporate client and server programs implemented in Java. With this, multiple designers at different locations will be able to cooperatively design integrated circuitry which incorporates electromigration reliability models.

3.1.2 Modeling of Advanced Device Structures

Project Staff

Zachary Lee, Michael B. McIlrath, Professor Dimitri A. Antoniadis

As MOS transistors are scaled to the submicron regime, the two-dimensional (2D) distribution of dopants becomes a very important factor affecting their performance. A technique that allows one to obtain the doping profile is therefore indispensable. One-dimensional (1D) profiling techniques such as the C-V method and SIMS have widely been used. Direct 2D techniques, however, have met with less success. Khalil et al.¹ and Ouwering² used an inverse modeling approach by finding a doping profile such that its simulated C-V characteristics match its corresponding experimentally determined counterpart.

We have developed a new inverse modeling-based technique for the extraction of 2D doping profiles in submicron MOS transistors using I-V characteristics

1 N. Khalil et al., *IEEE Electron Device Lett.* 16 (1): 17 (1995).

2 G.J.L. Ouwering, *Solid State Electron.* 34(2): 197 (1991).

in the subthreshold region. The main advantages of this technique include: (1) ability to extract 2D doping profiles of devices having very short channel lengths due to its immunity to parasitic capacitances and noise; (2) low sensitivity to gate area variations; (3) low dependence on mobility model; (4) nondestructive nature; and (5) simplicity of data collection and preparation, as well as general ease of use.

In general, the I-V data of a short-channel device in the subthreshold region capture the 2D electrostatic effects of drain-induced barrier lowering (DIBL), sub-surface punch-through, surface punch-through, and subthreshold slope. For example, the DIBL effect results from the reduction in surface potential energy barrier between the source and channel due to the built-in potential and applied bias (V_{ds}) at the drain.

According to the analytical model of Liu et al.,³ the shift in threshold voltage (V_{th}) has an approximate linear dependence on V_{ds} , and an exponential dependence on the 2D doping geometry (in particular, the "channel length" L_{ch}). The corresponding change in drain current (I_d) is therefore exponentially dependent upon V_{ds} , and also exponentially dependent upon the exponential of the doping geometry. On the other hand, I_d depends only linearly on the mobility (μ) and device geometry such as the width (W) and gate length (L_g). Consequently the uncertainty of μ and gate area is not significant in the profile extraction, in light of the much greater dependencies that the current has on the 2D distribution of dopants as signified by the 2D effects discussed above. Similar to DIBL, the subthreshold slope and extent of punch-through also provide important information.

We have demonstrated the application of the technique on a number of devices having different channel dopings, but similar source/drain dopings with indium "halo" implants.⁴ The extraction procedure starts with the extraction of the 1D doping profile (i.e., doping in the depth direction), which can be accomplished by fitting I_d versus V_{gs} versus V_{bs} data of a long-channel device, the C-V method of a large area capacitor, or from SIMS data.

Figure 1a shows the I-V data of a device having a step-doping channel profile as shown in Figure 1b. Here, the profile is represented by a sum of two Gaussian functions, with the amplitude, center, and width of each Gaussian function a fitting parameter. Once the 1D profile is obtained, the 2D profile, as parameterized using a sum of two 2D Gaussian functions, and representing the source/drain/halo regions, is extracted by fitting simulated I_d versus V_{gs} versus V_{ds} data generated by the device simulator MEDICI⁵ to the corresponding experimental data in the subthreshold region. Here, the center and width of each Gaussian function, in both the depth and lateral directions, are varied in the optimization. The amplitude of one of the Gaussian functions, which represents the "halo" doping, is also allowed to be optimized. The amplitude of the second Gaussian function, which represents the source/drain, however, is kept fixed at the doping level as determined by 1D process simulations and SIMS, since the technique is unable to resolve very high (i.e., degenerate) doping levels.

Figure 2 shows the I-V data of the initial and optimized profiles as shown in Figure 3a and Figure 3b, respectively. Figure 4a and Figure 4b show a comparison between the extracted profiles of different devices. It can be seen that the source/drain/halo regions of the devices are very similar, particularly the peak doping levels of the "halo" implants, which occur at approximately 10^{18} cm⁻³. This is an expected result since the devices were processed under similar conditions.

3 Z. Liu et al., *IEEE Trans. Electron Dev.* 40(1): 86 (1993).

4 H. Hu et al., *IEEE Trans. Electron Dev.* 42: 669 (1995).

5 *MEDICI Manual*, Technology Modeling Associates.

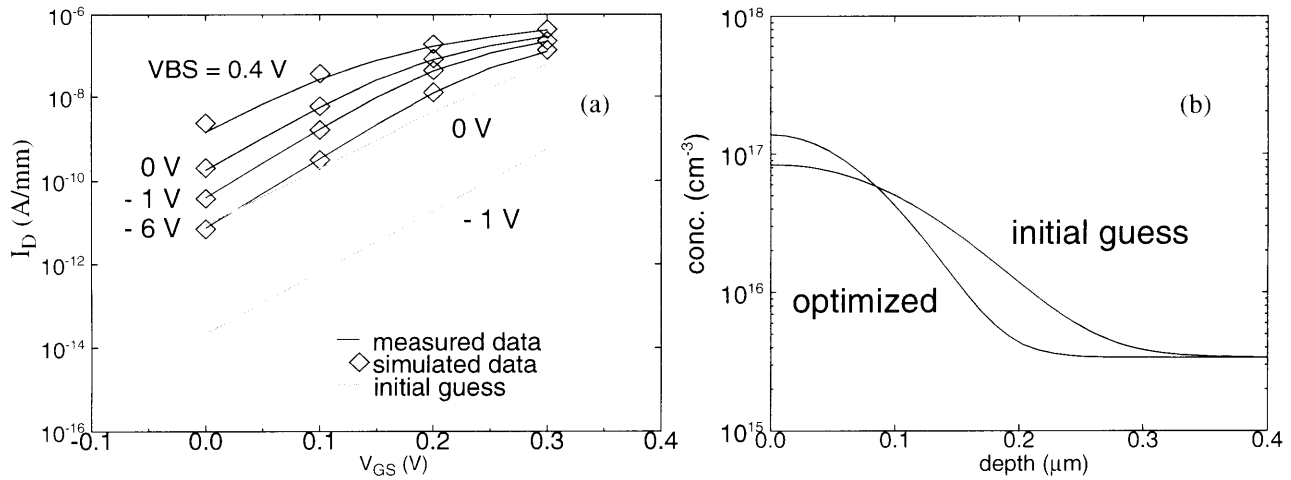


Figure 1. (a) Comparison of measured, simulated (initial guess), and simulated (optimized) data of the 1D (depth) profiles as shown in (b). The device has $L_{gate} = 5 \mu\text{m}$, with $T_{ox} = 50 \text{ \AA}$, $W = 50 \mu\text{m}$, and a step-doping channel profile formed by BF_2 implants.

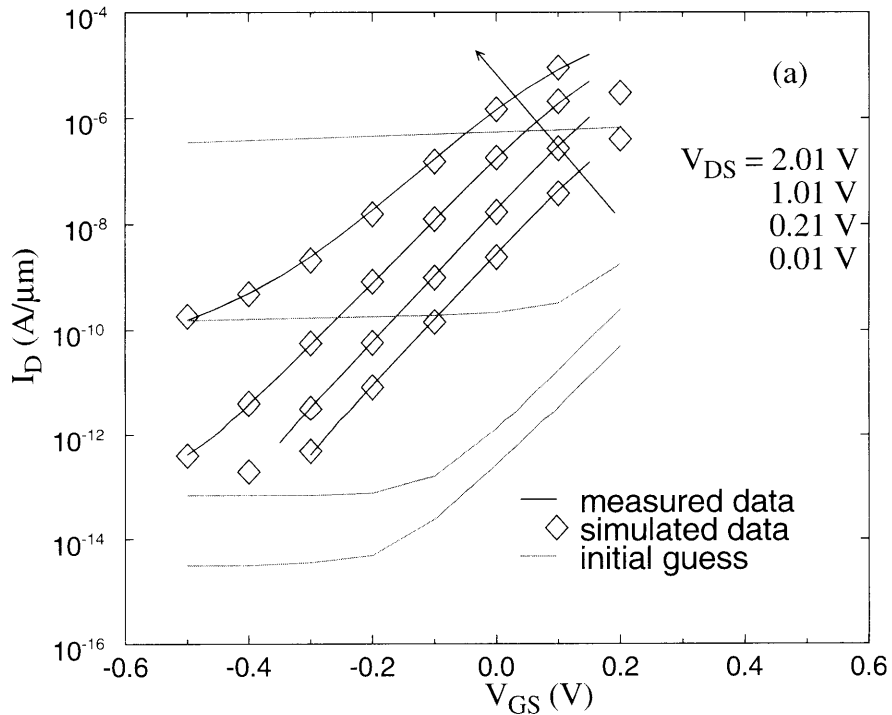


Figure 2. Measured, simulated (initial guess), and simulated (optimized) data of a device having the step-doping channel profile of Figure 1b, and a nominal $L_{gate} = 0.15 \mu\text{m}$, $T_{ox} = 50 \text{ \AA}$, $W = 5 \mu\text{m}$, and with "halo" source/drain implants. The source and drain were formed by arsenic while the "halos" were formed by indium implants.

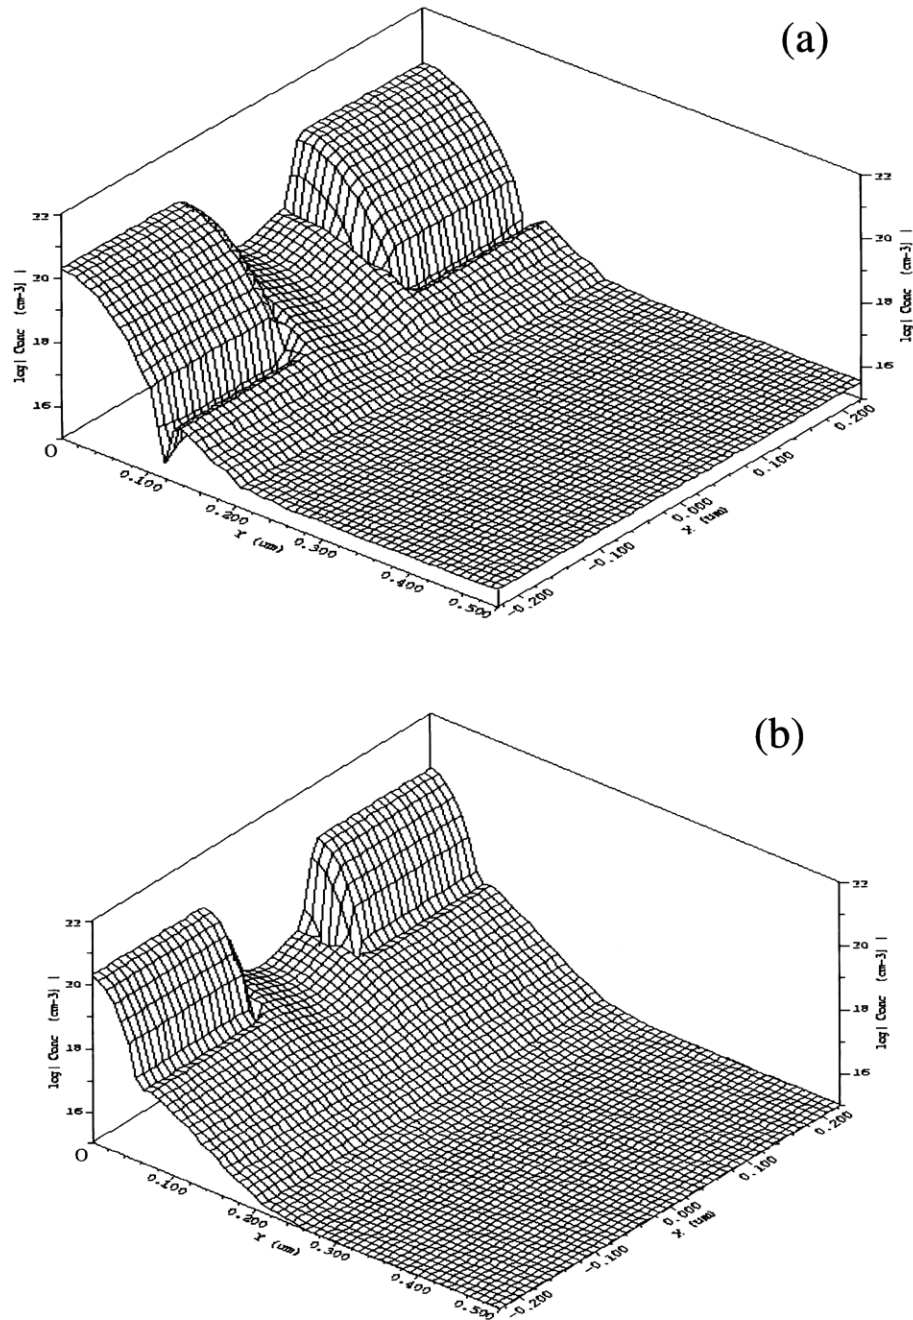


Figure 3. (a) initial guess profile used in the extraction shown by Figure 2. Note the large junction depths that caused the large amounts of punch-through. (b) optimized profile having I-V characteristics that match the measured data.

By obtaining the 2D doping profile, this technique automatically allows one to obtain the channel length, which is an important parameter for gauging technologies. Figure 4 shows a comparison between

the extracted channel lengths using this technique with the effective channel lengths extracted using the C-V and the "shift and ratio" methods.⁶ Here, the channel length is "defined" by the positions in the

6 C. Huang et al., *IEEE Trans. Electron Dev.* 43(6): 958 (1996).

source/drain at which the doping is sufficiently high (i.e., $2 \times 10^{19} \text{ cm}^{-3}$, although due to the steepness of the source/drain profiles this value is not critical.) The agreement is very good. It should be noted that the Gaussian representation presented here is only one of many possibilities; other functions such as the complementary error function and spline representations may be used as well. Further development of the technique may involve matching both I-V and C-V data simultaneously to make use of the best of both techniques.

Table 1 is a comparison of L_{eff} of various devices extracted by the C_{gds} and shift and ratio methods⁷ and the inverse modeling technique presented in this report. The numbers given in the first column correspond to the same numbers designated for the devices of Figure 4.

Table 1: Comparison of L_{eff} of various devices

Device No.	L_{eff} (μm)	
	C_{gds} method	Inverse Modeling
1	0.122	0.125
2	0.162	0.150
3	0.203	0.203
4	0.232	0.234

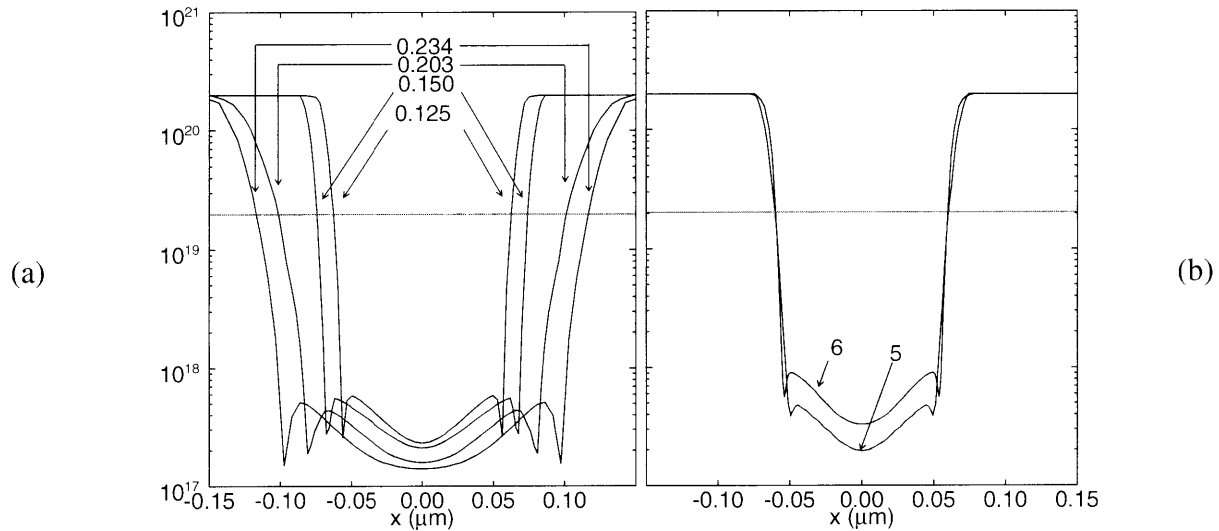


Figure 4. Comparison of lateral doping profiles at the SiO_2/Si interface of various devices. Other than the channel implant and L_{gate} , the devices are identical (i.e., having the same source/drain/halo implants.) (1) device having the step channel doping of Figure 1b and a nominal $L_{\text{gate}} = 0.15 \mu\text{m}$; (2)-(4) same as (1), but respectively having $L_{\text{gate}} = 0.19 \mu\text{m}$, $0.23 \mu\text{m}$, and $0.26 \mu\text{m}$; (5) device having no channel implant, with $L_{\text{gate}} = 0.15 \mu\text{m}$; (6) device having a super-steep retrograde channel profile, with $L_{\text{gate}} = 0.12 \mu\text{m}$. Note that at degenerate doping levels (i.e., $2 \times 10^{19} \text{ cm}^{-3}$), as within the region indicated by the dashed line, the accuracy of the extracted profiles decreases.

⁷ C. Huang et al., *IEEE Trans. Electron Dev.* 43(6): 958 (1996).Ibid.

3.1.3 Conference Papers

Lee, Z., M. McIlrath, and D. Antoniadis. "Inverse Modeling of MOSFETs using I-V Characteristics in the Subthreshold Region." *Proceedings of the International Electron Devices Meeting (IEDM)*, Washington, D.C., December 1997.

3.2 Distributed Collaborative Design and Prototyping Infrastructure

Sponsors

Defense Advanced Research Projects Agency
Contract DABT 63-95-C-0088
Stanford University

3.2.1 Architecture for Distributed Design and Fabrication

Project Staff

Professor Duane S. Boning, Michael B. McIlrath, Professor Donald E. Troxel

The design and fabrication of state-of-the-art semiconductor devices and integrated circuits requires an increasingly diverse and expensive set of resources, including manufacturing equipment, people, and computational tools. Advanced semiconductor research activities can be even more demanding, frequently requiring unique equipment and processing capabilities.

We are developing a flexible, distributed system architecture capable of supporting collaborative design and fabrication of semiconductor devices and integrated circuits. Such capabilities are of particular importance in the development of new technologies, where both equipment and expertise are limited. Distributed fabrication enables direct, remote, physical experimentation in the development of leading edge technology, where the necessary manufacturing resources are new, expensive, and scarce. Computational resources, software, processing equipment, and people may all be widely distributed; their effective integration is essential in order to achieve the realization of new technologies for specific product requirements. Our architecture leverages current vendor and consortia developments to define software interfaces and infrastructure based on existing and emerging networking, CIM, and CAD standards. Process engineers and product designers access

processing and simulation results through a common interface and collaborate across the distributed manufacturing environment.

3.2.2 Labnet Software

Project Staff

Thomas L. Lohman, Professor Duane S. Boning

University microfabrication laboratories are facing many new challenges and opportunities: (1) facilities are becoming more expensive and difficult to manage; (2) resources and expertise need be shared and made available to a wider community; and (3) education and research are becoming more dependent on multi-institutional collaboration. Given the above challenges, there is a growing need for a new distributed information infrastructure, that will allow remote collaboration, access to remote sites' data and sharing of end-user software applications, considering the differences between remote sites in computer platforms, operating systems, and technical resources. Past research has been done within this application domain but most working systems are too tightly coupled to their local facilities, suffer from portability problems, and do not address the issue of data distribution and remote site interaction.

The Labnet Software Project was initiated in recognition of a need for universities to share the development and support effort needed to develop and maintain new distributed laboratory information systems. Joint development work among MIT, Stanford University and the University of California at Berkeley is in progress. The main goals of the joint development effort are to:

- Assess the applicability of emerging technologies such as the Object Management Group's (OMG) Common Object Request Broker Architecture (CORBA), OMG's Interface Definition Language (IDL), Sun Microsystem's Java language, and object databases.
- Explore infrastructure to enable collaborative distributed design and fabrication (including object-oriented distributed programming interfaces and web-based user interface capability).
- Develop abstract specifications of programming interfaces to both data and services.
- Explore standards to achieve software compatibility such as the Sematech CIM Application Framework.

Publication

McIlrath, M., D.S. Boning, and D.E. Troxel. "Architecture for Distributed Design and Fabrication." In *Plug and Play Software for Agile Manufacturing*. Ed. B.L.M. Goldstein. *Proc. SPIE* 2913: 134-47 (1997).

3.2.3 Distributed Process Control Architecture

Project Staff

Aaron E. Gower, Professor Duane S. Boning, Michael B. McIlrath

Semiconductor fabrication requires an increasingly expensive and integrated set of tightly controlled processes, driving the need for a fabrication facility with fully computerized, networked processing equipment. We have designed an integrated, open system architecture enabling distributed experimentation and process control for plasma etching. The system was developed at MIT's Microsystems Technology Laboratories and employs in-situ CCD interferometry based analysis in the sensor-feedback control of an Applied Materials Precision 5000 Plasma Etcher (AME5000). Our system supports accelerated, advanced research involving feedback control algorithms and includes a distributed interface that utilizes the internet to make these fabrication capabilities available to remote users.

The system architecture is both distributed and modular: specific implementation of any one task does not restrict the implementation of another. The low level architectural components include a host controller that communicates with the AME5000 equipment via SECS-II and a host controller for the acquisition and analysis of the CCD sensor images. A Cell Controller (CC) manages communications between these equipment and sensor controllers. The CC is also responsible for process control decisions; algorithmic controllers may be integrated locally or via remote communications. Finally, a System Server manages connections from internet/intranet (web) based clients and uses a direct link with the CC to access the system. Each component communicates via a predefined set of TCP/IP socket based messages. This flexible architecture makes integration easier and more robust and enables separate software components to run on the same or different computers independent of hardware or software platform.

Publication

Gower, A., D. Boning, and M. McIlrath. "Flexible, Distributed Architecture for Semiconductor Process Control and Experimentation." In *Open Architecture Control Systems and Standards*. Ed. F.M. Proctor; *Proc. SPIE* 2912: 146-58 (1997).

3.2.4 Remote Microscope for Collaborative Inspection of Integrated Circuits

Project Staff

Manuel Perez, Brian Lee, Professor Donald E. Troxel

The internet remote microscope was developed to enable users to inspect a microscope specimen remotely by using an ordinary workstation computer connected to the internet. The remote microscope is a distributed system that consists of one or more graphical client interfaces that communicate over the internet with a microscope server unit consisting of hardware and software needed to automatically control an inspection microscope. The client interface presents the user with a graphical microscope control panel and two image panels that show static images of the microscope specimen that can be updated upon request.

Because it is not important to have live video when examining many types of specimens, especially in the context of inert semiconductor wafers, this approach gives acceptable performance while requiring only limited bandwidth. From the control or instrumentation panel, the user may select a new magnification, pan position, and focus setting (manual or automatic), and can then instruct the system to capture a new image at the specified coordinates. The new image can be placed in one of the two arbitrary display windows, allowing the user to keep a previous image for reference. Typically, one would actually use one window to show a global or panoramic view of the specimen at low magnification, while using the other window to show a more detailed region of interest at high magnification. The server system consists of a Zeiss microscope, an automated stage accurate to 0.4 microns for X-Y translation and 0.1 microns for Z direction, a video camera, and an ordinary personal computer running OS/2 that services requests over the internet from clients.

The PC contains a framegrabber board that can capture an ordinary NTSC video signal from a CCD camera that is mounted on top of the microscope, and the PC is also responsible for controlling the stage, tur-

ret, and focus settings for an automated Zeiss microscope. Except for the initial placement of a wafer on the stage, this system is fully automated and controllable from the client control panel. Essentially, the remote microscope allows distant users to access and view a specimen remotely as if they were controlling the microscope themselves. An additional capability of the internet remote microscope is that multiple clients can view the microscope simultaneously during a conference inspection mode. This enables any number of experts anywhere on the internet to simultaneously view the microscope images collaboratively, although only one person at a time is in control and allowed to change the system settings.

Users use the remote microscope by retrieving the client applet from a web server, residing on the same system as the remote microscope server application. This design has made the client program platform independent, allowing the use of the client on any machine which supports Java applets. The Java client currently includes all the functionality of the original client, as well as many of the new manual focusing options currently being designed.

New features added include a text chat tool, online help files, a mini tools window, and a layout based navigation tool. The text based chat tool allows users to send small text messages to one another, while inspecting a wafer. The online help contains a complete users guide, trouble shooting tips, and other remote microscope related material. These help files will be directly available through the web server. The mini tools window allows for quick zoom, move, and grab commands, as well as including some measurement functions. A Java based MAGIC file viewer in our group serves as the basis for an easy and quick navigation tool.

Publication

Perez, M. *Java Remote Microscope for Collaborative Inspection of Integrated Circuits*. M.Eng. thesis, Department of Electrical Engineering and Computer Science, MIT, June 1997.

3.2.5 Semiconductor Process Repository

Project Staff

Matthew D. Verminski, William P. Moyné, Michael B. McIlrath, Professor Donald E. Troxel

The goal of this research task is to create a system to facilitate distributed process research and design. Such a system will allow users to retrieve and examine process flows from multiple process libraries across the network.

Work has proceeded on the design and development of a distributed process repository interface. The repository application programming interface (API) is encapsulated by an OMG CORBA distributed object model and defined by an Interface Description Language (IDL) specification. The process object model used to encapsulate the process repository API is based on the Semiconductor Process Representation (SPR) Information Model. The IDL specification is programming language-neutral; application clients and repository services may be implemented in any language supported by a CORBA-compliant object request broker (ORB) and interoperate across a local or wide-area network. Process repositories may be distributed; process objects and services may be located at various sites transparently to application clients. Applications and services may interoperate using entirely distinct ORB implementations if a common protocol such as the Internet InterORB Protocol (IIOP) or appropriate bridges are available.

The present SPR IDL development includes the base information model. This standard process representation interface provides a common facility to communicate fabrication processes. The fabrication process information organizes processes into smaller subprocesses. At each level, the process can be described from different views. These include the *effect* of a process on the wafer, the *environment* around the wafer during the process, and the *equipment* settings during the process. Each view contains parameters that describe some aspect of the wafer, environment, or equipment during some interval of time. Dynamic attributes (property lists) are also supported for maximum extensibility. The base SPR IDL has been extended to include specific effects and parameters with statistical information.

Two SPR-based repository implementations are in progress. One uses the Xerox InterLanguage Unification (ILU) ORB³ to provide an SPR wrapper to pro-

cesses in the MIT CAFE CIM system⁹ used by the Microsystems Technology Laboratories. Repository object implementations are built directly on the CAFE GESTALT object oriented programming layer. This repository implementation now integrates IIOOP directly, supporting operation with clients using heterogeneous ORBs without the need for the request-level bridging employed earlier.

A distributed software architecture for semiconductor process design has been defined and implemented in Java with the OrbixWeb Object Request Broker (ORB). The implementation communicates with any ORB adhering to the Internet Inter-ORB Protocol (IIOOP). A persistent storage mechanism has been implemented using object design objectstore PSE (Persistent Storage Engine) for Java.

Other services to manage, query and find distributed objects are being developed. Their interfaces are based upon the Object Management Group's (OMG) CORBA services specifications. A Life Cycle service for creating, deleting, copying, and moving distributed objects has been developed. Work has begun on implementing a Query service and a Trader service. Together, the services will be essential for the development of distributed and shared applications for semiconductor process research and design.

We have also been collaborating with the Sematech CIM Framework project in the areas of Specification Management and CIM Architecture. This work is also CORBA IDL-based and we are investigating the possibilities for interoperation of these environments.

Thesis

Verminski, M. *A Distributed Software Architecture for Semiconductor Process Design*. S.M. thesis, Department of Electrical Engineering and Computer Science, MIT, January 1998.

3.2.6 Networked and Distributed CAD Tools

The rapid growth of computer networks has changed the way applications can be made available. The internet provides a framework with which to distribute and share tools among many users. One of the various methods used to integrate applications with the internet is the use of CGI (Common Gateway Inter-

face) programming. This complemented with HTML (Hypertext Markup Language) form based entry for inputs allows users with a standard web browser to access applications.

Exploring Semiconductor Device Parameter Space using Rapid Analytical Modeling

Project Staff

Brian Lee, Michael B. McIlrath, Professor Duane S. Boning, Professor Donald E. Troxel, Professor Anantha P. Chandrakasan

The creation and implementation of a semiconductor device parameter space exploration tool has been accomplished, which can assist circuit and device designers. Such a tool allows the designer to analyze trade-offs between parameter variations (after defining electrical constraints at the circuit level of abstraction) as well as receive information about feasible device structures. In addition, it is also possible to compare device parameter variations within a technology family, as well as across different technology families.

The technique of exploring parameter space utilizes a method of rapid analytical modeling to allow for faster, but less accurate, evaluations than one might get through established methods of numerical simulation tools such as MEDICI or PISCES, offering an alternative to such simulators for circuit designers who wish to have rough estimates of parameter variation information, or device structure feasibility. The tool can be a valuable addition to any circuit or device designer's CAD environment.

A Framework for Distributed Web-based Microsystem Design

Project Staff

Debashis Saha, Professor Anantha P. Chandrakasan

The increasing complexity of microsystem design mandates a distributed and collaborative design environment. The high integration levels call for tools and generators that allow exploration of the design space irrespective of the geographical or physical availability of the design tools.

8 B. Janssen and M. Spritzer, *ILU Reference Manual*, Palo Alto Research Center, (Palo Alto: Xerox Corp, 1996).

9 M.B. McIlrath, D.E. Troxel, M.L. Heytens, P. Penfield, Jr., D.S. Boning, and R. Jayavant, "CAFE—The MIT Computer-Aided Fabrication Environment," *IEEE Trans. Comp., Hybrids, Manuf. Tech.*, 15(2): 353-60 (1992).

The World Wide Web serves as a desirable platform for distributed access to libraries, models and design tools. The rapid growth and acceptance of the World Wide Web has happened over the same time period in which distributed object systems have stabilized and matured. The Web can become an important platform for VLSI CAD, when the distributed object technologies (e.g., CORBA) are combined with the Web technologies (e.g., HTTP, CGI) and Web-aware object oriented languages (e.g., Java).

A framework using the Object-Web technologies enables distributed Web based CAD. The Object-Web architecture provides an open, interoperable and scalable distributed computing environment for microsystem design, in which Web based design tools can efficiently utilize the capabilities of existing design tools on the Web to build hierarchical Web tools. The framework includes the infrastructure to store and manipulate design objects, protocols for tool communication and WebTop, a Java hierarchical schematic/block editor with interfaces to distributed Web tools and cell libraries.

3.3 Scheduling Language for Manufacturing Systems

We have proposed the syntax and supporting structure of a language that allows a programmer to devise and implement scheduling policies for manufacturing systems. In the course of the description of the language, we have defined various methods of representing a factory, including the equipment and personnel in the factory, the process flows of parts and constraints on the production of parts.

We take an object-oriented approach to the definitions of the various components of the factory model. With the factory well-defined, we have then described the structure and syntax of a language that allows for the implementation of scheduling policies such as Kanban and CONWIP. A running example of a five-machine production line has been used to illustrate the constructs defined. Finally, we have described the structure of a scheduler based on the constructs developed that takes a real-time control perspective.

Thesis

Nemec, J.E. *A Quantity Scheduling Language for Manufacturing Systems*. S.M. (M.Sci. in Operations Research), Department of Electrical Engineering and Computer Science, MIT, June 1997.