

MATHEMATICAL MODELLING AND ANALYSIS
Volume 20 Number 1, January 2015, 9–29
<http://dx.doi.org/10.3846/13926292.2015.996615>
© Vilnius Gediminas Technical University, 2015

Publisher: Taylor&Francis and VGTU
<http://www.tandfonline.com/TMMA>
ISSN: 1392-6292
eISSN: 1648-3510

Solving Numerically the Static Maxwell Equations in an Axisymmetric Singular Geometry

Franck Assous^a and Irina Raichik^b

^a*Ariel University*

40700 Ariel, Israel

^b*Bar-Ilan University*

52900 Ramat-Gan, Israel

E-mail(*corresp.*): franckassous@netscape.net

E-mail: irina.raichik@gmail.com

Received December 31, 2012; revised November 5, 2014; published online January 15, 2015

Abstract. We propose a new numerical method to compute the singular solution of the Maxwell equations in axisymmetric domains, as for example in non convex polygonal domains. As geometrical singularities are mainly related to the space dependent part of the model, we focus on the static field computation. We then introduce a new approach, that consists in decomposing the domain into two or more subdomains, and to derive an *ad hoc* variational formulation in each subdomain. The interface conditions are then imposed with a method deduced from a Nitsche method coupled with a specific “exchange” approach. An advantage of this domain decomposition method is that it does not require neither overlapping nor iteration process. Another advantage is that no particular mesh refinement is needed near the geometrical singularities. Numerical examples will be shown.

Keywords: Maxwell equations, singular geometries, Laplace operator, Nitsche method, domain decomposition.

AMS Subject Classification: 65P25; 77C10.

1 Introduction

Electromagnetic phenomena play a very important role nowadays. Maxwell’s equations (see [7,8,9,19,24]) represent one of the most elegant and concise ways to state the fundamentals of electricity and magnetism. A lot of engineering problems today require to model and simulate them numerically. Furthermore, a lot of structures one needs to model have a complex three-dimensional geometry and present a surface with reentrant edges and/or corners. They are called geometrical singularities since they can generate very strong fields that have to be taken into account especially in a numerical approach.

Besides, even if it is sometimes unavoidable, three-dimensional computations may be very expensive. Reducing the three-dimensional problem to two-dimensional computations, by assuming that the geometry, the data and the initial conditions are independent of one of coordinates, reduces the cost of computations, and often gives a quite good approximation of the real three dimensional solution.

Various approaches have been suggested for solving Maxwell equations in a singular domain. To our knowledge, first theoretical works have been proposed by M. Birman and M. Solomyak (see [5, 6]). The principle of their approach is to decompose the space of electromagnetic fields into a simple sum of a regular field subspace and the subspace made of gradients of solutions to the Laplace problem. However, from a numerical point of view, this decomposition is not very useful since it is not a direct one.

In 1990s, a new vision on the characterizations of the singularity of the electromagnetic fields was given by M. Costabel and M. Dauge (see [11, 12] and references therein), called afterwards electromagnetic singularities. They also accomplished a thorough description of the Maxwell operator in 2D and 3D domain and proved density results. Lately (see [13]), they proposed that the electric field would be fully taken into account without any splitting thanks to a technique which consists of introducing suitable weights in the definition of functional spaces: it allows to capture numerically strong electric fields.

We refer to the work of Bonnet-Ben Dhia, Hazard and Lohrengel (see [14]), for solving the time-harmonic, divergence-free Maxwell equations. But, in practice, they use a truncation function that leads to very slow numerical convergence. Let us also mention comparisons of different existing approaches for solving the 2D Maxwell equations (see [17, 20]).

In this paper, we are interested in the axisymmetric singular geometry case (r, θ, z) . Two-dimensional geometry is achieved by assuming that the domain, the data and the initial conditions are independent of θ , namely $\frac{\partial}{\partial \theta} = 0$. This can be viewed as an intermediate between a full three-dimensional problem and a two-dimensional one. Since geometric singularities of the domain (like reentrant corners) have basically an influence on the space part of the equations, we will restrict ourselves to the static problem, by assuming $\frac{\partial}{\partial t} = 0$, as also developed in [10]. Then, we use that the singularity of the Maxwell equations is connected to the singular solution to the Laplace operator. Hence, we derive a new *ad hoc* numerical method to solve this Laplace-like problem. This method will be based on a domain decomposition method, so that it may be supported by the huge bibliography of the well-known domain decomposition methods. It will require the introduction of extended Nitsche method (see [4, 25]) coupled with a specific "exchange" approach in order to handle the transmission conditions of Dirichlet and Neumann type. Note that the proposed domain decomposition method does not require neither overlapping nor iteration process, which makes it efficient from a computational point of view. It will be also shown that no particular mesh refinement will be needed near the geometrical singularities.

2 From Maxwell to a Laplace-Like Operator

2.1 The Maxwell equations

Let Ω be a bounded and simply connected Lipschitz domain, Γ its boundary, and \mathbf{n} the unit outward normal to Γ . The time-dependent Maxwell equations are a set of four partial differential equations that relate the electric field \mathbf{E} and the magnetic induction \mathbf{B} to the charge density ρ and the current density \mathbf{J} . If we let c and ε_0 be the speed of light and the dielectric permittivity of the vacuum, the Maxwell equations in vacuum read

$$\frac{\partial \mathbf{E}}{\partial t} - c^2 \mathbf{curl} \mathbf{B} = -\frac{1}{\varepsilon_0} \mathbf{J}, \quad (2.1)$$

$$\frac{\partial \mathbf{B}}{\partial t} + \mathbf{curl} \mathbf{E} = 0, \quad (2.2)$$

$$\operatorname{div} \mathbf{E} = \frac{\rho}{\varepsilon_0}, \quad (2.3)$$

$$\operatorname{div} \mathbf{B} = 0, \quad (2.4)$$

these quantities depending on the space variable \mathbf{x} and on the time variable t . These equations are supplemented with appropriate boundary conditions. In this paper, we assume that the boundary is a perfect conducting medium or perfect conductor, in which the conductivity is assumed to be “infinite”: all electromagnetic fields \mathbf{E} and \mathbf{B} are uniformly equal to zero in such a medium. This ideal situation is often used to model metals. Of course, extension to other boundary conditions is possible. Classically, one models the perfect conductor boundary conditions by

$$\mathbf{E} \times \mathbf{n} = 0 \quad \text{and} \quad \mathbf{B} \cdot \mathbf{n} = 0 \quad \text{on the boundary } \Gamma.$$

Last, initial conditions are provided, for instance at initial time $t = 0$

$$\mathbf{E}(t = 0) = \mathbf{B}(t = 0) = 0.$$

2.2 Reduction to two-dimensional problems

We assume now that the bounded domain Ω is an axisymmetric one, limited by the surface of revolution Γ . Let us denote their intersections with a meridian half-plane by ω and γ_b their intersections with a meridian half-plane (see Fig. 1). One has $\partial\omega := \gamma = \gamma_a \cup \gamma_b$, where either $\gamma_a = \emptyset$ when γ_b is a closed contour (i.e. Ω does not contain the axis), or γ_a is the segment of the axis lying between the extremities of γ_b . We denote $\boldsymbol{\nu}$ is outward normal, and by $\boldsymbol{\tau}$ the unit tangential vector such that $(\boldsymbol{\tau}, \boldsymbol{\nu})$ is direct. It is natural to consider the cylindrical coordinates (r, θ, z) for such a domain. A meridian half-plane is defined by the equation $\theta = \text{constant}$, and (r, z) are Cartesian coordinates in this half-plane.

Assuming symmetry of revolution, namely $\partial/\partial\theta = 0$, means that the fields are entirely determined by their trace in ω , that is the datum of their value in a meridian half-plane. Applying $\partial/\partial\theta = 0$ in the classical formulae for

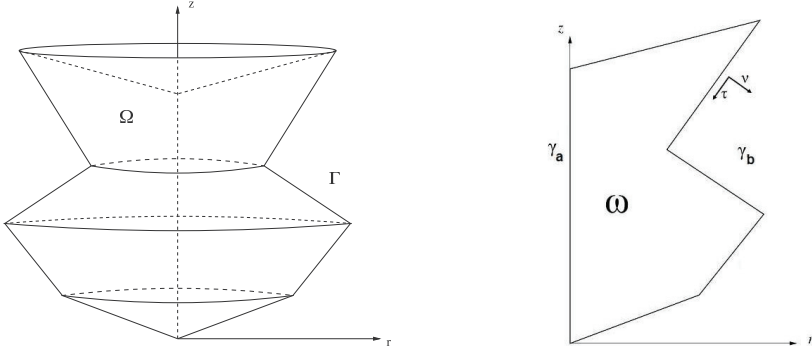


Figure 1. The axisymmetric domain Ω and the corresponding meridian domain ω .

the gradient, divergence, and curl operators in cylindrical coordinates (see for instance [3]), we get the following expressions:

$$\mathbf{grad} f = \left(\frac{\partial f}{\partial r}, \frac{\partial f}{\partial z} \right), \quad \operatorname{div} \mathbf{u} = \frac{1}{r} \frac{\partial}{\partial r} (r u_r) + \frac{\partial u_z}{\partial z}, \quad (2.5)$$

$$\Delta f = \frac{\partial^2 f}{\partial r^2} + \frac{1}{r} \frac{\partial f}{\partial r} + \frac{\partial^2 f}{\partial z^2}, \quad (2.6)$$

whereas the curl operator is given by the formula

$$\mathbf{curl} \mathbf{u} = \left(-\frac{\partial u_\theta}{\partial z}, \frac{\partial u_r}{\partial z} - \frac{\partial u_z}{\partial r}, \frac{1}{r} \frac{\partial}{\partial r} (r u_\theta) \right). \quad (2.7)$$

Remark that for a meridian vector field $\mathbf{u}_m = (u_r, u_z)$, its curl $\mathbf{curl} \mathbf{u}_m$ is azimuthal, so that it is convenient to introduce the roman type notation

$$\operatorname{curl} \mathbf{u}_m = \frac{\partial u_r}{\partial z} - \frac{\partial u_z}{\partial r}.$$

In the same way, $\mathbf{curl} u_\theta$ is meridian if u_θ is azimuthal. Hence, we set

$$\mathbf{curl} u_\theta = \left(-\frac{\partial u_\theta}{\partial z}, \frac{1}{r} \frac{\partial}{\partial r} (r u_\theta) \mathbf{e}_z \right).$$

As it is well known, these properties lead us to decouple the Maxwell system (2.1)–(2.4) into two systems of equations. From now on, let us denote the meridian component of the electric field and of the current density by $\mathbf{E} = (E_r, E_z)$, $\mathbf{J} = (J_r, J_z)$. Also denote by B_θ , J_θ the azimuthal component of the magnetic induction and of the current density, the axisymmetric Maxwell equations can be written as a system in (\mathbf{E}, B_θ)

$$\begin{cases} \frac{\partial \mathbf{E}}{\partial t} - c^2 \mathbf{curl} B_\theta = -\frac{1}{\varepsilon_0} \mathbf{J}, \\ \frac{\partial B_\theta}{\partial t} + \operatorname{curl} \mathbf{E} = 0, \\ \operatorname{div} \mathbf{E} = \frac{\rho}{\varepsilon_0}. \end{cases} \quad (2.8)$$

where the perfect conductor boundary condition is expressed

$$\mathbf{E} \cdot \boldsymbol{\tau} = 0 \quad \text{on } \gamma_b$$

and the symmetry conditions on the axis γ_a become

$$\mathbf{E} \cdot \boldsymbol{\nu} = E_r = 0, \quad B_\theta = 0 \quad \text{on } \gamma_a.$$

Then, with similar notations, a second system in (\mathbf{B}, E_θ) reads:

$$\begin{cases} \frac{\partial E_\theta}{\partial t} - c^2 \operatorname{curl} \mathbf{B} = -\frac{1}{\varepsilon_0} J_\theta, \\ \frac{\partial \mathbf{B}}{\partial t} + \operatorname{curl} E_\theta = 0, \\ \operatorname{div} \mathbf{B} = 0 \end{cases} \quad (2.9)$$

with the perfect conductor boundary condition

$$\mathbf{B} \cdot \boldsymbol{\nu} = 0, \quad E_\theta = 0 \quad \text{on } \gamma_b,$$

and the symmetry conditions on the axis γ_a

$$\mathbf{B} \cdot \boldsymbol{\nu} = B_r = 0, \quad E_\theta = 0 \quad \text{on } \gamma_a.$$

The two systems (2.8) and (2.9) are of the same nature. In this paper, we will focus on the second one, in which (E_θ, \mathbf{B}) are involved. The first one may analysed similarly. Remark however that in that case, the Laplace-like operator involved is not the same, but the one studied in [23].

At this point, let us introduce some Sobolev functional spaces and their respective norms, which will be useful for the following of the article. We define

$$\begin{aligned} L_r^2(\omega) &= \left\{ f : \omega \rightarrow \mathbb{R}; \int_\omega f^2 r dr dz < +\infty \right\}, \quad \|f\|_{0,\omega} = \left(\int_\omega f^2 r dr dz \right)^{1/2}, \\ H_r^1(\omega) &= \left\{ f \in L_r^2(\omega); \int_\omega |\mathbf{grad} f|^2 r dr dz < +\infty \right\}, \\ \|f\|_{1,\omega} &= (\|f\|_{0,\omega}^2 + \|\mathbf{grad} f\|_{0,\omega}^2)^{1/2}, \\ H_m^1(\omega) &= \left\{ f \in H_r^1(\omega); \int_\omega \frac{f^2}{r} dr dz < +\infty \right\}, \\ \|f\|_{m,\omega} &= \left(\|f\|_{1,\omega}^2 + \left\| \frac{f}{r} \right\|_{0,\omega}^2 \right)^{1/2}. \end{aligned}$$

Denoting the vector space $\mathbf{L}_r^2(\omega) := L_r^2(\omega) \times L_r^2(\omega)$ allows us to define the classical spaces for the Maxwell equations

$$\begin{aligned} \mathbf{H}(\operatorname{curl}, \omega) &= \{ \mathbf{v} \in \mathbf{L}_r^2(\omega); \operatorname{curl} \mathbf{v} \in L_r^2(\omega) \}, \\ \mathbf{H}(\operatorname{div}, \omega) &= \{ \mathbf{v} \in \mathbf{L}_r^2(\omega); \operatorname{div} \mathbf{v} \in L_r^2(\omega) \}. \end{aligned}$$

In the rest of the paper, we will need $\mathbf{H}_0(\operatorname{div}, \omega)$, the subspace of $\mathbf{H}(\operatorname{div}, \omega)$ with the vanishing normal trace, and the space of solutions

$$\mathbf{Y} := \mathbf{H}(\operatorname{curl}, \omega) \cap \mathbf{H}_0(\operatorname{div}, \omega).$$

Now, considering the azimuthal component E_θ , one can easily show that it is a solution to a scalar wave equation. Indeed, it is sufficient to take the time derivative of the first equation of (2.9), to apply the curl operator to the second one, and to use the identity $\operatorname{curl} \mathbf{curl} = -\Delta$. In these conditions, even in a singular domain, E_θ is always regular, namely belongs to $H_m^1(\omega)$ (see for a proof [3]) and there is no difficulty to compute it.

For this reason, we focus on the computation of magnetic field \mathbf{B} . Moreover, as we handle the geometrical singularity of the domain, we are dealing with the space-dependent part of the model (not the time-dependent one). Thus, we simplify the problem by considering the stationary problem associated with equations (2.9), by performing $\frac{\partial}{\partial t} = 0$, which becomes

$$\begin{cases} \operatorname{curl} \mathbf{B} = \frac{1}{c^2 \varepsilon_0} \mathbf{J}_\theta, \\ \operatorname{div} \mathbf{B} = 0. \end{cases} \quad (2.10)$$

This equation appears as a particular case of the following $(\operatorname{div}, \operatorname{curl})$ problem, that we will examine next:

For a given scalar function f , find $\mathbf{u} = (u_r, u_z)$ a divergence-free vector solution in a meridian singular two dimensional domain ω , solution to

$$\begin{cases} \operatorname{curl} \mathbf{u} = f, \\ \mathbf{u} \cdot \boldsymbol{\nu} = 0. \end{cases} \quad (2.11)$$

2.3 A decomposition in regular and singular parts

Much of this subsection is taken and adapted from [3, §3], to make the article self-contained. The reader interested in a practical approach only may skip to Section 3. As proved in [3], problem (2.11) is singular in the sense that for a non-convex domain ω – typically ω containing a reentrant corner – the space of solutions, says \mathbf{W} , is a subspace of \mathbf{Y} but *not a subspace* of $\mathbf{H}^1(\omega)$. More precisely, \mathbf{W} is defined by

$$\mathbf{W} = \{\mathbf{w} \in \mathbf{Y} : \operatorname{div} \mathbf{w} = 0\}, \quad \text{with norm } \|\operatorname{curl} \mathbf{w}\|_{0,\omega}.$$

Nevertheless, \mathbf{W} can be decomposed into two subspaces, where \oplus denotes a direct sum

$$\mathbf{W} = \mathbf{W}_R \oplus \mathbf{W}_S$$

with

$$\mathbf{W}_R = \mathbf{W} \cap \mathbf{H}^1(\omega).$$

Hence, \mathbf{W}_R is a *regular* subspace, as a subspace of $\mathbf{H}^1(\omega)$, and one can compute a numerical approximation by a standard method, for instance a P_1 -conforming finite element method. The difficulty comes from the *singular* subspace \mathbf{W}_S , that has been proved to be a finite-dimensional subspace (see [1]), the dimension being the number of reentrant corners of the domain ω . Moreover, one has also proved in [2] that a basis function \mathbf{w}_S of \mathbf{W}_S can be characterized as the solution to

$$\operatorname{curl} \mathbf{w}_S = P_S \quad \text{in } \omega, \quad (2.12)$$

$$\operatorname{div} \mathbf{w}_S = 0 \quad \text{in } \omega, \quad (2.13)$$

$$\mathbf{w}_S \cdot \boldsymbol{\nu} = 0 \quad \text{on } \gamma. \quad (2.14)$$

Here, the right-hand side P_S is singular in the sense that it belongs to $L_r^2(\omega)$, but not to $H_r^1(\omega)$, and is solution to the problem

$$\Delta' P_S = 0 \quad \text{in } \omega, \quad (2.15)$$

$$P_S = 0 \quad \text{on } \gamma, \quad (2.16)$$

where Δ' is a Laplace-like operator defined in axisymmetric coordinates (r, z) by:

$$\Delta' P_S := \frac{\partial^2 P_S}{\partial r^2} + \frac{\partial^2 P_S}{\partial z^2} + \frac{1}{r} \frac{\partial P_S}{\partial r} - \frac{P_S}{r^2}. \quad (2.17)$$

Hence, the key point is to compute P_S , which can not be solved by a standard finite element method, which would give $P_S = 0$ as a solution. However, following [15, 16, 21, 22], in the cartesian case, or [1] in the axisymmetric case, there exists a non-vanishing singular solution P_S which tends to infinity near the reentrant corner, and which does not belong to $H_r^1(\omega)$ but belongs to $L_r^2(\omega)$. Our aim is to propose an efficient numerical method to compute P_S , from which the singular solution \mathbf{w}_S will be easily and (hopefully!) accurately computed.

3 The Numerical Method

We will introduce now the numerical method to compute P_S , based on a domain decomposition approach. For the sake of simplicity, we will consider a non convex domain ω with only one reentrant corner. As we will see in what follows, this domain decomposition approach does not require neither overlapping nor iteration process. This makes it very efficient from a computational point of view.

3.1 A domain decomposition method

The principle of a domain decomposition method is to split the computational domain into several subdomains. Here, we split the domain ω into two subdomains ω_1 and ω_2 . As shown on Figure 2, the subdomain ω_1 is taken as the “external” domain and the subdomain ω_2 is the vicinity of the reentrant corner, with the interface $\gamma = \omega_2 \cap \omega_1$. For simplicity, we choose ω_2 to be an open angular sector in the neighbourhood of the reentrant corner. This leads us to

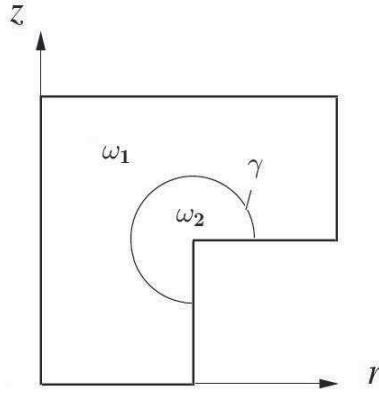


Figure 2. L-shape domain with one reentrant corner.

use local polar coordinates centered at the reentrant corner. In these conditions, ω_1 is the “regular” subdomain, since it does not contain the singularity, whereas ω_2 is the “singular” subdomain that contains the singularity.

Our aim is now to solve the problem in each subdomain separately, and to take into account the continuity of the solution at the interface γ . Since we deal with the second order operator Δ' , it is necessary to ensure the continuity of the solution P_S

$$P_S|_{\omega_1} = P_S|_{\omega_2} \text{ across the interface } \gamma,$$

and the continuity of the normal derivative of P_S

$$\left. \frac{\partial P_S}{\partial \nu_1} \right|_{\omega_1} + \left. \frac{\partial P_S}{\partial \nu_2} \right|_{\omega_2} = 0 \text{ across the interface } \gamma,$$

where ν_1 and ν_2 are respectively the outgoing normals of ω_1 and ω_2 at the interface γ . Denoting by P_1 the “external” solution, that is the restriction of P_S to ω_1 , and by P_2 the “singular” solution, that is the restriction of P_S to ω_2 , the system (2.15)–(2.16) can be decomposed in the following two systems:

Find $P_1 \in H_m^1(\omega_1)$ solution to Find $P_2 \in H_m^1(\omega_2)$ solution to

$$\left\{ \begin{array}{ll} -\Delta' P_1 = 0 & \text{in } \omega_1, \\ P_1 = 0 & \text{on } \partial\omega_1, \\ P_1 = P_2 & \text{on } \gamma, \\ \frac{\partial P_1}{\partial \nu_1} = -\frac{\partial P_2}{\partial \nu_2} & \text{on } \gamma; \end{array} \right. \quad \left\{ \begin{array}{ll} -\Delta' P_2 = 0 & \text{in } \omega_2, \\ P_2 = 0 & \text{on } \partial\omega_2, \\ P_2 = P_1 & \text{on } \gamma, \\ \frac{\partial P_2}{\partial \nu_2} = -\frac{\partial P_1}{\partial \nu_1} & \text{on } \gamma. \end{array} \right.$$

In the system on P_1 (left), P_2 is assumed to be given, whereas in the system on P_2 (right), P_1 is assumed to be given. In the regular subdomain ω_1 , P_1 is regular everywhere and can be solved by standard finite element method. However, the

problem set in ω_2 remains singular, since ω_2 still contains the reentrant corner, and it would also give $P_2 = 0$ as solution with a standard numerical method. To overcome this difficulty, one uses as in [2] that P_2 can be decomposed into

$$P_2 = Q_2 + P_2^S, \quad (3.1)$$

where Q_2 is the regular part everywhere in ω_2 of P_2 , that is Q_2 belongs to $H_r^1(\omega_2)$. P_2^S denoting the singular part of P_2 , that is the part that belongs to $L_r^2(\omega_2)$ but not to $H_r^1(\omega_2)$. Following [1], we have an analytic expression of the singular part P_2^S , given by

$$P_2^S = \frac{r}{a} \rho^{-\alpha} \sin(\alpha\phi), \quad (3.2)$$

where a is the distance from the reentrant corner to z -axis, and (ρ, ϕ) denote the local polar coordinates centered at the reentrant corner. Decomposition (3.1)–(3.2) will be used to derive the final variational formulation. Moreover, we have also to achieve first continuity of the solution. This will be performed by a Nitsche method. Secondly, the continuity of the normal derivative of the solution which will be imposed by an *exchange* technique in the variational formulations, that will be explained below. Let us introduce now the classical Nitsche method.

3.2 A variational formulation deduced from a Nitsche method

In 1970, J. Nitsche proposed in [25] a variational approach to enforce weakly Dirichlet boundary condition. In a certain sense, the method resembles Lagrange multiplier method, but it possesses better convergence property, ensures the existence and uniqueness of the solution.

Nitsche's method can be extend for imposing *essential* boundary conditions weakly in the finite element method for approximation of elliptic problems. Roughly speaking, *essential* boundary conditions, like the Dirichlet boundary conditions, are conditions that have to be imposed in the functional space in which the solution belongs to. At the opposite, *natural* boundary conditions, like the Neumann conditions, are conditions that appear naturally in the variational formulation and that cannot be handled by a Nitsche approach. The strong advantage of Nitsche's method is that it keeps the convergence rate of the finite element method [26], as opposed to the standard penalty method. Essentially, Nitsche's method imposes the boundary conditions via three boundary terms. Two of them contain the weak form of the normal derivatives of the solution and test functions. These two terms cause the method to be symmetric and consistent. A third term depends on the domain triangulation and causes the method to be stable.

To illustrate the method, we consider the standard Laplace problem. For a given bounded domain Ω of boundary Γ , let $H^{1/2}(\Gamma)$ be equal to the trace on Γ of elements $H^1(\Omega)$ and introduce the classical problem

For given functions $f \in L^2(\Omega)$ and $g \in H^{1/2}(\Gamma)$, find the solution u to

$$\begin{cases} -\Delta u = f & \text{in } \Omega, \\ u = g & \text{on } \Gamma. \end{cases} \quad (3.3)$$

We first introduce a shape regular finite element partition $\mathcal{T}_h = \cup K$ of the domain Ω . For any element K of the mesh \mathcal{T}_h , let $P_k(K)$ be the space of polynomials of degree $k \geq 1$ on K . We denote by E an edge of an element \mathcal{T}_h and by C_h the trace mesh induced by \mathcal{T}_h on the boundary Γ , that is

$$C_h = \{E; E = K \cap \Gamma, K \in \mathcal{T}_h\}.$$

Moreover, we assume that the elements of C_h verify the regularity condition

$$h_E \leq C\rho_E,$$

where h_E is the diameter element $E \in C_h$ and ρ_E is the maximum diameter of circle inscribed in E . Finally, let us introduce the finite element space

$$V_h = \{v \in H^1(\Omega); v|_K \in P_k(K)\}.$$

According to these definitions, Nitsche's method for the above problem consists in the following steps:

- Derivation of the classical variational formulation
find $u_h \in V_h$ such that:

$$\int_{\Omega} \nabla u_h \cdot \nabla v \, d\Omega - \int_{\Gamma} \frac{\partial u_h}{\partial n} v \, d\Gamma = \int_{\Omega} f v \, d\Omega, \quad \forall v \in V_h.$$

- Symmetrization by adding the expression

$$- \int_{\Gamma} \frac{\partial v}{\partial n} u_h \, d\Gamma$$

to left-hand side of equation and, since $u_h = g$ on Γ , adding the expression

$$- \int_{\Gamma} \frac{\partial v}{\partial n} g \, d\Gamma$$

to the right-hand side of equation, that yields

$$\int_{\Omega} \nabla u_h \cdot \nabla v \, d\Omega - \int_{\Gamma} \frac{\partial u_h}{\partial n} v \, d\Gamma - \int_{\Gamma} \frac{\partial v}{\partial n} u_h \, d\Gamma = \int_{\Omega} f v \, d\Omega - \int_{\Gamma} \frac{\partial v}{\partial n} g \, d\Gamma.$$

- Stabilization to ensure stability and coerciveness of the above variational formulation, by adding the expression (β being a given constant)

$$\beta \sum_{E \in C_h} \frac{1}{h_E} \int_E u_h v \, dE$$

to the left-hand side of equation, and in parallel the expression

$$\beta \sum_{E \in C_h} \frac{1}{h_E} \int_E g v \, dE$$

to the right-hand side of equation.

Hence, the Nitsche formulation for the Laplace operator is finally written as

$$\begin{aligned} & \int_{\Omega} \nabla u_h \cdot \nabla v \, d\Omega - \int_{\Gamma} \frac{\partial u_h}{\partial n} v \, d\Gamma - \int_{\Gamma} \frac{\partial v}{\partial n} u_h \, d\Gamma + \beta \sum_{E \in C_h} \frac{1}{h_E} \int_E u_h v \, dE \\ & = \int_{\Omega} f v \, d\Omega - \int_{\Gamma} \frac{\partial v}{\partial n} g \, d\Gamma + \beta \sum_{E \in C_h} \frac{1}{h_E} \int_E g v \, dE. \end{aligned} \tag{3.4}$$

The method is proved to be consistent and stable for a β sufficiently large see [26]. In other words, u solution to (3.3) is also solution to (3.4). Another property of Nitsche’s method is the optimal order of convergence. Indeed, Nitsche proved [25] that if β is a sufficiently large constant, then the discrete solution converges to the exact one with optimal order in H^1 and L^2 . Following [26], we introduce the mesh dependent norm $\|v\|_{1,h}$ defined by (with obvious standard notations)

$$\|v\|_{1,h} = \left(\|\nabla v\|_0^2 + \sum_{E \in C_h} h_E^{-1} \|v\|_{0,E}^2 \right)^{1/2}.$$

Assuming that $u \in H^{k+1}(\omega)$ and that β is sufficiently large, then it holds for $u_h \in V_h$ the solution to the Nitsche problem (3.4)

$$\|u - u_h\|_{1,h} \leq Ch^k \|u\|_{k+1}, \tag{3.5}$$

where C is a positive constant.

3.3 Computation of the basis P_S

The first step consists in applying the Nitsche method here to impose $P_1 = P_2$ on γ for subdomain ω_1 , P_2 being considered as a data, and reciprocally. We get the two following variational formulations:

Find $P_1 \in H_m^1(\omega_1)$ solution to

$$\begin{aligned} & \iint_{\omega_1} \left(\nabla P_1 \nabla \varphi_1 + \frac{P_1 \varphi_1}{r^2} \right) r d\omega \\ & - \int_{\gamma} \frac{\partial P_1}{\partial \nu_1} \varphi_1 r d\gamma - \int_{\gamma} \frac{\partial \varphi_1}{\partial \nu_1} P_1 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E P_1 \varphi_1 r dE \\ & = - \int_{\gamma} \frac{\partial \varphi_1}{\partial \nu_1} P_2 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E P_2 \varphi_1 r dE, \quad \forall \varphi_1 \in H_{m0}^1(\omega_1); \end{aligned}$$

Find $P_2 \in H_m^1(\omega_2)$ solution to

$$\begin{aligned} & \iint_{\omega_2} \left(\nabla P_2 \nabla \varphi_2 + \frac{P_2 \varphi_2}{r^2} \right) r d\omega - \int_{\gamma} \frac{\partial P_2}{\partial \nu_2} \varphi_2 r d\gamma \\ & - \int_{\gamma} \frac{\partial \varphi_2}{\partial \nu_2} P_2 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E P_2 \varphi_2 r dE \\ & = - \int_{\gamma} \frac{\partial \varphi_2}{\partial \nu_2} P_1 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E P_1 \varphi_2 r dE, \quad \forall \varphi_2 \in H_{m0}^1(\omega_2). \end{aligned}$$

In addition, we have now to impose the continuity of the normal derivatives across γ , that the Nistche method does not ensure. To deal with this problem, we introduce an *exchange* method that consists in exchanging the term $\partial P_1/\partial \nu_1$ with $-\partial P_2/\partial \nu_2$ in the variational formulation on ω_1 , and reciprocally for the variational formulation on ω_2 . The above variational formulations become:

Find $P_1 \in H_m^1(\omega_1)$ solution to

$$\begin{aligned} & \iint_{\omega_1} \left(\nabla P_1 \nabla \varphi_1 + \frac{P_1 \varphi_1}{r^2} \right) r d\omega + \int_{\gamma} \frac{\partial P_2}{\partial \nu_2} \varphi_1 r d\gamma \\ & - \int_{\gamma} \frac{\partial \varphi_1}{\partial \nu_1} P_1 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E P_1 \varphi_1 r dE \\ & = - \int_{\gamma} \frac{\partial \varphi_1}{\partial \nu_1} P_2 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E P_2 \varphi_1 r dE, \quad \forall \varphi_1 \in H_{m0}^1(\omega_1); \end{aligned}$$

Find $P_2 \in H_m^1(\omega_2)$ solution to

$$\begin{aligned} & \iint_{\omega_2} \left(\nabla P_2 \nabla \varphi_2 + \frac{P_2 \varphi_2}{r^2} \right) r d\omega + \int_{\gamma} \frac{\partial P_1}{\partial \nu_1} \varphi_2 r d\gamma \\ & - \int_{\gamma} \frac{\partial \varphi_2}{\partial \nu_2} P_2 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E P_2 \varphi_2 r dE \\ & = - \int_{\gamma} \frac{\partial \varphi_2}{\partial \nu_2} P_1 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E P_1 \varphi_2 r dE, \quad \forall \varphi_2 \in H_{m0}^1(\omega_2). \end{aligned}$$

As explained above, we must use the substitution (3.1) at this point. Indeed numerically solving the above formulation with a standard P_k -conforming finite element method would give $P_2 \equiv 0$ in the vicinity ω_2 of the reentrant corner. Hence, due to the continuity conditions, one would also get $P_1 \equiv 0$ in the subdomain ω_1 , that is $P \equiv 0$ in the whole domain ω . Moreover, the order of convergence of the method (see (3.5)) is not valid in ω_2 , due to the lack of regularity of P_2 . However, it is valid for its regular part Q_2 . We get

$$\frac{\partial P_2}{\partial \nu_2} = \frac{\partial Q_2}{\partial \nu_2} + \frac{\partial}{\partial \nu_2} \left(\frac{r}{a} \rho^{-\alpha} \sin(\alpha \phi) \right).$$

Moreover, using that

$$\Delta' \left(\frac{r}{a} \rho^{-\alpha} \sin(\alpha \phi) \right) = \frac{-3\alpha}{a} \rho^{-\alpha-1} \sin((\alpha+1)\phi),$$

we are now looking for Q_2 - instead of P_2 - satisfying

$$\begin{cases} -\Delta Q_2 = \frac{-3\alpha}{a} \rho^{-\alpha-1} \sin((\alpha+1)\phi) & \text{in } \omega_2, \\ Q_2 = 0 & \text{on } \partial\omega_2, \\ Q_2 = P_1 - \frac{r}{a} \rho^{-\alpha} \sin(\alpha\phi) & \text{on } \gamma, \\ \frac{\partial Q_2}{\partial \nu_2} = -\frac{\partial P_1}{\partial \nu_1} - \frac{\partial}{\partial \nu_2} \left(\frac{r}{a} \rho^{-\alpha} \sin(\alpha\phi) \right) & \text{on } \gamma. \end{cases} \quad (3.6)$$

In these conditions, we obtain a new variational formulation with (P_1, Q_2) as unknowns, that reads

Find $P_1 \in H_m^1(\omega_1)$ such that

$$\begin{aligned} & \iint_{\omega_1} \left(\nabla P_1 \nabla \varphi_1 + \frac{P_1 \varphi_1}{r^2} \right) r d\omega + \int_{\gamma} \frac{\partial Q_2}{\partial \nu_2} \varphi_1 r d\gamma \\ & - \int_{\gamma} \frac{\partial \varphi_1}{\partial \nu_1} P_1 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E P_1 \varphi_1 r dE \\ & = - \int_{\gamma} \frac{\partial}{\partial \nu_2} \left(\frac{r}{a} \rho^{-\alpha} \sin(\alpha \phi) \right) \varphi_1 r d\gamma - \int_{\gamma} \frac{\partial \varphi_1}{\partial \nu_1} Q_2 r d\gamma \\ & - \int_{\gamma} \frac{\partial \varphi_1}{\partial \nu_1} \frac{r}{a} \rho^{-\alpha} \sin(\alpha \phi) r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E Q_2 \varphi_1 r dE \\ & + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E \left(\frac{r}{a} \rho^{-\alpha} \sin(\alpha \phi) \right) \varphi_1 r dE, \quad \forall \varphi_1 \in H_{m0}^1(\omega_1); \end{aligned}$$

Find $Q_2 \in H_m^1(\omega_2)$ such that

$$\begin{aligned} & \iint_{\omega_2} \left(\nabla Q_2 \nabla \varphi_2 + \frac{Q_2 \varphi_2}{r^2} \right) r d\omega + \int_{\gamma} \frac{\partial P_1}{\partial \nu_1} \varphi_2 r d\gamma \\ & - \int_{\gamma} \frac{\partial \varphi_2}{\partial \nu_2} Q_2 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E Q_2 \varphi_2 r dE \\ & = - \int_{\gamma} \frac{\partial}{\partial \nu_2} \left(\frac{r}{a} \rho^{-\alpha} \sin(\alpha \phi) \right) \varphi_2 r d\gamma - \int_{\gamma} \frac{\partial \varphi_2}{\partial \nu_2} P_1 r d\gamma - \int_{\gamma} \frac{\partial \varphi_2}{\partial \nu_2} \frac{r}{a} \rho^{-\alpha} \sin(\alpha \phi) r d\gamma \\ & + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E P_1 \varphi_2 r dE - \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_E \frac{r}{a} \rho^{-\alpha} \sin(\alpha \phi) \varphi_2 r dE \\ & - \iint_{\omega_2} \frac{3\alpha}{a} \rho^{-\alpha-1} \sin((\alpha+1)\phi) \varphi_2 r d\omega, \quad \forall \varphi_2 \in H_{m0}^1(\omega_2). \end{aligned}$$

To get the variational formulations which are of practical interest for numerical computations, we first remark that due to the geometry of domain ω_2 , which is a angular sector, we have $\frac{\partial}{\partial \nu_2} = \frac{\partial}{\partial \rho}$. Since $r = a + \rho \cos \phi$, we easily get that $\frac{\partial}{\partial \rho} \left(\frac{r}{a} \right) = \frac{1}{a} \frac{\partial}{\partial \rho} (a + \rho \cos \phi) = \frac{1}{a} \cos \phi$ which leads to

$$\frac{\partial}{\partial \rho} \left(\frac{r}{a} \rho^{-\alpha} \sin(\alpha \phi) \right) = \left(\frac{1}{a} \cos \phi \rho^{-\alpha} - \alpha \frac{r}{a} \rho^{-\alpha-1} \right) \sin(\alpha \phi).$$

Substituting these relations in the expressions above, the variational formulations that will be the basis of the numerical scheme read

Find $P_1 \in H_m^1(\omega_1)$ such that

$$\iint_{\omega_1} \left(\nabla P_1 \nabla \varphi_1 + \frac{P_1 \varphi_1}{r^2} \right) r d\omega + \int_{\gamma} \frac{\partial Q_2}{\partial \nu_2} \varphi_1 r d\gamma$$

$$\begin{aligned}
& - \int_{\gamma} \frac{\partial \varphi_1}{\partial \nu_1} P_1 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} P_1 \varphi_1 r dE \\
& = - \int_{\gamma} \left(\frac{1}{a} \cos \phi \rho^{-\alpha} - \alpha \frac{r}{a} \rho^{-\alpha-1} \right) \sin(\alpha \phi) \varphi_1 r d\gamma - \int_{\gamma} \frac{\partial \varphi_1}{\partial \nu_1} Q_2 r d\gamma \\
& - \int_{\gamma} \frac{\partial \varphi_1}{\partial \nu_1} \frac{r}{a} \rho^{-\alpha} \sin(\alpha \phi) r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} Q_2 \varphi_1 r dE \\
& + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} \frac{r}{a} \rho^{-\alpha} \sin(\alpha \phi) \varphi_1 r dE, \quad \forall \varphi_1 \in H_{m0}^1(\omega_1);
\end{aligned}$$

Find $Q_2 \in H_m^1(\omega_2)$ such that

$$\begin{aligned}
& \iint_{\omega_2} \left(\nabla Q_2 \nabla \varphi_2 + \frac{Q_2 \varphi_2}{r^2} \right) r d\omega + \int_{\gamma} \frac{\partial P_1}{\partial \nu_1} \varphi_2 r d\gamma \\
& - \int_{\gamma} \frac{\partial \varphi_2}{\partial \nu_2} Q_2 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} Q_2 \varphi_2 r dE \\
& = - \int_{\gamma} \left(\frac{1}{a} \cos \phi \rho^{-\alpha} - \alpha \frac{r}{a} \rho^{-\alpha-1} \right) \sin(\alpha \phi) \varphi_2 r d\gamma - \int_{\gamma} \frac{\partial \varphi_2}{\partial \nu_2} P_1 r d\gamma \\
& - \int_{\gamma} \frac{\partial \varphi_2}{\partial \nu_2} \frac{r}{a} \rho^{-\alpha} \sin(\alpha \phi) r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} P_1 \varphi_2 r dE \\
& - \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} \frac{r}{a} \rho^{-\alpha} \sin(\alpha \phi) \varphi_2 r dE \\
& - \iint_{\omega_2} \frac{3\alpha}{a} \rho^{-\alpha-1} \sin((\alpha+1)\phi) \varphi_2 r d\omega, \quad \forall \varphi_2 \in H_{m0}^1(\omega_2).
\end{aligned}$$

As a straight consequence of the previous derivations, we readily get the following consistency result

Theorem 1. *Let P_S be the singular solution of the equations (2.15)–(2.16). Then P_S solves the above systems.*

Moreover, using the same tools as for the standard Nitsche method, one can show that this modified axisymmetric Nitsche-like method is stable, for a sufficient large β . Numerical illustrations of this approach will be given in Section 4.

3.4 Computation of the basis \mathbf{w}_S

Assuming that P_S has been obtained, our aim is now to compute a basis function \mathbf{w}_S of \mathbf{W}_S characterized by (2.12)–(2.14). If we want to use the fact that \mathbf{w}_S belongs to $\mathbf{W}_S \subset \mathbf{H}(\text{curl}, \omega)$ to solve this problem, we can for example transform it into a problem in $\mathbf{curl curl}$. A second and more convenient way to find \mathbf{w}_S is to use its so-called “stream function” ψ . Using the following property (see [1]):

$$\forall \mathbf{w}_S \in \mathbf{W}_S; \exists! \psi \in H_m^1(\omega) \text{ such that } \mathbf{w}_s = \mathbf{curl} \psi,$$

where ψ is the unique solution to the Laplace-like problem

$$\begin{cases} -\Delta'\psi = P_S & \text{in } \omega, \\ \psi = 0 & \text{on } \gamma. \end{cases} \quad (3.7)$$

As it is more easy to invert a Laplace-like operator than a curl or a \mathbf{curl} curl one, instead of solving (2.12)–(2.14), we chose to solve first the system (3.7) to get ψ , then to compute $\mathbf{w}_S \in \mathbf{W}_S$ solution to $\mathbf{w}_S = \mathbf{curl}\psi$. Note also that ψ being equal to Δ'^{-1} of $P_S \in L_r^2(\omega)$, it is quite regular and thus easy to compute.

3.5 Computation of ψ

Using the same domain decomposition as for P_S , we introduce for ψ_S the two systems

$$\begin{array}{ll} \text{Find } \psi_1 \in H_m^1(\omega_1) \text{ solution to} & \text{Find } \psi_2 \in H_m^1(\omega_2) \text{ solution to} \\ \left\{ \begin{array}{ll} -\Delta'\psi_1 = P_1 & \text{in } \omega_1, \\ \psi_1 = 0 & \text{on } \partial\omega_1, \\ \psi_1 = \psi_2 & \text{on } \gamma, \\ \frac{\partial\psi_1}{\partial\nu_1} = -\frac{\partial\psi_2}{\partial\nu_2} & \text{on } \gamma; \end{array} \right. & \left\{ \begin{array}{ll} -\Delta'\psi_2 = P_2 & \text{in } \omega_2, \\ \psi_2 = 0 & \text{on } \partial\omega_2, \\ \psi_2 = \psi_1 & \text{on } \gamma, \\ \frac{\partial\psi_2}{\partial\nu_2} = -\frac{\partial\psi_1}{\partial\nu_1} & \text{on } \gamma. \end{array} \right. \end{array}$$

As previously, one can solve this problem with the variational formulations

Find $\psi_1 \in H_m^1(\omega_1)$ such that

$$\begin{aligned} & \iint_{\omega_1} \left(\nabla\psi_1 \nabla\varphi_1 + \frac{\psi_1\varphi_1}{r^2} \right) r d\omega - \int_{\gamma} \frac{\partial\psi_1}{\partial\nu_1} \varphi_1 r d\gamma \\ & - \int_{\gamma} \frac{\partial\varphi_1}{\partial\nu_1} \psi_1 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} \psi_1 \varphi_1 r dE \\ & = - \int_{\gamma} \frac{\partial\varphi_1}{\partial\nu_1} \psi_2 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} \psi_2 \varphi_1 r dE \\ & + \iint_{\omega_1} (P_1 \varphi_1) r d\omega, \quad \forall \varphi_1 \in H_{m0}^1(\omega_1); \end{aligned}$$

Find $\psi_2 \in H_m^1(\omega_2)$ such that

$$\begin{aligned} & \iint_{\omega_2} \left(\nabla\psi_2 \nabla\varphi_2 + \frac{\psi_2\varphi_2}{r^2} \right) r d\omega - \int_{\gamma} \frac{\partial\psi_2}{\partial\nu_2} \varphi_2 r d\gamma \\ & - \int_{\gamma} \frac{\partial\varphi_2}{\partial\nu_2} \psi_2 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} \psi_2 \varphi_2 r dE \\ & = - \int_{\gamma} \frac{\partial\varphi_2}{\partial\nu_2} \psi_1 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} \psi_1 \varphi_2 r dE \\ & + \iint_{\omega_2} P_2 \varphi_2 r d\omega, \quad \forall \varphi_2 \in H_{m0}^1(\omega_2). \end{aligned}$$

As we have already explained in subsection 3.3, after taking into account that $\frac{\partial \psi_1}{\partial \nu_1} + \frac{\partial \psi_2}{\partial \nu_2} = 0$ and using the exchange method, we get the following final variational formulation

Find $\psi_1 \in H_m^1(\Omega_1)$ such that:

$$\begin{aligned} & \iint_{\omega_1} \left(\nabla \psi_1 \nabla \varphi_1 + \frac{\psi_1 \varphi_1}{r^2} \right) r d\omega + \int_{\gamma} \frac{\partial \psi_2}{\partial \nu_2} \varphi_1 r d\gamma \\ & - \int_{\gamma} \frac{\partial \varphi_1}{\partial \nu_1} \psi_1 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} \psi_1 \varphi_1 r dE \\ & = - \int_{\gamma} \frac{\partial \varphi_1}{\partial \nu_1} \psi_2 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} \psi_2 \varphi_1 r dE \\ & + \iint_{\omega_1} (P_1 \varphi_1) r d\omega, \quad \forall \varphi_1 \in H_{m0}^1(\omega_1); \end{aligned}$$

Find $\psi_2 \in H_m^1(\Omega_2)$ such that:

$$\begin{aligned} & \iint_{\omega_2} \left(\nabla \psi_2 \nabla \varphi_2 + \frac{\psi_2 \varphi_2}{r^2} \right) r d\omega + \int_{\gamma} \frac{\partial \psi_1}{\partial \nu_1} \varphi_2 r d\gamma \\ & - \int_{\gamma} \frac{\partial \varphi_2}{\partial \nu_2} \psi_2 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} \psi_2 \varphi_2 r dE \\ & = - \int_{\gamma} \frac{\partial \varphi_2}{\partial \nu_2} \psi_1 r d\gamma + \beta \sum_{E \in \Sigma_h} \frac{1}{h_E} \int_{\gamma} \psi_1 \varphi_2 r dE \\ & + \iint_{\omega_2} (P_2 \varphi_2) r d\omega, \quad \forall \varphi_2 \in H_{m0}^1(\omega_2). \end{aligned}$$

Remark first that since ψ is regular even in the subdomain ω_2 , a decomposition similar to (3.1) used for the computation of P_S in ω_2 , even it does exist, is useless. After ψ , the last step consists in computing \mathbf{w}_S which satisfies the equation

$$\mathbf{w}_S = \mathbf{curl} \psi.$$

Note that with this approach, we ensure that the divergence of $\mathbf{w}_S = 0$, due to the relation $\mathbf{div} \mathbf{curl} \equiv 0$. Here again, we use the same domain decomposition of $\omega = \omega_1 \cup \omega_2$. A P_1 -conforming finite element method has been developed, based on the FreeFem++ package [18], to solve this problem. Numerical illustrations are given in the following section.

4 Numerical Results

In this section, we present some numerical results to illustrate the efficiency of the proposed method. We consider the 3-D top hat domain Ω with a reentrant circular edge, that corresponds to an L-shaped 2-D domain ω with reentrant corner (see Fig. 2). Our aim is to compute the magnetic basis \mathbf{w}_S of \mathbf{W}_S .

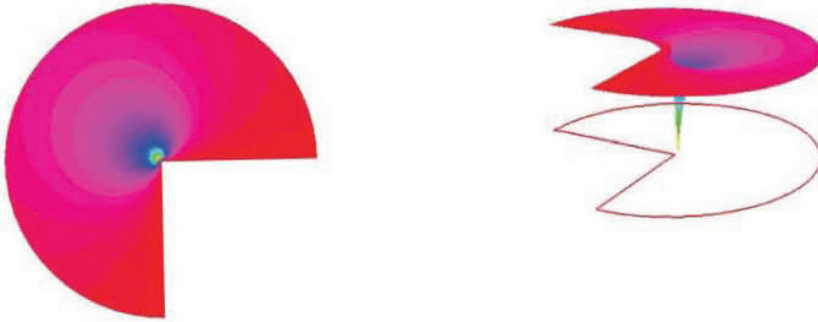


Figure 3. Singular P_S solution in the internal domain ω_2 : 2-d view (left) and 3-d view (right).



Figure 4. Singular P_S solution in the external domain ω_1 : 2-d view (left) and 3-d view (right).

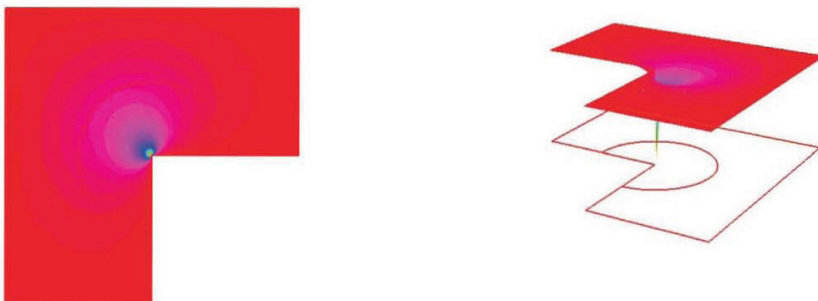


Figure 5. Singular P_S solution in the whole domain ω : 2-d view (left) and 3-d view (right).

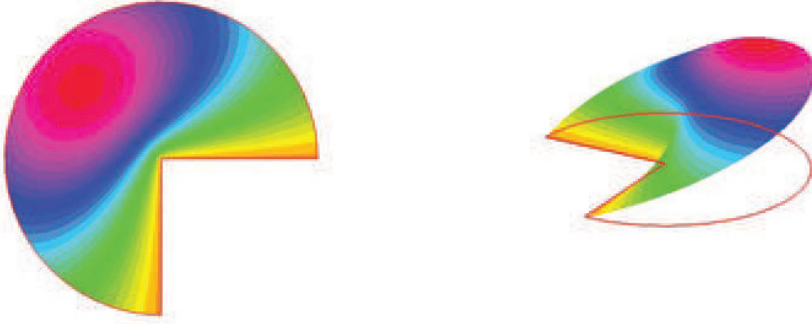


Figure 6. Stream function ψ in the internal domain ω_2 : 2-d view (left) and 3-d view (right).

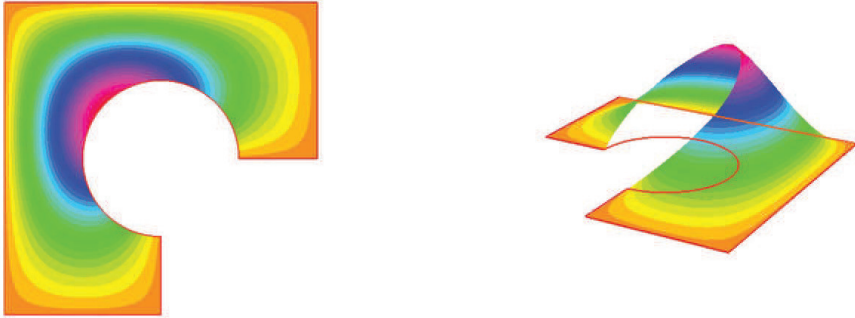


Figure 7. Stream function ψ in the external domain ω_1 : 2-d view (left) and 3-d view (right).



Figure 8. Stream function ψ in the whole domain ω : 2-d view (left) and 3-d view (right).

We first introduce an unstructured mesh of the L-shaped domain ω made up of triangles, with no particular mesh refinement near the corner. Following the method exposed in previous sections, to begin with, we compute the singular function P_S . The numerical results are depicted in Figures 3–5. When representing functions or fields with a singular behavior, we have chosen to truncate



Figure 9. Singular \mathbf{w}_S solution: r -component (left) and z -component (right).

the results in the singular (infinite) node. One can see that the method is able to compute P_S , whereas a usual method would give $P_S = 0$ as solution. Moreover, as expected, the continuity of the solution and of its normal derivative are well handled.

The second step consists in computing the stream function ψ , where P_S is used as a right-hand side. Results are shown in Figures 6–8, and illustrate that the method is also efficient for more regular functions or fields like ψ . Again, the continuity conditions are properly taken into account.

Finally, we get the magnetic basis \mathbf{w}_S of \mathbf{W}_S by taking the **curl** of ψ , that ensures that the relation $\operatorname{div} \mathbf{w}_S = 0$. The two components (w_S^r, w_S^z) obtained are depicted in Figure 9. This still shows that the method captures well the field \mathbf{w}_S near the edge (and far away from it). A conforming P^1 Finite Element Method cannot yield such a result. In addition, the results are not noisy, even though the mesh is not particularly refined near the edge.

5 Conclusion

In this paper, we presented a new numerical method, based on a domain decomposition approach, to solve the Maxwell equations in an axisymmetric singular domain. It is based on a decomposition of the computational domain into two or more – depending on the number of geometrical singularities – subdomains: an internal one, close to the singularity, and an external one.

Since geometric singularities of the domain have basically an influence on the space part of the equations, we restricted ourselves to the static problem, by assuming $\frac{\partial}{\partial t} = 0$. Then, we considered the case of the static magnetic field $\mathbf{B} = (B_r, B_z)$.

We have shown that to compute a basis of this singular subspace, the key point is to compute P_S , which cannot be solved by a standard finite element method, which would give $P_S = 0$. We proposed a new method to efficiently compute P_S and consequently \mathbf{w}_S . It consists in decomposing the domain ω into 2 subdomains, and to derive an *ad hoc* variational formulation, in which the interface conditions have to be handled.

This method also uses the local expression of the singularity, and an extended version of the Nitsche method, to handle the Dirichlet-type transmission conditions, coupled with a specific “exchange” method, to take into account Neumann-type transmission conditions. An advantage of this domain decomposition method is that it does not require neither overlapping nor iteration process. This makes it efficient from a numerical point of view. Numerical results have been shown to illustrate the method. Moreover, as it is based on domain decomposition approach, this method can be easily extend to parallel computations.

References

- [1] F. Assous, P. Ciarlet Jr. and S. Labrunie. Theoretical tools to solve the axisymmetric maxwell equations. *Math. Meth. Appl. Sci.*, **25**:49–78, 2002.
<http://dx.doi.org/10.1002/mma.279>.
- [2] F. Assous, P. Ciarlet Jr. and S. Labrunie. Solution of axisymmetric maxwell equations. *Math. Meth. Appl. Sci.*, **26**:861–896, 2003.
<http://dx.doi.org/10.1002/mma.400>.
- [3] F. Assous, P. Ciarlet Jr. and J. Segré. Numerical solution to the time-dependent Maxwell equations in two-dimensional singular domain: The singular complement method. *J. Comput. Phys.*, **161**:218–249, 2000.
<http://dx.doi.org/10.1006/jcph.2000.6499>.
- [4] R. Becker, P. Hansbo and R. Stenberg. A finite element method for domain decomposition with non-matching grids. *M2AN*, **37**:209–225, 2003.
- [5] M.Sh. Birman and M.Z. Solomyak. L2-theory of the Maxwell operator in arbitrary domains. *Russian Math. Surveys*, **42**:75–96, 1987.
<http://dx.doi.org/10.1070/RM1987v042n06ABEH001505>.
- [6] M.Sh. Birman and M.Z. Solomyak. The weyl asymptotic decomposition of the spectrum of the Maxwell operator for domain with lipschitzian boundary. *Vestnik. Leningr. Univ. Math.*, **20**:15–21, 1987.
- [7] J. Van Bladel. *Electromagnetic Fields*. McGraw-Hill, New York, 1985.
- [8] M. Cessenat. *Mathematical Methods in Electromagnetism. Linear Theory and Applications*, volume 41 of *Advances in Mathematics for Applied Sciences*. World Scientific, Singapore, 1996.
- [9] G. Cohen. *Higher Order Numerical Methods for Transient Wave Equations*. Springer, New York, 2002.
- [10] D.M Copeland, J. Gopalakrishnan and J.E. Pasciak. A mixed method for axisymmetric div–curl systems. *Math. Comput.*, **77**(264):1941–1965, 2008.
<http://dx.doi.org/10.1090/S0025-5718-08-02102-9>.
- [11] M. Costabel. A remark on the regularity of solutions of Maxwell’s equations on Lipschitz domains. *Math. Meth. Appl. Sci.*, **12**:365–368, 1990.
<http://dx.doi.org/10.1002/mma.1670120406>.
- [12] M. Costabel and M. Dauge. Maxwell and Lamé eigenvalues on polyhedral domains. *Math. Meth. Appl. Sci.*, **22**:243–258, 1999.
- [13] M. Costabel and M. Dauge. Weighted regularization of maxwell equations in polyhedral domains. *Numer. Math.*, **93**:239–277, 2002.
<http://dx.doi.org/10.1007/s002110100388>.

- [14] A.-S. Bonnet-Ben Dhia, C. Hazard and S. Lohrengel. A singular field method for the solution of Maxwell's equations in polyhedral domains. *SIAM J. Appl. Math.*, **59**:2028–2044, 1999. <http://dx.doi.org/10.1137/S0036139997323383>.
- [15] P. Grisvard. *Elliptic Problems in Nonsmooth Domains*, volume 24 of *Monogr. Stud. Math.* Pitman, London, 1985.
- [16] P. Grisvard. *Singularities in Boundary Value Problems*, volume 22 of *RMA*. Masson, Paris, 1992.
- [17] C. Hazard. Numerical simulation of corner singularities: a paradox in maxwell-like problems. *C. R. Acad. Sci. Paris, Ser. IIB*, **330**:57–68, 2002.
- [18] Frédéric Hecht. *FreeFem++*. Laboratoire J.L. Lions, Université Pierre et Marie Curie, 2010.
- [19] J.D. Jackson. *Classical Electrodynamics*. John Wiley and Sons, New York, 1975.
- [20] E. Jamelot. A nodal finite element method for Maxwell's equations. *C. R. Acad. Sci. Paris, Ser. I*, **339**:809–814, 2004.
- [21] V.A. Kondrat'ev. The smoothness of solutions of Dirichlet's problem for second order elliptic equation in a region with a piecewise-smooth boundary. *Differential Equations*, **6**:1392–1401, 1976.
- [22] V.A. Kondrat'ev. Singularities of a solution of Dirichlet's problem for a second-order equation in the neighborhood of an edge. *Differential Equations*, **13**:1411–1415, 1977.
- [23] H. Li. Finite element analysis for the axisymmetric laplace operator on polygonal domains. *J. Comput. Appl. Math.*, **235**:5155–5176, 2011. <http://dx.doi.org/10.1016/j.cam.2011.05.003>.
- [24] P. Monk. *Finite element methods for Maxwell's equations*. Oxford University Press, 2003.
- [25] J. Nitsche. Über ein Variationsprinzip zur lösung von Dirichlet-Problemen bei Verwendung von Teilrumen, die keinen Randbedingungen unterworfen sind. *Abh. Math. Sem. Univ. Hamburg*, **36**:9–15, 1971. <http://dx.doi.org/10.1007/BF02995904>.
- [26] R. Stenberg. On some techniques for approximating boundary conditions in the finite element method. *J. Comput. Appl. Math.*, **63**:139–148, 1995. [http://dx.doi.org/10.1016/0377-0427\(95\)00057-7](http://dx.doi.org/10.1016/0377-0427(95)00057-7).