

8-17-2010

A Modeling Approach to Determine the Impacts of Land Use and Climate Change Scenarios on the Water Flux of the Upper Mara River

L. M. Mango

GIS-RS Center, Florida International University, lm_mango@yahoo.com

Assefa Melesse

Department of Earth and Environment, Florida International University, melessea@fiu.edu

M. E. McClain

Department of Water Engineering, UNESCO-IHE Institute for Water Education, Delft, The Netherlands

Daniel Gann

GIS-RS Center, Florida International University, gannd@fiu.edu

S. G. Setegn

Department of Earth and Environment, Florida International University

Follow this and additional works at: <http://digitalcommons.fiu.edu/gis>



Part of the [Environmental Sciences Commons](#), and the [Remote Sensing Commons](#)

Recommended Citation

Mango, L.M., A.M. Melesse, M.E. McClain, D. Gann, & S.G. Setegn. (2010). A Modeling Approach to Determine the Impacts of Land Use and Climate Change Scenarios on the Water Flux of the Upper Mara River. *Hydrol. Earth Syst. Sci. Discuss.*, 7(4), 5851–5893. <http://doi.org/10.5194/hessd-7-5851-2010>

This work is brought to you for free and open access by the GIS Center at FIU Digital Commons. It has been accepted for inclusion in GIS Center by an authorized administrator of FIU Digital Commons. For more information, please contact dcc@fiu.edu.

This discussion paper is/has been under review for the journal Hydrology and Earth System Sciences (HESS). Please refer to the corresponding final paper in HESS if available.

A modeling approach to determine the impacts of land use and climate change scenarios on the water flux of the upper Mara River

L. M. Mango¹, A. M. Melesse², M. E. McClain³, D. Gann¹, and S. G. Setegn²

¹Geographic Information Systems-Remote Sensing Center, Florida International University, Miami, FL 33199, USA

²Department of Earth and Environment, Florida International University, Miami, FL 33199, USA

³Department of Water Engineering, UNESCO-IHE Institute for Water Education, Delft, The Netherlands

Received: 8 June 2010 – Accepted: 30 July 2010 – Published: 17 August 2010

Correspondence to: L. M. Mango (lm_mango@yahoo.com)

Published by Copernicus Publications on behalf of the European Geosciences Union.

HESSD

7, 5851–5893, 2010

**Impacts of land use
and climate change
scenarios on water
flux**

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Abstract

With the flow of the Mara River becoming increasingly erratic especially in the upper reaches, attention has been directed to land use change as the major cause of this problem. The semi-distributed hydrological model Soil and Water Assessment Tool (SWAT) and Landsat imagery were utilized in the upper Mara River Basin in order to 1) map existing field scale land use practices in order to determine their impact 2) determine the impacts of land use change on water flux; and 3) determine the impacts of rainfall (0%, $\pm 10\%$ and $\pm 20\%$) and air temperature variations (0% and +5%) based on the Intergovernmental Panel on Climate Change projections on the water flux of the upper Mara River.

This study found that the different scenarios impacted on the water balance components differently. Land use changes resulted in a slightly more erratic discharge while rainfall and air temperature changes had a more predictable impact on the discharge and water balance components. These findings demonstrate that the model results show the flow was more sensitive to the rainfall changes than land use changes. It was also shown that land use changes can reduce dry season flow which is the most important problem in the basin. The model shows also deforestation in the Mau Forest increased the peak flows which can also lead to high sediment loading in the Mara River. The effect of the land use and climate change scenarios on the sediment and water quality of the river needs a thorough understanding of the sediment transport processes in addition to observed sediment and water quality data for validation of modeling results.

1 Introduction

Water is an extremely important resource in Kenya and is the lifeline of its ecosystems. It is used for agriculture, industry, power generation, livestock production, and many other important activities. However, only 1.9 percent of Kenya is covered by water

HESSD

7, 5851–5893, 2010

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



(SoK, 2003) and most of this is supplied by the country's rivers most of which are concentrated in the highlands. In terms of water supply, Kenya receives seasonally and annually variable marginal rainfall with an annual average rainfall of 630 mm which is relatively low for an equatorial country (FAO, 2005). It is also categorized as a water scarce country based on the average per capita water availability (WRI, 2007) and this is a major challenge to the country in several ways. The scarcity of this crucial resource therefore necessitates its quantification, and maintenance of adequate flows.

The 395 km long Mara River is transboundary and drains an area of about 13,750 km² across the Kenya-Tanzania border, the Mara Basin (Mati et al., 2005). Widespread human activities such as cultivation and deforestation of the Mau catchment in the highlands have led to erratic flow in the Mara River in both the dry and wet seasons and this is a problem considering the high demand for water by the large populations of Mara Basin inhabitants. Downstream of the Mara River are human settlements, agricultural areas, protected areas that support immense wildlife populations and wetlands that are dependent on the availability of this water in adequate quality and quantity. Activities such as deforestation, irrigation and the construction of weirs on tributaries of the Mara such as the Amala River may reduce the flow of the Mara river to a halt during severe droughts and this reduction in quantity and quality greatly impacts wildlife-water interactions and consequently, the ecology of ecosystems such as the Mara river basin (Gereta and Wolanski, 1998, 2002). Serneels et al. (2001) in a study of land cover changes in the Mara ecosystem, noted that climatic, anthropogenic and other factors shape the vegetation, ecology and biodiversity of an ecosystem. According to Mutie et al. (2006), modification of natural land cover and soil conditions have brought about changes in the river flow regime such as high peak flows, reduced baseflows, enlarged river channel and silt deposition downstream. Reliable data is needed to develop policies and comprehensive management principles for sustainable resource utilization (Mati et al., 2005). Therefore, determining the impact of land use and climate change on the main tributaries of the Mara River; the Amala and Nyangores rivers is considered an important step in ensuring adequate minimum

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



and maximum river flows sufficient for all the stakeholder needs.

The specific objectives of this study were to: map existing land use practices using remote sensing and field observations, determine the impacts of land use change, rainfall and air temperature variation on the water flux of the upper Mara River in Kenya.

5 The findings of this study provided scenarios on the impacts of land use and climate change in the upper Mara River Basin therefore adding to the existing literature and knowledge base with a view of promoting better land use management practices in Kenya and application of the SWAT model in similar densely populated, highly agricultural watersheds all over the world.

10 2 Methods

For the SWAT model application in the upper Mara Basin, detailed dataset inputs had to be prepared. These datasets included detailed land use/land cover map, soil classification map, and climate data on a daily time-step. The land use map is an important input for the model and involved analysis of remote sensor data in order to generate a detailed accurate map for use in the SWAT model.

2.1 Study area

The transboundary Mara River Basin is shared between Kenya and Tanzania and is located in East Africa between longitudes 33.88372° and 35.907682° West, latitudes -0.331573° and -1.975056° South. It covers about 13 750 km² (Mati et al., 2005) and is characterized by different types of land cover and land uses as a result of different human activities carried out by the stakeholders in various parts of the basin. The land uses include; urban settlements and villages, subsistence and large scale agriculture, forestry, livestock, fisheries, tourism, conservation areas, mining and other industries. The Mara River flows from its catchment in the high altitude Mau Forest in Kenya across different landscapes and finally drains into Lake Victoria at Musoma Bay in Tanzania.

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



2.2 SWAT model description

The Soil and Water Assessment Tool (SWAT) is a hydrological model that can be applied at the river basin, or watershed scale. It was developed for the purpose of simulation of impact of land management practices on water, sediment and agrochemical yields in large watersheds with varying soils, land use and agricultural conditions over extended time periods (Neitsch et al., 2005). Arnold et al. (1998) defines SWAT as a semi-distributed, time continuous simulator operating on a daily time step. It is developed for assessment of the impact of management and climate on water supplies, sediment, and agricultural chemical yields in sub-basins and larger basins. The program is provided with an interface in Arc View GIS (Di Luzio et al., 2002) for the definition of watershed hydrologic features and storage, as well as the organization and manipulation of the related spatial and tabular data.

2.3 Land use data classification

The SWAT model requires a spatially explicit land use map as an input in order to simulate the hydrology of a watershed. Land use data was obtained by the classification of remote sensor data specifically, satellite imagery from the Landsat 4/5 Thematic Mapper (TM) sensor built for earth observation purposes. Both its spatial resolution of 30 m pixel and 7 band radiometric resolution make it suitable for land cover classification (Van der Meer et al., 2002). Two images of Path 169, Row 61 and Path 169, Row 60 from the 5 September 2008 were selected for the classification.

The imagery was prepared by subsetting, mosaicking and atmospheric correction that was required to remove haze and cloud from the image and also to convert the image from radiance to scaled surface reflectance values required for use in the land cover/land use classification. Atmospheric correction was carried out by ATCOR 2 of the ATmospheric CORrection (ATCOR) module in ERDAS IMAGINE that consists of ATCOR 2 and ATCOR 3 (Jensen, 2005) used for flat and rugged terrain, respectively.

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Land cover classification was carried out by means of a machine learning algorithm that makes use of recursive partitioning. The pixel spectral values and spatial locations of different land cover classes were extracted from the atmospherically corrected image and saved in a table. The reflectance data was then loaded into the statistical package R (RDCT, 2009) that performed the classification of the data by means of recursive partitioning script. A cross-validation which involves hiding the classes obtained one at a time and using the other resultant classes to predict their values statistically (Liu and Liu, 2008) was performed in 5 and 10 iterations, respectively, to increase the accuracy of the classification. The resulting decision tree and production rules were used to build an expert classifier in ERDAS IMAGINE 9.3 (ERDAS, 2006) used to perform a classification of the image.

The expert classifier was constructed using the Knowledge Engineer Tool which involved identification of the hypotheses which are the classes identified in the study area; Cloud, Bushland, Cropland, Grassland, Bare soil, Shadow, Water and Forest. The expert system rules (variables) and conditions were specified based on remote sensing multispectral reflectance characteristics and derivatives including the Kauth Thomas Tasseled Cap transformation and texture bands. The recursive partitioning process carried out beforehand resulting in the decision tree and production rules significantly reduced the time and effort required to construct the expert classifier which was then used to classify the image.

A land use/land cover classification scheme was formulated that would accurately and adequately represent the land cover/land use within the Mara River basin (Table 1). This scheme however follows the basic principles of the USGS Land use/land cover classification system (LULCCS) for use with remote sensor data level classification (Anderson et al., 1976).

2.4 Hydrological modeling

The SWAT (Soil and Water Assessment Tool) model was the ideal choice for use in this study because of various reasons; it is a physically based model that requires

specific information about weather, soil properties, topography, vegetation and land management practices which it uses as inputs to simulate the physical processes associated with water movement, nutrient transport, crop growth and sediment movement. This enables it to model ungaged watersheds and more importantly, quantify the impact of alternative input data such as changes in land use, land management practices and climate on water quality and quantity. Secondly, it uses readily available data, while more inputs can be used to simulate more specialized processes it is still able to operate on minimum data which is an advantage especially when working in areas with insufficient or unreliable data. Third, the SWAT model is computationally efficient, able to run simulations of very large basins or management practices without consuming large amounts of time and expenses. Lastly, it is a continuous time or a long-term yield model able to simulate long term impacts of land use, land management practices and build up of pollutants (Neitsch et al., 2005). These qualities of the SWAT model enabled the quantification of long term impacts of land use changes, variations in rainfall and air temperature on the hydrology of the Mara Basin.

2.4.1 DEM

The digital elevation model (DEM) of 90 m by 90 m resolution for the study area obtained from the Shuttle Radar Topography Mission (SRTM) was used. The DEM gives the elevation of a particular point at a particular spatial resolution and was used in the delineation of the watershed and analysis of the land surface characteristics and drainage patterns.

2.4.2 Soil data classification

Soil data was obtained from the Soil Terrain Database of East Africa (SOTER). GIS layers were obtained and used in the hydrological model as one of the main inputs to the SWAT model which requires soil property data such as the texture, chemical composition, physical properties, available moisture content, hydraulic conductivity, bulk

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



density and organic carbon content for the different layers of each soil type (Setegn, 2008). A user table specific for the Mara River basin soil layer was appended to the soil table in the SWAT database by using Arc toolbox in ArcGIS since the soil types found in the study area are not included in the US soils database

2.4.3 Land use

Land use data for the year 2008 was obtained by analysis of Landsat TM imagery in the process described previously in this chapter resulting in land cover maps of the study area. These land cover maps were then converted to shapefiles and aggregated to make them easier to input into the model for use in the hydrological modeling exercise.

Land use and management is an important factor affecting different processes in the watershed such as surface runoff, erosion and evapotranspiration. Reclassification of the land use map was done in order to present them in a form that is acceptable in the model and this is the USGS Land use/ Land cover classification scheme for Use with Remote Sensor data level classification (Anderson et al., 1976).

2.4.4 Climate data

Climate data used in the SWAT model consists of daily rainfall, temperature, wind speed, humidity and evapotranspiration data. The weather variables used were the daily precipitation values obtained from the Bomet Water Supply Office Station located at Bomet Town and Kiptunga Forest Station located in Elburgon District, minimum and maximum air temperature values for the period of 1996–2003 obtained from the Kericho Hail Research and Narok Meteorological weather stations. These data were obtained from the Ministry of Water Resources of Kenya and the Lake Victoria South Water Resource Management Authority in Kenya.

Another source of rainfall data for the hydrological modeling was obtained from the Famine Early Warning System (FEWS) Rainfall Estimation (RFE) imagery. This is a computer generated product that uses Meteosat infrared data at a horizontal resolution

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



of 10 km (Xie and Arkin, 1996). The rainfall is obtained by means of a python script developed by Gann (2008) which runs in an ArcGIS environment and extracts RFE statistics from daily rasters for user defined regions such as watersheds or sub-watersheds. Output is formatted to be compatible with input file format of ArcSWAT, in this case daily time series data tables in the ArcSWAT 2005 model input format. This process resulted in the creation of 30 artificial rain gages as the centroids of the 30 sub-watersheds making up the Amala and Nyangores watersheds. Both the Amala and Nyangores watersheds were assigned 15 RFE Rain gauges each for use in the hydrological modeling process. The RFE data was able to provide continuous and complete data ranging from the years 2002 to 2008 which was used in the model simulations.

2.4.5 River discharge

Daily river discharge data was obtained for the rivers Amala and Nyangores from the gauging stations located at the outlets of the basins. The discharge values for the two tributaries of the Mara; the Amala and Nyangores Rivers were used for calibration and validation of the model. In the Nyangores watershed, the available discharge data ran from the year 1996 to the year 2008. For the rain gauge data model, out of that the 8 years of complete time series datasets 4 years were used for calibration and the remaining 4 years were used for validation. For the RFE model, 4 years were used for calibration and 3 for validation. In the Amala watershed, observed discharge data spanned from the year 2000 to 2006 and for the rain gauge model, 2 years were used for calibration and 2 years were used for validating the model. For the RFE model, 3 years were used for the calibration and 2 years for validation of the model. The length of the simulations was determined by the availability and length of time series data for discharge, air temperature and rainfall which are key pieces in the model simulation.

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

2.4.6 Model run

To set up a hydrological SWAT model, basic data are required: topography, soil, land use and climatic data (Schuol et al., 2006). The model setup involved five steps: (1) data preparation, (2) sub-basin discretization, (3) HRU definition, (4) parameter sensitivity analysis, (5) calibration and uncertainty analysis.

The DEM was projected to the required projection parameter which is UTM Zone 37 South. A mask was used to reduce the area for stream delineation and analysis of terrain drainage patterns of the land surface. The streams were delineated from the DEM which accurately captured their true location on the ground. The land use/land cover layer was reclassified into the SWAT/USGS land use code as per required by the model and linked to a user table with the land use code.

Watershed and sub-watershed delineation was carried out using the DEM and has various steps including: DEM setup, stream definition, outlet and inlet definition, watershed outlets selection and definition and calculation of sub basin parameters. The resulting sub-watersheds were then divided into units based on their unique combination of land use, soils and slope combinations and these units are known as HRUs (hydrologic response units). The model was run on a default simulation of 8 years from 1996 to 2003 for the Rain gauge data and from 2002 to 2003 a period of two years for the RFE data.

2.5 Scenario analysis

2.5.1 Land use scenarios

To explore the sensitivity of SWAT outputs to land use and the effect of land use/land cover changes on the discharge of the Amala and Nyangores Rivers, land use scenarios were explored. Attention was paid to ensure these were realistic scenarios in accordance to the ongoing trends of land use change within the study area. The percent coverage and details of the conversions are presented in the Tables 5 and 6. The

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



as its major source of energy. The A1FI scenario projects a temperature increase with a best estimate of 4.0 degrees centigrade with a likely range of between 2.4–6.4 degrees centigrade. Precipitation in the 21st century and beyond is projected to increase by between 5 and 20% for the region. This prompted the precipitation and temperature scenarios below purposely set to capture the effect of both increase and decrease of precipitation and increase in surface temperature.

The different climate scenarios explored included;

1. Rainfall scenarios: 0%, $\pm 10\%$ and $\pm 20\%$
2. Temperature scenarios: 0% and +5%
3. Combination of rainfall and temperature scenarios

These were carried out by replacing the precipitation and temperature files in the model and running the simulations with the best parameters acquired from the calibration process.

3 Results and discussion

The results presented in this paper are those of the Nyangores watershed with reference to the Amala watershed whose results present similarly to some degree. The Nyangores watershed made use of a larger data set and made it possible to capture both short and long term variations in rainfall and discharge. The results of this study are divided into two categories: land cover classification and hydrological modeling. The land cover mapping provides data on the type of land use/land cover types present within the Amala and Nyangores watersheds. The hydrological modeling section provides data on the discharge amounts and water balance components of the Amala and Nyangores watersheds and the influence of land use and climate change.

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



3.1 Land cover mapping

The expert classifier was built and this involved the generation of a decision tree by recursive linear partitioning and the process resulted in the production of decision trees based on the training data that was specified for input into the statistical package R.

This resulted in production rules used in the expert classifier to classify the image. The classification was successful in distinguishing different land cover classes in the image and the accuracy of the classification was determined by the use of an error or confusion matrix.

The resultant error matrix gave a \hat{K} statistic value of 0.825358 or 82.53% while the overall classification accuracy for the classification was 0.847283 or 84.73%. These values were taken as a fairly good accuracy considering the heterogeneity of the study area that may pose significant difficulties using different classification methods. The error matrix indicated that there was substantial confusion between bushland, forest and grassland which was attributed to the selection of training data and also the fact that use of spectral and texture data alone were not capable of accurately distinguishing these three classes.

The land use map was reclassified into SWAT land use/land cover classes (Table 1) to be used in the hydrological modeling process.

3.2 Hydrological modeling

A sensitivity analysis was carried out and the 10 most sensitive parameters (Table 2) were chosen for calibration of the model. The hydrological modeling exercise resulted in discharge simulation values for the Amala and Nyangores watersheds for different rainfall inputs; Rain gauge measurements and radar rainfall estimates (RFE). The discharge hydrographs for daily and monthly data were compared for calibration and scenario analysis.

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

3.2.1 Model calibration and validation

Parameter adjustment was carried out in conjunction with the statistical evaluation until an acceptable correlation or resemblance between the two datasets was achieved. Calibration is the process of estimating model parameters by comparison of model predictions or output for a given set of assumed conditions with observed or measured data for the same conditions (Moriassi et al., 2007). Comparison was carried out for the datasets obtained and the resulting statistics for the daily and monthly simulations are shown in the Tables 3 and 4. Statistics such as the Nash-Sutcliffe Efficiency (NSE), Pearson's correlation coefficient (r) and the Coefficient of Correlation (R^2) which were used to describe and compare the different datasets (observed and simulated).

In the case of the Nyangores and Amala rain gauge data models, there was a clear underperformance of the models in the case of discharge simulation as shown by the different model evaluation statistics in Moriassi et al. (2007). Calibration of the rain gauge data produced NSE values of 0.076 and -0.533 for Amala and Nyangores, respectively, which are considered poor. The RFE data on the other hand produced NSE values of 0.622 and 0.586 for the Amala and Nyangores rivers and were considered good results.

Validation was also carried out for the model simulations and is defined as the process of demonstrating that a given site-specific model is capable of making sufficiently accurate simulations (Refsgaard, 1997). This was carried out to determine whether these models were suitable for evaluating the impact of land use and climate change. For the RFE models NSE values of 0.389 and 0.094 were obtained for the Amala and Nyangores, respectively, and taking into consideration the errors that may have been introduced by missing data values, the models were considered suitable for predicting the impacts of climate and land use change. According to Abbaspour et al. (2006), watershed scale model calibration is challenging and is impeded by uncertainties like watershed processes unknown to the modeler, processes not captured by the model and simplification of the processes by the model.

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



3.2.2 Climate change scenarios

Assuming accurate estimates of the water balance components, SWAT was used to evaluate the impacts of various scenarios of climate change on both the Amala and Nyangores rivers. The combined discharge hydrographs for the climate change scenarios shown below help single out the impact a single climate change event however unlikely, would have on the discharge of the Nyangores river. Table 8 shows the percent changes in the annual averages of Nyangores Basin water balance components and Table 9 shows the ratio of water balance components to precipitation for these climate change scenarios.

Ogutu et al. (2007) examined the influence of the El Nino-southern Oscillation on rainfall and temperature and Normalized Difference Vegetation Index fluctuations in the Mara-Serengeti ecosystem and it is anticipated that climate change will accelerate habitat dessication and deterioration of vegetation quality. Generally the reduction of precipitation brought about a reduction in available water in the watersheds reducing baseflows to very low levels. The increase in temperature also reduces the water availability to some degree by increasing evapotranspiration in the watershed thus reducing amount of water and discharge. According to Ficklin et al. (2009), temperature is one of the most important factors governing plant growth and depending on the optimum temperature of the plants, the plant growth cycle will be shifted also affecting the water balance components. Increases in precipitation by 10 percent and 20 percent increased the discharge and baseflow in the rivers but on the other hand may have negative effects across land such as erosion and in the reach such as increased sediment load and flooding.

3.2.3 Land use change scenarios

The resulting hydrographs show the effect the different land use scenarios had on the river discharge. From observation of the graphs it is evident that all the land use scenarios significantly reduced the baseflow and average flow of the whole period of

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



simulation. The partial deforestation and forest to agriculture scenarios resulted in high peak flows and lower baseflows while the complete deforestation scenario was characterized by high peak flows but has a baseflow that appears almost equivalent to that of the present day scenario (RFE calibrated model). Details on how these different land use scenarios affected the different water balance components can be seen in Table 10.

3.2.4 Combination of land use and climate change scenarios

The shown hydrographs display the discharge outputs of the land use-climate change scenarios which were more realistic scenarios in terms of future projections of land use and climate change. The most plausible land use scenarios in the case of the Upper Mara basin are the three covered in this study, with complete deforestation being the least likely to happen among the three. In the case of climate change, the most plausible are the combinations of temperature increase and precipitation increase and decrease depending on geographic location as projected by the IPCC though precipitation reduction is a more often occurrence in the study area as of today and therefore were included in the scenarios analysis.

The resulting hydrographs and annual average for water balance components (Table 10) were able to graphically show the effects of the combined scenarios in terms of stream response. From the hydrographs (Figs. 7 and 8) and Fig. 10, the effect of land use on the discharge hydrographs and water balance components was evident. The conversion of forest to agriculture scenario had the lowest baseflows and the cause for this is the reduction in ground water recharge which is shown in Fig. 10 and Table 10 with reductions of up to 49.99% when precipitation is reduced by 20% and a reduction of 32% when precipitation is reduced by 10% and a reduction of 48% at normal precipitation. Complete deforestation on the other hand, saw an increase in surface runoff and this occurred in the 20% precipitation reduction in both Amala and Nyangores watersheds.

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



3.2.5 Annual average percent changes in water balance components for climate and land use-climate change scenarios

The Figs. 9 and 10 show the percent changes in the annual average water balance components for the climate and land use-climate change scenarios.

From Fig. 9, it is evident that sediment yield is the most responsive followed by revap, surface runoff and transmission losses.

For the land use-climate change scenarios, the percent changes in water balance components in Fig. 10 below display the variation in the water balance components across different land uses. Details of these changes are shown in detail in Tables 10 and 11, the different land use scenarios affect the water balance components differently and where these differences are most pronounced are in the surface runoff and groundwater recharge.

All the water balance components vary linearly to precipitation which can also be observed from the plots that are almost identical to one another especially those that are of corresponding reduction/increase in precipitation. In the land use-climate change combined scenarios, there is a reduced amount of groundwater recharge, surface runoff, and total water yield to the stream meaning the water balance will be significantly affected by the reduction of precipitation, increased temperature and altered land cover.

The climate change scenarios revealed that the variation of precipitation has the greatest impact on the amount of discharge, sediment yield, surface runoff (a reduction of 20% in precipitation will reduce the surface runoff by half its amount in both the Amala and Nyangores watersheds) and generally to the water balance components in the watersheds. The ratio of the water balance components to precipitation reduces drastically with the reduction of precipitation. This is expected as precipitation is the main driving force of the hydrological cycle and any change in the amount will be directly reflected in the flow of the Mara River.

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Temperature increase impacts the discharge less directly than decrease in precipitation but nonetheless has an impact by increasing evapotranspiration and plant production which will ultimately affect land cover in the long-term. More realistic climate change simulations that combined precipitation reduction and temperature increase had the most effect on the discharge and water balance components with a reduction in river discharge in both wet and dry seasons, reduction in total water yield, ground-water discharge, surface runoff and groundwater contribution to the river channel. As previous studies that have found precipitation and slope to be the main factors affecting streamflow in small watersheds, the model results show that Amala and Nyangores are no different and imply that climate change alone will have profound effects on the upper Mara River flow and the human and wildlife inhabitants of the Mara River basin.

4 Conclusions

Based on the results obtained in this study, the expert classifier is a suitable methodology to classify imagery at a high and produce an accurate map of a highly variable area using far less time and effort than conventional algorithms. The resulting map obtained from this land cover classification was of a high accuracy (85%) and was suitable for use as an input into SWAT especially for the simulation of effects of land use change in a spatially explicit hydrological model.

The model evaluation results (Tables 3 and 4) suggest that the calibration process may have not adequately captured the variations in the different hydrological years (periods) in both the Rain gauge and RFE models which may be due to the fact that the time series data was not long enough to achieve this. In the case of the Rain gauge models compared to the RFE models, the statistics and hydrographs show the rainfall values from the Rain gauge data were not well representative of the actual rainfall that was received in the basins under study. Lack of a dense rain gauge station network within the study area that was unable to capture the different rainfall amounts and account for the spatial variability of the rainfall received is the most likely cause

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



of this result. Rainfall is the main driving force of the hydrological cycle and when the rainfall for large watersheds such as the Amala and Nyangores watersheds cannot be accurately accounted for this presents a problem in the simulation process and when calibrating the model because this necessitates the rigorous adjustment of parameters which is not only a time consuming process but also may result in parameter values that may give a good simulation result but are hydrologically unrealistic for the watershed.

However, it can be inferred that the set-up and calibration of a semi-distributed hydrological model such as SWAT in a large watershed with variable land cover, soils and topography is a feasible task and will yield satisfactory results given reliable data and proper attention to manual or automatic calibration.

The model simulations showed that the upper Mara River flow will be significantly affected in the face of the climate and land use change scenarios posing difficulties in adaptation to the altered flow regimes of the Amala and Nyangores rivers. The different water balance components were affected regardless of the type and amount of change that was undergone thus affecting the magnitude and timing of the flow. It is therefore prudent to work towards establishing and maintaining adequate minimum flows that would mitigate the effects of reduced baseflows and put in place measures to maintain adequate sustained river flows to the benefit of the stakeholders of the Mara River basin such as proper land and water management practices.

Acknowledgements. The authors acknowledge the Global Water for Sustainability program and the United States Agency for International Development (USAID) that funded the study. Authors thank the Worldwide Fund for Nature Offices, Kenya and Tanzania Ministries of Water and Irrigation, and Lake Victoria South Catchment Management Authority (of Kenya's Water Resources Management Authority). The authors thank Stefan Uhlenbrook, Delft, The Netherlands, for reviewing this manuscript and his valuable suggestions.

References

- Abbaspour, K. C., Yang, J., Maximov, I., Siber, R., Bogner, K., Mieleitner, J., Zobrist, J., and Srinivasan, R.: Modelling hydrology and water quality in the pre-alpine/alpine Thur watershed using SWAT, *J. Hydrol.*, 333, 413–430, 2006.
- 5 Anderson, R. J., Hardy, E. E., Roach, J. T., and Witmer, R. E.: A Land Use And Land Cover Classification System For Use With Remote Sensor Data, United States Geological Survey, United States Government Printing Office, Washington D.C., 1976.
- Arnold, J. G., Srinivasan, R., Muttiah, R. S., and Williams, J. R.: Large area hydrologic modeling modeling and assessment. Part I: Model development, *J. Am. Water Resour. Assoc.*, 34, 73–89, 1998.
- 10 Di Luzio, M., Srinivasan, R., and Arnold, J. G.: Integration of Watershed Tools and the SWAT Model into BASINS, *J. Am. Water Resour. Assoc.*, 38(4), 1127–1141, 2002.
- ERDAS Incorporated: ERDAS IMAGINE Tour Guides: ERDAS IMAGINE V9.3, ERDAS World-wide Headquarters, Atlanta, Georgia, pp. 662, 2006.
- 15 Ficklin, D. L., Luo, Y., Luedeling, E., and Zhang, M.: Climate change sensitivity assessment of a highly agricultural watershed using SWAT, *J. Hydrol.*, 374(2009) 16–29, 2009.
- Food and Agriculture Organization (FAO) of the United Nations: Kenya Country Report, in: Irrigation in Africa in Figures, AQUASTAT Survey 2005, FAO, Rome, 2005.
- Gereta, E., Wolanski, E., Borner, M., and Serneels, S.: Use of an ecohydrology model to predict the impact on the Serengeti ecosystem of deforestation, irrigation and the proposed Amala Weir water Diversion Project in Kenya, *Ecohydrology and Hydrobiology*, 2(1–4), 135–142, 2002.
- 20 Gereta, E. and Wolanski, E.: Water quality-wildlife interaction in the Serengeti national park, Tanzania, *African J. Ecol.*, 36(1), 1–14, 1998.
- 25 Intergovernmental Panel on Climate Change: Climate Change 2007: Synthesis Report, Cambridge Press, Cambridge, 2007.
- Jensen, J. R.: Introductory Digital Image Processing: A Remote Sensing Perspective, Third Edition, Prentice-Hall, Englewood Cliffs, New Jersey, 2005.
- Liu, X. H. and Liu, Y.: The accuracy assessment in areal interpolation: An empirical investigation, *Sci. China Ser. E-Tech. Sci.*, 51, Supp. I , 62–71, 2008.
- 30 Mati, B. M., Mutie, S., Home, P., Mtaló, F., and Gadain, H.: Land Use Changes in the Trans-boundary Mara Basin: A Threat to Pristine Wildlife Sanctuaries in East Africa, Paper pre-

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



sentation at the: 8th International River Symposium, Brisbane, Australia, 6–9 September 2005.

Moriasi, D. N., Arnold, J. G., Van Liew, M. W., Bingner, R. L., Harmel, R. D., and Veith, T. L.: Model Evaluation Guidelines for Systematic Quantification of Accuracy in Watershed Simulations, *Transactions of the ASABE*, 50(3), 885–900, 2007.

Mutie, S., Mati, B., Gadain, H., and Gathenya, J.: Evaluating land use change effects on river flow using USGS geospatial stream flow model in Mara River basin, Kenya, Paper presentation at the 2nd Workshop of the EARSel SIG on Land Use and Land Cover, Bonn, 28–30 September 2006.

Neitsch, S. L., Arnold, J. G., Kiniry, J. R., and Williams, J. R.: Soil and Water Assessment Tool, Theoretical Documentation: Version 2005, Temple, TX. USDA Agricultural Research Service and Texas A&M Blackland Research Center, 2005.

Ogutu, O. J., Piepho, H. P., Dublin, H. T., Bhola, N., and Reid, R. S.: El Nino-Southern Oscillation, rainfall, temperature and Normalized Difference Vegetation Index Fluctuations in the Mara-Serengeti ecosystem, *Afr. J. Ecol.*, 46, 132–143, 2007.

R Development Core Team: An Introduction to R: Notes on R: A Programming Environment for Data Analysis and Graphics Version 2.10.1 (2009-12-14), available online at URL <http://www.r-project.org/>, 2009.

Serneels, S., Said, M. Y., and Lambin, E. F.: Land cover changes around a major east African wildlife reserve: the Mara Ecosystem (Kenya), *Int. J. Remote Sens.*, 22(17), 3397–3420, 2001.

Refsgaard, J. C.: Parameterisation, calibration, and validation of distributed hydrological models, *J. Hydrol.*, 198(1), 69–97, 1997.

Setegn, S. G., Srinivasan, R., and Dargahi, B.: Hydrological Modelling in the Lake Tana Basin, Ethiopia using SWAT model, *The Open Hydrology Journal*, 2(2008), 25–38, 2008.

Survey of Kenya (SoK): National Atlas of Kenya, Fifth Edition, SoK, Nairobi, 2003.

Van der Meer, F.: Imaging spectrometry for geological applications, in: Meyers, G. R. A., *Encyclopaedia of Analytical Chemistry: Applications, Theory and Instrumentation*, Wiley, New York, A2310, 31 pp., 2000.

World Resources Institute, Department of Resource Surveys and remote Sensing, Ministry of Environment and Natural resources, Kenya; Central Bureau of Statistics, Ministry of Planning and Development, Kenya; and International Livestock Research Institute: Nature's Benefits in Kenya: An Atlas of Ecosystems and Human Well-Being, World Resources Institute, Wash-

HESSD

7, 5851–5893, 2010

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



ington D.C., Nairobi, 2007.
Xie, P. and Arkin, P. A.: Global precipitation: A 17-Year monthly analysis based on gauge observations, Satellite Estimates, and numerical model outputs, B. Am. Meteorol. Soc., 78, 112539–112558, 1997.

HESSD

7, 5851–5893, 2010

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 1. Land use/land cover type reclassification into SWAT LU/LC classes.

Land cover type	SWAT LU/LC type
Forest	Forest evergreen Forest deciduous
Water	Water
Bushland	Forest mixed
Grassland	Range grasses
Agriculture	Agricultural land generic Agricultural land close grown

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Table 2. Sensitivity ranking of parameters towards water flow.

Sensitivity rank	Amala rain gauge	Nyangores rain gauge	Amala RFE	Nyangores RFE
1	ESCO	ESCO	CN2	ESCO
2	CN2	CN2	GWQMN	GWQMN
3	GWQMN	ALPHA_BF	ESCO	CN2
4	SOL_Z	GWQMN	SOL_Z	SOL_Z
5	ALPHA_BF	SOL_Z	ALPHA_BF	ALPHA_BF
6	REVAPMN	REVAPMN	SOL_AWC	SOL_AWC
7	SOL_AWC	SOL_AWC	REVAPMN	REVAPMN
8	CANMX	CH_K2	CANMX	CANMX
9	BLAI	BLAI	GW_REVAP	GW_REVAP
10	GW_REVAP	CANMX	SOL_K	BLAI

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 3. Model evaluation statistics for daily discharge.

Statistic	Rivers							
	Amala				Nyangores			
	RFE		Rain gauge		RFE		Rain gauge	
	Cal	Val	Cal	Val	Cal	Val	Cal	Val
NSE	0.527	0.192	0.004	0.327	0.485	0.0807	−0.445	0.0178
R^2	0.548	0.333	0.206	0.329	0.530	0.233	0.072	0.257
R	0.741	0.57	0.454	0.573	0.728	0.483	0.269	0.507

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Discussion Paper | Discussion Paper | Discussion Paper | Discussion Paper | Discussion Paper

[Title Page](#)

[Abstract](#) [Introduction](#)

[Conclusions](#) [References](#)

[Tables](#) [Figures](#)

[⏪](#) [⏩](#)

[◀](#) [▶](#)

[Back](#) [Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

Table 4. Model evaluation statistics for monthly discharge.

Statistic	Rivers							
	Amala				Nyangores			
	RFE		Rain gauge		RFE		Rain gauge	
Cal	Val	Cal	Val	Cal	Val	Cal	Val	
NSE	0.622	0.389	0.076	0.407	0.586	0.094	-0.533	-0.057
R^2	0.654	0.459	0.303	0.413	0.645	0.325	0.085	0.321
R	0.809	0.678	0.550	0.643	0.803	0.57	0.291	0.566



Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Table 6. Percent areal coverage of land use/land cover type.

Land use land cover type	NY_LU08	AM LU08	NY PD	AM PD	NY CD	AM CD	NY FA	AM FA	Upper Mara
Forest evergreen	26.34	21.18	26.34	21.18	0.00	0.00	0.00	0.00	24.81
Forest deciduous	3.75	13.56	0.00	0.00	0.00	0.00	0.00	0.00	9.06
Forest mixed	5.79	1.32	0.00	0.00	0.00	0.00	0.00	0.00	3.71
Agricultural land generic	17.47	0.00	23.26	1.32	17.47	0.00	17.47	0.00	9.13
Agricultural land close grown	46.65	63.93	50.40	77.50	46.65	63.93	82.53	100.00	53.29
Range grasses	0	0	0	0	35.88	36.07	0	0	0.00
Total (%)	100	100	100	100	100	100	100	100	100

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Table 7. Annual average water balance components for the calibrated Nyangores watershed models.

Components	Nyangores RG 1996–2003	Nyangores RFE 2002–2008
PRECIP (mm)	1329.9	1097.2
SURQ (mm)	15.03	11.51
LATQ (mm)	60.67	43.09
GW_Q (mm)	354.59	481.23
REVAP (mm)	21.89	3.48
DA_RCHG (mm)	22.47	25.33
GW_RCHG (mm)	449.43	506.63
WYLD (mm)	429.28	535
PERC (mm)	450.02	509.52
ET (mm)	789	530
PET (mm)	1150.3	1179
TLOSS (mm)	1.01	0.82
SEDYLD (T/HA)	0.686	0.704

PR–10 = Precipitation reduced by 10%, PR–20 = Precipitation reduced by 20%, TM+5 = Air Temperature increase by 5%, PR+10 = Precipitation increase by 10%, PR+20 = Precipitation increase by 20%

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

[Title Page](#)
[Abstract](#) [Introduction](#)
[Conclusions](#) [References](#)
[Tables](#) [Figures](#)
[⏪](#) [⏩](#)
[◀](#) [▶](#)
[Back](#) [Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

Table 8. Percent changes in the annual averages of Nyangores Basin water balance components for climate change scenarios.

Components	NY PR-10	NY PR-20	NY TM+5	NY PR-10TM+5	NY PR-20TM+5	NY PR+10TM+5	NY PR+20TM+5
PRECIP (mm)	-9.92	-19.98	0.00	-9.92	-19.98	10.07	19.98
SURQ (mm)	-34.14	-60.38	-5.04	-38.23	-63.51	37.71	90.79
LATQ (mm)	-14.97	-29.89	-2.32	-17.15	-31.84	12.90	27.80
GW_Q (mm)	-17.31	-34.50	-4.09	-21.29	-38.26	13.52	30.76
REVAP (mm)	-35.92	-63.51	-6.61	-41.38	-68.39	34.48	77.30
DA_RCHG (mm)	-17.29	-34.50	-4.07	-21.28	-38.26	13.54	30.75
GW_RCHG (mm)	-17.31	-34.50	-4.09	-21.29	-38.26	13.52	30.76
WYLD (mm)	-17.47	-34.66	-3.97	-21.31	-38.26	13.97	31.77
PERC (mm)	-17.27	-34.42	-4.08	-21.24	-38.17	13.49	30.69
ET (mm)	-1.94	-4.49	3.91	1.83	-0.98	5.70	7.28
PET (mm)	0.00	0.00	3.15	3.15	3.15	3.15	3.15
TLOSS (mm)	-25.61	-50.00	-1.22	-28.05	-52.44	28.05	62.20
SEDYLD (T/HA)	-39.49	-67.05	-3.69	-43.47	-69.89	50.43	124.15

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Table 9. Ratio of water balance components to precipitation for the Nyangores Basin climate change scenarios.

	NY RFE COMP	NY PR-10	NY PR-20	NY TM+5	NY PR-10 TM+5	NY PR-20 TM+5	NY PR+10 TM+5	NY PR+20 TM+5
PREC (mm)	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
SURQ (mm)	0.010	0.008	0.005	0.010	0.007	0.005	0.013	0.017
LATQ (mm)	0.039	0.037	0.034	0.038	0.036	0.033	0.040	0.042
GW_Q (mm)	0.439	0.403	0.359	0.421	0.383	0.338	0.452	0.478
REVAP (mm)	0.003	0.002	0.001	0.003	0.002	0.001	0.004	0.005
DP AQ RCHRG (mm)	0.023	0.021	0.019	0.022	0.020	0.018	0.024	0.025
TOTAL AQ RCHRG (mm)	0.462	0.424	0.378	0.443	0.403	0.356	0.476	0.503
WYLD (mm)	0.488	0.447	0.398	0.468	0.426	0.376	0.505	0.536
PERC (mm)	0.464	0.426	0.381	0.445	0.406	0.359	0.479	0.506
ET (mm)	0.483	0.526	0.577	0.502	0.546	0.598	0.464	0.432
PET (mm)	1.075	1.193	1.343	1.108	1.230	1.385	1.007	0.924
TLOSS (mm)	0.001	0.001	0.000	0.001	0.001	0.000	0.001	0.001
SED (T/HA)	0.001	0.000	0.000	0.001	0.000	0.000	0.001	0.001

PD = Partial Deforestation, CD = Complete Deforestation, FA = Forest replaced by Agriculture

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Table 10. Percent changes in the annual averages of Nyangores Basin water balance components for land use-climate change scenarios.

C	NY PD	NY CD	NY FA	NY PD	NY PD	NY CD	NY CD	NY FA	NY FA
				PR-10 TM+5	PR-20 TM+5	PR-10 TM+5	PR-20 TM+5	PR-10TM+5	PR-20 TM+5
PRECIP (mm)	0.00	-9.92	-19.98	0.00	-9.92	-19.98	0.00	-9.92	-19.98
SURQ (mm)	6.94	-24.08	-48.85	20.58	-13.61	-41.47	31.49	-5.99	-36.31
LATQ (mm)	-1.56	-20.65	-35.94	-0.66	-17.55	-32.60	-14.91	-30.31	-43.44
GW_Q (mm)	-4.16	-30.49	-49.05	-0.75	-24.38	-43.01	-9.39	-33.28	-51.00
REVP (mm)	-1.84	-12.76	-26.76	-0.89	-10.03	-23.28	-2.80	-12.76	-27.37
DA_RCHG (mm)	-4.04	-29.68	-48.09	-0.75	-23.79	-42.21	-9.06	-32.33	-50.00
GW_RCHG (mm)	-4.06	-29.71	-48.12	-0.79	-23.78	-42.21	-9.09	-32.35	-49.99
WYLD (mm)	-2.00	-28.50	-47.85	2.93	-21.96	-41.88	-3.00	-28.49	-47.98
PERC (mm)	-4.22	-29.92	-48.36	-1.10	-24.07	-42.49	-9.71	-32.91	-50.50
ET (mm)	1.64	3.46	0.23	-1.93	-1.33	-4.20	2.46	3.50	0.35
PET (mm)	0.00	3.15	3.15	0.00	3.15	3.15	0.00	3.15	3.15
TLOSS (mm)	9.90	-10.15	-29.21	23.76	1.49	-19.80	45.30	20.30	-4.46
SEDYLD (T/HA)	22.39	-12.37	-42.73	11.90	-22.78	-50.15	41.48	1.19	-33.21

NY = Nyangores Watershed

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Table 11. Ratio of water balance components to precipitation for the Nyangores Basin land use-climate change scenarios.

	NY DEF	NY PD	NY CD	NY FA	NY PD PR–10 TM+5	NY CD PR–10 TM+5	NY FA PR–10 TM+5	NY PD PR–20 TM+5	NY CD PR–20 TM+5	NY FA PR–20 TM+5
PREC (mm)	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
SURQ (mm)	0.072	0.077	0.087	0.094	0.061	0.069	0.075	0.046	0.053	0.057
LATQ (mm)	0.040	0.040	0.040	0.034	0.036	0.037	0.031	0.032	0.034	0.029
GW_Q (mm)	0.285	0.273	0.282	0.258	0.220	0.239	0.211	0.181	0.203	0.174
REVAP (mm)	0.013	0.013	0.013	0.013	0.013	0.013	0.013	0.012	0.013	0.012
DP AQ RCHRG (mm)	0.016	0.015	0.016	0.014	0.012	0.013	0.012	0.010	0.011	0.010
Total AQ RCHRG (mm)	0.316	0.303	0.313	0.287	0.246	0.267	0.237	0.205	0.228	0.197
WYLD (mm)	0.393	0.385	0.405	0.381	0.312	0.341	0.312	0.256	0.286	0.256
PERC (mm)	0.315	0.301	0.311	0.284	0.245	0.265	0.234	0.203	0.226	0.195
ET (mm)	0.567	0.576	0.556	0.581	0.651	0.621	0.651	0.710	0.679	0.711
PET (mm)	1.075	1.075	1.075	1.075	1.230	1.230	1.230	1.385	1.385	1.385
TLOSS (mm)	0.004	0.004	0.005	0.005	0.004	0.004	0.005	0.003	0.004	0.004
SED (T/HA)	0.005	0.006	0.005	0.006	0.004	0.004	0.005	0.003	0.003	0.004

Title Page

Abstract Introduction

Conclusions References

Tables Figures

⏪ ⏩

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



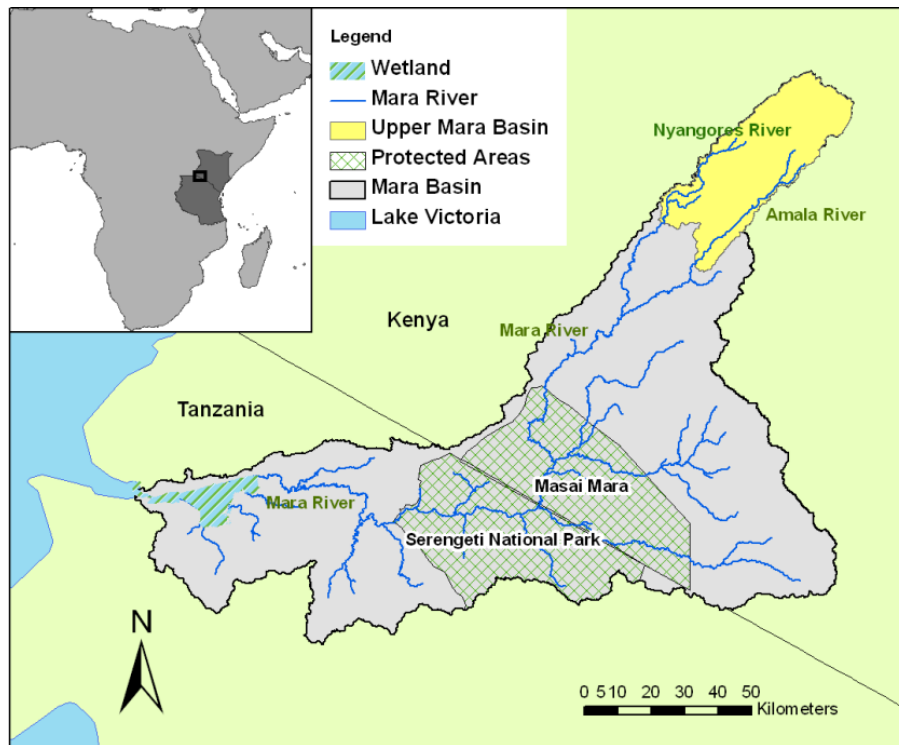


Fig. 1. Study area.

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	

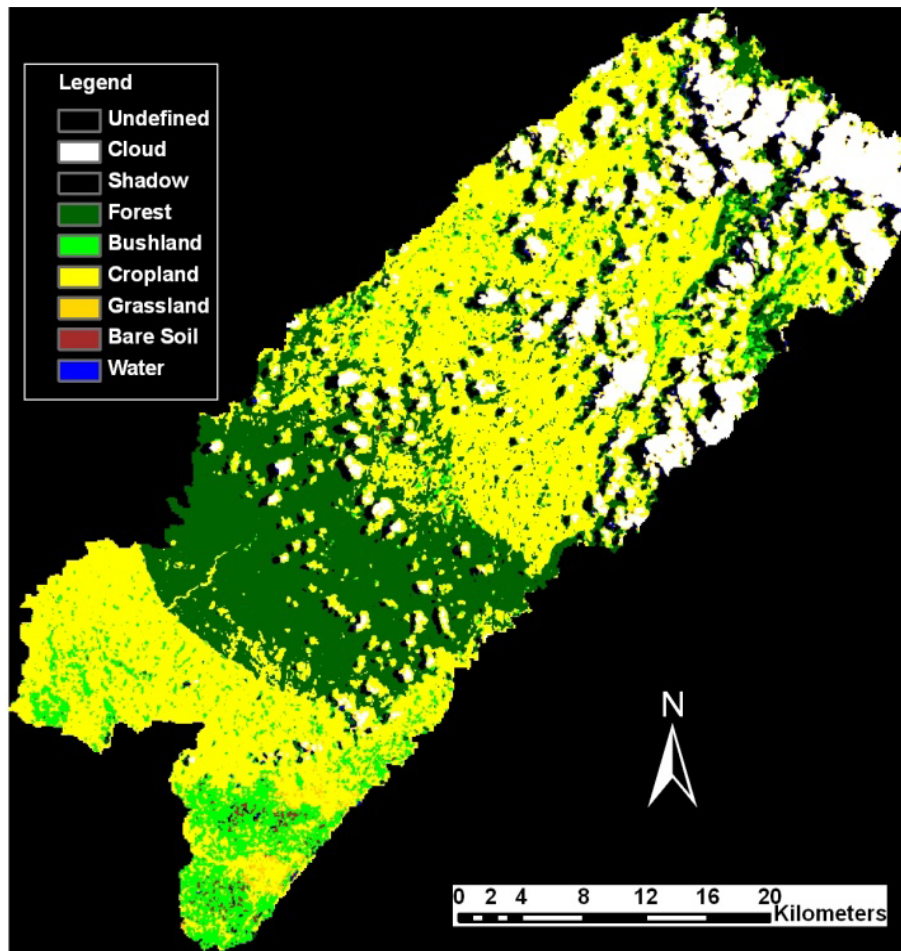


Fig. 2. 2008 land cover classification map for the upper Mara Basin.

HESSD

7, 5851–5893, 2010

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

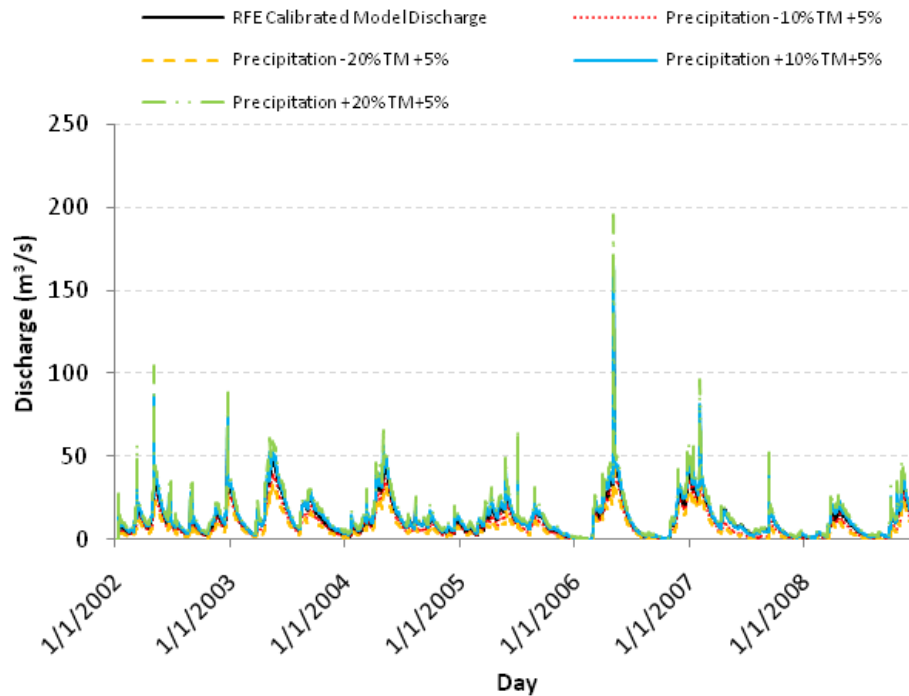


Fig. 3. Nyangores daily discharge for climate change scenarios.

Title Page

Abstract	Introduction
Conclusions	References
Tables	Figures

⏪ ⏩
◀ ▶
Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

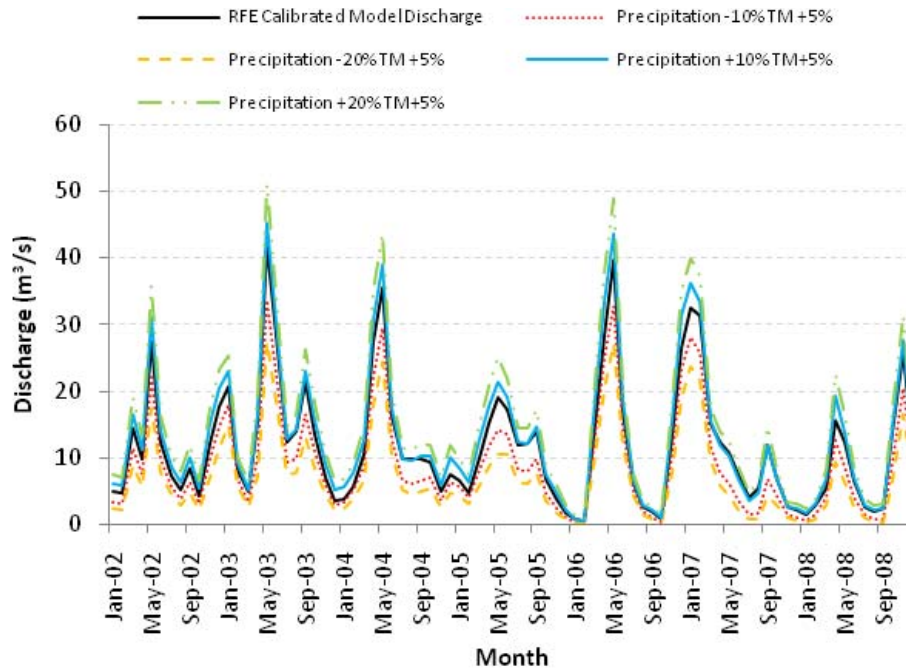


Fig. 4. Nyangores monthly discharge for climate change scenarios.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

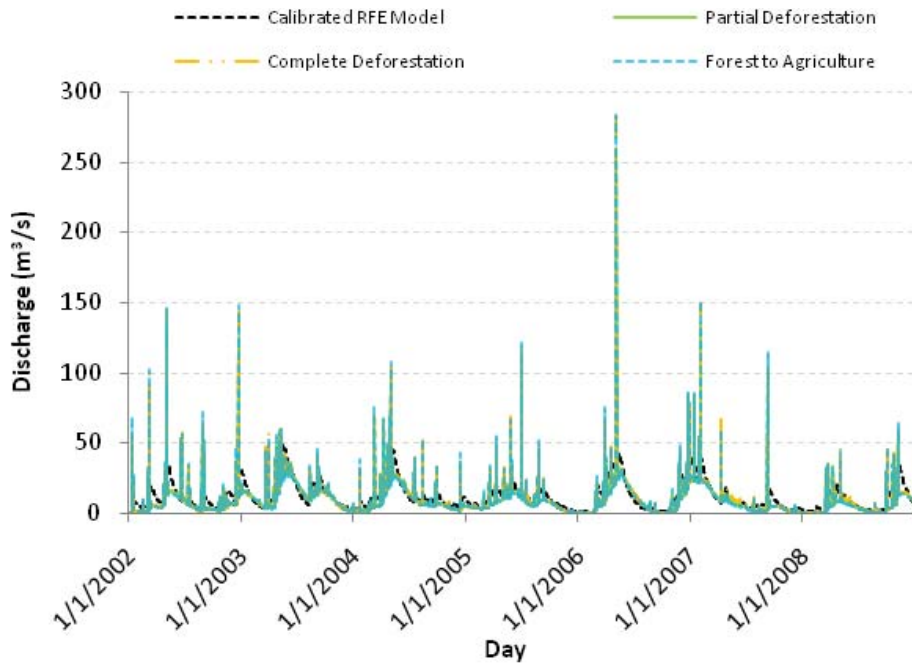


Fig. 5. Simulated Nyangores river daily discharge for different land use scenarios.

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

[Title Page](#)

[Abstract](#) | [Introduction](#)

[Conclusions](#) | [References](#)

[Tables](#) | [Figures](#)

[⏪](#) | [⏩](#)

[◀](#) | [▶](#)

[Back](#) | [Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



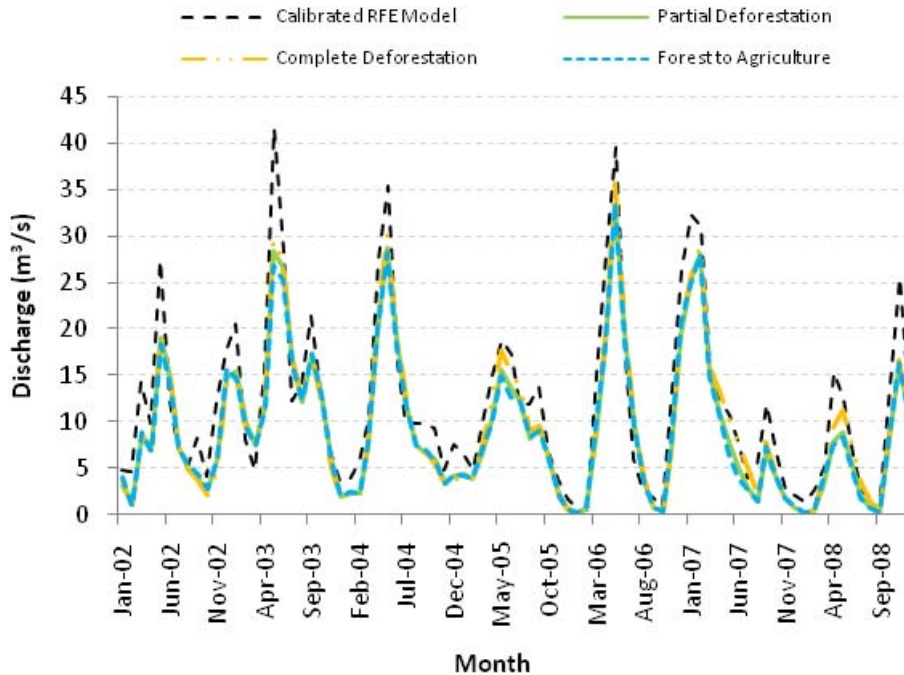


Fig. 6. Simulated Nyangores river monthly discharge for different land use scenarios.

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

[Title Page](#)

[Abstract](#) [Introduction](#)

[Conclusions](#) [References](#)

[Tables](#) [Figures](#)

[◀](#) [▶](#)

[◀](#) [▶](#)

[Back](#) [Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

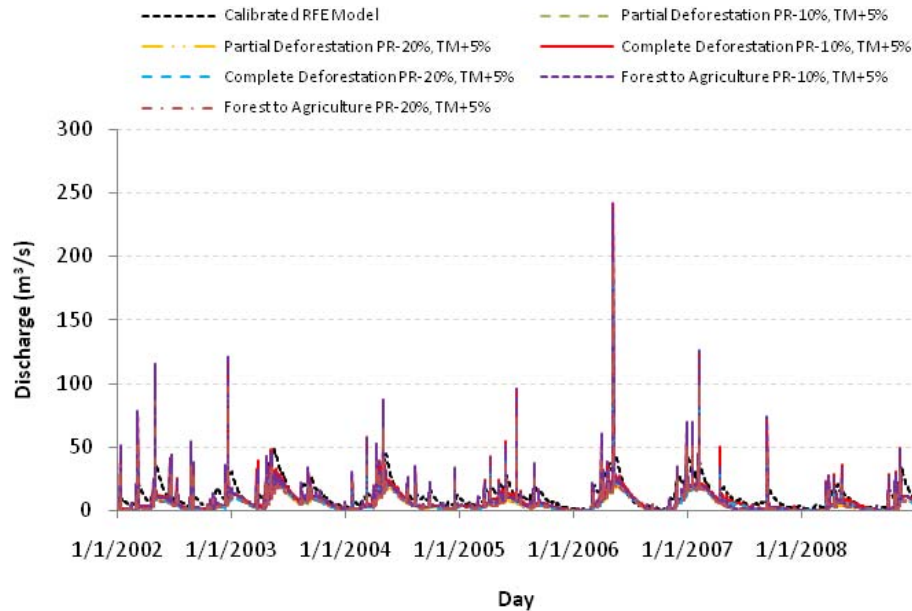


Fig. 7. Nyangores daily discharge for land use-climate change scenarios.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

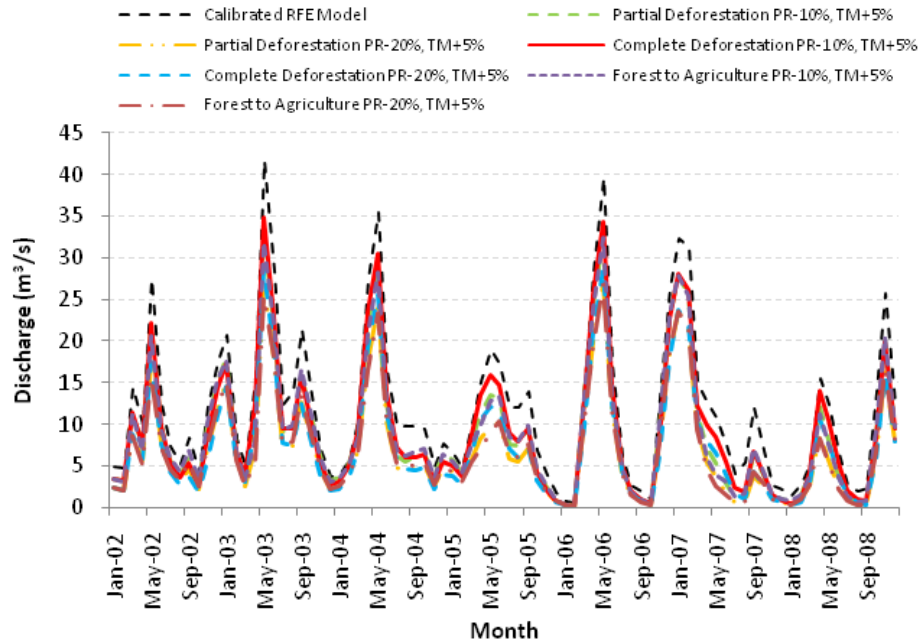


Fig. 8. Nyangores monthly discharge for land use-climate change scenarios.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

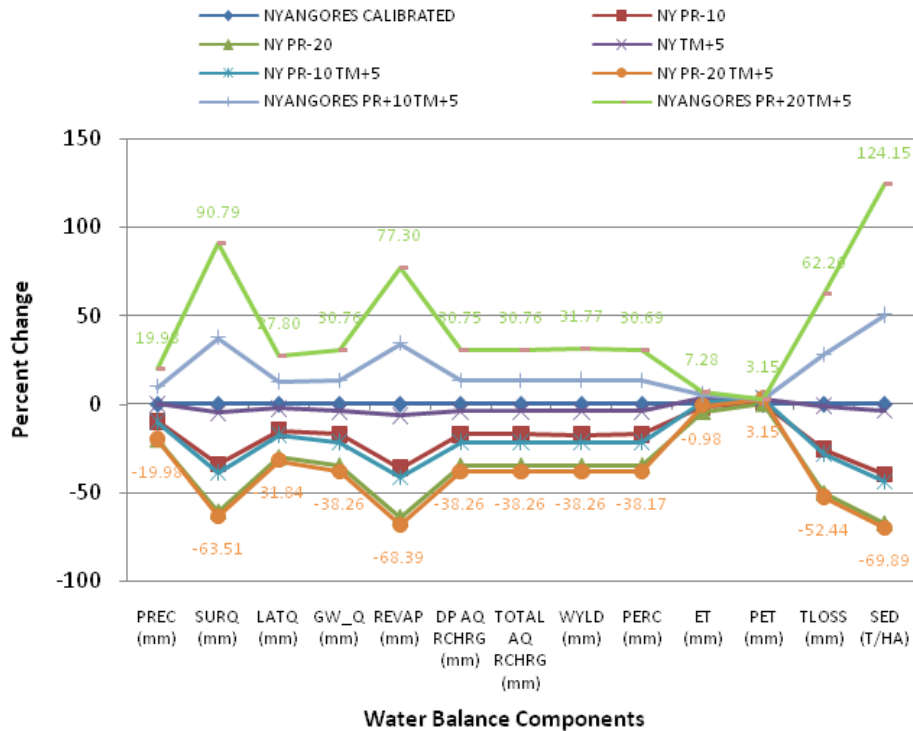


Fig. 9. Annual average percent changes for Nyangores water balance components for climate change scenarios.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc


Printer-friendly Version

Interactive Discussion



Impacts of land use and climate change scenarios on water flux

L. M. Mango et al.

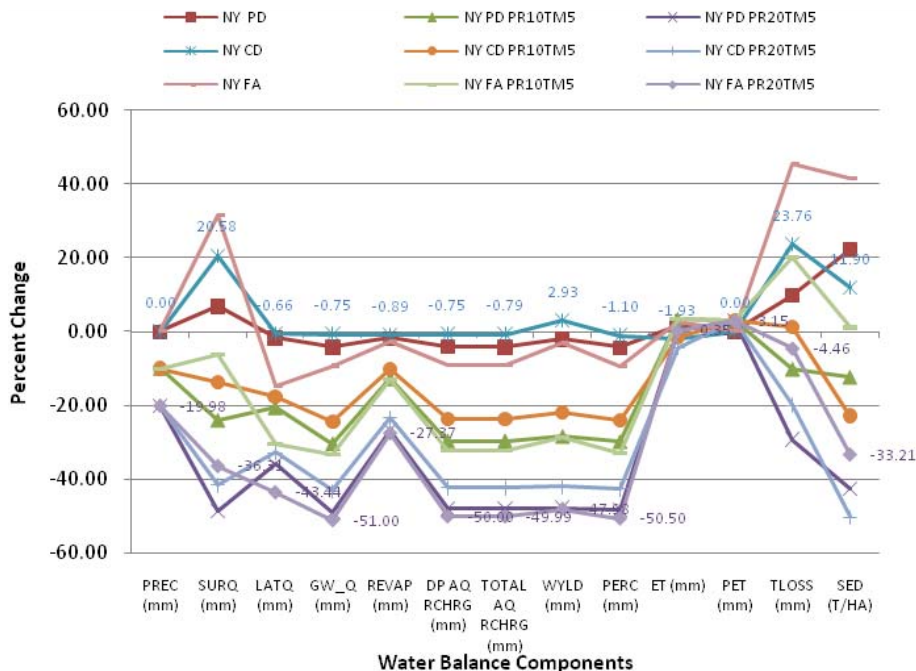

NY = Nyangores Basin, PD = Partial Deforestation, CD = Complete Deforestation, FA = Forest replaced by Agriculture

Fig. 10. Percent changes for water balance components in Nyangores land use-climate change scenarios.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

⏪ ⏩

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

