



Vibration motions studied by Heterodyne Holography

Fadwa Joud, Frédéric Verpillat, Pierre-André Taillard, Michael Atlan, Nicolas Verrier, Michel Gross

► To cite this version:

Fadwa Joud, Frédéric Verpillat, Pierre-André Taillard, Michael Atlan, Nicolas Verrier, et al.. Vibration motions studied by Heterodyne Holography. Optical Society of America, 2013. Digital Holography and Three-Dimensional Imaging, Apr 2013, Kohala Coast, Hawaii, United States. pp.DTh3A.5, 2013, <10.1364/DH.2013.DTh3A.5>. <hal-00840516>

HAL Id: hal-00840516

<https://hal.archives-ouvertes.fr/hal-00840516>

Submitted on 2 Jul 2013

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Vibration motions studied by Heterodyne Holography

F. Joud¹, F. Verpillat¹, P.A. Taillard², M. Atlan³, N. Verrier^{3,4} and M. Gross⁴

¹Laboratoire Kastler Brossel - UMR 8553 CNRS-UPMC-ENS 24 rue Lhomond 75005 Paris France

²Conservatoire de musique neuchâtelois, Avenue Léopold-Robert 34; CH-2300 La Chaux-de-Fonds; Switzerland

³Institut Langevin UMR 7587 CNRS ESPCI ParisTech, 1, rue Jussieu, 75005 Paris France

⁴Laboratoire Charles Coulomb - UMR 5221 CNRS-UM2 place Eugène Bataillon 34095 Montpellier France
gross@lkb.ens.fr

Abstract: Playing with amplitude, phase and frequency of both reference and signal arms, heterodyne holography is well adapted to vibration analysis. Vibration sidebands can be imaged and stroboscopic measurement sensitive to mechanical phase can be made.

OCIS codes: (090.1760) Computer holography; (200.4880) Optomechanics; (040.2840) Heterodyne; (100.2000) Digital image processing

Conference Paper

Digital Holography and Three-Dimensional Imaging

Kohala Coast, Hawaii United States

April 21-25, 2013

Advances in Digital Holography I (DTh3A)

<http://dx.doi.org/10.1364/DH.2013.DTh3A.5>

Citation

M. Gross, F. Joud, M. Atlan, P. Taillard, F. Verpillat, and N. Verrier, "Vibration motions studied by Heterodyne Holography," in *Digital Holography and Three-Dimensional Imaging*, OSA Technical Digest (online) (Optical Society of America, 2013), paper Dth3A.5.

<http://www.opticsinfobase.org/abstract.cfm?URI=DH-2013-DTh3A.5>

There is a big demand for full field vibration measurements, in particular in industry. Different holographic techniques have been used to analyze vibrations, the most simple and most common one being time averaged holography [1]. We have developed heterodyne holography [2] that is a variant of phase shifting holography [3] that control the reference arm phase with acousto optic modulators. This technique can be used to study vibration very efficiently.

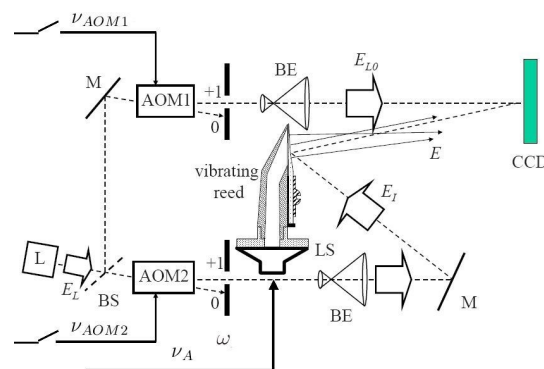


Fig. 1 – Typical vibration heterodyne holography setup. L : main laser ; AOM1, AOM2 : acousto-optic modulators ; M : mirror ; BS : beam splitter ; BE : beam expander ; CCD : CCD camera ; LS : loudspeaker exciting a clarinet reed through the bore of a clarinet mouthpiece at frequency ν_A .

Figure 1 shows a typical heterodyne holography setup applied to vibration analysis. The modulators (AOM1 and AOM2) make possible to control electronically both the amplitudes, phases and frequencies of the fields of both the reference (E_{LO}) and signal arms (E_I and E). Because of the vibration motion at frequency ν_A , the signal field E can be developed into carrier $n = 0$ and sideband $n \neq 0$ field components E_n of frequency $\nu_n = \nu_0 + n\nu_A$ where ν_0 is the frequency of the illumination optical field E_I :

$$E = \sum_{n=-\infty}^{+\infty} E_n e^{2\pi v_n t} \quad \text{with} \quad E_n = j^n J_n(A) e^{2\pi v_n t}$$

J_n is the Bessel function of order n , A is the phase modulation amplitude and $j^2 = -1$. By a proper choice of the AOMs frequencies ($\nu_{AOM1}, \nu_{AOM2} \sim 80\text{MHz}$) it is then possible to detect selectively each sideband n . For example, to perform the 4 phases detection of sideband n , one must make : $\nu_{AOM1} - \nu_{AOM2} = \nu_A + \nu_{CCD}/4$ where ν_{CCD} is the CCD camera frame frequency.

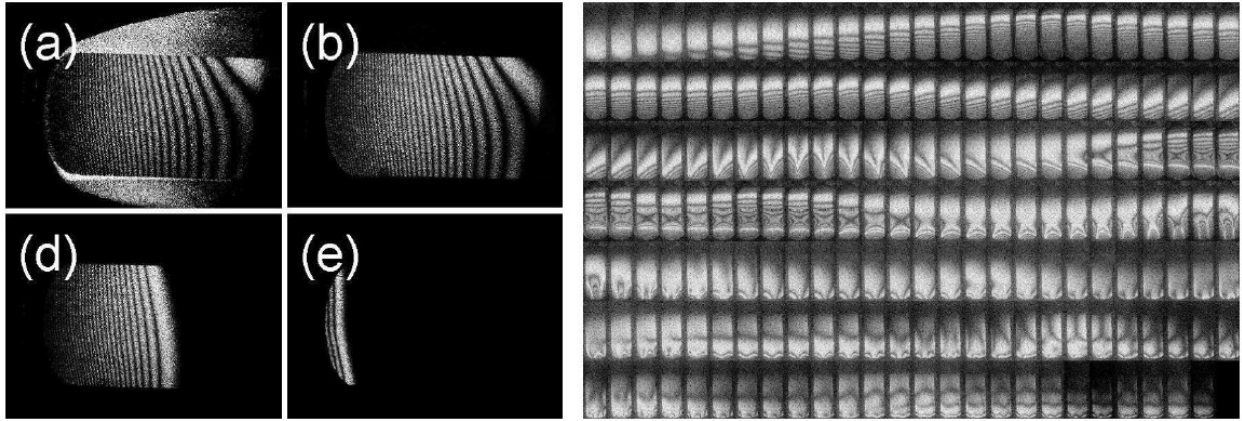


Fig. 2 – (Left hand side) Reconstructed holographic image of a clarinet reed vibrating at frequency $\nu_A = 2143$ Hz. Carrier image (a) with $n = 0$, and sideband images (b,c,d) with $n = 1$ (b), $n = 20$ (c) and $n = 100$ (d). (Right hand side) $n = 1$ holographic images of a clarinet reed for $\nu_A = 1.4$ to 20 kHz by steps of 25 cents (181 images ordered from left to right, continued on the next row).

Figure 2 (left) shows typical vibration images that have been obtained at fixed frequency $\nu_A = 2143$ Hz for sideband rank n varying from $n = 0$ to $n = 100$ [4]. The time averaged fringes obtained for $n = 0$ are shifted toward the tip of the reed when increasing the sideband rank n . Since all frequencies ($\nu_{AOM1,2}$ and ν_A) are driven by numerical synthesizer, one can sweep the vibration frequency and perform an automatic acquisition of the vibration field maps as shown on Fig.2 (right) [5].

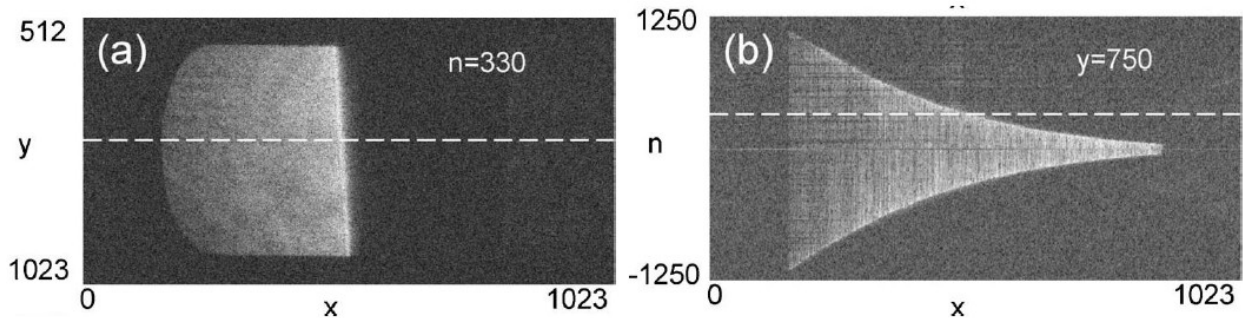


Fig. 3 – (a) x, y image reconstructed with sideband $n = 330$, with a large amplitude of vibration. (b) x, n images corresponding to cuts of 3D data along the horizontal white dashed line of (a).

By recording a cube of data of coordinate x, y and n , and by performing cut along the x direction, it is also possible to analyze large amplitude vibration that cannot be studied by time averaged holography, because the time averaged fringes are too tight. Figure 3 show an clarinet reed example with an amplitude of vibration of $\pm 60\mu\text{m}$ on tip of the reed [6].

It is also possible to use the AOMs to turn on and off the signal and reference arms at the vibration frequency, and to perform by the way stroboscopic holography. In the case of large amplitude vibration, one can get a images the vibration velocities as shown on Fig.4 (left) [7]. For small amplitude, one can get image of the vibration motion by slowly drifting the phase of the stroboscopic illumination and by performing a double demodulation on the data as shown on Fig.4 (right) [8]. Note that we have not consider here the case of very small amplitude vibration. In that case, heterodyne holography is also extremely useful since, as mentioned by Psota et al. [9], the detection of the sideband of harmonic rank $n = 1$ is intrinsically well adapted to the detection of small vibration amplitude A . For $n=1$, the holographic signal varies like $J_1(A) \cong A/2$, while, for time averaged holography ($n=0$), the signal varies like $J_0(A) \cong 1 - A^2/4$.

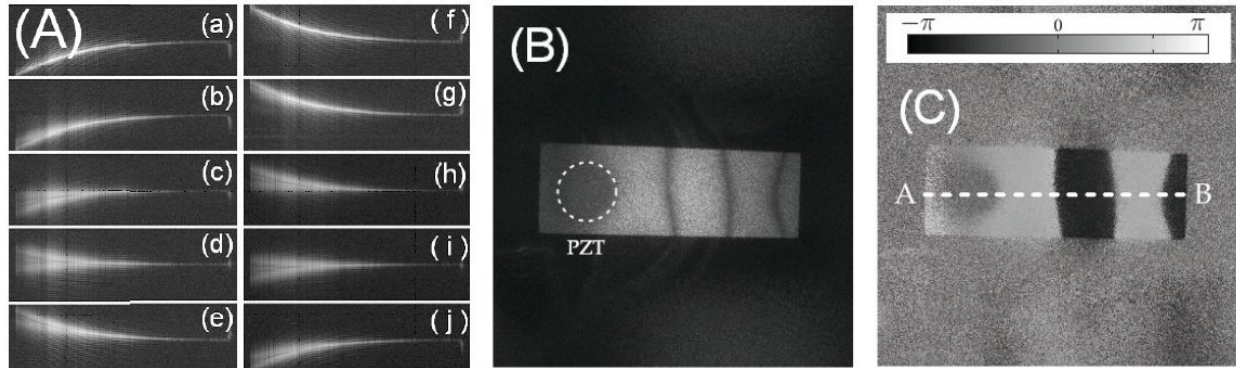


Fig. 4 – (A) x, n cuts of 3D data (analog to the Fig.3(b) cut) made for successive strobe time. (B,C) Amplitude (B) (black : nodes, white : anti nodes) and phase (C) image of a vibrating sheet of paper with drifting strobe illumination and double demodulation.

References

- [1] P. Picart, J. Leval, D. Mounier, and S. Gougeon. Time-averaged digital holography. *Optics letters*, 28(20) :1900–1902, 2003.
- [2] F. Le Clerc, L. Collot, and M. Gross. Numerical heterodyne holography with two-dimensional photodetector arrays. *Optics letters*, 25(10) : 716– 718, 2000.
- [3] I. Yamaguchi. Phase-shifting digital holography. *Digital Holography and Three-Dimensional Display*, pages 145–171, 2006.
- [4] F. Joud, F. Laloe, M. Atlan, J. Hare, and M. Gross. Imaging a vibrating object by sideband digital holography. *Optics Express*, 17(4) :2774– 2779, 2009.
- [5] P.A. Taillard, F. Laloe, M. Gross, J.P. Dalmont, and J. Kergomard. Measurements of resonance frequencies of clarinet reeds and simulations. *arXiv preprint arXiv :1202.2114*, 2012.
- [6] F. Joud, F. Verpillat, F. Laloe, M. Atlan, J. Hare, and M. Gross. Fringe free holographic measurements of large-amplitude vibrations. *Optics letters*, 34(23) :3698–3700, 2009.
- [7] F. Verpillat, F. Joud, M. Atlan, and M. Gross. Imaging velocities of a vibrating object by stroboscopic sideband holography. *Optics Express*, 20(20) :22860–22871, 2012.
- [8] M. Atlan, M. Gross, and N. Verrier. Phase-resolved heterodyne holographic vibrometry with a strobe local oscillator. *Optics letters. to be published*, 2013.
- [9] P. Psota, V. Lédl, R. Doleček, J. Václavík, and M. Šulc. Comparison of digital holographic method for very small amplitudes measurement with single point laser interferometer and laser doppler vibrometer. *Digital Holography and Three-Dimensional Imaging*, 2012.