

# Assessment of groundwater contamination in an agricultural peri-urban area (NW Portugal): an integrated approach

M. F. Barroso • M. J. Ramalhosa • A. Olhero • M. C. Antaño • M. F. Pina •  
L. Guimaraes • J. Teixeira • M. J. Afonso • C. Delerue-Matos • H. I. Chamine

**Abstract** The excessive use of pesticides and fertilisers in agriculture has generated a decrease in groundwater and surface water quality in many regions of the EU, constituting a hazard for human health and the environment. Besides, on-site sewage disposal is an important source of groundwater contamination in urban and peri-urban areas. The assessment of groundwater vulnerability to contamination is an important tool to fulfil the demands of EU Directives. The purpose of this study is to assess the groundwater vulnerability to contamination related mainly to agricultural activities in a peri-urban area (Vila do Conde, NW Portugal). The hydrogeological framework is characterised mainly by fissured granitic basement and sedimentary cover. Water samples were collected and analysed for temperature, pH, electrical conductivity, chloride, phosphate, nitrate and nitrite. An evaluation of groundwater vulnerability to contamination was applied (*GOD-S*,

this study highlights the adequacy of an integrated approach, combining hydrogeochemical data, vulnerability assessments and multivariate analysis, to understand groundwater processes in peri-urban areas.

**Keywords** Groundwater quality • Agricultural activity • Vulnerability • Urban hydrology • NW Portugal

## Introduction

Groundwater quality and agriculture interactions occurring in hydrological systems are complex and manifold. Agricultural soils in peri-urban areas are important for food supply to the growing city population. However, groundwater contamination is increasing as a result of a significant intensification in agricultural production.

During the last 50 years there has been an enormous rise in food production in many countries through the increased use of irrigation. Much of this irrigation water has been drawn from groundwater as people realised the advantages to increased productivity of timely irrigation and security of application (Morris et al. 2003; Gleeson et al. 2010). Most agricultural land uses have provided major sources of diffuse groundwater contamination since the introduction of mechanisation and use of fertilisers (Capri et al. 2009). In particular, the past decades have led to an increasing use of fertilisers and pesticides, most of them with high concentrations of nitrogen and phosphorus (e.g. Rodvang and Simpkins 2001; Eickhout et al. 2006; Candela et al. 2008), that can contribute in the long term to groundwater pollution (Razowska-Jaworek and Sadurski 2005).

Nitrogen fertilisers are applied extensively in agriculture to increase crop production, but excess nitrogen supplies can cause air, soil, and water contamination. Groundwater and surface water quality degradation often depends on the use of nitrogen fertilisers. In recent

*Pesticide DRASTIC-Fm, SINTACS and SI*) and the potential nitrate contamination risk was assessed, both on a hydrogeological GIS-based mapping. A principal component analysis was performed to characterised patterns of relationship among groundwater contamination, vulnerability, and the hydrogeological setting assessed. Levels of nitrate above legislation limits were detected in 75 % of the samples analysed. Alluvia units showed the highest nitrate concentrations and also the highest vulnerability and risk. Nitrate contamination is a serious problem affecting groundwater, particularly shallow aquifers, especially due to agriculture activities, livestock and cesspools. GIS-based cartography provided an accurate way to improve knowledge on water circulation models and global functioning of local aquifer systems. Finally,

years, the use of residues has increased, especially livestock residues (liquid and semi-liquid manure), leaching towards the subsoil through rainfall or irrigation. Direct discharges of nitrogen compounds from on-site sanitation and from sewer effluent also exacerbate the problem. Moreover, the contamination of drinking water supplies can pose immediate risks to human health (e.g., Morris et al. 2003; Corniello et al. 2007; Di Lorenzo et al. 2012; Wick et al. 2012; Esmaeili et al. 2014).

Nitrate ( $\text{NO}_3^-$ ) is very soluble and readily leaches to groundwater or drainage tiles when fertiliser or manure application rates are greater than plant nutrient needs (e.g., Rodvang and Simpkins 2001; Jalali 2011; Cheong et al. 2012; Esmaeili et al. 2014). Phosphorus is the principal limiting nutrient in fresh waters and in excess it is responsible for anthropogenic eutrophication. Phosphorus

surpluses tend to be greatest in areas with a high density of livestock operations (Rodvang and Simpkins 2001).

In the European Union (EU), the Nitrates Directive 91/676/EEC (OJEC [Official Journal of the European Communities] 1991) was drawn up with the specific purpose to reduce water contamination caused by nitrates from agricultural sources and to prevent this contamination. EU member states had, among other actions, to identify waters affected by nitrate contamination and to designate Nitrate Vulnerable Zones (NVZs) (Stigter et al. 2006, 2011). Within this context it is important to note that groundwater and surface water are a single and global resource (Winter et al. 1998; Sophocleous 2002). The fissured bedrock and soil media properties are significantly important to the hydraulic flow path dynamics. Also, the shallow aquifers are often connected to surface water becoming more exposed to contamination sources. Adding to this, the small-scale features between unsaturated and the saturated zones have a key influence on the behaviour of hydrological systems. Hence, groundwater vulnerability to contamination is an intrinsic relative, non-measurable, dimensionless property of a groundwater system that depends on its sensitivity to human and/or natural impacts (e.g., Foster 1990; Vrba and Zaporožec 1994; Vrba and Lipponen 2007). Moreover, the assessment of groundwater vulnerability is an important basis to accomplish the demands of the EU Water Framework Directive 2000/60/EC (OJEU [Official Journal of the European Union] 2000) and EU Groundwater Directive 2006/118/EC (OJEU [Official Journal of the European Union] 2006).

The main objectives of this study were:

1. To detect and assess contamination of groundwater by nitrate and chloride in a peri-urban area (Vila do Conde, Porto metropolitan region, NW Portugal) embedded in a context of a Nitrate Vulnerable Zone;
2. To evaluate groundwater vulnerability to nitrate contamination in relation to the peri-urban hydrogeological setting, taking advantage of GIS-based mapping for management purposes;
3. To improve knowledge of groundwater processes in such areas and their importance to the design of the hydrogeological conceptual model and an integrated urban water management in complex hydrogeological systems.

#### Study area: hydrogeological setting

Vila do Conde peri-urban area is located in the Porto metropolitan region (NW of Portugal), to the South of Ave River and close to the Atlantic Ocean (Fig. 1). Vila do Conde is a municipality with a total area of 149.31 km<sup>2</sup> and 79,390 inhabitants (INE—Instituto Nacional de

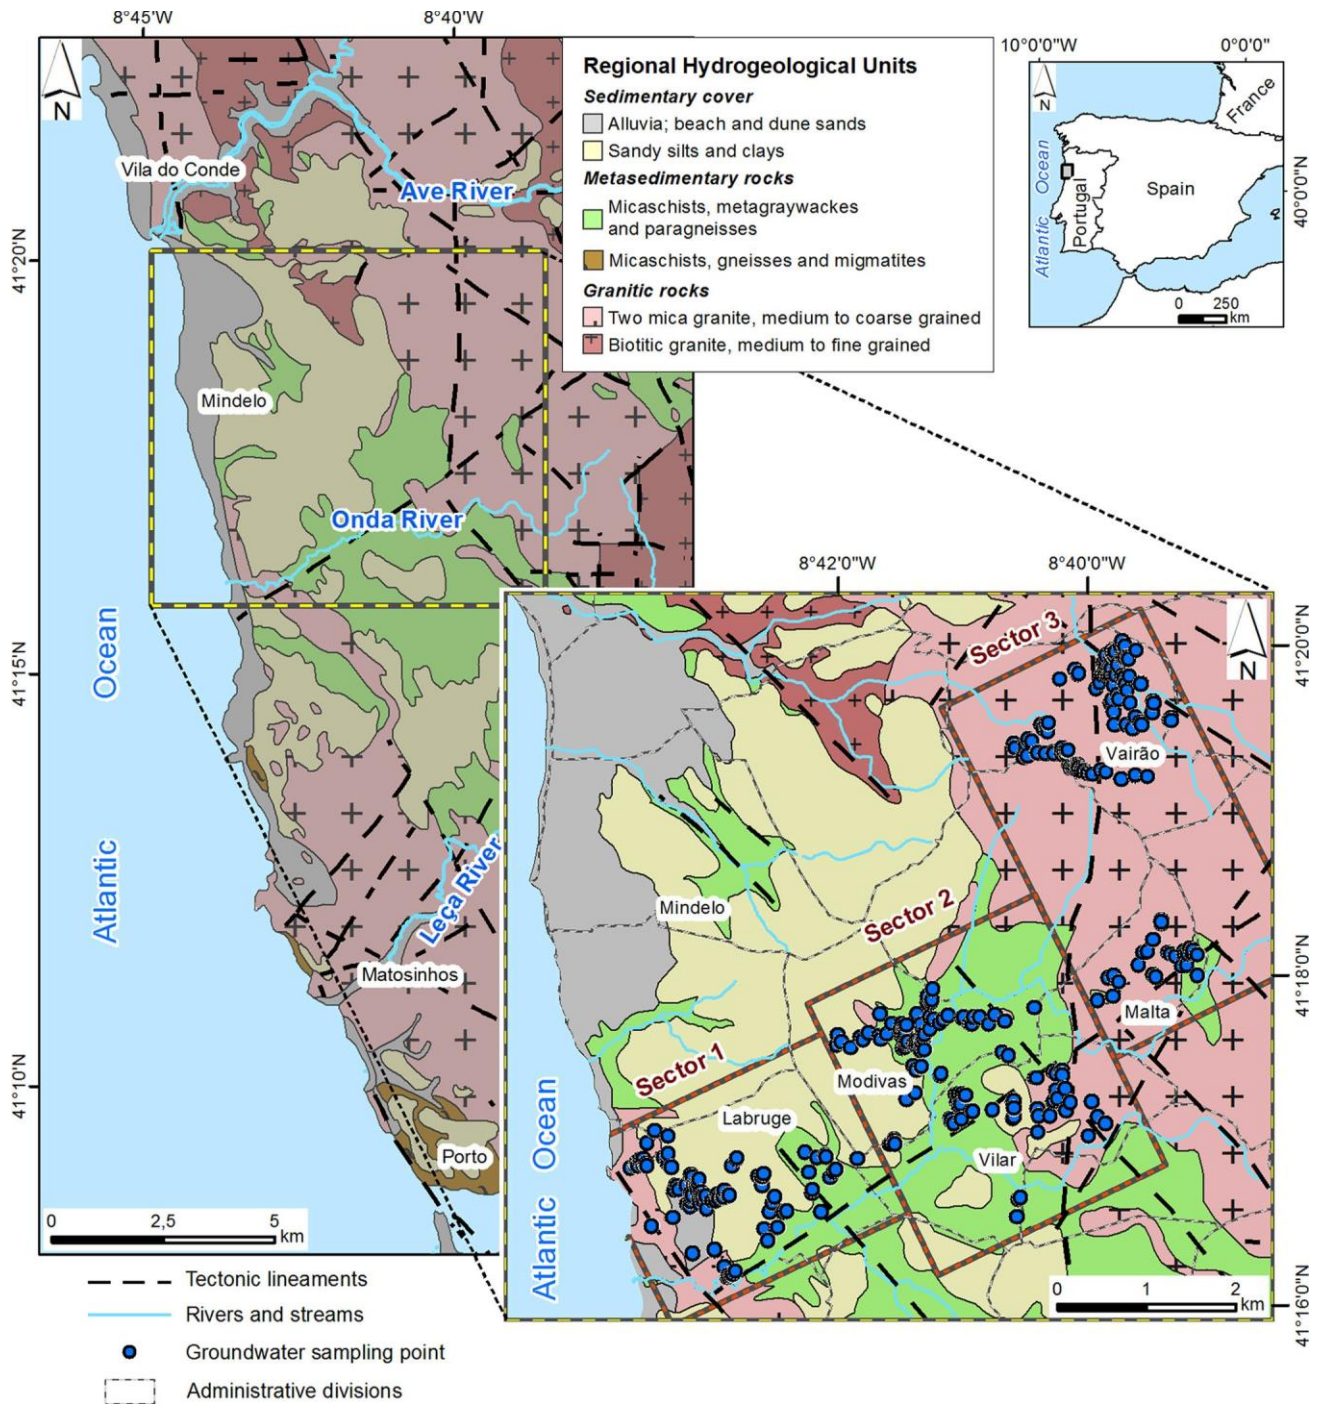


Fig. 1 Regional hydrogeological setting from Vila do Conde peri-urban area (cf. Table 1), Porto metropolitan region, NW Portugal (geological background updated from Carrington da Costa and Teixeira 1957; Teixeira and Medeiros 1965; Pereira et al. 1989;

Chamine' et al. 2003; hydrogeological framework adapted from Pedrosa 1999; Afonso et al. 2004; Carvalho 2006; Afonso 2011). Study sites (Sectors 1, 2 and 3) are shown in the lower right corner of the figure

Estátística 2011). This region has an Atlantic mild temperate climate, with a mean annual precipitation around 1,200 mm and a mean annual air temperature of 14 °C (Afonso et al. 2007; Afonso 2011). Groundwater is the

fundamental source of fresh water supply, either for drinking, domestic use or agricultural practices within the region. Most of the population does not have public water supply and sanitation systems and depends on agricultural

Table 1 Regional hydrogeological units (cf. Fig. 1) and related features in the Vila do Conde area, Porto urban region (updated from Pedrosa 1999; Carvalho et al. 2005, 2007; Carvalho 2006; Afonso et al. 2007; Afonso 2011)

Hydrogeological groups	Sedimentary cover		Metasedimentary rocks		Granitic rocks	
	Alluvia; beach and dune sands (ABD)	Sandy silts and clays (SC)	Micaschists, metagraywackes and paragneisses (MR)	Micaschists, gneisses and migmatites (MRM)	Two-mica granite, medium to coarse grained (GR)	Biotitic granite, medium to fine grained (BGR)
<b>Hydrogeological features</b>						
Thickness (m)	15	15–25	50	50	100	100
<b>Weathering profile</b>						
Low (m)	n.a.	n.a.	10–20	5–10		
High (m)	n.a.	n.a.			20–50	20–50
Silty and/or clayey	n.a.	n.a.	x			x
Sandy	n.a.	n.a.		x	x	x
<b>Connectivity to the drainage system</b>						
With	x	x				
Possible			x	x	x	x
<b>Type of flow</b>						
Porous media	x	x				
Fissured media			x	x	x	x
Transmissivity ( $T, m^2/d$ )	20	1	4–18	5–10	5–10	5–10
<b>Groundwater confinement</b>						
Unconfined aquifer		Aquitard	Semi-confined to confined aquifer	Semi-confined to confined aquifer	Semi-confined to confined aquifer	Semi-confined to confined aquifer
<b>More suitable exploitation structures</b>						
Dug wells, galleries and springs	x	x		x	x	x
Boreholes			x			
<b>Well discharge, <math>Q</math> (L/s)</b>						
Very low ( $Q < 1$ )		x	x	x	x	x
Low ( $1 < Q < 2$ )	x					
<b>Hydrochemical facies</b>						
Cl–Na to NO <sub>3</sub> –Na	Cl–Na to NO <sub>3</sub> –Na	Cl–Na to NO <sub>3</sub> –Na	Cl–Na–Ca to HCO <sub>3</sub> –Na–Ca	Cl–Na–Ca to HCO <sub>3</sub> –Na–Ca	Cl–Na	Cl–Na to HCO <sub>3</sub> –Na

*n.a.* not applicable

production (namely potatoes, vegetables, fruits and maize) and farming and cattle raising (especially bovines). These products are one of the most important food supplies to the surrounding villages and cities. The period of fertilisation is mostly concentrated in early spring for summer crops like maize. The two main types of fertilisation are: organic, especially manure (ca. 700 kg/ha/year), yet sewage is also used, and inorganic (ca. 120 m<sup>3</sup>/ha/year). The inorganic fertilisers are composed mainly by nitrogen, phosphorous and potassium, but nitrogen prevails among the other two (Pedrosa et al. 2002). Sprinkler is the dominant irrigation system. In this region, groundwater resources are mainly conditioned by the described climatological conditions, as well as by geologic and morphotectonical features. The

regional geological framework comprises a crystalline fissured basement of highly deformed and overthrust Late Proterozoic/Palaeozoic metasedimentary and granitic rocks. The post-Miocene sedimentary deposits often overlay the bedrock (Pereira et al. 1989; Chamine et al. 2003, and references therein). The morphotectonic background comprises a littoral platform characterised by a quite regular planation surface dipping gently to the west, culminating around 100 m a.m.s.l. (Araújo et al. 2003). Incised river valleys, namely Ave and Leça, intersect the flatness of this morphological surface, which evidence a regional tectonic control. The main features of the regional hydrogeologic units in this area are described in Table 1.

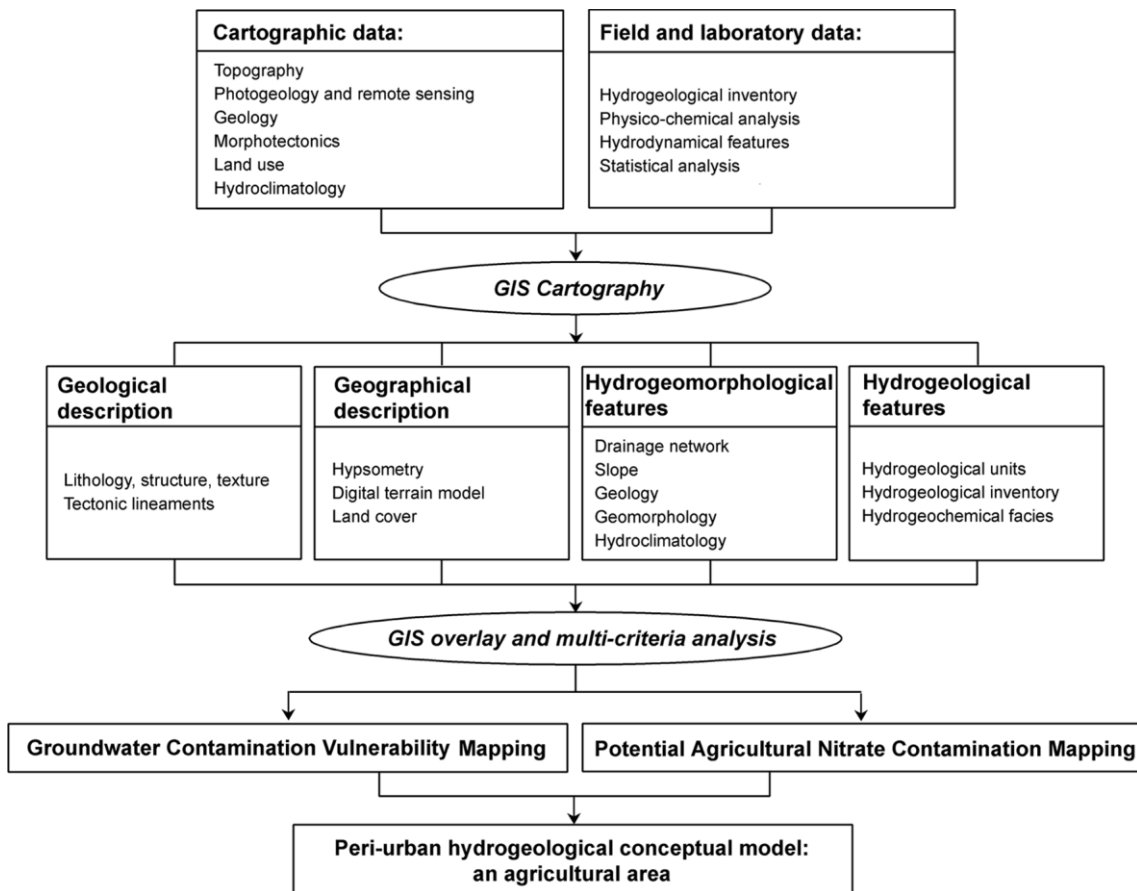


Fig. 2 Conceptual flowchart representing methodologies applied in this study

According to Monteiro (2005), the following pedologic units (nomenclature in agreement with the IUSS Working Group WRB 2007) occur in this area: the most representative are dystric cambisols and humic cambisols, mostly associated with granitic rocks, their source material; haplic arenosols and dystric fluvisols also occur, the former in the littoral area, related with dune and beach sands, and the latter connected with alluvia.

The study area was divided into three key sectors (Fig. 1), each of them dominated by a hydrogeological group: sector 1, in the sedimentary cover, sector 2 in metasedimentary rocks and sector 3 in granitic rocks.

## Materials and methods

This study followed a geo-environmental approach with the aim of understanding and assessing the nature and suitability for human consumption and agricultural practices of these peri-urban groundwater systems (Fig. 2).

The area was studied using the following tools (e.g., Vrba and Zaporozec 1994; Struckmeier and Margat 1995; Assaad et al. 2004; Witkowski et al. 2007; Chamine' et al.

2013): geological and hydrogeological mapping, hydro- logical techniques and aquifer vulnerability evaluation. Geological fieldwork surveys were first carried out to identify major geologic features responsible for ground- water circulation paths and to assess litho- structural and textural heterogeneities.

A hydrogeological field inventory was developed, which included dug wells, boreholes and water galleries. Groundwater samples were collected in all three study sectors and used for the hydrochemical evaluation, and subsequent identification of areas at increased risk. In situ determinations included temperature, pH, and electrical conductivity using a multiparametric portable equipment (Hanna Instruments, HI 9828). Groundwater samples were collected in 1.5 L pre-cleaned bottles, for the analysis of major cations and anions, to evaluate the main regional hydrogeochemical facies. AquaChem 5.1 software was used for the hydrochemical interpretation. All the inventory and sampling sites were georeferenced with a high-accuracy GPS (Trimble® GeoExplorer).

In total, 380 sampling sites were established in the three sectors (Fig. 1): Sector 1, dominated by a sedimentary cover, with 106 water points; Sector 2, mostly by metasedimentary

rocks, with 126 water points; Sector 3, granitic rocks, with 148 water points.

Because one main aim was to assess suitability and risk for human consumption, most of the sampling points (86 %) were located in the peri-urban fabric. The remaining sampling points were located in associated agricultural areas.

The hydrochemical analyses included the determination of chloride ( $\text{Cl}^-$ ), phosphate ( $\text{PO}_4^{3-}$ ), nitrate and nitrite ( $\text{NO}_2^-$ ). Samples were conditioned and analysed according to standard field procedures. All reagents used were of pro analysis grade and obtained from Merck (Darmstadt, Germany). Ultrapure water (0.054  $\mu\text{S}/\text{cm}$ ) was produced by a Milli-Q system from Millipore (Milford, MA, USA). The content determination of the parameters was based on the procedure described in standard methods for the examination of water and wastewater issued by the American Public Health Association (APHA 1995). To validate all the methodologies an inter-laboratory study was done.

Data pertaining to the hydrochemical parameters measured were compared by one-way analysis of variance (one-way ANOVA) to investigate differences among the studied sectors, and the hydrogeological units, as well. For the purpose of data analysis values below the limits of detection were replaced by half of the respective limit value. Prior to the analysis data were checked for normality and variance homogeneity using the Kolmogorov–Smirnov and the Levene's tests, respectively.

Groundwater vulnerability to contamination was evaluated using several methods: *GOD-S* (Foster 1987; Foster and Hirata 1988; Foster et al. 2002), *Pesticide DRASTIC-Fm* (Aller et al. 1987; Denny et al. 2007), *SINTACS* (Civita 1994, 2010; Civita and De Maio 2000) and *SI* (Ribeiro 2000; France's et al. 2001). For *DRASTIC-Fm*, two updates were done: (1) the assigned weights for *DRASTIC* were those proposed for *Pesticide DRASTIC*; (2) the *Fm* parameter was derived from the tectonic lineaments density map and grouped into five classes (km of lineaments/ $\text{km}^2$ ):

4, 4–8, 8–12, 12–16 and >16, with ratings of 2, 4, 6, 8 and 10, respectively. Concerning *SINTACS*, the weights of Nitrates String were used (Civita 2010). Finally, for *SI*, the Land Use (*LU*) parameter was derived from land cover maps (CLC2006, Painho and Caetano 2006; COS2007, IGP—Instituto Geográfico Português 2010). Hydrogeological background was on the basis of the computation for the vulnerability approach. Groundwater vulnerability was subdivided into several broad classes from "Negligible—Low" to "Extremely High". The national colour code for *DRASTIC* index ranges was applied. Finally, an integrated assessment between all the methods was made.

A principal component analysis (PCA) was then performed with hydrochemical variables and the data obtained through the assessment of groundwater vulnerability. PCA is an effective tool for the characterisation of anthropogenic inputs (Lorenzo et al. 2007). It allows for a

description of a multidimensional system by reducing the number of studied variables to a few significant summary components facilitating the interpretation of relationships among them and the identification of contamination profiles for large data bodies. Here, the aims were to investigate the relationships between groundwater vulnerability and the hydrochemical data, compare the bedrock profile in terms of vulnerability and hydrochemical load, and search for patterns that could improve the design of the hydro-geological conceptual model in urban areas. For this, the vulnerability indexes obtained through the GIS-based analysis, the hydrochemical data and the depth of the sampled water wells were entered in the PCA as quantitative variables. The hydrogeological unit was entered as supplementary qualitative variable. Only principal components (PCs) with Eigen values >1 were retained for interpretation. PCA interpretation was based on the examination of the correlations between the variables and the PCs obtained. Confidence ellipses were drawn around the hydrogeological units (i.e., around the barycentre of the samples assessed on each unit) to enable visualising whether or not the units differ significantly. PCA was carried out with FactoMineR.

Based on the PCA results, an assessment of potential nitrate contamination risk was made by correlating the agricultural nitrate hazard index—*IPNOA* (Padovani and Trevisan 2002; Corniello et al. 2007; Capri et al. 2009)—with the *SINTACS* index. For *IPNOA* only the nitrogen load from farming was taken into account and so only farmed areas, which are the leading sources of potential nitrate contamination, were considered.


The hydrogeological and hydrogeochemical database generated in this study can be updated at any time if one of the parameters modifies its characteristics, and thus new maps can be easily generated. This integrative methodology is possible through the application in a GIS environment (ArcGis 9.3 platform) followed by a multivariate analysis, which were in this study strongly helpful for the presentation and interpretation of the results.

## Results and discussion

### Hydrogeochemistry

The hydrogeological units that dominate in the selected key sectors are (Fig. 3a): sedimentary cover (ABD and SC), in Sector 1, particularly sandy silts and clays (SC); metasedimentary rocks (MR), micaschists, metagraywackes and paragneisses, in Sector 2; and, finally, in Sector 3, granitic rocks (GR), two-mica granite, medium to coarse grained.

Fig. 3 Hydrogeochemistry versus hydrogeological units and study sectors. a Distribution of hydrogeological units in the three study sectors; b stiffdiagrams for Sectors 1, 2 and 3 (adapted from Afonso 2011); c depth of water wells; concentrations of chloride (d), phosphate (e), nitrate (f) and nitrite (g)

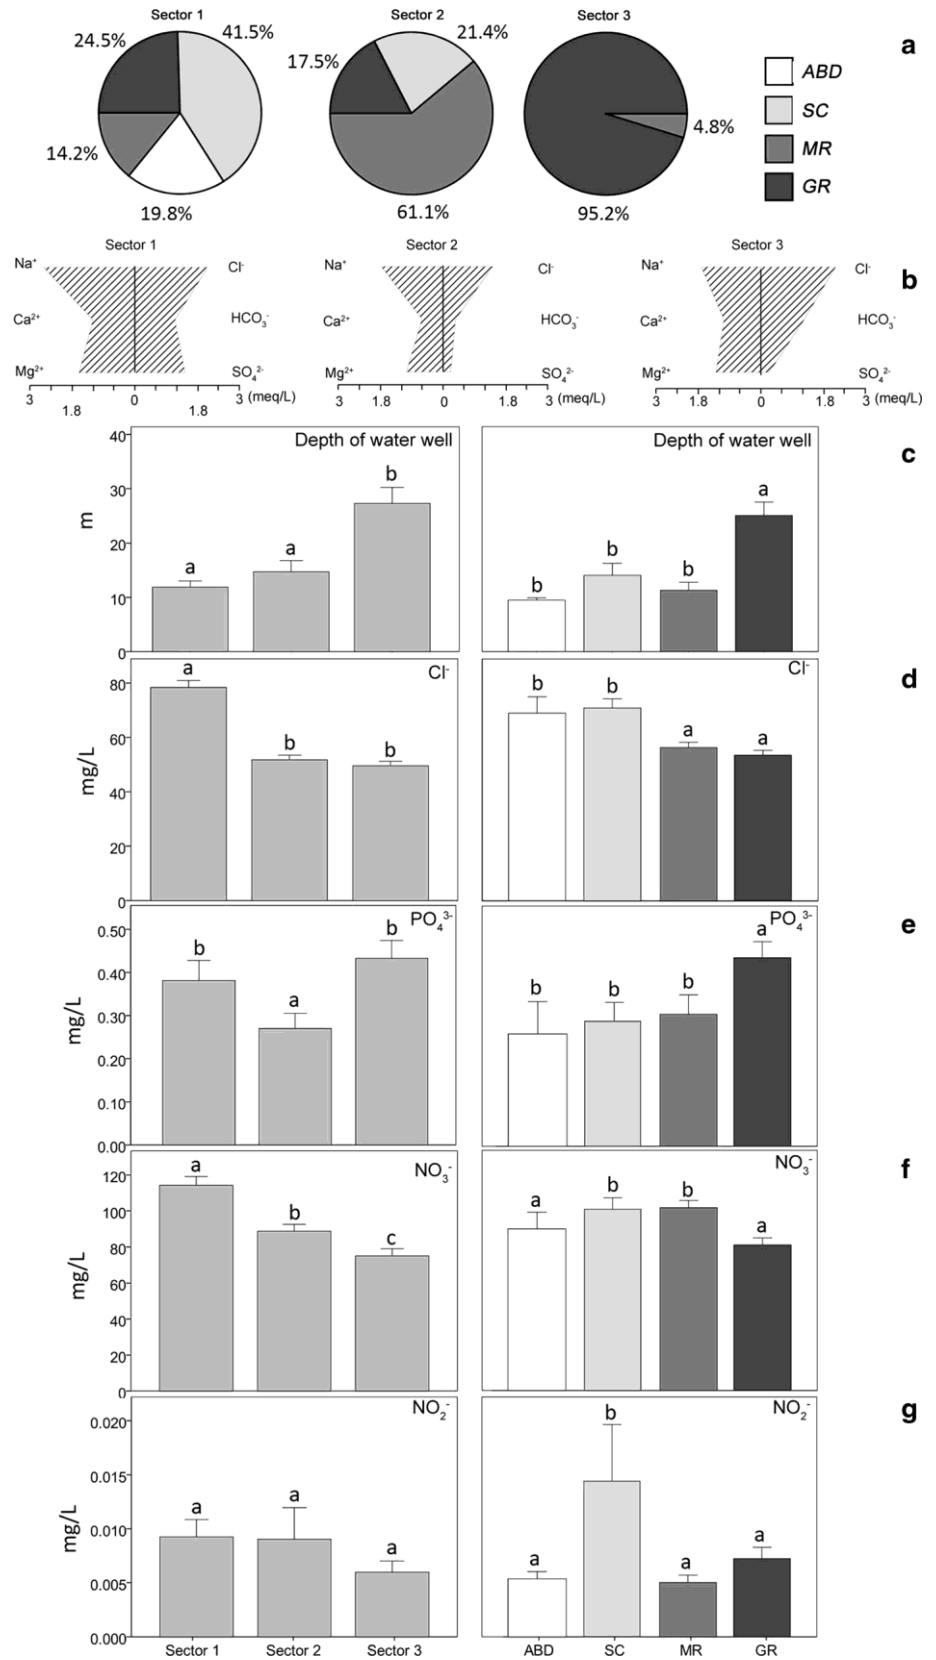

The groundwater analysed are slightly acidic with a mean pH value of 6.3. Minor differences between sectors were found: sectors 1 and 2 showed pH values around 6.2 and sector 3 about 7.1. Electrical conductivity measurements ranged from

354 to 688  $\mu\text{S}/\text{cm}$ , which indicate the presence of medium mineralised waters. The median values for each sector were fairly diverse: 654  $\mu\text{S}/\text{cm}$  for Sector 1, 392  $\mu\text{S}/\text{cm}$  for Sector 2 and 425  $\mu\text{S}/\text{cm}$  for Sector 3. The values are in good agreement with data reported previously for this area (Afonso et al. 2007; Afonso 2011). Moreover, they are consistent with the hydrogeochemical signature determined for these groundwater, which are of Cl type, with minor differences among sectors (Fig. 3b): Sector 1, Cl-SO<sub>4</sub>-Na type; Sector 2, Cl-Na type; and Sector 3, Cl-Na-Mg type (Afonso 2011).

Concerning the water supply structures, most of them (91.4 %) are dug wells, boreholes constitute 7.8 % and water galleries represent only 0.8 %. The average depth of the water wells (Fig. 3c) is similar in Sectors 1 and 2,

between 10 and 15 m, and significantly higher in Sector 3, around 30 m. This agrees with the fact that most of the boreholes, with higher depths, are located in Sector 3, where granitic rocks prevail.

Sector 1 showed significantly higher (35 %) Cl<sup>-</sup> concentrations respect with to Sectors 2 and 3 (Fig. 3d). Regarding variation of Cl<sup>-</sup> values among hydrogeological units, significant differences were observed also for the sedimentary cover (ABD, SC), relative to the remaining units, with concentrations there exceeding 70 mg/L.

Concerning PO<sub>4</sub><sup>3-</sup> (Fig. 3e), although the concentrations are low, Sector 2 presented significantly lower (by about 35 %) PO<sub>4</sub><sup>3-</sup> values than Sectors 1 and 3. The same tendency was found for ABD, SC and MR hydrogeological units in relation with GR unit.

Significant differences among sectors were also found for the concentrations of NO<sub>3</sub><sup>-</sup> which decreased from Sector 1 to Sector 3 (Figs. 3f, 4). SC and MR

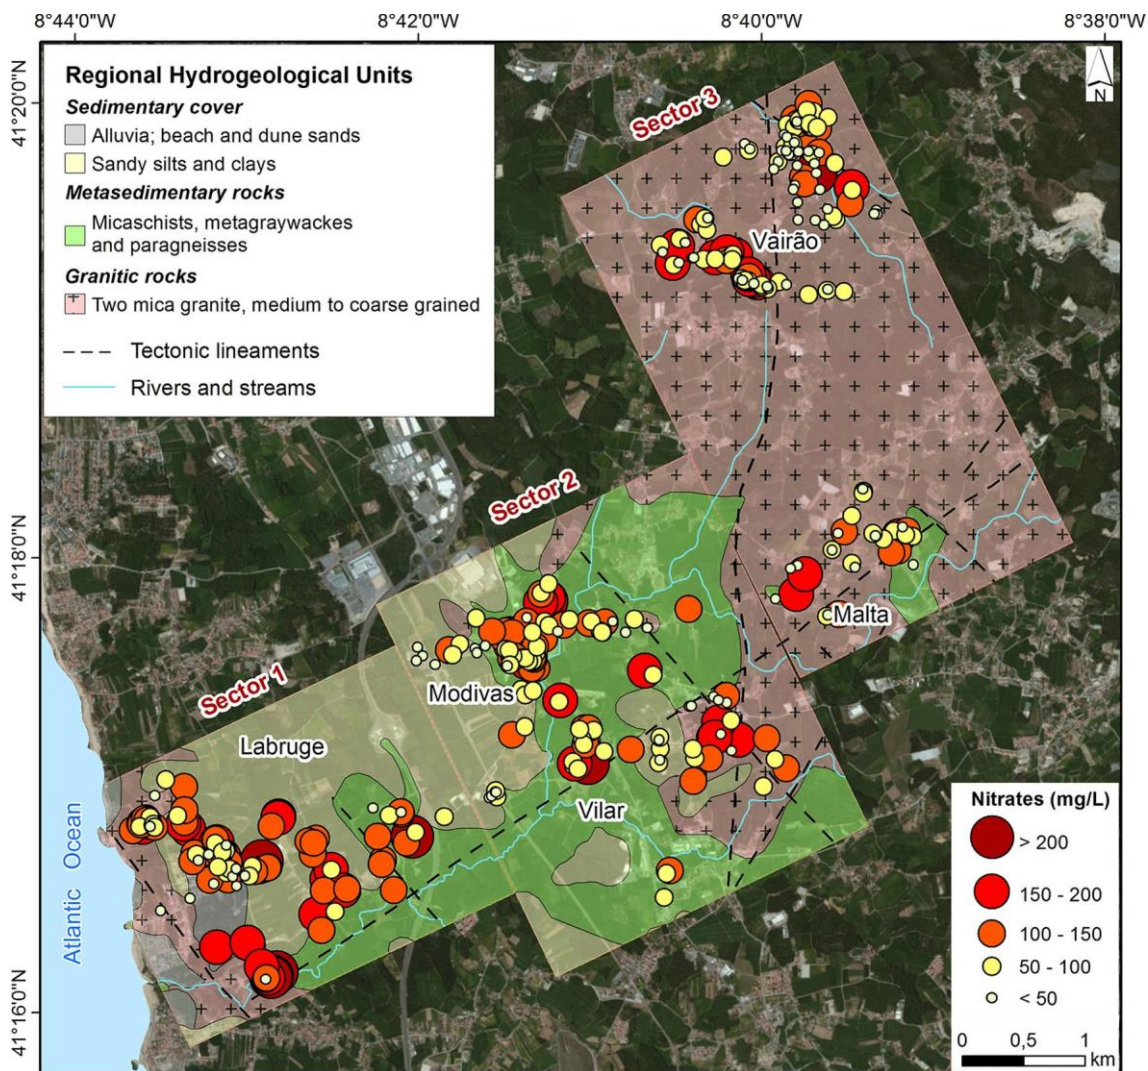


Fig. 4 Nitrate concentrations in groundwater samples from the three study sectors



hydrogeological units presented the highest average concentrations of  $\text{NO}_3^-$  detected and significantly higher than those measured in samples from ABD and GR units. The highest nitrate value (280 mg/L) was found in Sector 2, linked to the MR unit. It is also of note that all the sectors and the four hydrogeological units showed mean nitrate values above 50 mg/L.

Regarding  $\text{NO}_2^-$  (Fig. 3g), no significant differences were found among the three sectors, which presented concentrations lower than 0.01 mg/L. Nevertheless, SC hydrogeological unit showed significantly higher levels than the remaining units.

Taking into account the European guidelines for the use of groundwater for human consumption, these groundwater do not exceed the parametric values for chloride (250 mg/L) and for nitrite (0.5 mg/L). On the contrary, nitrate exceeds the parametric value (50 mg/L) in 75 % of the samples. Moreover, according to the Portuguese legislation for irrigation activities (MA—Ministério do Ambiente 1998), 70 mg/L and 50 mg/L are the maximum allowed parametric values for chloride and nitrates, respectively.

#### Groundwater vulnerability and patterns of relationship to hydrogeochemistry

Figure 5 synthesises the groundwater vulnerability mapping obtained with the four employed methods and the principal component analysis (PCA) of hydrogeochemical and vulnerability data. The study area displayed a generally moderate to high vulnerability to contamination.

Globally, in the PCA, three components presented Eigen values higher than 1, expressing 72.47 % of the total variability observed in the data. The first component (PC1) summarises 40.53 % of the total inertia, expressing 2.36 times more variability than the second component. The second component (PC2) was of relative importance, summarising 18.92 % of the variability. The third component provided limited additional information, hence PCA interpretation was based on the first two PCs (expressing 59.45 % of the total variability). PC1 is mainly linked to the vulnerability of hydrogeological units. It groups all four vulnerability indexes, showing high positive correlations ( $r=0.90$ ,  $p < 0.001$ ) with the component, in a highly homogeneous group. The correlation between any two of these indexes is equal to or higher than 0.85.

Further, it expresses a gradient opposing units showing low vulnerability on average (MR and SC,  $p < 0.001$ ) to units showing high vulnerability (ABD,  $p < 0.001$ ). PC2 is

highly associated to  $\text{NO}_3^-$  levels, which show a significant high positive correlation ( $r=0.82$ ,  $p < 0.001$ ) with this axis.  $\text{Cl}^-$  levels are also positively correlated to PC2, although to a lesser extent ( $r=0.68$ ,  $p < 0.001$ ), and negatively correlated to the depth of the water wells ( $r=-0.60$ ,  $p < 0.001$ ).

Correlations of  $\text{NO}_3^-$  or  $\text{Cl}^-$  with the depth of the water wells were  $-0.35$  and  $-0.13$ , respectively. Also, contribution of individual samples to data structuring was not clearly related to the depth of the wells. Despite the variability observed, the gradient opposes GR unit which tends to show lower than average  $\text{NO}_3^-$  and  $\text{Cl}^-$  levels to ABD, which exhibits higher levels of these ions.

Overall, vulnerability of the hydrogeological units reflects the main structuring of the data. The fact that all four vulnerability indexes employed in the present study show high positive correlations among themselves and with the first PCA component suggests that they perform equally well in assessing the vulnerability of this type of hydrogeological framework. Different vulnerability and contamination profiles were exhibited by the four hydrogeological units. Vulnerability appears to be associated with  $\text{NO}_3^-$  and  $\text{Cl}^-$  in the ABD unit (West part of Sector 1) but not in the remaining units. Indeed, ABD is characterised by high to extremely high vulnerability and higher  $\text{NO}_3^-$  and  $\text{Cl}^-$  levels, consistent with its porous nature, sandy lithology and high permeability, which favours the leaching of nitrates and chlorides into underlying groundwater. Conversely, SC and MR (mostly located in Sectors 1 and 2) are characterised by very low to low

vulnerability and exhibit a range of  $\text{NO}_3^-$  and  $\text{Cl}^-$  levels around average. This is dependable of the fact SC and MR have a low permeability, since SC is a porous media with a clayey nature and MR has a silty to clayey weathering profile. GR shows a moderate vulnerability and a tendency

for lower  $\text{NO}_3^-$  and  $\text{Cl}^-$  levels. Although GR (mainly situated in Sector 3) is the unit with deeper depth of the sampled water wells, the correlation between  $\text{NO}_3^-$  or  $\text{Cl}^-$  and depth is rather low. This suggests that circulation paths through the, sometimes, high thickness weathering profile of the granitic bedrock may promote retention of  $\text{NO}_3^-$  and  $\text{Cl}^-$  ions, resulting from contamination events driven by superficial anthropic activities, such that low ion levels are found in samples collected at deeper depths.

Agricultural and non-agricultural origins for nitrates in groundwater are well documented in the literature (e.g., Barrett et al. 1999; Razowska-Jaworek and Sadurski 2005; Wakida and Lerner 2005; Schirmer et al. 2013). The high values of nitrates in the study area are most probably due to agriculture activities and livestock production located in the surroundings of the sampling sites. Contamination from household discharges connected to on-site sewage disposal (cesspools, septic tanks) and improper water wells protection may have a relevant contribution to this contamination, as well. The identification of sources of agricultural and anthropic contaminants should also be based in other hydrochemical and isotopic analyses. Therefore, sulphate data and the isotopic composition of nitrate and sulphate should be analysed in future investigations (e.g., Rock and

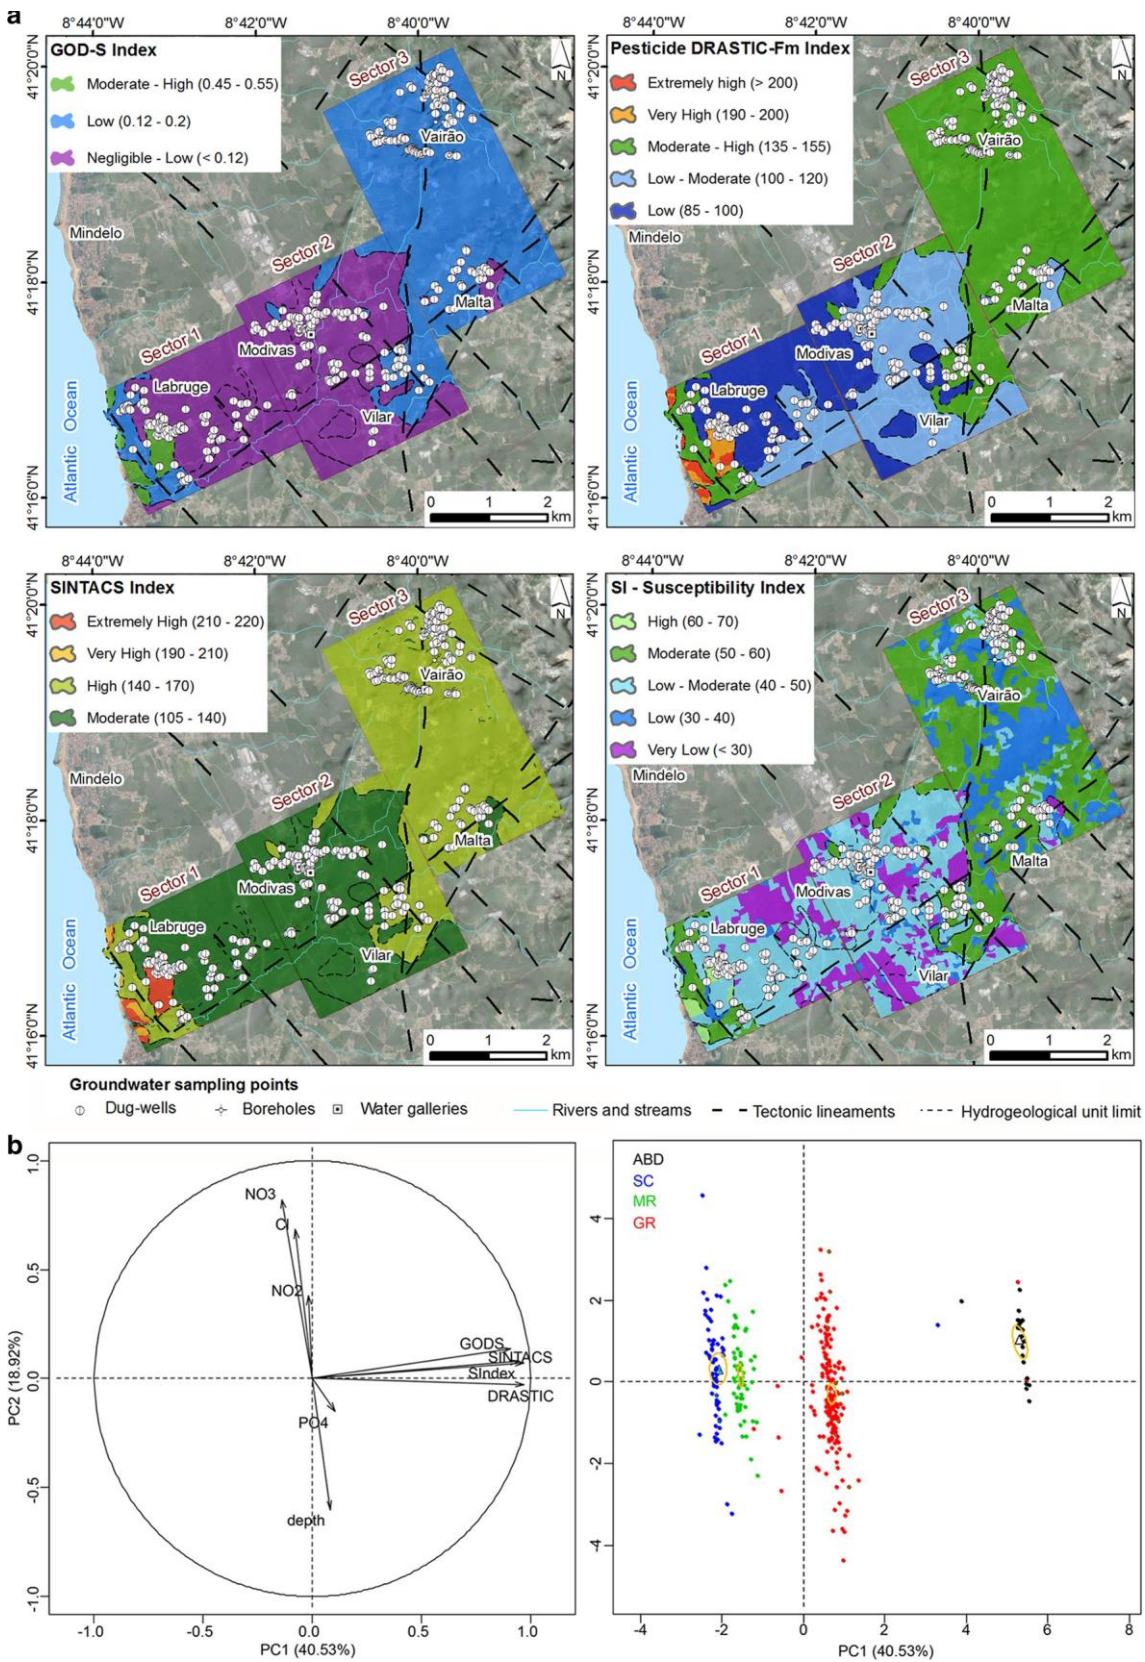


Fig. 5 Groundwater vulnerability indexes (a): *GOD-S* (top left), *Pesticide DRATIC-Fm* (top right), *SINTACS* (down left) and *SI* (down right). Principal component analysis (PCA) of hydrogeochemical and vulnerability data (b); caption as in Fig. 3

Mayer 2002; Kaown et al. 2009; Cheong et al. 2012; Di Lorenzo et al. 2012).

Concerning chlorides, their origin should be meteoric, including sea spray, and by anthropic contamination, namely organic fertilisers and cesspools. These conclusions agree with those by Heitor (2000), Pedrosa et al. (2002), Goncalves et al. (2006), Silva et al. (2006), Afonso et al. (2007), Correia et al. (2010) and Afonso (2011).

#### Groundwater risk to contamination

The IPNOA index was applied to farmed areas to produce the nitrate contamination hazard map (Fig. 6a). This map was then overlapped with a vulnerability index. Based on the PCA results, which indicated that all four indexes employed in the presence study were highly correlated among themselves (Fig. 5a), the SINTACS index was chosen for the overlapping. SINTACS takes into account several environmental factors such as topography, hydrology, geology, hydrogeology, and pedology. The overlapping of both maps allowed creating the map of potential risk to nitrate contamination (Fig. 6b).

The nitrate contamination hazard is generally high. Few areas are classified as moderate, although the hazard index (9.17) is close to the high class. Areas with a very low hazard correspond mainly to discontinuous peri-urban areas, associated with backyards. In these areas, fertilisers are mainly inorganic and in much less quantities and tillage is considered minimum.

The potential risk of nitrate contamination was generally high to moderate, owing to the aquifer vulnerability. Extremely high risk was associated to sandy lithologies, alluvia and beach and dune sands, consistent with the results of the vulnerability analysis and with the high levels of nitrates measured in groundwater.

#### Conceptual hydrogeological model

This integrative approach improved the peri-urban hydrogeological conceptual model for these groundwater systems (Fig. 7). Three main aquifer systems coexist and interlock:

1. Alluvia and beach and dune sands (ABD): porous media, low thickness (15 m), unconfined, hydraulically connected to the drainage system, shallow water table (5 m), moderate to high permeability (10 m/d), Cl-SO<sub>4</sub>-Na water type, high to very high vulnerability to contamination, and a high to very high potential risk to nitrate contamination;
2. Complex of micaschists, metagraywackes and paragneisses (MR): fissured media, semi-confined to confined, sometimes moderately weathered with

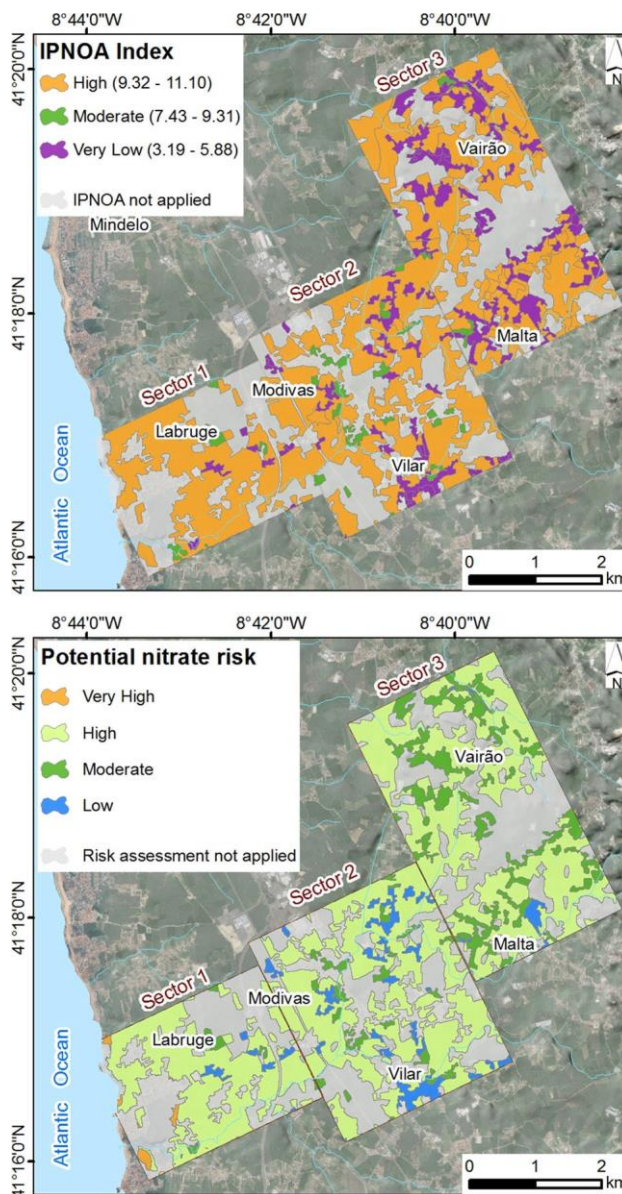


Fig. 6 Map of the IPNOA index of nitrate hazard and map of the potential nitrate contamination risk from agricultural sources in the study area

thicknesses that may reach 15 m, shallow to moderate piezometric surface (15 m), low to moderate permeability (2 m/d), Cl-Na water type, low to moderate vulnerability to contamination, and a low to moderate potential risk to nitrate contamination;

3. Granite (GR) fissured media, semi-confined to confined, moderately to highly weathered with thicknesses in the range of 20–30 m, shallow to moderate piezometric surface (10 m), low to moderate permeability (1 m/d), Cl-Na-Mg water type, moderate to high vulnerability to contamination, and a moderate to high potential risk to nitrate contamination.

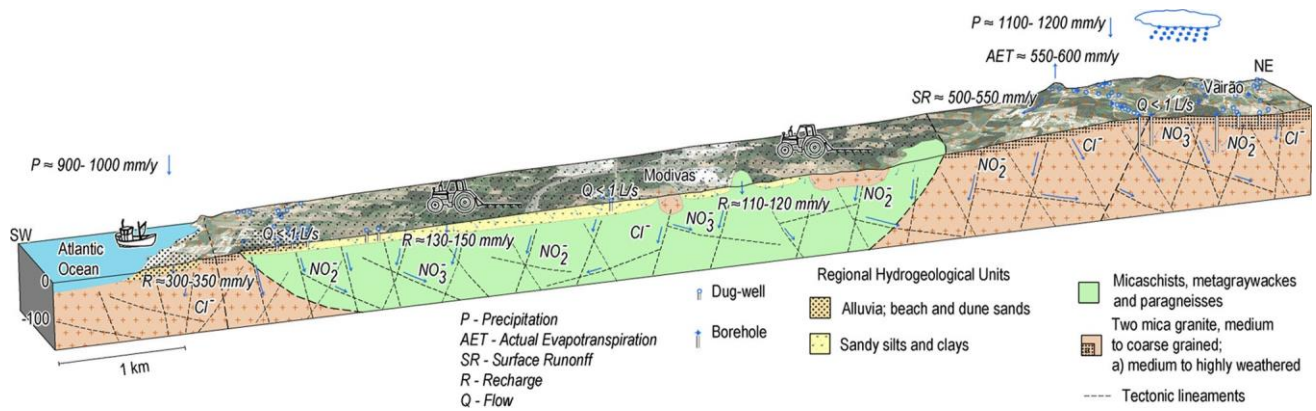


Fig. 7 Hydrogeological conceptual model as resulted from the integrated approach

### Concluding remarks

The results of this study provided a comprehensive picture of the groundwater chemical status, with regard to chlorides, phosphates, nitrates and nitrites. It also confirmed the utility of intrinsic vulnerability indexes (*GOD-S*, *Pesticide DRASTIC-Fm*, *SINTACS* and *SI*) and specific vulnerability to nitrate contamination index (*IPNOA*) for evaluating the groundwater vulnerability in Northern Portugal on a regional scale.

Vila do Conde region may be classified as a vulnerable area because of the high nitrate concentrations that may be found either in groundwater, soil or even vegetables, as a consequence of intensive agricultural activity. The present results further support this, revealing levels above legislation limits in the peri-urban area. Additionally, they suggest that organic and inorganic fertilisers and anthropic activities, which are driven to groundwater via irrigation and rainfall, seem to be the main factors causing the nitrate and chloride contents observed.

Vulnerability methods can be a useful groundwater management tool, at medium to small scales for designating new Nitrate Vulnerable Zones and in agro-environmental policies, as defined in EU legislation. The use of groundwater would imply the review of the available nitrogen for fertilisation, following the Code of Good Agricultural Practices, which has become mandatory in consequence of the application of the Nitrates Directive.

The results presented herein raise special concerns since many of the sampling sites assessed are in use as source of drinking water. They warrant further research to assess the evolution of nitrate levels in this area, particularly in alluvia and beach and dune sands units, and the efficacy of measures to constrain nitrogen inputs into the environment. To better define the anthropogenic sources of the dissolved nitrates, an isotopic investigation of  $d^{15}N$  and  $d^{18}O$  in dissolved nitrates should be carried out. Moreover, sulphate data should be collected and  $d^{34}S$  and  $d^{18}O$  values of

sulphates should be determined to evaluate the contamination by sewage of these groundwater.

Mapping of the vulnerability to groundwater contamination is indeed a powerful tool for communication between groundwater investigators and those working in water resources and land use planning and management. Nevertheless, one should never lose sight of two realities (Foster et al. 2013): primarily, all vulnerability assessments symbolise a 'best professional synthesis' of available information, and also, all vulnerability maps are a screening tool to identify where priority protection measures are likely to be required to manage a potential groundwater contamination threat.

**Acknowledgments** This work was partially financed by FEDER- EU COMPETE Funds and the Portuguese Foundation for the Science and Technology, FCT (POCI/CTE-GEX/59081/2004, PEst-C/CTE/ UI4035 and PEst-OE/CTE/UI0098), and by the LABCARGA|ISEP re-equipment program (IPP-ISEP|PAD'2007/08). M.F. Barroso is grateful for the post-doc fellowship (SFRH/BPD/78845/2011), granted by POPH (QREN-Tip. 4.1), funded by FCT and FEDER-EU Funds. Special thanks are due to the household farmers, local authorities and Alice Carvalho from the Vila do Conde Agricultural Cooperative for all the support. We acknowledge the anonymous reviewers for the constructive comments that helped to improve the focus of the manuscript. The present paper is dedicated to Professor J. Martins Carvalho (1943-), outstanding Hydrogeologist, who launched the modern groundwater exploration and the integrated environmental hydrogeology approach in Portugal.

### References

- Afonso MJ, Chamine' HI, Carvalho JM, Marques JM, Gomes A, Araujo MA, Fonseca PE, Teixeira J, Marques da Silva MA, Rocha FT (2007) Urban groundwater resources: a case study of Porto City in northwest Portugal. In: Howard KWF (ed): Urban groundwater: meeting the challenge. International Association of Hydrogeologists Selected Papers SP8. Taylor & Francis Group, London, pp 271-287
- Afonso MJ (2011) Hidrogeologia e hidrogeoquímica da região litoral urbana do Porto, entre Vila do Conde e Vila Nova de Gaia (NW

- de Portugal): implicações geoambientais. PhD Dissertation, Instituto Superior Técnico, Universidade Técnica de Lisboa
- Afonso MJ, Chamine HI, Gomes A, Teixeira J, Araújo MA, Fonseca PE, Carvalho JM, Marques JM, Marques da Silva MA, Rocha F (2004) Cartografia geológica e geomorfológica estrutural da área metropolitana do Porto: implicações na gestão dos recursos hídricos subterráneos. *Xeografia, Revista de Geografia, Território e Meio Ambiente* 4:101–115
- Aller L, Bennet T, Lehr JH, Petty RJ (1987) DRASTIC: a standardized system for evaluating groundwater pollution potential using hydrologic settings. US EPA Report, 600/2–87/035, Robert S. Kerr Environmental Research Laboratory, Ada, OK
- APHA (1995) Standard methods for the examination of water and wastewater, 19th edn. American Public Health Association, Washington, DC
- Araújo MA, Gomes A, Chamine HI, Fonseca PE, Gama Pereira LC, Pinto de Jesus A (2003) Geomorfologia e geologia regional do sector de Porto-Espinho (W de Portugal): implicações morfo-estruturais na cobertura sedimentar Cenozóica. *Cad Lab Xeol Laxe* 28:79–105
- Assaad FA, LaMoreaux PE, Hughes TH, Wangfang Z, Jordan H (2004) Field methods for geologists and hydrogeologists. Springer-Verlag, Berlin, Heidelberg
- Barrett MH, Hiscock KM, Pedley S, Lerner DL, Tellam JH, French MJ (1999) Marker species for identifying urban groundwater recharge sources: a review and case study in Nottingham, UK. *Water Res* 33(14):3083–3097. doi:10.1016/S0043-1354(99)00021-4
- Candela L, Wallis KJ, Mateos RM (2008) Non-point pollution of groundwater from agricultural activities in Mediterranean Spain: the Balearic Islands case study. *Environ Geol* 54(3):587–595. doi:10.1007/s00254-007-0853-0
- Capri E, Civita M, Corniello A, Cusimano G, De Maio M, Ducci D, Fait G, Fiorucci A, Hauser S, Pisciotta A, Pranzini G, Trevisan M, Delgado Huertas A, Ferrari F, Frullini R, Nisi B, Offi M, Vaselli O, Vassallo M (2009) Assessment of nitrate contamination risk: the Italian experience. *J Geochem Explor* 102:71–86. doi:10.1016/j.gexplo.2009.02.006
- Carrington da Costa J, Teixeira C (1957) Carta Geológica de Portugal na escala de 1/50000. Notícia explicativa da Folha 9-C (Porto). Serviços Geológicos de Portugal, Lisboa
- Carvalho JM (2006) Prospecção e pesquisa de recursos hídricos subterráneos no Maciço Antigo Português: linhas metodológicas. PhD Dissertation, Universidade de Aveiro
- Carvalho JM, Espinha Marques J, Afonso MJ, Chamine HI (2005) O caudal de exploração em captações de água mineral natural e de nascente em rochas cristalinas do maciço antigo português. In: Moreno IZ, Herranz MTG (eds) Rubio RF. Proceedings del I Foro Ibérico sobre Aguas Envasadas y Balnearios, Madrid, pp 133–144 Carvalho JM, Espinha Marques J, Afonso MJ, Chamine HI (2007) Prospecção e pesquisa de recursos hidrominerais de água de nascente no Maciço Antigo Português. *Boletim de Minas* 42(2):161–196
- Chamine HI, Gama Pereira LC, Fonseca PE, Noronha F, Lemos de Sousa MJ (2003) Tectonoestratigrafia da faixa de cisalhamento de Porto-Albergaria-a-Velha-Coimbra-Tomar, entre as Zonas Centro-Ibérica e de Ossa-Morena (Maciço Ibérico, W de Portugal). *Cad Lab Xeol Laxe* 28:37–78
- Chamine HI, Carvalho JM, Afonso MJ, Teixeira J, Freitas L (2013) On a dialogue between hard-rock aquifer mapping and hydrogeological conceptual models: insights into groundwater exploration. *Eur Geol Mag* 35:26–31
- Cheong J-Y, Hamm S-Y, Lee J-H, Lee K-S, Woo N-C (2012) Groundwater nitrate contamination and risk assessment in an agricultural area, South Korea. *Environ Earth Sci* 66:1127–1136. doi:10.1007/s12665-011-1320-5
- Civita MV (1994) Le carte della vulnerabilità degli acquiferi all'inquinamento: teoria & pratica. Pitagora Editrice, Bologna
- Civita MV (2010) The combined approach when assessing and mapping groundwater vulnerability to contamination. *J Water Resour Prot* 2:14–28. doi:10.4236/jwarp.2010.21003
- Civita MV, De Maio M (2000) Valutazione e cartografia automatica della vulnerabilità degli acquiferi all'inquinamento con il sistema parametrico: SINTACS R5. Pitagora Editrice, Bologna
- Corniello A, Ducci D, Ruggieri G (2007) Areal identification of groundwater nitrate contamination sources in periurban areas. *J Soils Sediments* 7(3):159–166. doi:10.1065/jss2007.03.213
- Correia M, Barroso A, Barroso MF, Soares D, Oliveira MBPP, Delermatos C (2010) Contribution of different vegetable types to exogenous nitrate and nitrite exposure. *Food Chem* 120:960–966. doi:10.1016/j.foodchem.2009.11.030
- Denny SC, Allen DN, Journeay JM (2007) DRASTIC-Fm: a modified vulnerability mapping method for structurally controlled aquifers in the southern Gulf Islands, British Columbia, Canada. *Hydro-geol J* 15:483–493. doi:10.1007/s10040-006-0102-8
- Di Lorenzo T, Brilli M, Del Tosto D, Galassi DMP, Petitta M (2012) Nitrate source and fate at the catchment scale of the Vibrata River and aquifer (central Italy): an analysis by integrating component approaches and nitrogen isotopes. *Environ Earth Sci* 67:2383–2398. doi:10.1007/s12665-012-1685-0
- Eickhout B, Bouwman AF, van Zeijts H (2006) The role of nitrogen in world food production and environmental sustainability. *Agric Ecosyst Environ* 116:4–14. doi:10.1016/j.agee.2006.03.009
- Esmaili A, Moore F, Keshavarzi B (2014) Nitrate contamination in irrigation groundwater. *Environ Earth Sci*, Isfahan, Iran. doi:10.1007/s12665-014-3159-z
- Foster SD (1987) Fundamental concepts in aquifer vulnerability, pollution risk and protection strategy. In: van Duijvenbooden W, van Waegeningh HG (eds) Vulnerability of soil and groundwater to pollutants, Proceedings and Information. TNO Committee on Hydrological Research, The Hague, pp 69–86
- Foster SD (1990) Impacts of urbanisation on groundwater. In: Massing H, Packman J, Zuidema FC (eds) Hydrological processes and water management in urban areas. invited lectures and selected papers of the UNESCO/IHP International Symposium Urban Water'88. IAHS Publication 198, Wallingford, Oxfordshire, pp 187–207
- Foster SD, Hirata R (1988) Groundwater pollution risk assessment: a methodology using available data. WHO-PAHO/HPE-CEPIS Technical Manual, Lima
- Foster SD, Hirata R, Gomes D, D'Elia M, Paris M (2002) Groundwater quality protection: a guide for water utilities, municipal authorities, and environment agencies. The World Bank, Washington, D.C.
- Foster SD, Hirata R, Andreo B (2013) The aquifer pollution vulnerability concept: aid or impediment in promoting groundwater protection? *Hydrogeol J* 21:1389–1392. doi:10.1007/s10040-013-1019-7
- Francés A, Paralta E, Fernandes J, Ribeiro L (2001) Development and application in the Alentejo region of a method to assess the vulnerability of groundwater to diffuse agricultural pollution: the Susceptibility Index. In: Ribeiro L (ed) Proceedings 3rd International Conference on Future Groundwater Resources at Risk. CVRM, Lisboa, pp 35–44
- Gleeson T, VanderSteen J, Sophocleous MA, Taniguchi M, Alley WM, Allen DM, Zhou Y (2010) Groundwater sustainability strategies. *Nat Geosci* 3:378–379. doi:10.1038/ngeo881
- Gonçalves C, Esteves da Silva JCG, Alpendurada MF (2006) Chemometric interpretation of pesticide occurrence in soil samples from an intensive horticulture area in north Portugal. *Anal Chim Acta* 560:164–171. doi:10.1016/j.aca.2005.12.021
- Heitor AMF (2000) Contaminação das águas subterráneas no Norte de Portugal. In: Samper J, Leitão T, Fernández L, Ribeiro L (eds) Las

- aguas subterráneas en el Noroeste de la Península Ibérica. Textos de las Jornadas, Mesa Redonda y Comunicaciones. A Coruña. AIH-Grupo Español & APRH. ITGE, Madrid, pp 295–308
- IGP—Instituto Geográfico Português (2010) Carta de uso e ocupação do solo de Portugal Continental para 2007 (COS2007): memória descritiva. IGP, Lisboa
- INE—Instituto Nacional de Estatística (2011) Statistical information about Portuguese population: Vila do Conde city. <http://www.ine.pt/>. Accessed 26 April 2013
- IUSS Working Group WRB (2007) World reference base for soil resources 2006, first update 2007. World soil resources reports No. 103. FAO, Rome
- Jalali M (2011) Nitrate pollution of groundwater in Toyserkan, western Iran. *Environ Earth Sci* 62:907–913. doi:10.1007/s12665-010-0576-5
- Kaown D, Koh D-C, Mayer B, Lee K-K (2009) Identification of nitrate and sulfate sources in groundwater using dual stable isotope approaches for an agricultural area with different land use (Chuncheon, mid-eastern Korea). *Agric Ecosyst Environ* 132:223–231. doi:10.1016/j.agee.2009.04.004
- Lorenzo F, Alonso A, Pellicer MJ, Pages JL, Perez-Arlicea M (2007) Historical analysis of heavy metal pollution in three estuaries on the north coast of Galicia (NW Spain). *Environ Geol* 52:789–802. doi:10.1007/s00254-006-0516-6
- MA—Ministério do Ambiente (1998) Decreto-Lei n.º 236/98, de 1 de Agosto. *Diário da República—I Série-A*, N.º 176
- Monteiro A [coord] (2005) Atlas agroclimatológico do Entre Douro e Minho. Projecto POCTI/GEO/14260/1998
- Morris BL, Lawrence ARL, Chilton PJC, Adams B, Calow RC, Klinck BA (2003) Groundwater and its susceptibility to degradation: a global assessment of the problem and options for management. early warning and assessment report series, RS. 03-3. United Nations Environment Programme, Nairobi, Kenya
- OJEC [Official Journal of the European Communities] (1991) Directive 91/676/EEC of the Council Directive of 12 December 1991, concerning the protection of waters against pollution caused by nitrates from agricultural sources. *Official Journal of the European Communities*, L 375/1–L 375/8
- OJEU [Official Journal of the European Union] (2000) Directive 2000/60/EC of the European parliament and of the council of 23 October 2000 establishing a framework for Community action in the field of water policy. *Official Journal of the European Union*. L 327/1–L 327/72
- OJEU [Official Journal of the European Union] (2006) Directive 2006/118/EC of the European parliament and of the council of 12 December 2006 on the protection of groundwater against pollution and deterioration. *Official Journal of the European Union*. L 372/19–L 372/31
- Padovani L, Trevisan M (2002) I nitrati di origine agricola nelle acque sotterranee. Un indice parametrico per l'individuazione di aree vulnerabili. *Quad. e Tecn. Di Protez. Ambient.*, vol. 75. Pitagora editrice, Bologna (In Italian with English extended abstract)
- Painho M, Caetano M (2006) Cartografia de ocupação do solo: Portugal continental, 1985-2000: CORINE Land Cover 2000. Instituto do Ambiente, Amadora
- Pedrosa MY (1999) Notícia explicativa da Carta Hidrogeológica de Portugal, escala 1/200000. Folha 1. Instituto Geológico e Mineiro, Lisboa
- Pedrosa MY, Brites JA, Pereira AP (2002) Carta das fontes e do risco de contaminação da região de Entre-Douro-e-Minho. Folha Sul, escala 1/100000, Nota explicativa. Instituto Geológico e Mineiro, Lisboa
- Pereira E, Ribeiro A, Carvalho GS, Noronha F, Ferreira N, Monteiro JH [coord] (1989) Carta Geológica de Portugal, escala 1/200000. Folha 1. Serviços Geológicos de Portugal, Lisboa
- Razowska-Jaworek L, Sadurski A (2005) Nitrates in groundwater. International Association of Hydrogeologists Selected Papers SP5. Balkema, London
- Ribeiro L (2000) IS: um novo índice de susceptibilidade de aquíferos à contaminação agrícola. Internal report, ERSHA/CVRM, IST, Lisboa, Portugal
- Rock L, Mayer B (2002) Isotopic assessment of sources and processes affecting sulfate and nitrate in surface water and groundwater of Luxembourg. *Isot Environ Health Stud* 38(4):191–206. doi:10.1080/10256010208033265
- Rodvang SJ, Simpkins WW (2001) Agricultural contaminants in quaternary aquitards: a review of occurrence and fate in North America. *Hydrogeol J* 9:44–59. doi:10.1007/s100400000114
- Schirmer M, Leschik S, Musolff A (2013) Current research in urban hydrogeology: a review. *Adv Water Resour* 51:280–291. doi:10.1016/j.advwatres.2012.06.015
- Silva S, Sousa J, Ramalhosa MJ, Barroso MF, Antão MC, Pina MF, Delerue-Matos C (2006) Incidence of nitrate, nitrite, chloride and phosphate in groundwater in Movidas, Portugal. In: Beleza VM (ed) Proceedings of the International Water Conference, IWC2006. Centro de Estudos de Águas/IDT-ISEP, Porto, pp 557–560
- Sophocleous M (2002) Interactions between groundwater and surface water: the state of the science. *Hydrogeol J* 10:52–67. doi:10.1007/s10040-001-0170-8
- Stigter TY, Ribeiro L, Carvalho Dill AMM (2006) Application of a groundwater quality index as an assessment and communication tool in agro-environmental policies—two Portuguese case studies. *J Hydrol* 327:578–591. doi:10.1016/j.jhydrol.2005.12.001
- Stigter TY, Carvalho Dill AMM, Ribeiro L (2011) Major issues regarding the efficiency of monitoring programs for nitrate contaminated groundwater. *Environ Sci Technol* 45:8674–8682. doi:10.1021/es201798g
- Struckmeier WF, Margat J (1995) Hydrogeological maps: a guide and a standard legend. International Association of Hydrogeologists ICH 17. Verlag Heinz Heise, Hannover
- Teixeira C, Medeiros AC (1965) Carta geológica de Portugal na escala 1:50000. Notícia explicativa da folha 9A-Póvoa de Varzim. Serviços Geológicos de Portugal, Lisboa
- Vrba J, Lipponen A (2007) Groundwater resources sustainability indicators. UNESCO, IHP-VI, Series on groundwater, 14, UNESCO, Paris
- Vrba J, Zaporozec A (1994) Guidebook on mapping groundwater vulnerability. International Association of Hydrogeologists ICH 16. Verlag Heinz Heise, Hannover
- Wakida FT, Lerner DN (2005) Non-agricultural sources of groundwater nitrate: a review and case study. *Water Res* 39:3–16. doi:10.1016/j.watres.2004.07.026
- Wick K, Heumesser C, Schmid E (2012) Groundwater nitrate contamination: factors and indicators. *J Environ Manage* 111:178–186. doi:10.1016/j.jenvman.2012.06.030
- Winter T, Harvey JW, Franke OL, Alley WM (1998) Ground water and surface water a single resource. US Geological Survey Circular 1139, USGS, Denver, Colorado
- Witkowski A, Kowalczyk A, Vrba J (2007) Groundwater vulnerability assessment and mapping. International Association of Hydrogeologists Selected Papers SP11. Taylor & Francis Group, London