



Straightness of rectilinear vs. radio-concentric networks: modeling simulation and comparison

Didier Josselin, Vincent Labatut, Dieter Mitsche

► To cite this version:

Didier Josselin, Vincent Labatut, Dieter Mitsche. Straightness of rectilinear vs. radio-concentric networks: modeling simulation and comparison. Symposium on Simulation for Architecture and Urban Design (SimAUD), May 2016, London, United Kingdom. Symposium on Simulation for Architecture and Urban Design (SimAUD), 2016. <hal-01367824>

HAL Id: hal-01367824

<https://hal.archives-ouvertes.fr/hal-01367824>

Submitted on 16 Sep 2016

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution - NonCommercial - ShareAlike 4.0 International License

Straightness of rectilinear vs. radio-concentric networks: modeling, simulation and comparison

Didier Josselin^{*1,2}, Vincent Labatut^{†2} and Dieter Mitsche^{‡3}

¹UMR ESPACE 7300, CNRS, Université d'Avignon, France

²Laboratoire Informatique d'Avignon EA 4128, Université d'Avignon, France

³Laboratoire de Mathématiques Dieudonné, Université de Nice, France

Abstract

This paper proposes a comparison between rectilinear and radio-concentric networks. Indeed, those networks are often observed in urban areas, in several cities all over the world. One of the interesting properties of such networks is described by the *straightness* measure from graph theory, which assesses how much moving from one node to another along the network links departs from the network-independent straightforward path. We study this property in both rectilinear and radio-concentric networks, first by analyzing mathematically routes from the center to peripheral locations in a theoretical framework with perfect topology, then using simulations for multiple origin-destination paths. We show that in most of the cases, radio-concentric networks have a better straightness than rectilinear ones. How may this property be used in the future for urban networks?

1 Introduction

We propose to study and to compare the *straightness* of two very common networks: rectilinear and radio-concentric networks. This measure, also

called *directness*, is related to another index called *efficiency* [24], and is the reciprocal of the *tortuosity* (a.k.a. *circuitry*) [14] – see section 2.1 for a formal definition. In a general meaning, a high straightness reflects the capacity of a network to enable the shortest routes. It is somehow an accessibility assessment: the higher the straightness, the shorter the distance (or moving time) on the network, due to reduced detours.

First, we show a few pictures of old and current networks observed in the real-world, to highlight their peculiar structures [17]. Hippodamian or rectilinear (also called Manhattan) networks are made of rectangular polygons, while radio-concentric networks show a center location and a series of radial and circular links.

Second, we model theoretical rectilinear and radio-concentric networks. We introduce the mathematical formula of the straightness for center-to-periphery routes, and we demonstrate that in most of the cases, even with a low number of rays, radio-concentric networks provide straighter paths.

Third, we empirically process the straightness of all routes (any node to any node) using Dijkstra's shortest path algorithm [6]. The results confirm that for any type of routes, radio-concentric structure has higher straightness.

*didier.josselin@univ-avignon.fr

†vincent.labatut@univ-avignon.fr

‡dmitsche@unice.fr

1.1 Some Rectilinear Networks

Rectilinear networks are very common all over the world. They are also called Hippodamian maps due to the Greek architect Hippodamos. These networks are characterized by road sections crossing at right angles. Built according to land registry and road construction efficiency in a process of urban sprawl, they look like pure theoretical shapes: a grid of squares of identical surface and side length. Figure 1 shows an example of an old hippodamian urban structure in the antique Egyptian city of Kahun (pyramid of Sesostris).



Figure 1: The antique Egyptian city of Kahun (pyramid of Sesostris); Wikipedia.

More recent rectilinear networks are illustrated by the American cities of Chicago in 1848 (Figure 2), New-York with Manhattan (Figure 3), Sacramento (Figure 4) and also the Asian city of Hô Chi Minh in Vietnam (Figure 5).

1.2 Radio-concentric Networks and Shapes

The second type of network we study is also very common. It is very different in its shape, although it presents basic polygonal entities of various sizes, due to the radial structure. In these networks, the center is somehow a fuzzy location, that often refers to the old part of the town. From this supposed center, radial roads are drawn, crossing a series of perpendicular ring roads, depending on the surface of the city.



Figure 2: Chicago (USA) in 1848; Wikipedia.

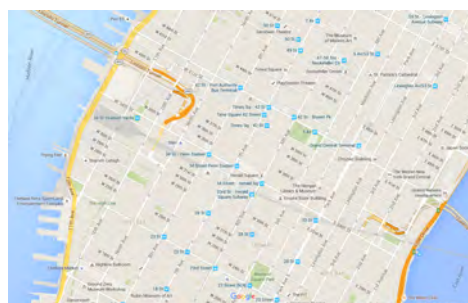


Figure 3: The famous rectilinear network of Manhattan (USA); Google Maps.

These shapes were already visible in old maps such as medieval Avignon (cf. Figure 6), especially in its *intramuros* part, which is surrounded by battlements. In more recent urbanization, many urban areas reveal concentric shapes. Figures 7, 8, 9, 10, 11 and 12 are good examples of how much geometrical these shapes are. Indeed, as with rectilinear networks, there exist many degrees of spatial regularity in radio-concentric networks, from very symmetric structures like amphitheatres (Figures 11 and 12, representing the European Parliament and the antique theater of Orange, respec-

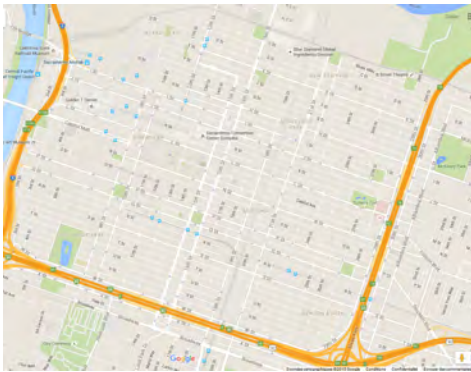


Figure 4: The very regular road network of Sacramento (USA); Google Maps.



Figure 6: Medieval map of *intramuros* Avignon (France).



Figure 5: Road network of Hô Chi Minh (Vietnam); Google Maps.

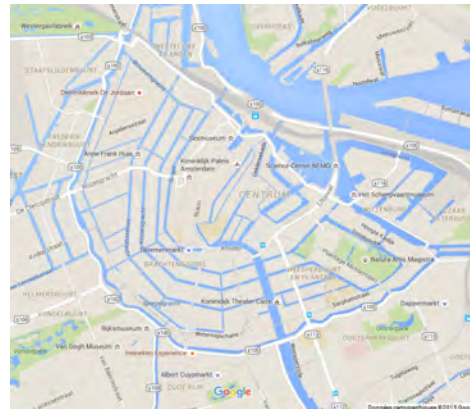


Figure 7: Amsterdam (The Netherlands); Google Maps.

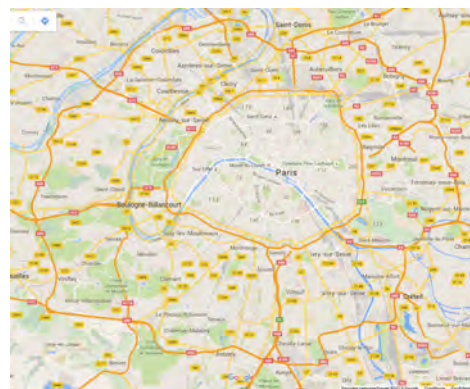


Figure 8: Paris (France); Google Maps.

tively) or circular cities (Figure 10, which depicts a series of connected perfectly circular villages constituting SunCity), to more asymmetric urban shapes (Figure 7, showing the one-side radio-concentric shape of Amsterdam) or graphs with a more relaxed or degraded geometry (Figures 8 and 9, presenting Paris and Sfax, respectively).



Figure 9: Sfax (Tunisia); Google Maps.



Figure 10: Suncity in Arizona (USA); Google Maps.



Figure 11: European Parliament in Strasbourg (France); Photo-alsace.com.

1.3 Geographical Models of Rectilinear or Radio-concentric Shapes

Networks are often studied in geography because they depict the visible human mark of population 4



Figure 12: Ancient theater of Orange (France); Avignon-et-provence.com.

life in their territories. Beyond monographs which describe particular places, there exist a few typologies of urban networks and schemes generally explored and measured via topological structure or functional dimensions of the cities [8, 9]. Concerning the types of urban networks and graphs, Blanchard and Volchenkov [3] presented a simple-faced classification of different types of route schemes, including rectilinear networks (e.g. Manhattan), organic towns (e.g. city of Bielefeld, North Rhine-Westphalia in Germany), shapes of corals (e.g. Amsterdam or Venice). In his book, Marshall elaborates different taxonomies of street patterns [18]. However, it is also possible to design very theoretical networks in order to study their properties, other things being equal [22]. Nevertheless, there is no consensual classification of the urban networks. Looking at the literature, it is interesting to notice that the publications about network design are actually shared by different disciplines involved in the field: (spatial) econometrics of transportation [11], mathematical optimization [4], information and communication technologies [7] or social networks [16]. These disciplines can be advantageously complemented by the domain of graph theory [2, 19, 1].

On the one hand, the main contribution of the Manhattan networks in the domain of spatial modeling and measuring is the rectilinear distance calculation, which is related to the mathematical L_1 -

norm [10], compared to the Euclidian distance based on the L_2 -norm [13]. On the other hand, the radio-concentric framework generated several outstanding models. In 1924, E. Burgess proposed the concentric zone model to explain urban social structures [20], followed by Hoyt in 1939, who defined the sector model based on the urban development along centrifugal networks [12]. In parallel, W. Christaller [5] and A. Lösch [15] designed the central places theory to understand how cities are organized in territory, according to the distribution of goods and services to the population. These models deal with access to facilities and are based on network design and costs. In 1974, Perreur and Thisse defined the circum-radial distance based on such structures [21]. Toblers law [23] and the Newton gravity model also both indicate an inverse relation between the strength of a force F_{ij} and the distance d_{ij} separating two points i and j in geographical space, giving to the center(s) a particular status in networks. All these spatial theories participate in defining and emphasizing radio-concentric models and shapes; however they neither refute nor contradict rectilinear webs that can also own centers in different ways.

2 Straightness in Theoretical Rectilinear and Radio-concentric Networks for Center-to-Periphery Routes

In this section, we focus on the straightness of center-to-periphery routes, for both rectilinear and radio-concentric theoretical networks. The results are purely analytic, i.e. no simulation is involved. The networks are theoretical and perfectly regular, with pure geometric shapes. The proposed methods are specifically designed for these types of networks.

We call *radius* an edge starting at the center of a radio-concentric network. An edge connecting two radii is called a *side*. Unlike the rectilinear net-

work, the radio-concentric network is controlled by a parameter θ : the angle formed by two consecutive radii. The constraint on θ is that there must exist an integer k such that $k = 2\pi/\theta$. We suppose that $k > 2$, because with $k = 1$ the sides are not defined, and with $k = 2$, both radii are mingled. We call *angular sector* the part of the unit circle between two consecutive radii. A *half-sector* is the part of the unit circle between a radius and a neighboring bisector (cf. Figure 14).

2.1 Definition of the Straightness

For a pair of nodes, the *Straightness* is the ratio of the spatial distance d_S as the crow flies, to the geodesic distance d_G obtained by following the shortest path on the network:

$$S = \frac{d_S}{d_G} \quad (1)$$

This measures ranges from 0 to 1, a high value indicating that the graph-based shortest path is nearly straight, and contains few detours.

Coming from graph theory, this property is interesting in network assessment, because it measures a part (in a certain meaning) of the "accessibility" capacity of a network. It is a kind of relative efficiency to reach a point in a network. In our case, edges have neither impedance, nor direction. We do not consider any possible traffic jams in the flow propagation. In our assumption, speed is the same all over the graph and so time is proportional to distance.

Let the center of the network be the origin of a Cartesian coordinate system. In the rest of the document, we characterize a center-to-periphery move by an angle α , formed by the x axis and the segment going from the network center to the targeted peripheral node. The angle vertex is the network center, as represented in Figures 13 and 14. For the rectilinear network, we consequently note the straightness $S(\alpha)$ for the route of angle α . For the rectilinear network, due to the presence of the

parameter θ (the angle between two consecutive radii), we denote the straightness by $S_\theta(\alpha)$.

2.2 Simplifying Properties of the Considered Networks

2.2.1 Rotation

Both networks have certain *rotation*-related properties, which allow some simplifications. As mentioned before, in a radio-concentric network, two consecutive radial sections of the network are separated by an angle θ . In a rectilinear network (see Figure 13), a cell is a square. The angle between two consecutive edges originating from the network center is therefore $\theta = \pi/2$. So, we can distinguish $k = 4$ angular sectors, corresponding to the quadrants of our Cartesian coordinate system.




Figure 13: A perfect rectilinear network, with $\theta = \pi/2$ and α in $[0, \pi/4]$.

Both types of networks can be broken down to k angular sectors, which are all similar modulo a rotation centered at the network center. So, *without loss of generality*, we can restrict our analysis to the first angular sector, i.e. to the interval $\alpha \in [0; \theta]$.

2.2.2 Homothety

An additional simplification comes from the *homothetic* nature of both studied networks. Indeed, in these networks, a center-to-periphery route can go either through the edges originating from the network, or through those intersecting with these




Figure 14: A perfect radio-concentric network, with θ separating two radial sections, and α in $[0, \theta/2]$.

edges, as represented in Figures 15 and 16. Let us consider a move from p_1 to p_4 . In both cases, h is parallel to H , so we can deduce that:

$$\frac{l}{L} = \frac{d}{D} = \frac{h}{H}$$

Then we obtain:

$$l \cdot D = L \cdot d \quad ; \quad d \cdot H = D \cdot h \quad ; \quad l \cdot H = L \cdot h$$

We can set:

$$l \cdot D + l \cdot H = L \cdot d + L \cdot h$$

That is to say S is the same whether the destination point is located on the closest or the farthest edge to the network center, for both types of networks:

$$S = \frac{l}{d+h} = \frac{L}{D+H} \quad (2)$$

Consequently, *without any loss of generality*, we can therefore restrict our analysis to the first mesh of the network, i.e. to the first square for the rectilinear network and to the first triangle for the radio-concentric network.

2.2.3 Symmetry

The last simplification comes from a symmetry property present in both networks, as illustrated by Figure 17 for radio-concentric networks. Observe that when α is smaller than $\theta/2$, the shortest paths

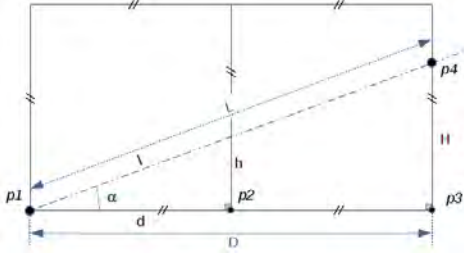


Figure 15: Geometry of a rectilinear network.

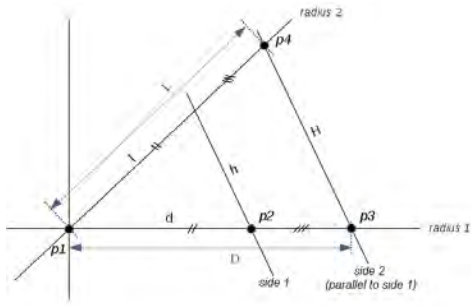


Figure 16: Geometry of a radio-concentric network.

go through the first radius (p_1p_3), whereas as soon as α exceeds this threshold, they go through the second one ($p_1p'_3$). Also note that the line corresponding to this angle $\theta/2$ is the bisector of the angle formed by both radii.

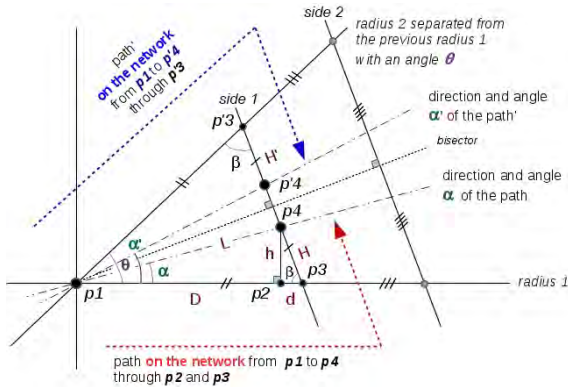


Figure 17: Basic paths followed on a radio-concentric geometric network.

Let us now consider the shortest path to p_4 ,

$$\sin \alpha = \frac{h}{l} \quad ; \quad \cos \alpha = \frac{d}{l}$$

which corresponds to an angle $\alpha < \theta/2$. We wish to calculate the shortest path to some other point p'_4 , corresponding to an angle $\alpha' > \theta/2$, and such that the travelled distance is the same as for p_4 . We know that $[p_1; p_3]$ and $[p_1; p'_3]$ have the same length, so the distance to travel on the side is the same for both routes, i.e. $H = H'$. Moreover, the angles formed by each radius and the side are equal by construction: it is β . Let us now consider the triangles (p_1, p_3, p_4) and (p_1, p'_3, p'_4) . We have two pairs of equal consecutive sides and the angles they form are equal; they are both β . So, both triangles are congruent, and we have: $\widehat{p_3, p_1, p_4} = \widehat{p'_3, p_1, p'_4}$. By definition, $\widehat{p_3, p_1, p_4} = \alpha$ and $\widehat{p'_3, p_1, p'_4} = \theta - \alpha'$, so we get $\alpha = \theta - \alpha'$, and finally $\alpha' = \theta - \alpha$. For the same reason (congruence), $L = L'$, meaning that the distances *as the crow flies* are identical for p_4 and p'_4 .

Since both distances (on and off the network) are the same for p_4 and p'_4 , their straightness are also equal. In other words: $S_\theta(\alpha) = S_\theta(\theta - \alpha)$. We can conclude that, without any loss of generality, we can focus our study on the first half of the first angular sector, i.e. the interval $\alpha \in [0; \theta/2]$. The same proof can be applied to the rectilinear network, which displays the same type of symmetry. Consequently, the same simplification holds.

2.3 Analytic Expression of the Straightness

In the previous section, we showed that, due to certain properties of rotation, homothety and symmetry, we can restrict our analysis of the straightness to only the interval $\alpha \in [0; \theta/2]$ for both networks. For the rectilinear network, note that $\theta = \pi/2$. So, in this specific case, we consider the interval $[0, \pi/4]$. Let us now give the expression of the straightness for each type of network.

For the rectilinear network, we have from Figure 15:

Then, from (2), we obtain:

$$S(\alpha) = \frac{l}{d+h} = \frac{1}{\cos \alpha + \sin \alpha} \quad (3)$$

For the radio-concentric network, let us observe Figure 17. Note that p_2 is the projection of p_4 onto the first radius. We obtain two rectangular triangles containing p_2 : $(p_1; p_2; p_4)$ and $(p_4; p_2; p_3)$. This allows us to write the following equations:

$$\cos \alpha = \frac{D}{L} \quad ; \quad \cos \beta = \frac{d}{H}$$

$$\sin \alpha = \frac{h}{L} \quad ; \quad \sin \beta = \frac{h}{H}$$

$$\tan \alpha = \frac{h}{D} \quad ; \quad \tan \beta = \frac{h}{d}$$

By removing h we get

$$L \cdot \sin \alpha = D \cdot \tan \alpha = H \cdot \sin \beta = d \cdot \tan \beta,$$

and hence we obtain:

$$D = \frac{L \cdot \sin \alpha}{\tan \alpha}$$

$$d = \frac{L \cdot \sin \alpha}{\tan \beta}$$

$$H = \frac{L \cdot \sin \alpha}{\sin \beta}$$

We substitute these values into (1), then simplify and obtain:

$$S_\theta(\alpha) = \frac{L}{D + d + H} \quad (4)$$

$$= \frac{1}{\cos \alpha + \frac{\sin \alpha}{\tan \frac{\pi-\theta}{2}} + \frac{\sin \alpha}{\sin \frac{\pi-\theta}{2}}} \quad (5)$$

Note that these formulas are valid only for the interval $\alpha \in [0; \theta/2]$. The other values can be deduced by symmetry and/or rotation, as explained earlier.

2.4 Comparison of Networks

With the analytic expression of the straightness for both types of networks, we can now compare their performance for center-to-periphery routes. Figure 18 represents the straightness obtained for the different network types and parameter values. The x - and y -axis represent the angle α and the straightness S calculated using the different previous formula, respectively. The optimal straightness value is represented by the black dotted horizontal line $f(\alpha) = 1$. The closer the graphical representation of a network is to this line, the better the network is in terms of straightness.

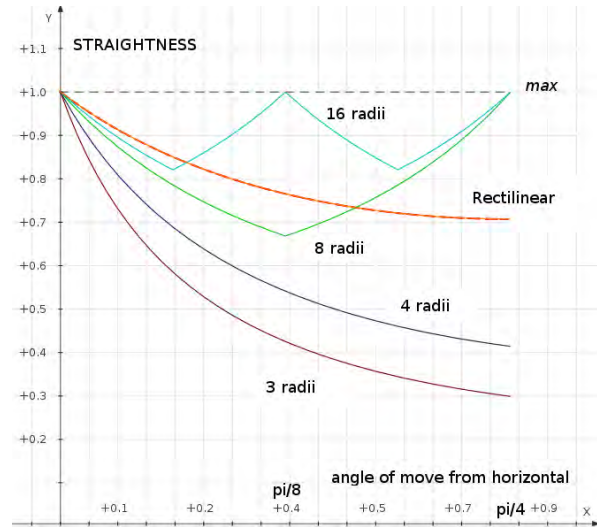


Figure 18: Straightness S of different networks depending on the angle α of motion: 1 rectilinear network and 4 radio-concentric networks from 3 to 16 radii ; $\alpha \in [0; \frac{\pi}{4}]$.

For the radio-concentric network, we consider several values of the parameter θ , corresponding to $k = 3, 4, 8, 16$, represented in purple, blue, green, and cyan, respectively. The rectilinear network is represented in red. The x -axis ranges only from $\alpha = 0$ to $\pi/4$, which is enough, regarding the simplifications we previously described: we know all the plotted lines have a periodic behavior, which directly depends on θ .

For all lines, we have $S(0) = 1$, which corresponds to a straightforward move on the first radius (or horizontal edge, for the rectilinear network). Then, the straightness decreases when α gets larger, since the destination point gets farther from this radius, and therefore from an optimal route. This corresponds to the lower route, represented in red in Figure 17. The decrease stops when α reaches $\theta/2$ (i.e. the bisector): the straightness then starts increasing again, until it reaches 1. This is due to the fact that the shortest path is now the upper route, represented in blue in Figure 17. The maximal value is reached when $\alpha = \theta$, i.e. when the destination point lays on a radius, allowing for an optimal route. The same ripple pattern is then repeated again, and appears k times.

As mentioned before, the periodicity directly depends on θ : the smaller the angle, the larger the number of radii, which means the number of ripples increases while their size decreases. In other words, and unsurprisingly, the straightness of a radio-concentric network increases when its number of radii increases. More interesting is the fact that most of the time, 8 (a very small number) radii are sufficient to make radio-concentric networks better than rectilinear ones.

2.5 Boundary Condition

Let us now consider a radio-concentric network with infinitely small θ . From the definition of k , we know this would result in an infinitely large number of radii:

$$\lim_{\theta \rightarrow 0} k = \lim_{\theta \rightarrow 0} \frac{2\pi}{\theta} = +\infty$$

The radii of such a network would cover the whole surface of a disk. Since we focus our study on the first angular half-sector, α is itself bounded from above by $\theta/2$. So, if θ tends towards 0, α does too. From (5), we consequently get:

$$\lim_{\theta \rightarrow 0} S_\theta(\alpha) = \lim_{\theta \rightarrow 0} \frac{1}{\cos \alpha + \frac{\sin \alpha}{\tan \frac{\pi - \theta}{2}} + \frac{\sin \alpha}{\sin \frac{\pi - \theta}{2}}} \quad (6)$$

We have:

$$\begin{aligned} \lim_{\theta \rightarrow 0} \cos \alpha &= \lim_{\alpha \rightarrow 0} \cos \alpha = 1 \\ \lim_{\theta \rightarrow 0} \tan \frac{\pi - \theta}{2} &= +\infty \\ \lim_{\theta \rightarrow 0} \sin \alpha &= \lim_{\alpha \rightarrow 0} \sin \alpha = 0 \\ \lim_{\theta \rightarrow 0} \sin \frac{\pi - \theta}{2} &= 1 \end{aligned}$$

We finally obtain the boundary for the straightness of a radio-concentric network with an infinite number of radii:

$$\lim_{\theta \rightarrow 0} S_\theta(\alpha) = 1$$

This result is obvious and consistent with the case where the complete route goes along a radius. Indeed, with an infinite number of radii, we can always find a radius to move directly from the center to the destination. Figure 18 confirms this result: increasing the number of radii reduces the period and the amplitude of the *ripples*, eventually leading to the optimal horizontal straight line of the equation $S = 1$.

Between the two extreme cases of 3 radii and an infinite number of radii, we should remind the reader that 8 radii are enough for the radio-concentric network to become better than the rectilinear one in terms of straightness of center-to-periphery routes. Let us see now how it goes for multi-directional moves.

3 Simulation of the Average Straightness for All Routes

Studying analytically the straightness for all possible moves (other than center-to-periphery) would be too time-consuming, so we switched to simulation. We used the statistical software R to simulate the motions on both rectilinear and radio-concentric networks. The shortest paths are processed using Dijkstra's algorithm [6], for all pairs of nodes (see Figures 19 and 20).




Figure 19: A perfect rectilinear graph.




Figure 20: A perfect radio-concentric graph.

These results are very interesting and confirm our theoretical findings, as well as our observations regarding the good straightness of radio-concentric networks, thrifty in number of radii, compared to rectilinear networks. Figure 21 shows that, even when increasing the granularity of the grid forming a rectilinear network, the average straightness is constant, at a value lower than 0.8. This is consistent with our remark regarding the homothety property of this network.

Regarding the radio-concentric network, Figure 22 shows that the average straightness overtakes the rectilinear threshold (0.8) when the number of radii is about 8 or 10. It is interesting to notice that the number of sides does not affect the straightness much. This was expected for center-to-periphery routes, as for the rectilinear network. However, the routes considered here are more general, going from anywhere to anywhere, and moreover, the radio-concentric network is not a tessellation like the rectilinear one, so it is surprising to

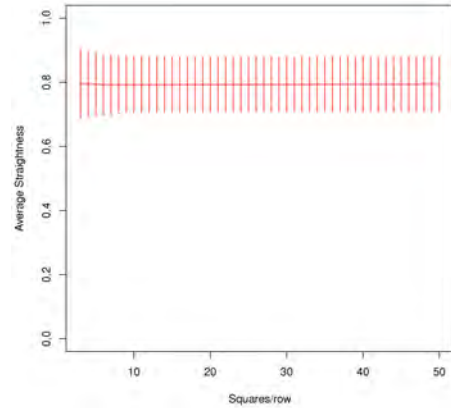


Figure 21: Average straightness S (and standard deviation) for a rectilinear network, as a function of its size (expressed in number of squares by side).

make this observation: further inquiry will be necessary to provide some explanations.

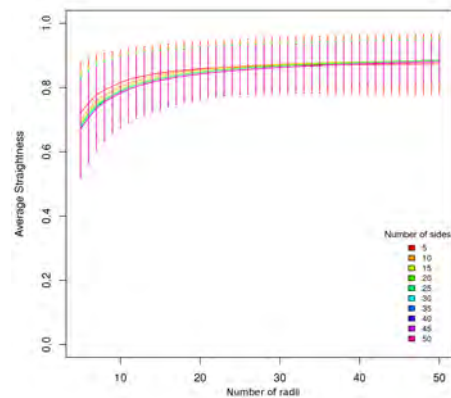


Figure 22: Average straightness S (and standard deviation) for a radio-concentric network, as a function of its number of radii, and for different number of sides (see colors).

4 Conclusion

In this paper, we first presented a few urban networks based on rectilinear versus radio-concentric structures. Then, in a theoretical framework, we showed the superiority of the radio-concentric network compared to the rectilinear network, in terms of straightness. It was first demonstrated analytically in the particular case of center-periphery motions and then simulated on paths with multiple origins and destinations, using the statistical software R. To our knowledge, these results are new and original. They show that, straightness-wise, whatever the density of rectilinear networks, those cannot efficiently compete with radio-concentric networks, because their straightness is bounded by construction, at least within a theoretical framework.

However, this exploratory study does not take into account several factors that must be now studied to complete these first results. It will be interesting to find exactly over which number of radii a radio-concentric network has a better straightness than a rectilinear one. Knowing this threshold, we shall then be able to calculate the total length of both networks to fill an equivalent average straightness on similar surfaces to drain. What will be the most thrifty network in terms of length of "cables"? On another aspect, these calculations and simulations consider very theoretical networks. Geographers, architects and town planners may be interested in understanding the real straightness of urban, rectilinear versus radio-concentric networks, in real conditions (population mobility, congestion). This is also one of the further researches developed in the *Urbi&Orbi* project.

ACKNOWLEDGMENTS

We would like to thank the CNRS (PEPS MoMIS) and the University of Avignon for supporting this research.

References

- [1] M. Barthélemy. Spatial networks. *Physics Reports*, 499(1-3):1–101, 2011.
- [2] C. Berge. *Théorie des graphes et ses applications*. Donod, 1958.
- [3] P. Blanchard and D. Volchenkov. *Mathematical Analysis of Urban Spatial Networks*. Springer, 2009.
- [4] G. Buttazzo, A. Pratelli, S. Solimini, and E. Stepanov. *Optimal Urban Networks via Mass Transportation*. Springer, 2009.
- [5] W. Christaller. *Die zentralen Orte in Süddeutschland. Eine ökonomisch-geographische Untersuchung über die Gesetzmäßigkeit der Verbreitung und Entwicklung der Siedlungen mit städtischen Funktionen*. Gustav Fischer, 1933.
- [6] E. W Dijkstra. A short introduction to the art of programming. Technical report, 1971.
- [7] A. El Gamal and Y.-H. Kim. *Network Information Theory*. Cambridge University Press, 2011.
- [8] J.-C. Foltête, C. Genre-Grandpierre, and D. Josselin. *Impacts of Road Networks on Urban Mobility, in Modeling Urban Dynamics*, pages 103–128. ISTE Ltd and John Wiley & Sons, 2010.
- [9] C. Genre-Grandpierre. *Forme et fonctionnement des réseaux de transport : approche fractale et réflexions sur l'aménagement des villes*. Phd thesis, Université de Franche-Comté, 2000.
- [10] S. L. Hakimi. Optimum locations of switching center and the absolute center and medians of a graph. *Operations Research*, 12: 450–459, 1964.

- [11] J. V. Henderson and J.-F. Thisse, editors. *Handbook of Regional Urban Economics*, volume 4 of *Cities and Geography*. Elsevier, 2004.
- [12] H. Hoyt. *The structure and growth of residential neighborhoods in American cities*. Federal Housing Administration, Washington DC, 1939.
- [13] D. Josselin and M. Ciligot-Travain. Revisiting the center optimal location. A spatial thinking based on robustness, sensitivity and influence analysis. *Environment & Planning B*, 40:923–941, 2013.
- [14] A. R. Kansal and S. Torquato. Globally and locally minimal weight spanning tree networks. *Physica A*, 301(1-4):601–619, 2001.
- [15] A. Lösch. *Die räumliche Ordnung der Wirtschaft. Eine Untersuchung über Standort, Wirtschaftsgebiete und internationalen Handel*. Gustav Fischer, 1940.
- [16] H. MacCarthy, P. Miller, and P. Skidmore. *Network logic. Who governs in an interconnected world?* Demos, 2004.
- [17] D. Mangin. *Infrastructures et formes de la ville contemporaine. La ville franchisée*. Number 157 in Dossiers du Certu. La documentation française, 2004.
- [18] S. Marshall. *Street patterns*. Spon Press, 2005.
- [19] P. Mathis. *Graphs and Networks*. ISTE, 2007.
- [20] R. E. Park, E. W. Burgess, and R. D. McKenzie. *The City*. The University of Chicago Press, Chicago, Illinois, 1925.
- [21] J. Perreur and J. Thisse. Central metrics and optimal location. *Journal of Regional Science*, 4(3):411–421, 1974.
- [22] I. Thomas. *Transportation Network and the Optimal Location of Human Activities. A numerical geography approach*. Edward Elgar Publishing ltd, 2002.
- [23] W. Tobler. A computer movie simulating urban growth in the detroit region. *Economic Geography*, 46(2):234–240, 1970.
- [24] I. Vragovi, E. Louis, and A. Daz-Guilera. Efficiency of informational transfer in regular and complex networks. *Physical Review E*, 71:036122, 2005.