

International Journal of Humanoid Robotics  
© World Scientific Publishing Company

## NAVIGATION AMONG MOVABLE OBSTACLES: REAL-TIME REASONING IN COMPLEX ENVIRONMENTS

MIKE STILMAN<sup>1</sup>  
JAMES J. KUFFNER<sup>1,2</sup>

<sup>1</sup> *Robotics Institute, Carnegie Mellon University,  
5000 Forbes Ave. Pittsburgh, Pennsylvania 15213, USA  
robot@cmu.edu, kuffner@cs.cmu.edu*

<sup>2</sup> *Digital Human Research Center,  
National Institute of Advanced Industrial Science and Technology (AIST),  
2-41-6 Aomi, Koto-ku, Tokyo, Japan 135-0064*

In this paper, we address the problem of Navigation Among Movable Obstacles (NAMO): a practical extension to navigation for humanoids and other dexterous mobile robots. The robot is permitted to reconfigure the environment by moving obstacles and clearing free space for a path. This paper presents a resolution complete planner for a subclass of NAMO problems. Our planner takes advantage of the navigational structure through state-space decomposition and heuristic search. The planning complexity is reduced to the difficulty of the specific navigation task, rather than the dimensionality of the multi-object domain. We demonstrate real-time results for spaces that contain large numbers of movable obstacles. We also present a practical framework for single-agent search that can be used in algorithmic reasoning about this domain.

*Keywords:* NAMO; navigation; manipulation; planning; motion; movable obstacles.

### 1. Introduction

In this paper, we explore the domain of *Navigation Among Movable Obstacles* (NAMO). Consider the example of a human planning to move through a cluttered space. He or she does not simply avoid every obstacle, but instead will often reposition chairs, doors and other movable objects while navigating. These actions open free space for paths when a plan through the original space is difficult or impossible. For humans, the ability to move objects is a natural component of navigation. For robots, although numerous algorithms for force control and walking have enabled robots to conform to variations in the environment, little work exists that would allow robots *to conform the environment to the robot's goals*.

Not only is NAMO a natural extension to the current capabilities of humanoid robots, it presents challenging research problems for theoretical motion planning, as well as practical applications including office and home cleaning, industrial manipulation and urban search and rescue. Current work in *urban search and rescue* focuses



Fig. 1. A sample NAMO domain. All depicted objects are internally represented with polygons.

on small mobile robots or snakes. These robots are highly effective at search, since they can access obstructed environments by avoiding obstacles.<sup>1</sup> However, *rescue efforts* still largely rely on humans entering dangerous scenes. This is precisely due to the human ability to intuitively determine safe methods for clearing paths and our dexterity in carrying out such plans. Although replacing the human in hazardous search and rescue may be a long term goal, we propose the NAMO domain as an initial step towards this fascinating research area. In our work we examine a practical, though simplified, formulation of the NAMO problem. We discuss potential variations in the problem statement, the notion of optimality, as well as descriptions of sub-problem classes. Finally, we present a prototype planner that takes advantage of the underlying navigational  $\mathcal{C}$ -space to construct real-time intuitive solutions to a wide range of NAMO problems.

## 2. Problem Statement

For simplicity in algorithmic analysis we restrict our domain to a planar projection of a continuous three dimensional environment. The environment contains:

- $R$  - a humanoid or dexterous mobile robot equipped with a gripper arm.
- $\mathcal{L}$  - a set of polygonal *Fixed Obstacles* that the robot must avoid in navigation.
- $\mathcal{M}$  - a set of polygonal *Movable Obstacles* that the robot can manipulate by applying forces at allowable contacts. Each  $O_i \in \mathcal{M}$  has planar dynamic properties: *Center of Mass*, *Mass* and *Moment of Inertia*.

Given an initial configuration of the robot and environment, the robot's task is to assume a target configuration or *goal*. A solution should consist of a motion plan that iterates walking, grasping and moving obstacles until the robot is at the goal.

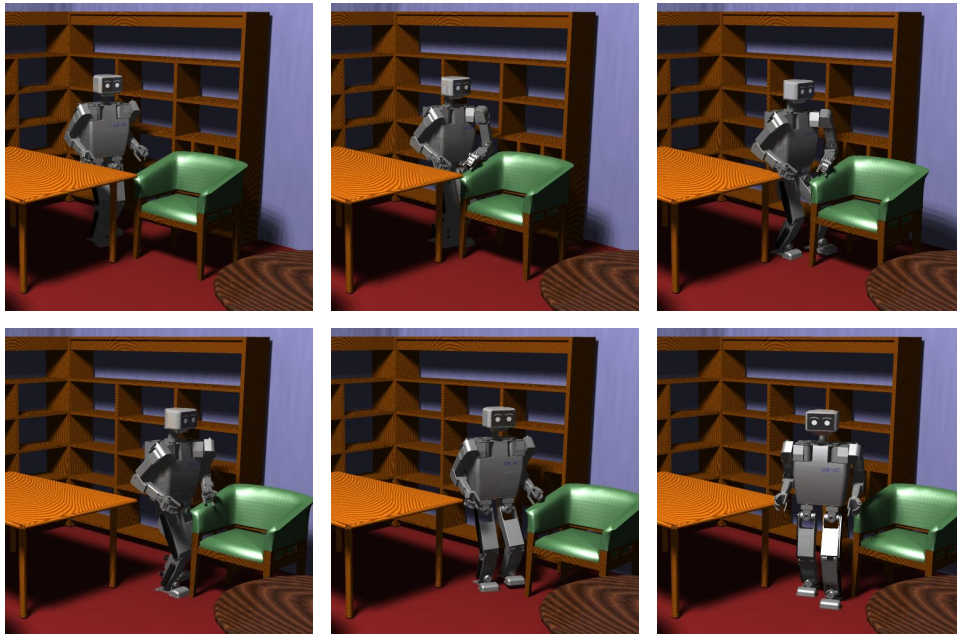


Fig. 2. Planned solution to a NAMO problem. The robot H7 repositions a chair to make space for a navigation path.

We define an optimal plan for the NAMO domain as one that first moves the *least number of obstacles* and second *uses the least amount of Work*. *Work* is defined in the standard dynamic sense of  $Work = Force \times Distance$ . Note that there are many possible practical extensions to the definition of optimality. For example, a notion of fragility could be introduced to indicate the risks associated with moving an obstacle.

### 3. Related Work

At first glance, Navigation among Movable Obstacles is an instance of *Motion Planning*. However, the complexity of this problem is prohibitive to the conventional application of complete motion planning algorithms. Consider a closed, planar world that contains a robot and  $N$  obstacles. Suppose we attempt a resolution-complete version of the problem using search over a discretized 2-D planar projection of the 3-D world. Let the configuration of the robot base be represented by  $\mathcal{C}_R = (x, y, \theta)$ , with resolution  $m$  in  $x, y$  and  $\theta$ . The generic size of the robot  $\mathcal{C}$ -space  $|\mathcal{C}_R| = O(m^3)$ . Analogously, for each object  $|\mathcal{O}_i| = O(m^3)$ . The full motion search space is the product of these subspaces,  $\mathcal{C}_R \times \mathcal{O}_1 \times \mathcal{O}_2 \times \dots \times \mathcal{O}_N$ , and therefore has  $O(m^{3(N+1)})$  world states. Furthermore, for  $K$  directions of object motion, the branching factor of a brute force search is  $NK$ . If  $K = 6$ ,  $N > 5$  (a rather primitive problem), this domain quickly surpasses reasonable limits of computational resources of memory and time. Gordon Wilfong first showed that a simplified variant of this domain is NP-hard.<sup>2</sup> More recent work has demonstrated NP-completeness results for trivial

problems where blocks can only be pushed on a planar grid.<sup>3</sup>

The challenges of this domain are not restricted to a large search space. We are also required to consider navigation, environment contact and manipulation of the obstacles. For a comprehensive discussion of NAMO, let us consider works in these fields and the aspects of our problem that they address. In terms of navigation, our robot is asked to work in a configuration space that will change over time. In particular, certain obstacles may move and therefore alter the space.

Previously, obstacles moving along specified trajectories was a problem addressed by bounding the velocities of the obstacles and augmenting the configuration space with time.<sup>4</sup> In doing so, a point in the free space ensures that a configuration is valid at the given time in which it takes place. This approach has been extended to kinodynamic domains,<sup>5</sup> as well as real-time deformable plans.<sup>6</sup> Work along these lines, however, focuses on a world model which the robot cannot control. In that sense, the problems addressed can still be formulated as existence of paths through an expanded state space.

Models of the world that support *robot interaction* are typically in the form of manipulation or assembly planning. For instance, Mason and Lynch developed bounds for stable pushing motions by a mobile robot with edge-edge contact between the robot and a specified object.<sup>7,8</sup> They introduced a search algorithm that would branch on possible motions within these bounds and yield stable plans for repositioning the object among obstacles. Alami et.al. pursued a similar problem with rigid grasping by constructing graphs of transit and transfer(manipulation) paths for robot/object motion.<sup>9</sup> This work was later extended by Simeon et.al. to handle continuous grasps and placements.<sup>10</sup> Alternatively, researchers in humanoid robotics have shown the potential for generalizing human motion capture in deciding manipulator contact placement and quasi-static manipulation planning.<sup>11</sup> Harada et. al. have presented control strategies that enable humanoid robots to manipulate large, massive objects.<sup>12</sup> Work along these lines is essential for implementing a NAMO planner on an actual robot, however it does not address the higher-level problem of deciding motions for large numbers of objects as required by our domain. Okada et. al. find navigation plans for humanoids by considering obstacles that can be repositioned by picking them up and carrying them.<sup>13</sup> In our work,<sup>14</sup> we focus on non-prehensile manipulation such as pushing and dragging as well as domains with large numbers of obstacles.

The majority of research that deals with interactions that involve *multiple objects* is in assembly planning. Yet, the primary focus of this field diverges from the characteristics of NAMO. Assembly planners generally focus on separating a collection of parts and typically ignore the robot/manipulator. Planning actions allow unassembled parts to be removed to “infinity.”<sup>15,16</sup> One of the largest difficulties of the movable obstacle domain is strictly due to the unintended interactions between obstacles and the robot, since both are required to stay within a constrained space. This complication is addressed by a less studied but highly relevant extension

of assembly planning known as the *rearrangement problem*.<sup>17</sup> Rearrangement is a number of real-world generalizations of the Sokoban puzzle: a robot is required to move a set of objects between specified initial and final configurations.<sup>18</sup> Although the task of the robot is akin to the earlier mentioned manipulation work, the key difference is that it may not be possible to directly achieve the individual object placement goals. Rearrangement planners typically construct precedence graphs and determine intermediate configurations for obstacles.<sup>19</sup> Since intermediate configurations are not specified in the problem statement, the curse of dimensionality in this problem is very similar to NAMO. The most experimentally successful rearrangement planners employ opportunistic methods in selecting object perturbations that allow for simplified planning.<sup>17,20</sup>

Almost all the mentioned developments in navigation, manipulation and assembly address problems with fully specified final configurations. To our knowledge, the only existing planner that deals with many movable objects and specifies a single navigation goal was developed by Chen and Hwang (CH).<sup>21</sup> In this work, the authors allow the robot to “*shove\_aside*” and “*push\_forward*” obstacles as the robot moves towards the goal. Their solution consists of a navigation trajectory which minimizes the associated cost of moving obstacles away from the robot. To generate this solution, they introduce a global planner that heuristically evaluates the cost of moving obstacles away from randomly selected points in the domain. The planner then searches a graph of neighboring points to form a trajectory of least cost. This trajectory is verified by a local planner that can apply manipulation primitives to connect two neighboring points. CH is effective on some examples, yet it has some important drawbacks. For each robot location that is found to be reachable, the algorithm considers only one possible trajectory that led to that event. The authors recognize this lack of backtracking as a cause for incompleteness and show that even slight improvements to their framework would cause exponential growth in complexity. Furthermore, allowing all colliding objects to move jointly narrows the solution space to *plowing* paths. All objects are greedily pushed away from the robot, allowing it to move forward. In particular, since manipulation is restricted to validating the connectivity of *neighboring points*, manipulation tasks that affect distant portions of the world are never considered. For instance, in Figure 6, moving the couch to open a path on the opposite side of the couch would not be addressed by this planner. Although these constraints make the CH algorithm difficult to extend, it serves as a baseline for development in the NAMO domain.

#### 4. Overview

In the following sections, we will introduce the fundamental characteristics of NAMO planning and describe the key tools and methods for approaching this domain. In Section 5, we discuss the choices for contact and actions that define a suitable action-space for the robot. In particular, we focus on developing a space that is well suited for real-world actions, yet can still be analyzed as a planning domain. Section 6 develops a framework for reduced dimensionality analysis of our




Fig. 3. A large, constrained object requiring manipulation motions that consider dynamics.

large action space. We introduce the navigational configuration space as both a tool for bounding the complexity of object interactions, and a heuristic for guiding search. Section 7 presents a simple and informative prototype planner based on the previous discussion. We show that our planner could be employed in real-time for improved robot navigation. Finally, Section 8 outlines issues related to the complexity of object coupling in the NAMO domain, and Section 9 concludes with a summary discussion. Due to the structure of the planning methodology, our algorithms can easily be extended to handle future developments in multi-object reasoning. We discuss open problems and directions of research that would greatly contribute to the power of planning in NAMO.

## 5. Contact and Motion Primitives

The primary focus of our work is to develop algorithms that take maximum advantage of the robot’s dexterity and the environment structure. In order to simplify the manipulation problem, most manipulation planners restrict the domain to translational motion, pushing or prehensile manipulation.<sup>7,17,20</sup> While reducing the action space, these planners also reduce the solution space. However, many real-world NAMO problems have simpler solutions when the motion of obstacles is not restricted.

Figure 3 is one of many examples where a large object, such as a table, is highly constrained in motion. The size of this object makes prehensile manipulation (constraining all the degrees of freedom) difficult. For a human, the intuitive approach is to grasp the table at a convenient location, as shown in Figure 3. Then, *for select directions of pulling/pushing, the natural dynamics of the table will generate the complex motion* that guides it. Our formulation not only adds point contact and pulling, but develops a mapping that projects simple linear robot motion to complex transformations of the object.

To be precise, motion may be defined by a point contact at vector  $\mathbf{P}$  from the object COM and force  $\mathbf{F}$  applied by the robot. If we allow a single point contact force to act on the object at a given time, then the mapping from the action space of the robot to the associated planar state-space transitions of obstacles can be modeled as follows:

$$\dot{v} = \frac{\mathbf{F}}{M} \quad (1)$$

$$\ddot{\theta} = \frac{|\mathbf{F} \times \mathbf{P}|}{I} \quad (2)$$

In our simulation we also add viscous friction to the objects. This description of robot motion appears compatible with the planar physical capabilities of a dexterous mobile robot. It does not, however, conform to the statically stable pushing properties discussed by Lynch.<sup>7</sup> We assume that for slow quasi-static motion, a local robot controller will be able to compensate for environment modeling error. The mapping in Eqs. 1, 2 highlights the two aspects of object manipulation that we must address. Namely, how do we select the contact point  $\mathbf{P}$  and the force  $\mathbf{F}$ ?

### 5.1. Contact Points

There is substantial work in grasping and manipulator/object contact.<sup>22,23</sup> We assume that within the local workspace of the robot base, existing methodology can be used to implement a desired grasp of an obstacle at a desired contact point. Hence, our primary concern is to define valid contacts for a mobile robot whose manipulator configuration space is largely constrained by the free-space of the robot base. We define the following sets of points for each movable obstacle  $O$ :

$$P(O) = \{\text{The set of all points on the object}\}$$

$$CP(O) \subset P(O) \{p \in CP \text{ can potentially be grasped by the robot}\}$$

Natural choices for  $CP$  are the edges of a polygonal obstacle, or other line segments that can be identified as graspable for a more involved obstacle definition.

For each  $p \in CP(O)$  we define:

$F(p)$  - the set of all possible forces that can be exerted on point  $p$ .  
 $F'(p) \subset F$  - the subset of forces on point  $p$  that can be exerted without directional slip or loss of contact between the end-effector and the obstacle.  $F'(p)$  restricts the set of possible robot interactions with any point of the obstacle. It determines whether the obstacle can be pushed or pulled from a given contact location.

$Reach(p)$  - the set of possible configurations for the robot base from which the robot would be able to make manipulator contact with the point  $p$ . Analogously,  $Reach(O)$  is the set of base configurations that allow the robot to reach some  $p \in CP(O)$ .

Let  $\mathcal{C}$  be the configuration space of the robot base  $R_{COM}$ , i.e. the space that we wish to navigate. Let  $Acc(R_{COM}) \subset \mathcal{C}_{free}$  be the currently accessible free-space at the time of the grasp. Then, for a given obstacle, the possible grasps are defined as follows:

$AReach(O) = Reach(O) \cap Acc(R_{COM})$  is the set of all accessible configurations of the base that allow the robot to grasp the obstacle. For a particular base configuration  $b \in AReach(O)$ , and a point  $p \in CP(O)$  where  $b \in Reach(p)$ , the following holds:

The robot with base configuration  $b$  can exert forces  $F'(p)$  on point  $p \in CP(O)$ .

## 5.2. Obstacle Motion through Robot Motion Primitives

In order to search the space of robot interactions with obstacles, we can choose to consider all potential wrenches on the obstacle’s COM and then find corresponding robot actions that would make them feasible. Although this would be resolution complete with respect to all motions of the object, it also would be computationally expensive due to the necessary search through possible base configurations and actions for each wrench.

We choose an alternative formulation: sampling the possible contact points in  $CP(O)$  and evaluating the intersection  $Reach(O) \cap Acc(R_{COM})$ . This procedure yields the set  $AReach(O)$  of accessible  $R_{COM}$  configurations from which  $O$  is graspable and the associated grasp points  $p$ . The action space is then directly computed by associating robot action forces with each pair  $(R_{COM}, p)$ .

So far we have defined contacts for robot forces and assumed an existing set of robot actions. Yet, for a high-DOF robot such as a humanoid, the complete set of possible actions is extremely large. Furthermore, many of the robot’s actions are redundant with respect to the object and even the end-effector point. This suggests the implementation of a small set of parametrized primitive actions that best span the space of object manipulation.

We observe that significant displacements of large objects will require the robot to move its base throughout the manipulation. Rather than exploring the space of possible manipulator motions, we select the robot base displacement as an action parameter. Complete actions incorporate the base motion and control the robot arms to create soft constraints on the motion of the object. Suppose the robot base is at configuration  $R_{COM}$  and the end-effector is attached to point  $p$  on the obstacle. We allow purely translational accelerations of the robot’s COM in any direction. The robot’s manipulator imposes a non-linear spring/damper distance constraint between the robot’s COM and the point of contact  $p$ . Eq. 4 calculates the force applied at  $p$ , resembling the shallow exponential stress-strain curve of passive human muscle.<sup>24</sup>  $\mathcal{D}$  is the desired distance,  $\mathbf{N}(V) = V/|V|$  and  $k_p, k_v$  are gains.

$$p_d = R_{COM} + \mathcal{D}\mathbf{N}(p - R_{COM}) \quad (3)$$

$$\begin{aligned} F_x &= \text{sign}(p_{dx} - p_x)k_p(e^{|p_{dx} - p_x|} - 1) - k_v\nu_x \\ F_y &= \text{sign}(p_{dy} - p_y)k_p(e^{|p_{dy} - p_y|} - 1) - k_v\nu_y \end{aligned} \quad (4)$$

The action space is represented by translational motions of  $R_{COM}$  in some discrete number of directions. Given an initial  $(R_{COM}, p)$ , Eq. 1-4 can be numerically integrated to determine actions in the domain of obstacle motion. For fixed time steps and accelerations, robot actions are defined by the triple  $(R_{COM}, p, d)$ , where  $d$  is the direction of motion. The actual interactions at point  $p$  are restricted to  $F'(p)$



and limited to obstacle motions that may have rotational slip but not translational slip between the end-effector and the contact point. Motions for smaller objects can be represented similarly, by directly moving the desired contact point.

This formulation for primitive actions yields intuitive behavior in simulation (Figure 7). On a robot platform, we assume that the spring/damper system can be implemented through force-control and/or natural dynamics of the robot. Still, the problem of selecting *a globally optimal set of actions* that span the manipulation space without redundancy remains an open and interesting topic for future work.

## 6. NAMO Planning

In the previous section, we formulated a reduced search space that is restricted to feasible real-world actions of a dexterous mobile robot. In our planner we demonstrate how primitive actions can generate interesting solutions for the NAMO domain. Theoretically, we could implement a breadth-first forward planner that would apply the primitive actions. This would be both resolution complete and metric optimal, yet practically intractable due to the large branching factor that results from applying all feasible actions to all reachable obstacles.

This motivates a shift in discussion from feasible actions to *useful* ones, as well as the value of moving particular obstacles. In this section we develop tools for bounding the complexity of NAMO, and heuristic methods for dramatically expediting forward planning.

### 6.1. Domain Observations

In Section 5.1, we defined  $\mathcal{C}$  as the configuration space of  $R_{COM}$ , the robot base. Suppose the robot can be safely bounded by a polygonal discretization of a circle. We can always project an instance of NAMO into the planar configuration space of navigation. This is accomplished by the standard convolution of the circular robot bounds and the obstacles.<sup>25</sup> We use a circle to bound the robot because the robot and obstacles may rotate and the robot should preserve a safe distance regardless of configuration. Figure 4 illustrates an instance of NAMO. The obstacle bounds are expanded to represent their associated obstacles in the configuration space  $\mathcal{C}$ .

Notice that the navigational free-space is disjoint. Let  $\mathcal{C}_{free}$  represent all the space that  $R_{COM}$  could occupy.  $Acc(R_{COM})$  is the subspace of  $\mathcal{C}_{free}$  that can be reached solely by navigation from the current base configuration. In a NAMO domain, the initial  $Acc(R_{COM})$  does not contain the goal. This points to an alternative formulation of our problem: *The task of the robot is to manipulate objects such that the goal configuration is added to  $Acc(R_{COM})$ .*

The operator *add* places a component of free space  $C_i$  in  $Acc(R_{COM})$ . *add* makes all configurations in  $C_i$  accessible to the robot except ones occupied by obstacles that are moved by *add*. In Figure 4,  $\mathcal{C}_{free}$  consists of five disjoint components (four of which are labeled  $C_1$ - $C_4$ ). Moving the table and then the couch would respectively *add*  $C_2$  and  $C_4$  to  $Acc(R_{COM})$ , accomplishing the NAMO task.

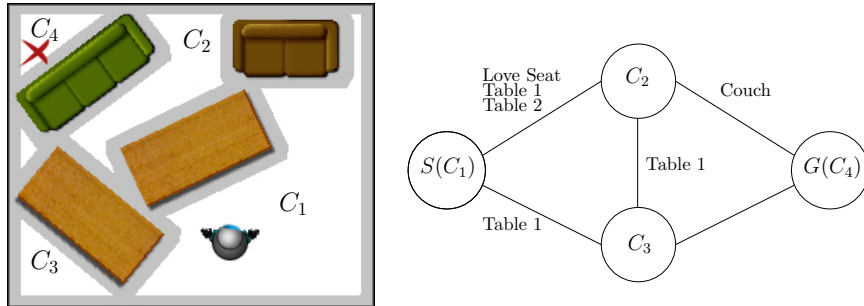


Fig. 4. A simulated representation of the dynamic  $R_{COM}$  configuration space. The labeled subspaces  $C_1$ - $C_4 \subset \mathcal{C}_{free}$  are disjoint components of free space.  $Acc(R_{COM}) \equiv C_1$ . On the right is the associated  $DFG$  with labeled components of Figure 4. Note:  $OL(3, G) \equiv \emptyset$ .

The illustrated problem falls into a subclass of NAMO which we label *linear* or  $LP_1$  by analogy to rearrangement planning.<sup>17</sup> Let us call a *keyhole* the subproblem of moving one or more objects to connect two components of  $\mathcal{C}_{free}$ . A problem is  $LP$  if there exists a sequence of independent keyhole solutions that solves the problem. We use “independent” to mean that any operator in our action space that solves a keyhole in this sequence does not interfere with the selection of an operator to solve any subsequent keyhole.  $LP_1$  is the class of problems for which disconnected components of free-space can be connected independently by moving a single obstacle.

Although  $LP_1$  covers a large number of real-world problems, it is not difficult to construct examples that lie outside this subclass. These examples are characterized by obstacles that do not directly separate two components of  $\mathcal{C}_{free}$  but constrain the motion of the separating obstacle.  $LP_k$  would allow moving  $k$  interacting obstacles to independently resolve a *keyhole*. It is also possible for obstacle motion that solves one keyhole to interfere with the solution of another by constraining the motion of other obstacles or directly detaching a component of  $\mathcal{C}_{free}$  (for additional discussion of these issues, see Section 8).

## 6.2. Utilizing the Underlying Navigational Structure

Section 5 identified a search space for planning the motions of an object. This space is parametrized by the accessible contact points  $AReach(O)$  and the motions of the robot after grasping. Directly searching the action space for a solution to NAMO is infeasible. However, the introduction of navigational structure allows us to construct subproblems in the action space that can be solved quickly and optimally. In this section we develop GRAPHCONNECT - a simple, resolution complete and metric optimal algorithm that takes advantage of  $\mathcal{C}_{free}$  structure to solve problems in  $LP_1$ .

For any problem in  $LP_1$ , GRAPHCONNECT constructs a plan as follows: Define a set  $DF$  of disjoint  $C_i \subset \mathcal{C}_{free}$  components, where  $S$  and  $G$  are components containing the robot and goal respectively. We construct a graph  $DFG$  where each node is

an element of  $DF$ . Each edge  $e$ , connecting  $(C_i, C_j)$  of  $DFG$ , is associated with a list  $OL(e)$  of obstacles that face both  $C_i$  and  $C_j$ . We remove all edges in  $DFG$  for which  $OL(e) \equiv \emptyset$ .

Let  $SFG$  be a graph that only contains node  $S$ . We grow  $SFG$  as follows: Select a node  $C_1$  in  $SFG$ . Select an edge  $e$  in  $DFG$  between nodes  $C_1$  and  $C_2$ , where  $C_2 \notin SFG$ . Now, assuming the robot is located in  $C_1 \subset \mathcal{C}_{free}$ , we try to connect  $C_1$  to  $C_2$ . To do this, we individually consider the motions of each obstacle in  $OL(e)$  by means of the subprocedure  $MANIP-SEARCH(C_1, C_2, O)$ . If the two components of free-space can be connected, the edge  $s$  and node  $C_2$  are added to  $SFG$ . Otherwise edge  $e$  is removed from  $DFG$ . If more than one obstacle  $O \in OL(e)$  can be moved successfully, we select the plan requiring the least *Work*. This process is iterated until we successfully add  $G$  to  $SFG$ , or we fail, noting that all connected nodes of  $DFG$  have been added to  $SFG$ .

$MANIP-SEARCH(C_1, C_2, O)$ : This routine is called with a *keyhole* subproblem of NAMO consisting of two disjoint components of  $\mathcal{C}_{free}$ :  $C_1, C_2$  and an obstacle  $O$ . It returns a motion plan for a robot in  $C_1$  that connects  $C_1$  and  $C_2$  by manipulating  $O$ , or NIL on failure. As described in Section 5, we can sample  $AREACH(O)$  and associated contact points  $p \in CP(O)$  that are reachable by a robot in  $C_1$ . A simple  $MANIP-SEARCH$  implementation will then conduct a bounded breadth-first search of the robot action space after grasping the object at each  $p$ . The sequence of actions connecting  $C_1$  and  $C_2$  yielding the least amount of *Work* is returned.

Observe that  $MANIP-SEARCH$  never yields an operator that requires more than the minimal *Work*. This restricts the *intrusion* of an obstacle into  $C_2$  and offers a large  $LP_1$  problem class. Note that a successful  $MANIP-SEARCH$  changes the state of the world  $S_W$  by displacing the robot and an object. The new  $S_W$  is returned by  $MANIP-SEARCH$  and stored in  $SFG$  along with the added node  $C_2$ . Further calls to  $MANIP-SEARCH$  to connect  $C_2$  with some  $C_3 \notin SFG$  will be performed in the altered  $S_W$ . This ensures the validity of the sequence of motions found by our planner. Although  $MANIP-SEARCH$  is relatively straight forward, the task of recognizing that the goal has been achieved is non-trivial. We discuss this challenge, and provide one possible solution in Appendix A.

Our description of  $GRAPHCONNECT$  illustrates the potential for using a  $\mathcal{C}$ -space decomposition of NAMO problems to construct small subproblems that can easily be solved by a motion planner. Furthermore, the construction of  $GRAPHCONNECT$  allows for a simple proof of its relationship to the  $LP_1$  problem class.

**Lemma 1.**  $GRAPHCONNECT$  is resolution complete for problems in  $LP_1$ .

**Proof.** Let  $\Pi$  be a solvable problem in  $LP_1$ . We show that GRAPHCONNECT will find a solution. By definition of  $LP_1$ , there exists a sequence  $\Omega$  of disjoint  $\mathcal{C}_{free}$  components starting in  $S$  and ending in  $G$ . We show that GRAPHCONNECT will add  $G$  to  $SFG$  by induction. In the base case,  $S \in SFG$ . Assume  $C_i$  is in  $SFG$ . By the definition of  $LP_1$ , a robot in  $C_i$  can independently move one obstacle  $O$  to connect an  $\Omega$ -consecutive component  $C_j$ . Let  $e$  be the edge between  $C_i$  and  $C_j$  in  $DFG$ . Clearly,  $O$  faces both  $C_i$  and  $C_j$ , thus  $ob \in OL(e)$ . Since MANIP-SEARCH( $C_i, C_j, O$ ) is complete over the action space, it will find the connecting motion. Therefore,  $C_j$  will be added to  $SFG$ . By induction,  $G$  will be added to  $SFG$ .

Trivially, there are finite numbers of edges and nodes in  $DFG$ . Every iteration of GRAPHCONNECT either adds a node to  $SFG$  or removes an edge of  $DFG$ . Therefore, the algorithm must either add  $G$  to  $SFG$  or find that there are no remaining edges  $e$  that connect any  $C_i \in SFG$  to a  $C_j \notin SFG$ . Hence GRAPHCONNECT terminates in finite time and is resolution complete for problems in  $LP_1$ .  $\square$

In addition to completeness, we can sketch a proof that GRAPHCONNECT with breadth-first-search is optimal for  $LP_1$  problems: Since each edge of  $SFG$  corresponds to moving one obstacle, and breadth-first-search will construct an  $SFG$  with a minimal number of edges, our solution satisfies the first criterion of NAMO optimality. Furthermore, suppose we extend the search until all edges of solution depth are added. Then if more than one solution is found, MANIP-SEARCH can be used to score the *Work* expended on each path and satisfy the second criterion.

### 6.3. Improvement over GraphConnect

The last optimality result would be most interesting if GRAPHCONNECT was feasible for implementation. Yet, although this algorithm dramatically reduces the search space from brute force action-space search, its primary purpose is to convey the utility of the reduced dimensional  $\mathcal{C}$ -space structure. Practically, a NAMO domain could have a large number  $K_o$  objects and  $N_f$  disjoint free-space components. Constructing the graph would require an algorithm to determine which objects connect which components of free-space. Furthermore, we would need to call MANIP-SEARCH to verify every potential connection. This seems unreasonable for a navigation planner, since out of  $K_o$  objects we may only have to move one or two to reach the goal.

We believe that this observation is critical for developing a real-time system. In particular, the complexity of the problem should depend on the complexity of resolving *keyholes* that lie on a reasonable navigation path, not on the complexity of unrelated components of the world. In other words, *since the purpose of NAMO is navigation, a NAMO problem should only be difficult when navigation is difficult.*

In Section 7, we present an initial answer to this challenge. We introduce a heuristic algorithm that implicitly follows the structure of GRAPHCONNECT without graph construction. To do so, we again turn to the navigational substructure

of the problem. Previously, we observed that every NAMO plan is a sequence of actions that alter the accessible free-space  $Acc(R_{COM})$ . Every plan contains a *path* from the initial robot state to the goal. For plans in  $LP_1$ , this path contains no loops (i.e. after entering a component of free-space, it is never advantageous to return). Even  $LP_k$  and  $NLP$  problems may have large regions that are too far removed from the navigation path to be of any use. In our planner implementation we exploit the notion of *paths* to guide the planner towards reasonable obstacle selection.

## 7. Planner Prototype

With the tools and results from the previous sections, we now formulate a simple and effective planner for the NAMO domain. The planner follows a greedy, depth-first search to generate fast heuristic plans in  $LP_1$  environments. The employed heuristic,  $\mathcal{P}$ , is itself a navigation planner with relaxed constraints. It is used to select obstacles that are to be considered for motion. Following the algorithm description, we show that its search space is equivalent to that of GRAPHCONNECT (Section 6.2). With depth-first search, optimality is no longer guaranteed. However, the planner is much more efficient and still resolution complete for problems in  $LP_1$ .

### 7.1. Implemented Planner

Sub-planner  $\mathcal{P}(R_{COM}, S_W, AvoidList)$  is parametrized by robot location, the world state and a list of  $(O_i, C_i)$  pairs to avoid. After generating a path estimate to the goal, it returns the pair  $(O_1, C_1)$  of the first obstacle in the path, and the first disconnected free-space. If no such path exists,  $\mathcal{P}$  returns *NIL*.

$\mathcal{P}$  is implemented as follows: a path to the goal is found by means of A\* on a dense regular grid.<sup>a</sup> The robot cannot enter cells occupied by fixed  $\mathcal{C}$ -space obstacles or transition from a movable obstacle to another movable obstacle. Finally, for any pair  $(O_i, C_j) \in AvoidList$  the robot cannot transition consecutively from  $Acc(R_{COM})$  to cells occupied by  $O_i$  and subsequently to cells occupied by  $C_j$ . The heuristic cost of entering a grid cell  $\mathbf{c}$  is defined by:

$$H_{\mathcal{P}}(\mathbf{c}) = (1 - \alpha)d_{goal} + \alpha(W). \quad (5)$$

Let  $W$  be a positive scalar value proportional to an estimate of the total work (effort) required to move an object that spans  $\mathbf{c}$ .  $W = 0$  when  $\mathbf{c}$  is unoccupied. Currently, we base  $W$  on the occupying object's mass. The scaling factor  $\alpha$  provides a weighting for the relative importance of moving objects. Clearly there may be more effective means for estimating  $W$ . However, we must be wary of their complexity since  $\mathcal{P}$  is called often on a reconfigurable  $\mathcal{C}$ -space. The investigation of such heuristics is another interesting topic for future work.

<sup>a</sup>Appendix A contains an example of such a grid. Notice that  $\mathcal{P}$  constructs paths *through* obstacles.

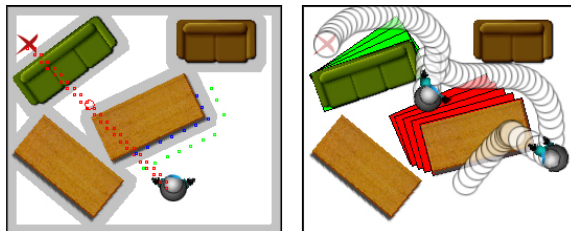


Fig. 5. Path generated by initial  $\mathcal{P}$  and final HEURISTIC-PLAN. In this case, no backtracking was necessary.  $\mathcal{P}$  selected the table over the love seat because it is defined to have lower mass.

Our implemented NAMO planner makes use of  $\mathcal{P}$  and MANIP-SEARCH, as described in Section 6.2. It is a greedy heuristic search with backtracking. The planner backtracks locally when the object selected by  $\mathcal{P}$  cannot be moved to connect the selected  $C_i \subset \mathcal{C}_{free}$ . It backtracks globally when all the paths identified by  $\mathcal{P}$  for connecting  $C_i$  are unsuccessful. The following pseudo-code details the implementation:

```

HEURISTIC-PLAN( $R_{COM}, S_W$ )
1   $AvoidList \leftarrow \emptyset$ 
2   $PartialPlan \leftarrow \emptyset$ 
3  while ( $O_1, C_1$ )  $\leftarrow \mathcal{P}(R_{COM}, S_W, AvoidList) \neq \text{NIL}$ 
4  do
5    if  $C_1 = \text{GOAL}$ 
6      then return ( $PartialPlan$  append  $\text{GOAL}$ )
7    ( $CP, Path, R'_{COM}, S'_W$ )  $\leftarrow \text{MANIP-SEARCH}(Acc(R_{COM}), C_1, O_1)$ 
8    if  $Path \neq \text{NIL}$ 
9      then  $PartialPlan$  append ( $CP, Path$ )
10      $FuturePlan \leftarrow \text{HEURISTIC-PLAN}(R'_{COM}, S'_W)$ 
11     if  $FuturePlan \neq \text{NIL}$ 
12       then return ( $PartialPlan$  append  $FuturePlan$ )
13     else  $AvoidList$  append ( $O_1, C_1$ )
14 return  $\text{NIL}$ 

```

For clarity, we have left out the generation of path plans from the current robot position to either the object contact point or the goal.  $PartialPlan$  is described as a list of pairs: ( $ContactPoint, ManipulationPath$ ). In a full implementation,  $PartialPlan$  is a list of triples that includes the  $NavigationPath$  to the contact point from  $R_{COM}$ .

## 7.2. Examples and Experimental Results

We have implemented the proposed NAMO planner in a dynamic simulation environment. The intuitive nature of HEURISTIC-PLAN is best illustrated by a sample problem solution generated by the planner. In Figure 6(a), we see that the  $\mathcal{C}$ -space of  $R_{COM}$  is disjoint - making this a NAMO problem. Line (3) of HEURISTIC-PLAN calls  $\mathcal{P}$  (the heuristic planner).  $\mathcal{P}$  conducts an  $A^*$  search and finds that the least

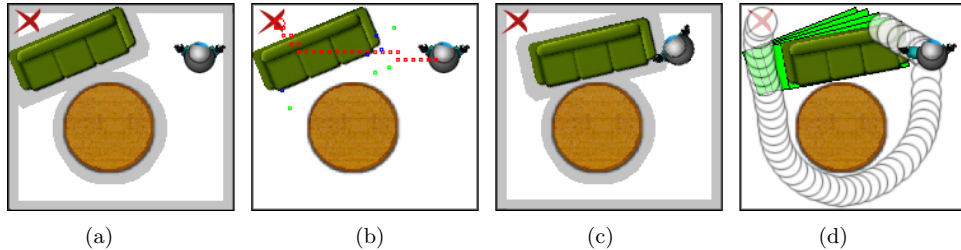


Fig. 6. Walk-through of a generated plan: (a)Problem (b) $\mathcal{P}$  (c)Keyhole solution (d)Final plan

cost path to the goal lies through the couch. The path is shown in Figure 6(b).  $\mathcal{P}$  also determines that the free-space component to be connected is the one containing the goal. Line (6) calls MANIP-SEARCH to find a motion for the couch. Figure 6(c) shows the minimum *Work* manipulation path that opens the goal free-space. Finally, a motion plan to the goal completes the procedure (Figure 6(d)). The remainder of the pseudo-code simply iterates this process when the connected free-space is not the goal and backtracks when a space fails to be connected.

Figure 6 is particularly interesting because it demonstrates our use of  $\mathcal{C}_{free}$  connectivity. As opposed to the local planner approach employed by CH, MANIP-SEARCH does not directly attempt to connect two neighboring points in  $\mathcal{C}$ . MANIP-SEARCH searches all actions in the manipulation space to join the  $\mathcal{C}$ -space components occupied by the robot and current goal or subgoal. The procedure finds that it is easiest to pull the couch from one side and then go around the table for access. This human-like high-level decision cannot be reached by using existing navigation planners.

Figure 6 also demonstrates a weakness of  $LP_1$  planning. Suppose the couch was further constrained by the table such that there was no way to move it. Although the table is obstructing the couch, the table does not explicitly disconnect any free-space and would therefore not be considered for motion.

Figures 7 and 8 illustrate more complex examples of NAMO planning. While computation time for Figure 6 is  $< 1s$ , the solutions for 7 and 8 were found in 6.5 and 9s respectively (on a Pentium 4 3GHz). Notice that the planning time depends primarily on the number of manipulation plans that need to be generated for a solution. Although the largest example contains 90 movable obstacles, compared to twenty in Figure 7, there is no sizable increase in the solution time.

### 7.3. Theoretical Considerations

HEURISTIC-PLAN has clear advantages over GRAPHCONNECT in terms of both average computation time and ease of implementation. It is also apparent that HEURISTIC-PLAN is not globally optimal since the algorithm is greedy with a non-admissible (though well informed) heuristic. Note, however, that for each choice of obstacle, the planner still selects a motion requiring the least *Work*. The following Lemmas lead us to a proof of  $LP_1$  completeness for HEURISTIC-PLAN:

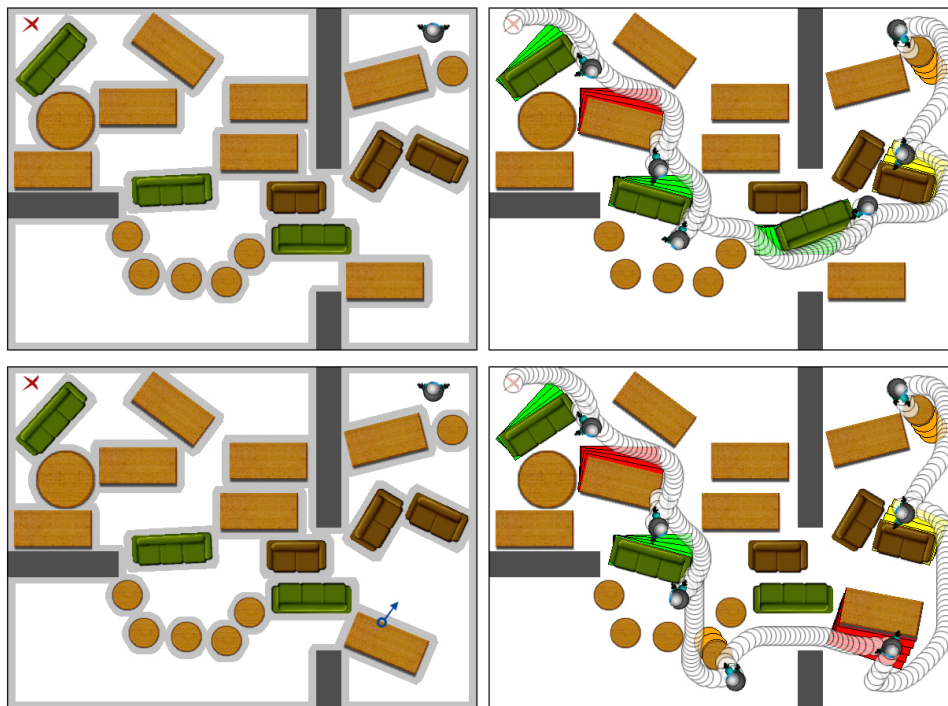


Fig. 7. The generated plan output by our dynamic simulation NAMO planner is illustrated by the time-lapse sequences on the right. In the lower frame, we changed the initial configuration of the table. The initial call to  $\mathcal{P}$  still plans through the couch, however MANIP-SEARCH finds that it cannot be moved. The planner backtracks, calling  $\mathcal{P}$  again and selects an alternative route.

**Lemma 2.** *Let  $O$  be a movable obstacle and  $C_1, C_2$  be disjoint regions of  $\mathcal{C}_{free}$ . For  $C_1$  considered by HEURISTIC-PLAN and for each pair  $(O, C_2)$ : If there exists a path from  $C_1$  to the goal which passes through  $C_1, O, C_2$  consecutively then HEURISTIC-PLAN will call  $\text{MANIP-SEARCH}(C_1, C_2, O)$ .*

**Proof.** Suppose HEURISTIC-PLAN is called with the robot in  $C_1$ . Then  $\mathcal{P}$  is repeatedly called with the pair  $(C_1, \text{AvoidList})$ . At each iteration,  $\mathcal{P}$  selects some reachable object  $O_i$  and  $C_j$  where  $(O_i, C_j) \notin \text{AvoidList}$  such that the path considered passes through  $C_1, C_i, C_j$  consecutively (by definition of  $\mathcal{P}$ ). This is followed by a call to  $\text{MANIP-SEARCH}(C_1, C_j, O_i)$ . After each iteration  $(O_i, C_j)$  are added to AvoidList. Since there are finite obstacles and elements of  $\mathcal{C}_{free}$ ,  $\mathcal{P}$  will add every pair through which there is path from  $C_1$  to  $G$ . Thus if there exists a path that passes through  $C_1, O, C_2$  consecutively then  $\mathcal{P}$  will add  $(O, C_2)$  and therefore HEURISTIC-PLAN will call  $\text{MANIP-SEARCH}(C_1, C_2, O)$ .  $\square$

**Lemma 3.** *If GRAPHCONNECT finds a solution to a NAMO problem, then HEURISTIC-PLAN will find a solution as well.*



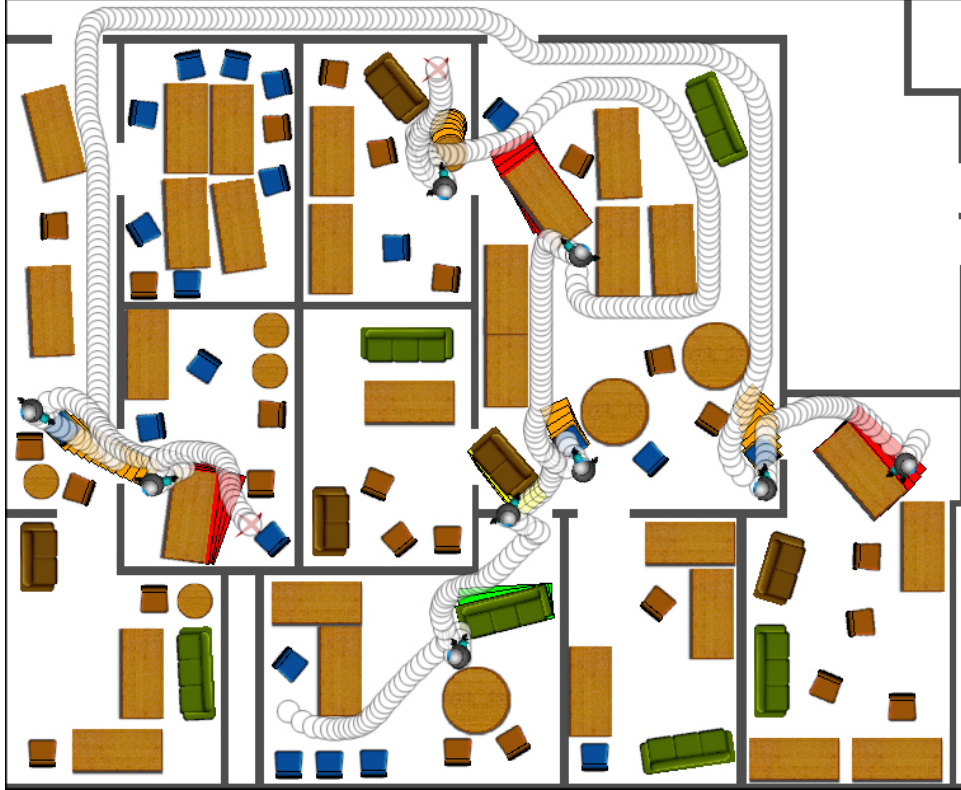


Fig. 8. A larger scale example consisting of 90 movable obstacles. Two separate plans are computed and demonstrated in our dynamic simulation.

**Proof.** Suppose GRAPHCONNECT has found a solution. Then there exists a sequence of connected nodes in  $SFG$  that connects  $S$  and  $G$ . We inductively show that HEURISTIC-PLAN will necessarily find a path before terminating. In the base case,  $S = G$  and  $\mathcal{P}$  will immediately find a solution. Now let  $C_i$  and  $C_j$  be two disjoint free-space components associated with consecutive nodes in the  $SFG$  solution sequence. Assume HEURISTIC-PLAN has found a plan to  $C_i$  from  $S$ . Since  $C_j$  is part of  $SFG$  with an edge from  $C_i$ , there exists an obstacle  $O$  that faces both  $C_i, C_j$ , for which  $MANIP-SEARCH(C_i, C_j, O)$  returns a valid plan. We observe:

$O$  faces  $C_i$  implies that there exists a path  $P_1$  from any point in  $C_i$  to  $O$  that does not enter any other obstacle.  $O$  faces  $C_j$  implies that there exists a path  $P_2$  within  $O$  that enters  $C_j$ . Trivially, there exists some path  $P_3$  from  $C_j$  to the goal.

We conclude that there exists a combined path  $Path_i = (P_1, P_2, P_3)$  from a robot in  $C_i$  to the goal. Furthermore,  $Path_i$  passes through  $C_i, O, C_j$  consecutively. Therefore, when considering  $C_i$ , HEURISTIC-PLAN will evaluate  $MANIP-SEARCH(C_i, C_j, O)$

(Lemma 2). Since we have already established that with these parameters MANIP-SEARCH returns a valid plan, HEURISTIC-PLAN will find a plan from  $C_i$  to  $C_j$  and therefore from  $S$  to  $C_j$  (by the inductive hypothesis). Consequently, by induction HEURISTIC-PLAN will find a plan from  $S$  to  $G$ .  $\square$

**Theorem 1.** HEURISTIC-PLAN is resolution complete for problems in  $LP_1$ .

**Proof.** This result follows directly from Lemmas 1,3. HEURISTIC-PLAN always finds a solution whenever GRAPHCONNECT finds a solution and otherwise reports failure in finite time. Because GRAPHCONNECT is resolution complete, HEURISTIC-PLAN is resolution complete.  $\square$

## 8. Looking Beyond $LP_1$

In our discussion of NAMO problems, we have focused on linear  $LP_1$  domains. The significance of the  $LP_1$  class comes from the inherent topological structure of navigable environments. Conventionally, the free space of these environments is fully connected, leading to the success of human navigation. It is also typical for these environments to contain movable objects that may be displaced due to functional need, natural disturbance or carelessness. Under these circumstances some objects may cause the free space to become disjoint. The goal of an  $LP_1$  planner is to quickly detect these objects and reason about manipulation that will restore the connected topology.

Reasoning about the navigational topology yields two significant benefits. First, we can establish an intuitive class of problems that can be solved by the planner. Additionally, since our planner detects keyholes in the planning problem, further planning can be localized to these keyholes rather than searching the entire space. These two advantages permit us to reduce the difficulty of NAMO problems from the complexity of state space to the complexity of coupling between object motions.

Although addressing motion coupling is a subject for future work, let us briefly glance at this challenge. Figure 9 was formerly presented as a puzzle problem that could not be solved by the CH planner.<sup>21</sup> CH greedily connects  $C_2$  by pushing the couch and immobilizes the table. Nevertheless, topologically this problem does not enforce a coupling between the couch and table. Choosing to first connect  $C_3$  naturally leads to a solution. The existence of a sequence of free space components that can be connected independently ( $C_1, C_3, C_2, C_4$ ) makes Figure 9 an  $LP_1$  problem.

Figure 10 is similar in spirit to Figure 9. In this case, however, solving the first keyhole necessarily leads to a scenario in which no single object can be moved to connect the final free space component. The planner must coordinate the motion of two objects to resolve the second keyhole. Coupling between the solutions makes this problem  $LP_2$ . The difficulty of a NAMO problem rises with the quantity of objects that must be considered in resolving a particular keyhole. Figure 11 (a) shows an example where only the couch separates the robot from the goal. However, all

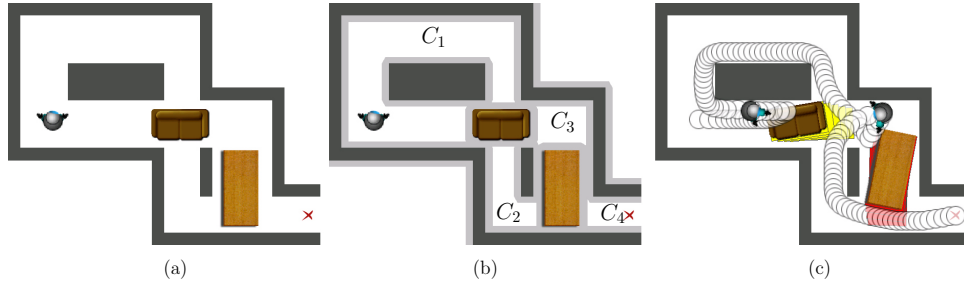


Fig. 9. (a) is not solved by Chen'91 and considered difficult. (b) illustrates the  $\mathcal{C}$ -space. In (c), our planner finds a solution in under a second.

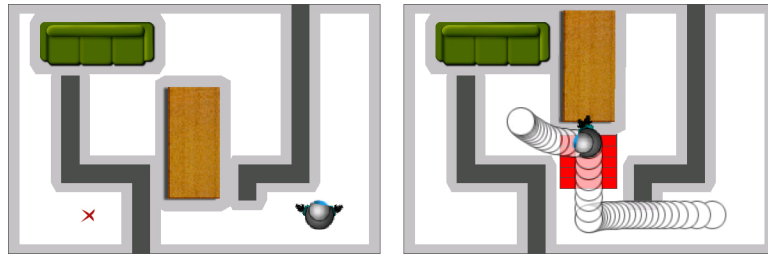


Fig. 10. An interesting example of an  $LP_2$  problem. The keyhole solutions are independent only if both objects can be manipulated in solving the second keyhole.

four objects must be manipulated to fulfill the desired motion. Consequently, this problem is in  $LP_4$ .

When first describing the NAMO domain we discussed the exponential rise in problem complexity due to the introduction of any object. Hence it is meaningful to begin planning conservatively. For instance, one might first determine whether or not the problem is  $LP_1$ . When a solution cannot be found, objects that interfere with the solution can then recursively be brought into consideration. In other words, one would plan motions for objects that preempt the desired motion strategy. For instance, in Figure 10(a), we would acknowledge that the chairs and table preempt the motion of the couch and plan their individual motions that open the desired volume of space. Future work along these lines will likely benefit from rearrangement planning techniques.<sup>17,20</sup>

In addition to reducing the quantity of objects that needs to be considered for manipulation, we note another factor that leads to problem complexity: inner coupling between object motions. When solving Figure 10 and 11(a) one might try to find independent paths for obstacles that can be sequenced towards a solution.<sup>19</sup> However, even for  $LP_2$  problems this may prove impossible. Figure 11(b) effectively conveys the necessity for intermediate obstacle configurations. The robot will need to alternate pulling the obstacles in order to achieve the final result. To distinguish

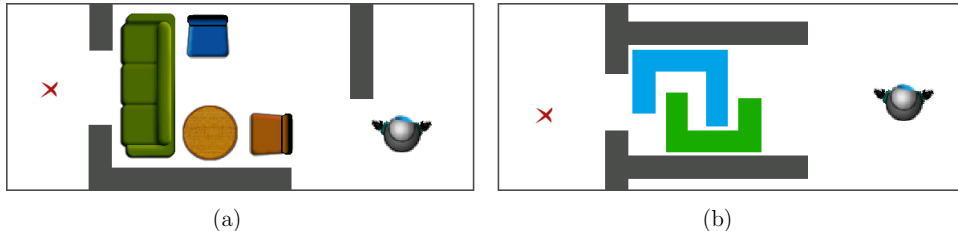


Fig. 11. (a) illustrates an  $LP_4$  problem. (b) shows that even an  $LP_2$  problem can have significant coupling between the object motions.

this challenge from that of obstacle quantity, we extend the problem definition to  $LP_k C_m$ . The parameter  $k$  refers to the maximum number of obstacles that must be moved to resolve a keyhole.  $m$  is the maximum number of intermediate obstacle configurations that is required.

## 9. Discussion

The problem of Navigation Among Movable Obstacles takes a step towards autonomous robot interaction with complex unstructured environments such as those involved in urban search and rescue applications. One direction of relevant research is the development of robust mechanisms and controls that allow for safe navigation and environment manipulation. In our work, we develop algorithmic solutions that can utilize the dexterity of such mechanisms by formulating real-time high-level manipulation strategies. In particular, such plans should allow robots to reconfigure their environments and solve difficult navigation tasks.

Although NAMO problems involving large numbers of obstacles are practically intractable for traditional AI planning algorithms, these are problems that humans solve regularly with relative ease. We observe that even *seemingly unstructured* environments contain significant structural components that humans take advantage of. The primary contribution of our work is the development of a planning methodology that utilizes an intuitive decomposition of the NAMO state-space, as well as the underlying structure of the navigation problem. The theoretical ideas introduced in this paper have been realized in the form of a heuristic motion planner that is resolution complete for a well defined subclass of NAMO problems. We experimentally demonstrated that such a planner can be implemented to efficiently solve relatively complex NAMO problems. In addition, the modular structure of the planning tools developed in this work yields an adaptable basis for future developments in robot/environment interaction.

In the class of  $LP_1$  problems solved by our planner, many questions remain for future research. For implementing our algorithm on an actual robot, we would need to address the effects of partial observability in both the static structure and the dynamics of the environment. One interesting direction of study will be the automated discovery of movable objects and their dynamic properties. Additionally, though navigation is generally planar, three-dimensional contact placement and

large object grasping should be considered. Furthermore, the problem of selecting the most practical action space for a robot that can affect its environment remains an open and fascinating topic for research.

In terms of planning, future work should address larger classes of NAMO problems. These include consideration for obstacles that do not directly disconnect the state-space but interfere with the motions to reconnect it. Three-dimensional effects due to object stacking and partial support should also be considered. It is possible that rearrangement planning methods that find intermediate obstacle configurations could be used to complement our algorithm after the search has been narrowed to smaller sets of relevant movable objects. We expect that rigorous study of these and other methods for state-space decomposition will lead to future progress in the capabilities of humanoid robots that includes a greater capacity for human-like reasoning in complex domains.

### Acknowledgements

We thank C. G. Atkeson for his helpful advice and support. We are grateful to S. Siddiqi for many discussions and his contribution to the planning simulation. This research was partially supported by NSF grants DGE-0333420, ECS-0325383, ECS-0326095, and ANI-0224419.

### Appendix A. Dynamic $\mathcal{C}$ -space Modification

The two algorithms described in our work make judicious use of the MANIP-SEARCH( $C_1, C_2, O$ ) routine as defined in Section 6.2. MANIP-SEARCH is required to search the available robot action space in manipulating  $O$  (Section 5). The search should terminate when  $\mathcal{C}_{free}$  contains a path for the robot to transition from  $C_1$  to  $C_2$ . Conceptually this is a clear objective that can easily be extended to higher dimensional spaces. In terms of implementation, however, deciding whether the goal has been satisfied is an interesting challenge.

Suppose the robot applies action  $a$  to obstacle  $O$ . We need to quickly determine whether a path ( $C_1, C_2$ ) exists. In terms of implementation and computational difficulty it seems daunting to formulate/maintain a complex model of all  $C_i$ . We avoid this by depicting the entire  $R_{COM}$   $\mathcal{C}$ -space as a planar grid, where  $\mathcal{C}$ -space obstacles are represented by rasterizing their perimeter.<sup>26</sup> Since the robot embodies a cell in the  $\mathcal{C}$ -space, we can trivially test for connectivity between  $C_1$  and  $C_2$  by locally searching for a path between any two grid cells  $p_1 \in C_1$  and  $p_2 \in C_2$ .

We are left with the problem of updating the  $\mathcal{C}$ -space in a way that would facilitate goal testing. Updating the discrete grid involves rasterizing the perimeter of the obstacle in its original configuration to *remove* it, and rasterizing it again in the new configuration. The difficulty lies in the fact that  $\mathcal{C}$ -space obstacles can overlap. *Removing* an obstacle requires us to clear the cells that belong to the obstacle. Due to overlap, however, a single grid cell may belong to more than one obstacle and should not be cleared when only one obstacle is removed. A simple binary grid provides no tools for determining if there are other objects occupying a given cell.

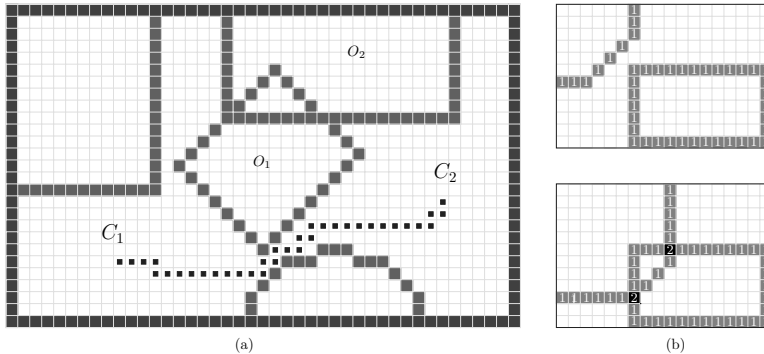


Fig. 12. (a) coarsely depicts a grid implementation of  $R_{COM}$   $\mathcal{C}$ -space. A free path is illustrated confirming the connectivity of  $C_1, C_2$ . Notice that  $O_1$  and  $O_2$  have overlapping projections in  $\mathcal{C}$ . (b) shows an update of dynamic  $\mathcal{C}$ -space by obstacle reference counting.

A naive approach to this problem can be highly inefficient. Maintaining lists of obstacles for each grid cell can add another dimension to the  $\mathcal{C}$ -space. Alternatively, testing other obstacles for inclusion involves unnecessary search.

We solve this problem as follows: rather than maintaining a binary grid to represent the  $\mathcal{C}$ -space, we keep an integer grid. Each cell is represented by a counter of the number of obstacles to which it belongs. *Removing* an obstacle decrements the cell counters during rasterization, and *adding* the obstacle increments them. The robot can then reach all accessible cells of 0 count. This algorithm requires no added complexity in implementation and allows us to perform  $\mathcal{C}$ -space updates in time linear to the perimeter of the manipulated obstacle.

Our current implementation and description rely on local search to test for connectivity. It is also possible to encode more information into grid cells to indicate the bordering component of free space. During rasterization, a simple verification procedure to detect free space opening may replace the search.

## References

1. A. Wolf, H. Ben Brown Jr., R. Casciola, A. Costa, M. Schwerin, E. Shamma, and H. Choset. A mobile hyper redundant mechanism for search and rescue task. In *Proc. IEEE/RSJ Intl. Conf. on Intelligent Robots and Systems*, pages 2889–2895, 2003.
2. G. Wilfong. Motion panning in the presence of movable obstacles. In *Proc. ACM Symp. Computat. Geometry*, pages 279–288, 1988.
3. E. Demaine and et. al. Pushpush and push-1 are np-complete. Technical Report 064, Smith, 1999.
4. J. H. Reif and M. Sharir. Motion planning in the presence of moving obstacles. In *Proc. 26th Annual Symposium on Foundations of Computer Science*, pages 144–154, 1985.
5. D. Hsu, R. Kindel, J. C. Latombe, and S. Rock. Randomized kinodynamic motion planning with moving obstacles. In *Workshop on the Algorithmic Foundations of Robotics*, 2000.
6. Oliver Brock and Oussama Khatib. Elastic strips: Real-time path modification for mobile manipulation. In *International Symposium of Robotics Research*, pages 117–

122. Springer Verlag, 1997.
7. K. M. Lynch and M. T. Mason. Stable pushing: Mechanics, controllability, and planning. *Int. Journal of Robotics Research*, 15(6):533–556, 1996.
  8. M.T. Mason. *Mechanics of Robotic Manipulation*. MIT Press, 2001.
  9. R. Alami, J.P. Laumond, and T. Siméon. Two manipulation planning algorithms. In *Workshop on the Algorithmic Foundations of Robotics*, 1994.
  10. T. Simeon, J. Cortes, A. Sahbani, and J.P. Laumond. A manipulation planner for pick and place operations under continuous grasps and placements. In *Proc. IEEE Int. Conf. on Robotics and Automation*, 2002.
  11. N. Pollard and J.K. Hodgins. Generalizing demonstrated manipulation tasks. In *Workshop on the Algorithmic Foundations of Robotics*, 2002.
  12. K. Harada, S. Kajita, K. Kaneko, and H. Hirukawa. Pushing manipulation by humanoid considering two-kinds of zmps. In *IEEE Int. Conf. on Robotics and Automation*, pages 1627–1632, 2003.
  13. K. Okada, A. Haneda, H. Nakai, M. Inaba, and H. Inoue. Environment manipulation planner for humanoid robots using task graph that generates action sequence. In *IEEE/RSJ Int. Conf. on Intelligent Robots and Systems (IROS'04)*, pages 1174–1179, 2004.
  14. M. Stilman and J.J. Kuffner. Navigation among movable obstacles: Real-time reasoning in complex environments. In *Proc. IEEE Int. Conf. on Humanoid Robotics (Humanoids'04) <http://www.golems.org/NAMO>*, 2004.
  15. M. H. Goldwasser and R. Motwani. Complexity measures for assembly sequences. *Int. J. of Computational Geometry and Applications*, 9:371–418, 1999.
  16. R. Wilson. *On Geometric Assembly Planning*. PhD thesis, Department of Computer Science, Stanford University, 1992.
  17. O. Ben-Shahar and E. Rivlin. Practical pushing planning for rearrangement tasks. *IEEE Trans. on Robotics and Automation*, 14(4):549–565, 1998.
  18. A. Junghanns and J. Schaffer. Sokoban: A challenging single-agent search problem. In *IJCAI Workshop on Using Games as an Experimental Testbed for AI Research*, pages 27–36, 1997.
  19. Thomas Chadzelek, Jens Eckstein, and Elmar Schömer. Heuristic motion planning with many degrees of freedom. Technical Report FB14-95-08, Universität des Saarlandes, August 1995.
  20. J. Ota. Rearrangement of multiple movable objects. In *IEEE Int. Conf. Robotics and Automation (ICRA)*, pages 1962–1967, 2004.
  21. P.C.Chen and Y.K.Hwang. Practical path planning among movable obstacles. In *Proc. IEEE Int. Conf. Robot. Automat.*, pages 444–449, 1991.
  22. Andrew T. Miller. *GraspIt: A Versatile Simulator for Robotic Grasping*. PhD thesis, Department of Computer Science, Columbia University, 2001.
  23. R. Pelossof, A. Miller, P. Allen, and T. Jebara. An svm learning approach to robotic grasping. In *IEEE Int. Conf. Robotics and Automation (ICRA)*, pages 3215–3218, 2004.
  24. D. G. Thelen. Adjustment of muscle mechanics model parameters to simulate dynamic contractions in older adults. *Journal of Biomechanical Engineering*, 125:70–77, 2003.
  25. T. Lozano-Perez. Spatial planning: a configuration space approach. *IEEE Trans. Comput.*, pages 108–120, 1983.
  26. J. Lengyel, M. Reichert, B.R. Donald, and D.P. Greenberg. Real-time robot motion planning using rasterizing computer. *Computer Graphics, ACM*, 24(4):327–335, 90.



**Mike Stilman** received his B.S. in Mathematics and M.S. in Computer Science from Stanford University in 2003. He is currently a Ph.D. student at the CMU Robotics Institute. His interests include Humanoid Robotics, Motion Planning and Control, particularly in high dimensional spaces. He aims to develop algorithms that complement robot control with automated reasoning and abstraction.



**James J. Kuffner** received his B.S. and M.S. in Computer Science from Stanford University in 1993 and 1995, and his Ph.D. from the Stanford University Dept. of Computer Science Robotics Laboratory in 2000. He was a Japan Society for the Promotion of Science (JSPS) Postdoctoral Research Fellow at the University of Tokyo from 1999 to 2001. He is currently an Assistant Professor at the CMU Robotics Institute, and an AIST Fellow at the Digital Human Research Center (AIST) in Tokyo, Japan.