

International Journal of Recycling of Organic Waste in Agriculture (2021)10: 175-184
Doi: 10.30486/IJROWA.2021.1900853.1081

ORIGINAL RESEARCH

Physico-chemical changes and maturity evaluation of composts from wood residue mixed with sewage sludge and chicken manure

Mohammad Hossein Saghi¹, Payam Ghorbannezhad^{2*}, Abotaleb Bay³, Farangis Saeidi⁴

Received: 03 June 2020 / Accepted: 13 April 2021 / Published online: 30 May 2021

Abstract

Purpose Using the effective approaches for modifying the recycled wood as a novel bulky agent improves the quality of soil amendment. This study aimed to compare the stability and maturity of the soil amendments produced by the compostation of forest industrial waste and sewage sludge on seed germination.

Method Three materials, namely sawdust, sewage sludge, and chicken manure were mixed at different ratios (dry weight basis) to reach the initial bulk density of 0.40 Kg.L⁻¹, the temperature of 30 °C, the C/N ratio of 25, and the moisture content of 60 %. A pilot-scale composting process was applied to monitor the aeration rate, temperature, and moisture contents during the process over time. The comparison of physico-chemical, phytotoxicity, and germination indices among the samples was performed in three repetitions.

Results The results of this study indicated that the sustainable conditions (i.e., the temperature of 70 °C, aeration rate of 0.30 L.Kg⁻¹DM.min⁻¹, and moisture content of 50-60 %) can have a significant effect on the thermophilic stage for compost curing without any inhibitory repercussion. Increasing the germination index of cress (*Lepidium sativum*) up to 79 % proved that the toxicity of industrial sewage sludge was declined through the elimination of heavy metals.

Conclusion This study revealed that the availability of bulky agents such as wood residue can reinforce the microbial activity by continuously decreasing the C/N ratio to the minimum value of 13.2.

Keywords Wood residue, Industrial sewage sludge, Co-composting, Phytotoxicity, Germination Index

Introduction

Forest residue valorization is becoming a promising issue due to the socio-economic status emanating from the reuse of waste and residues. Most of the forest industrial wastes are abundant without any appropriate utilization, which causes an increase in environmental risks in developing countries. The Iranian industrial

forest sector generates more than 50000 tons of wood residue and 35000 tons of wastewater sludge annually (Ghorbannezhad et al. 2016). The modification of environmental obligations relating to industries has led to the assignment of significant attention to the construction of wastewater treatment plants and implementation of the waste management program in Iran since recent decades (Ghorbannezhad et al. 2011). The biodegradability and high moisture content of industrial wastes ensure the necessity of converting forest residues into soil amendments and fertilizers. Forest residue such as wood waste and sewage sludge is a crucial source of organic matter and nutrients (Lee et al. 2018; Li et al. 2018; Mahon et al. 2017). It is essential to develop an eco-efficient technique for valorizing biomass wastes (de Souza Machado et al. 2018). Composting is applied as an attractive method for converting organic matter into sanitized products in the soil under aerobic

✉ Payam Ghorbannezhad
p_ghorbannezhad@sbu.ac.ir

¹ Department of Environmental Health Engineering, Sabzevar University of Medical Science, Sabzevar, Iran

² Department of Biorefinery Engineering, Faculty of New Technologies Engineering, Shahid Beheshti University, Tehran, Iran

³ Environmental Health Research Center, Golestan University of Medical Sciences, Golestan, Grogan, Iran

⁴ Student Research Committee, Sabzevar University of Medical Sciences, Sabzevar, Iran

conditions (Meena et al. 2016; Alvarenga et al. 2015). The thermophilic stage is a suitable way to convert organic matter by means of mineralization and humification (Chang et al. 2017; Lim et al. 2016). However, the hygienic instability, immaturity of sewage sludge, and pathogenic microorganism are compensated for during the thermophilic conditions of composting (Jara-Samaniego et al. 2017). To achieve an appropriate compost maturity, several fundamental factors like temperature, moisture content, C/N ratio, particle size, and pH level should be controlled (Ge et al. 2015; Onwosi et al. 2017; Kim et al. 2016).

The optimum conditions for the fabric preparation and composting processes are under investigation to ensure the compost stabilization and maturity (Brandon et al. 2018; Yang et al. 2018; Weithmann et al. 2018). In this regard, Brewer and Sullivan (2003) have reported that the lack of plant growth arises due to the decline of oxygen availability and it results in the inappropriate biodegradation of organic matter. The high-temperature support to convert to NH_3 leads to the inhibition of nitrification (Nigussie et al. 2017). The temperature of ammonia volatilization will increase during the composting process by around 70 °C (Nigussie et al. 2017). Aeration rate plays a vital role in controlling the temperature, moisture content, emissions, and supplying sufficient oxygen for the biological process (Zhang et al. 2016). To obtain the conventional composting, it is of importance to adjust the oxygen supply from the aeration system where the heterogeneity noticeably enhances the quality of compost (Faverial et al. 2016; Rasapoor et al. 2016; Shen et al. 2011).

Carbon (C) and nitrogen (N) are the fundamental materials for building the microbial cells and the synthesis of protein (Sweeten and Auvermann 2008). The seed germination (SG) is affected by the C/N ratio and inevitably the final product costs (Prasad et al. 2010). Carbon is the most dominant compound of microorganism cells and nitrogen is a required element for the microbial growth and recreation of protein construction. The consumption of bulking agents and the compost expenditure are declined by the low C/N ratio (Zhu 2007). Notwithstanding, the need for the stability and maturity of the ultimate compost should be explored to assure a low C/N ratio (Bernal et al. 2009). The low initial C/N ratio and the low amount of bulking agent lead to the successful production of high-quality composting (Zhu 2007). The moisture content is determined as an important parameter that allows the transport of

the dissolved nutrients in order to enhance the metabolic liveliness of microorganisms during the composting process (Petrica et al. 2009). However, physical criteria can determine the compost quality, which can be defined by the compost stability and maturity (Bernal et al. 2009).

The analysis of biological stability firmly depends on the phytotoxicity due to the microbial activity of organic matter for producing phytotoxic compounds. The stability and maturity of bio-compost have been investigated in a pilot study (Oviedo-Ocana et al. 2015). The results indicated that there is no significant correlation between the suggested criteria. It was also reported that the appropriate biological degradation happened during the aerobic bio-stabilization when both stability and maturity were taken into account at the same time. Hence, recognizing the process parameters and implementing the corrective conditions have led to access to high-quality compost. Consequently, the effective approach relies on efficient as well as cost-effective practical operations.

To date, few studies, if any, are found about the optimum condition of co-composting industrial wastes because of the complex interaction of process parameters. Thus, the aim of this study was to investigate the effect of physico-chemical criteria on the characterization of stability and maturity of co-composting from industrial wastes in an *in-situ* reactor. Industrial wastes such as wood residue and sewage sludge are characterized by high-reach carbon and low-density materials, which can make them suitable as a bulking agent during the composting.

Materials and methods

Feedstock preparation and collections

The wood residue was collected from a wood-based industry located in the north of Iran, Golestan Province. The chicken manure was also obtained from a local farmland around the factory. The company generates around 35 tons of biomass from production lines on a daily basis. The wood residue categories are placed in two groups: the wood that was generated with chipper instruments and did not contain the resin and the other group of woods that is impregnated with resin. Moreover, the C/N ratio of 11.5 and moisture content of 87 % was obtained for the dewatered sewage sludge associated with the wastewater treatment plant. The charac-

terization of wastewater treatment is presented in Table 1 and the design of the wastewater treatment plant is illustrated in Fig. 1.

The primary influence of manufacturing wood-based wastewater was subjected to lagoons due to the settlement of the large molecular organic matters and

their transference to a storage tank. In this process, the wastewater is regularly injected into other processes such as anaerobic, aerobic, and post-treatment, respectively. The removal efficiencies of wastewater pollutants generate sewage sludge which is potential for being reused as novel products in wood-based manufacturing.

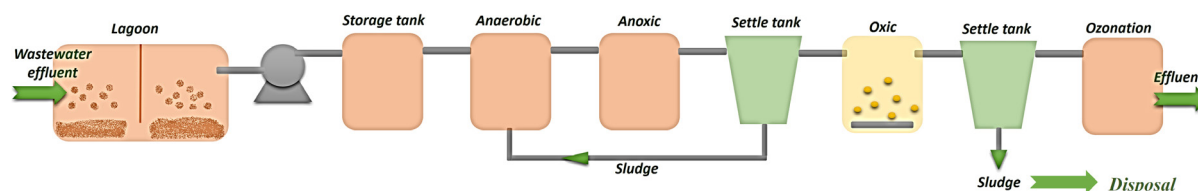


Fig. 1 Design of wood-based wastewater treatment plant

Table 1 Characteristics of untreated wastewater generated from wood-based composite mill

| Some characteristics of untreated wastewater | | | | | |
|--|------------|------------|-----------------|------------|------------|
| COD (mg/l) | BOD (mg/l) | TSS (mg/l) | Turbidity (NTU) | TS | pH |
| 4800 ± 150 | 1700 ± 37 | 4500 ± 115 | 3500 ± 64 | 5250 ± 180 | 5.5 ± 0.07 |

Composting experimental pilot-scale setup

Several treatments have been designed to consider the influence of physico-chemical changes on composting stability and maturity (Table 2). Three materials, including sawdust, sewage sludge, and chicken manure were

mixed at different ratios (dry weight basis) to reach the initial bulk density of 0.40 Kg.L⁻¹, the temperature of 30 °C, the C/N ratio of 25, and moisture content of 60 %. According to the related literature, the continuous aeration was set at 0.30 L.Kg⁻¹DM.min⁻¹ and measured every day (Talib et al. 2014).

Table 2 Characterization of materials before the start of treatments

| Parameters | Control Sample (C) | Mixture 1 (SWIR) | Mixture 2 (SW) | Mixture 3 (SWC) |
|------------|--------------------|------------------|----------------|-----------------|
| MC% | 62 ± 0.5 | 71 ± 1.15 | 69 ± 0.8 | 65 ± 0.8 |
| pH | 7.1 ± 0.01 | 7.7 ± 0.01 | 7.3 ± 0.01 | 7.5 ± 0.01 |
| TOC (%) | 43.1 ± 0.35 | 41.9 ± 0.3 | 44.9 ± 0.35 | 48.5 ± 0.35 |
| OM (%) | 77 ± 0.3 | 75 ± 0.55 | 79 ± 0.45 | 83 ± 0.4 |
| TKN (%) | 1.73 ± 0.05 | 1.75 ± 0.1 | 1.8 ± 0.06 | 1.93 ± 0.06 |
| C/N | 24.91 ± 1.05 | 23.97 ± 1.75 | 24.96 ± 1.5 | 25.1 ± 1.5 |

Control Sample (Wood residue; 100 wt%) = C; Sewage Sludge (60 wt%) + Wood residue impregnated with resin (40 wt%) = SWIR; Sewage Sludge (60 wt%) + Wood residue without resin (40 wt%) = SW; Sewage sludge (60 wt%) + Wood residue without resin (30 wt%) + Chicken manure (10 wt%) = SWC

A full pilot-scale setup was designed to operate the composting under the adjusted conditions. To this end, four reactors were taken into consideration to operate four treatments simultaneously. The schematic view of the pilot-scale is depicted in Fig. 2. The air store conducted the airflow rate of 0.30 L.Kg⁻¹DM.min⁻¹ which was dispensed from the bottom of an air compressor. The airflow rate was controlled by an airflow meter and

pressure regulator during the composting procedure. To obtain the homogenous compost and keep the sustainable oxygen level, the composting piles were circulated regularly (once every 3 days) for three months. The primary curing was set up to form the bio-cell with aeration for 35 days and to transfer it to a static pile system for secondary curing around 55 days.

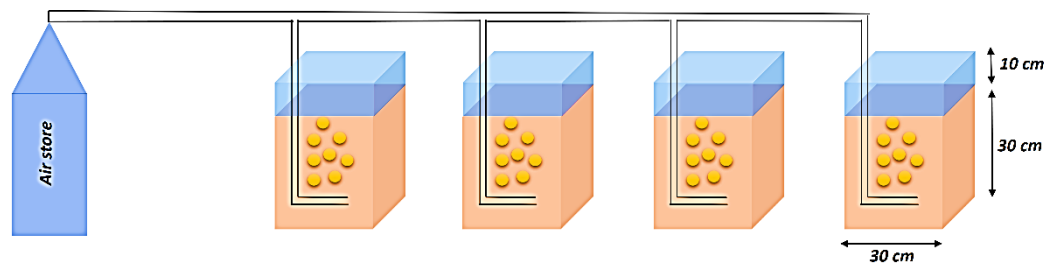


Fig. 2 Schematic view of the pilot-scale composting pile

The comparison of physico-chemical and phytotoxicity analyses among control sample (C; 100 wt% of Wood residue); SWIR (Sewage Sludge (60 wt%) + Wood residue impregnated with resin (40 wt%); SW (Sewage Sludge (60 wt%) + Wood residue without resin (40 wt%); and SWC (Sewage sludge (60 wt%) + Wood residue without resin (30 wt%) + Chicken manure (10 wt%)) was performed in three repetitions.

Physico-Chemical and Phytotoxicity analyses

The sample was oven-dried at the temperature of 105 °C to constant weight for measuring the moisture content (MC %). Then, the pH was evaluated after aqueous compost to distilled water in the ratio of 1:10 (w/v) by means of a benchtop pH meter. The incineration of the sample was done at a temperature of 550 °C for 5 hours in a furnace (Ghorbannezhad et al. 2018). Thereafter, the elemental analysis was performed for measuring the content of C, H, N, and S by VaroElcube, Elementary from Germany. The subtraction of the C, H, N, and S summation from 100 was recognized as the oxygen content of the treated compost (O). The total organic carbon (TOC) was estimated based on the Chinese national standard (NY 525-2002). Moreover, the total Kjeldahl nitrogen (TKN %) was measured as in the method described by Nejabat et al. (2017). The division of TOC (%) by TKN (%) was ascertained by the C/N ratio. The P and K were measured by colorimetric and flame photometry analyzers, respectively. The use of inductively coupled plasma mass spectrometry makes it possible to analyze the trace metallic elements (Cu, Cd, Zn) as well as mineral elements (Mn, Fe).

To determine the germination index (GI) of cress (*Lepidium sativum*) by the phytotoxicity test, one gram of aqueous compost was mixed with 10 ml of distilled water, and then it was shaken for 1 h. The mixture was centrifuged at 4000 rpm for 20 min and filtered by 45

µm membrane filters. The root length was measured after incubation at 25 °C in a dark room for three days. The GI was calculated as follows:

$$GI = \frac{\text{Seed germination of treatment (\%)} \times \text{root length of treatment}}{\text{seed germination of control (\%)} \times \text{root length of control}} \times 100 \quad \text{Eq. (1)}$$

The one-way analysis of variance (ANOVA) was run to analyze the data and a significant difference was observed by LSD-t-test. Pearson's correlation coefficient test was also used to analyze bivariate correlation and determine the empirical relationship of variables. In doing so, SPSS 19 was used for statistical analysis.

Results and discussion

Assessment of composting parameters

The temperature of treatments was systematically enhanced within the first week up to the thermophilic stage (more than 55 °C). The maximum temperature (over 65 °C) was achieved in the third week and then the temperature was rapidly declined on the 25th day (Fig. 3a). It was observed that it took a long time to increase the temperature for non-treatment samples. Moreover, the peak temperature was lower in non-treatment compost, whereas the highest temperature was observed at 42 °C compared to the mixture of wood residue and sewage sludge that the maximum temperature was 70 °C. It was shown that the addition of sewage sludge had no inhibitory influence on the temperature boosting during composting. The temperature was proved to play a critical role in the succession of microbial activities and resulted in the biodegradation rate of the compost (Wang et al. 2017). Substrates show the expected biodegradation consequence of favorable microbial operations at thermophilic conditions (Meng et al. 2017). The sewage sludge, as an herbaceous substrate, enables the reinforcement of the degradation because it contains

higher and easily biodegradable compounds (Zittel et al. 2018). Zhong et al. (2018) indicated that biomass residues make it possible to produce a qualified compost with a low C/N ratio at higher temperatures and in longer thermophilic phases. The authors suggested that the physical and chemical properties of compost would be improved by using the materials containing effective microorganisms like peat.

The final compost revealed that the moisture content is a parameter that exerts a significant effect on microbial activities. At the outset of the composting process, the moisture content was approximately 69 % while it dropped gradually until 25 days (Fig. 3b). To adjust a constant range of moisture content (50-60 %), water was added to the compost on days 5, 9, and 17.

The thermophilic stage led to the evaporation of water because of heat generation through microbial actions (Gomez-Brandon et al. 2008). Moreover, the aeration can strengthen this evidence whereas the addition of water not only increases the moisture contents but also improves nitrogen conservation during the composting process (Chang et al. 2016; Diaz and Savage 2007). In this regard, it has also been proved that biological activities should be stopped to stabilize the compost matter by keeping the moisture content at a low content (around 30 %). In fact, the indication of organic matter decomposition led to a continuous decrease in moisture content during the composting process (Guerra-Rodriguez et al. 2003). At the end of the composting process, the moisture contents decreased to 35 %.

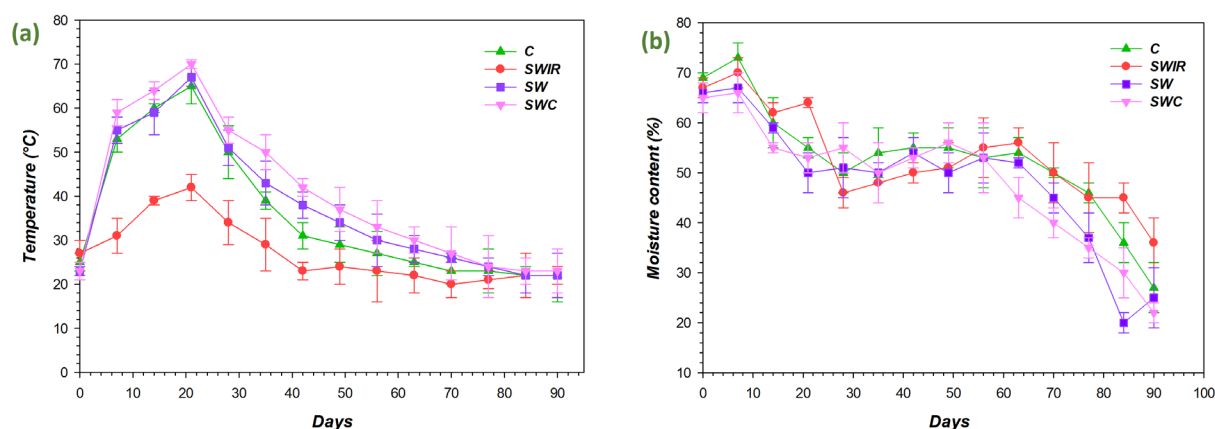


Fig. 3 Variation of temperature (a) and moisture contents (b) during the composting process

In Fig. 4, it has been shown that the pH has changed over the composting progress. Moreover, a short-term decrease was illustrated in the first few days and it was followed by a long cyclic increase. Ivankin et al. (2014) reported that the pH changes are associated with the degradation of organic matter for producing organic acids. The addition of sewage sludge could increase the pH through buffer characterization and the neutralization of the acid compounds (Yuan et al. 2016). Yin et al. (2018) reported that there is a correlation between pH value and the C/N ratio. The increase of pH value led to the increase of microbial activities and, consequently, the ammonia emissions increased. The results of this study revealed that the pH value decreased at the start of the composting process while adding sewage sludge enhanced the decomposition of organic matters and temperature. As a result, the ammonia emissions experienced a dramatic increase.

Characterization and phytotoxicity analysis

The C/N ratio initially increased, but it then decreased rapidly in a continuous pace to reach a maximum of 13.2. It is confirmed that with the reduction of the C/N ratio, the nitrogen content increases by an average of 2.9 % at the final product (Table 3). The fluctuation trend of carbon content was dependent on the CO₂ emission during carbon mineralization at the curing stage (Zhou et al. 2018). The denitrifying bacteria are responsible for nitrogen loss with the addition of carbon sources to the sewage sludge composting. Thus, the incorporation of bacteria was associated with the immobilization of and resulted in the acceleration of nitrogen loss and, thereby, the soil amendment was enhanced. The addition of bulky agents and carbon sources such as wood residue noticeably increased the nitrifying bacteria at the mesophilic stage. On the other hand, the availability of inhib-

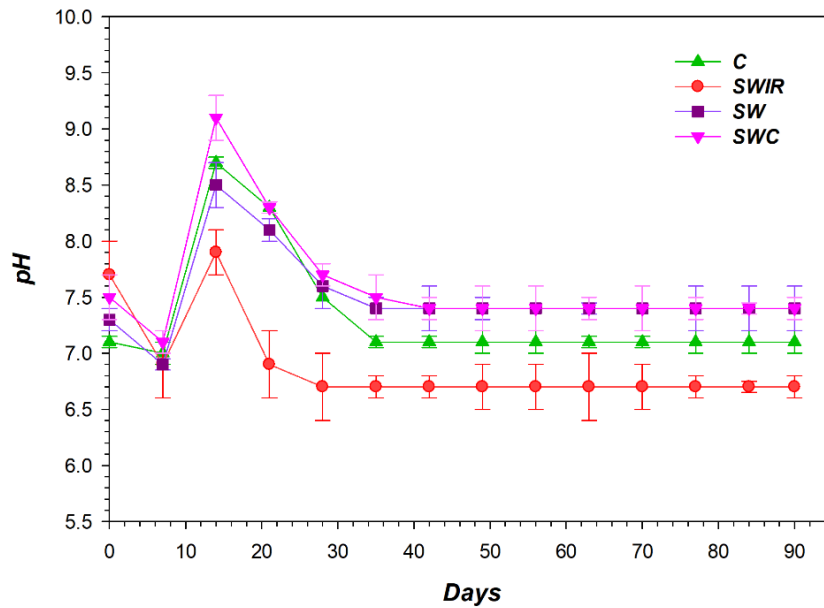


Fig. 4 Properties of pH changes during the composting process

itors such as resin leads to the eradication of mesophilic bacteria during composting. Therefore, the promotion of ammonia incorporation and nitrifying bacteria was closely related to carbon sources during the composting process. With the degradation of organic compounds,

organic nitrogen was formed. The ammonia was also oxidized into (by the mineralized aeration system. Finally, the denitrification of microorganisms reduces the to N_2 gas under anaerobic conditions (Wang and Zeng 2018).

Table 3 The amount of C/N ratio of different composting mixtures on different days

| Days | C/N ratio | | | |
|------|--------------------|------------------|----------------|-----------------|
| | Control Sample (C) | Mixture 1 (SWIR) | Mixture 2 (SW) | Mixture 3 (SWC) |
| 5 | 25.7 ± 1.8 | 24.6 ± 2.4 | 25.3 ± 2.2 | 26.1 ± 2 |
| 15 | 22.7 ± 1.5 | 22.6 ± 2.2 | 21.3 ± 2.1 | 20.2 ± 1.5 |
| 30 | 20.4 ± 1.6 | 21.7 ± 2.1 | 19.1 ± 1.7 | 16.3 ± 1.6 |
| 45 | 16.8 ± 1.7 | 20.5 ± 1.9 | 13.7 ± 1.9 | 12.4 ± 0.7 |
| 60 | 13.5 ± 0.9 | 15.7 ± 1.4 | 10.1 ± 1.3 | 9.8 ± 0.5 |
| 90 | 10.8 ± 0.6 | 13.2 ± 1.1 | 8.7 ± 0.5 | 7.7 ± 0.4 |

It is observed that the available impurities such as resin and plastic waste can strongly disturb the microbial efficiency. Nevertheless, mixing the bulky materials fulfilled the compost quality (Table 3). According to Table 4, the variation of Cd, Cu, Mn, and Fe indicated the metal loss during composting. The comparison of the initial value of total P and K (1.23 % and 0.96 %) reveals that their content increased in the final product (1.53 % and 1.16 %). The enhancement of TP and TK contents confirmed that the concentration effect is responsible for these events simultaneously where there is a higher rate of car-

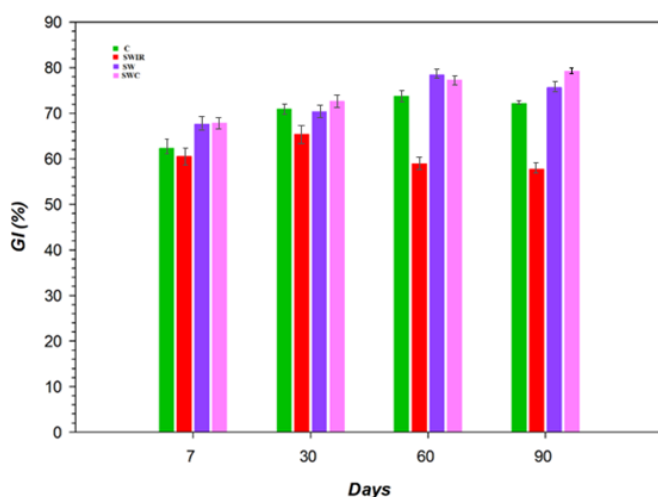
bon loss than that of the P, K during the composting process. Although the degradation of organic compounds may lead to the concentration of metals, the addition of sewage sludge causes the reduction of heavy metals in the final composting product because of its leaching during the composting process (Cesaro et al. 2019; Kebibeche et al. 2019). Moreover, the increase of soil pH restricts the heavy metals aggregation; and phytotoxic substrates in the soil improves the degradation rate and depletion of heavy metals retentions (Hazarika et al. 2017).

Table 4 Characterization of compost regards to Iranian Standard of soil regulations

| Parameters | Value | Threshold Limit Value |
|------------|-------|-----------------------|
| MC(%) | 22 | ≤ 50 |
| pH | 7.4 | 6.5-8.5 |
| TOC (%) | 14 | NA |
| OM (%) | 23.5 | NA |
| TKN (%) | 1.83 | ≤ 5 |
| C/N | 7.7 | ≤ 25 |
| TP (%) | 1.53 | 1-5 |
| TK (%) | 1.16 | 0.5-5 |
| Mn (ppm) | 25.7 | 15-25 |
| Fe (ppm) | 2169 | 2000-3000 |
| Cd (ppm) | 0.69 | ≤ 1.5 |
| Cu (ppm) | 29.55 | ≤ 200 |
| Zn (ppm) | 176.9 | ≤ 600 |
| GI (%) | 79.2 | ≤ 55 |

The evaluation of the germination index (GI) showed that there is an effective difference between the treated sample and non-treated compost in GI. The trend of GI showed that the phytotoxic parameter positively influences the plant growth. The difference of GI represents that the effect of bulky agents on the phytotoxicity results in the maturity and stability of the compost. In the same way, the experimental analysis indicated that the maximum GI of 79 % was obtained by mixing the sewage sludge and chicken manure, which indicates the maturity of sewage sludge compost. The germination index indeed increased over 63 days and then it came to a decreasing state (Fig. 5). Increasing the germination index implies the absolute effect of adding bulky agents and sewage sludge on the compost maturity and stability under the optimum processing conditions. The low

germination index at the beginning of the composting process is connected to inhibitors such as the biological decomposition of microbial microorganisms (Kazemi et al. 2016). A single parameter is not representative of compost quality (maturity and stability). Relevant research findings have reported that different germination indices indicate the disappearance of phytotoxicity compounds in mature composts (Tiquia et al. 1996; Huang et al. 2004; Chang et al. 2019). Wei et al (2000) also reported that the germination index above 80% is indicative of the considerable maturity of compost while Nolan et al (2011) believed that C/N ratio is more representative of the compost quality where even GI index was obtained above 100 %. The results of the current study confirmed the considerable maturity of final treated-compost, especially wood residue of 30%, sewage

**Fig. 5** Evaluation of germination index (GI) over the composting procedure

sludge of 60 %, and chicken manure of 10 %. The elimination of phytotoxic materials indicated the enhancement of maturity along with the germination index of the treated compost compared with control. Although the wood residue impregnated with resin showed a promotion in the germination promotion, it could not obtain the mature compost based on the Iranian standard criteria (the GI above 60 %). Nevertheless, the higher germination index indicates the lower concentration of phytotoxic substances of compost, which favors agricultural utilizations. However, the results of this study showed that there is a significant difference between the mixture of pure wood residue and industrial sewage sludge and the compost from wood residue impregnated with resin. The treatments applied in this study were proved suitable for producing value-added products from industrial wastes as agricultural compost. Furthermore, the integrated monitoring of the conventional process during the curing process can provide useful information to obtain a higher value of GI.

Conclusion

Using a sustainable method to create a value-added product is a promising approach for recovering industrial organic wastes. The mentioned composting process is recognized as a worldwide technique for the biological stabilization of organic compounds as a soil amendment. However, considering the parameters of the degradation procedure to obtain the proper quality of compost, namely maturity and stability, has still remained the main challenge. This study was indeed applied to an effective strategy in terms of co-composting from wood residue and sewage sludge by monitoring the temperature and moisture contents. Mixing bulky agents such as wood residue and sewage sludge not only can adjust the moisture content through providing adequate porosity but also would increase the temperature up to 70 °C compared to the control compost (the peak temperature of 42 °C). The increase of pH generates a higher acidic compound, which helps to improve the degradation of organic matter, which results in a decline of the C/N ratio and the reduction of phytotoxic compounds. The relevant outcome of the high germination index (GI) indicates the enhanced confidence of in-situ pilot-scale application toward the market of agricultural fertilizers.

Acknowledgment Financial support was provided by Sabzevar University of Medical Science program (No. IR.MEDSAB.

REC.1397.067) and by the Golestan Industrial Cellulosic Group Fund (No. 2019GICG1309).

Compliance with ethical standards

Conflict of interest The authors declare that there are no conflicts of interest associated with this study.

Open Access This article is distributed under the terms of the Creative Commons Attribution 4.0 International License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made.

Reference

- Alvarenga P, Mourinha C, Farto M, Santos T, Palma P, Sengo J, Morais MC, Cunha-Queda C (2015) Sewage sludge, compost, and other representative organic wastes as agricultural soil amendments: benefits versus limiting factors. *Waste Manag* 40: 44–52. <https://doi.org/10.1016/j.wasman.2015.01.027>
- Bernal MP, Albuquerque JA, Moral R (2009) Composting of animal manures and chemical criteria for compost maturity assessment. A review. *Bioresour Technol* 100: 5444–5453. <https://doi.org/10.1016/j.biortech.2008.11.027>
- Brandon AM, Gao S, Tian R, Ning D, Yang S, Zhou J, Wu W, Cridle CS (2018) Biodegradation of polyethylene and plastic mixtures in mealworms (larvae of *Tenebrio Molitor*) and effects on the gut microbiome. *Environ Sci Technol* 52(11): 6526–6533. DOI:10.1021/acs.est.8b02301
- Brewer LJ, Sullivan DM (2003) Maturity and stability evaluation of composted yard trimmings. *Compost Sci Util* 11 (2): 96–112. <https://doi.org/10.1080/1065657X.2003.10702117>
- Cesaro A, Conte A, Belgiorno V, Siciliano A, Guida M (2019) The evolution of compost stability and maturity during the full-scale treatment of the organic fraction of municipal solid waste. *J Environ Manag* 232: 264–270. <https://doi.org/10.1016/j.jenvman.2018.10.121>
- Chang R, Gan J, Chen Q, Li Y (2016) Effect of carbon resources conditioner on composting process and carbon and nitrogen loss during composting of cucumber stalk. *Trans Chin Soc Agric Eng* 32 (1): 254–259. DOI:10.11975/j.issn.1002-6819.2016.z2.035
- Chang R, Wang Q, Gan J, Li Y (2017) Influence of easily-degraded organic matter content on maturity and nitrogen loss during composting of a cucumber vine. *Trans Chin Soc Agric Eng* 33 (1): 231–237. doi:10.11975/j.issn.1002-6819.2017.01.032
- Chang R, Li Y, Chen Q, Guo Q, Jia J (2019) Comparing the effects of three in situ methods on nitrogen loss control, temperature dynamics and maturity during composting of agricultural wastes with a stage of temperatures over 70 °C. *J*

- Environ Manag 230:119-127.
<https://doi.org/10.1016/j.jenvman.2018.09.076>
- de Souza Machado AA, Lau CW, Till J, Kloas W, Lehmann A, Becker R, Rillig MC (2018) Impacts of microplastics on the soil biophysical environment. *Environ Sci Technol* 52(17): 9656-9665.
<https://doi.org/10.1021/acs.est.8b02212>
- Diaz LF, Savage GM (2007) Factors that affect the process. In *Waste Management Series 8*. Elsevier, pp. 49–65
- Faverial J, Boval M, Sierra J, Sauvart D (2016) End-product quality of composts produced under tropical and temperate climates using different raw materials: a meta-analysis. *J Environ Manag* 183: 909–916.
DOI:10.1016/j.jenvman.2016.09.057
- Ge J, Huang G, Huang J, Zeng J, Han L (2015) Mechanism and kinetics of organic matter degradation based on particle structure variation during pig manure aerobic composting. *J Hazard Mater* 292: 19–26.
<https://doi.org/10.1016/j.jhazmat.2015.03.010>
- Ghorbannezhad P, Azizi M, Ting SC, Layeghi M, Ramezani O (2011) Cleaner production: A case study of Kaveh paper mill. *Int J Sustain Eng* 4 (01): 68-74.
<https://doi.org/10.1080/19397038.2010.528464>
- Ghorbannezhad P, Bay A, Yolmeh M, Yadollahi R, Moghadam JY (2016) Optimization of coagulation-flocculation process for medium density fiberboard (MDF) wastewater through response surface methodology. *Desalin Water Treat* 57 (56): 26916-26931.
<https://doi.org/10.1080/19443994.2016.1170636>
- Ghorbannezhad P, Dehghani Firouzabadi M, Ghasemian A (2018) Catalytic fast pyrolysis of sugarcane bagasse pith with HZSM-5 catalyst using tandem micro-reactor-GC-MS, *Energy Source Part A: Recovery, Utilization, and Environmental Effects* 40 (1): 15-21.
<https://doi.org/10.1080/15567036.2017.1381785>
- Gomez-Brandon M, Lazcano C, Dominguez J (2008) The evaluation of stability and maturity during the composting of cattle manure. *Chemosphere* 70 (3): 436–444.
<https://doi.org/10.1016/j.chemosphere.2007.06.065>
- Guerra-Rodriguez E, Vazquez M, Diaz-Ravina M (2003) Dynamics of the co-composting of barley waste with liquid poultry manure. *J. Sci. Food Agric* 83 (3): 166–172.
<https://doi.org/10.1002/jsfa.1302>
- Hazarika J, Ghosh U, Kalamdhad AS, Khwairakpam M, Singh J (2017) Transformation of elemental toxic metals into immobile fractions in paper mill sludge through rotary drum composting. *Ecol Eng* 101:185-192.
<https://doi.org/10.1016/j.ecoleng.2017.02.005>
- Huang GF, Wong JWC, Wu QT, Nagar BB (2004) Effect of C/N on composting of pig manure with sawdust. *Waste Manage* 24: 805–813. <http://doi.org/10.1016/j.wasman.2004.03.011>
- Ivankin AN, Pandya U, Saraf M (2014) Intensification of aerobic processing of the organic wastes into compost. In: *Composting for Sustainable Agriculture*. Springer International Publishing, pp. 23–42
- Jara-Samaniego J, Pérez-Murcia MD, Bustamante MA, Pérez-Espinosa A, Paredes C, López M, López-Lluch DB, Gavilanes-Terán I, Moral R (2017) Composting as sustainable strategy for municipal solid waste management in the Chimborazo Region, Ecuador: Suitability of the obtained composts for seedling production. *J Clean Prod* 141: 1349–1358.
<https://doi.org/10.1016/j.jclepro.2016.09.178>
- Kazemi K, Zhang B, Lye LM, Cai Q, Cao T (2016) Design of experiment (DOE) based screening of factors affecting municipal solid waste (MSW) composting. *Waste Manag* 58: 107–117. <https://doi.org/10.1016/j.wasman.2016.08.029>
- Kebibeche H, Khelil O, Kacem M, Harche MK (2019) Addition of wood sawdust during the co-composting of sewage sludge and wheat straw influences seeds germination. *Ecotoxicol Environ Saf* 168: 423-430.
<https://doi.org/10.1016/j.ecoenv.2018.10.075>
- Kim E, Lee DH, Won S, Ahn H (2016) Evaluation of optimum moisture content for composting of beef manure and bedding material mixtures using oxygen uptake measurement. *Asian-Australas J Anim Sci* 29 (5): 753.
DOI:10.5713/ajas.15.0875
- Lee LH, Wu TY, Shak KPY, Lim SL, Ng KY, Nguyen MN, Teoh WH (2018) Sustainable approach to biotransform industrial sludge into organic fertilizer via vermicomposting: A mini-review. *J. Chemi.Technol. Biotechnol* 93(4): 925-935.
<https://doi.org/10.1002/jctb.5490>
- Li X, Chen L, Mei Q, Dong B, Dai X, Ding G, Zeng EY (2018) Microplastics in sewage sludge from the wastewater treatment plants in China. *Water Res* 142: 75-85.
<https://doi.org/10.1016/j.watres.2018.05.034>
- Lim SL, Lee LH, Wu TY (2016) Sustainability of using composting and vermicomposting technologies for organic solid waste biotransformation: Recent overview, greenhouse gases emissions and economic analysis. *J. Clean. Prod* 111: 262-278.
<https://doi.org/10.1016/j.jclepro.2015.08.083>
- Mahon AM, O Connell B, Healy MG, O Connor I, Officer R, Nash R, Morrison L (2017) Microplastics in sewage sludge: Effects of treatment. *Environ Sci Technol* 51(2): 810-818.
<https://doi.org/10.1021/acs.est.6b04048>
- Meena MD, Joshi PK, Jat HS, Chinchmalatpure AR, Narjary B, Sheoran P, Sharma DK (2016) Changes in biological and chemical properties of saline soil amended with municipal solid waste compost and chemical fertilizers in a mustard–pearl millet cropping system. *Catena* 140: 1–8.
<https://doi.org/10.1016/j>
- Meng L, Li W, Zhang S, Wu C, Lv L (2017) Feasibility of co-composting of sewage sludge, spent mushroom substrate and wheat straw. *Bioresour Technol* 226: 39–45.
<https://doi.org/10.1016/j.biortech.2016.11.054>
- Nejabat M, Kahe H, Shirani K, Ghorbannejad P, Hadizadeh F, Karimi G (2017) Health risk assessment of heavy metals via dietary intake of wheat in Golestan Province, Iran. *Hum Ecol Risk Assess: An International Journal* 23 (5): 1193-1201.
<https://doi.org/10.1080/10807039.2017.1309265>
- Nigussie A, Bruun S, Kuyper TW, de Neergaard A (2017) Delayed addition of nitrogen-rich substrates during composting of municipal waste: effects on nitrogen loss, greenhouse gas emissions, and compost stability. *Chemosphere* 166: 352–362.
<https://doi.org/10.1016/j.chemosphere.2016.09.123>
- Nolan T, Troy SM, Healy MG, Kwapinski W, Leahy JJ, Lawlor

- PG (2011) Characterization of compost produced from separated pig manure and a variety of bulking agents at low initial C/N ratios. *Bioresour Technol* 102: 7131-7138. <http://doi.org/10.1016/j.biortech.2011.04.066>
- Onwosi CO, Igbokwe VC, Odimba JN, Eke IE, Nwankwoala MO, Iroh IN, Ezeogu LI (2017) Composting technology in waste stabilization: on the methods, challenges, and future prospects. *J Environ Manag* 190: 140-157. <https://doi.org/10.1016/j.jenvman.2016.12.051>
- Oviedo-Ocaña ER, Torres-Lozada P, Marmolejo-Rebellon LF, Hoyos LV, Gonzales S, Barrera R, Komilis D, Sanchez A (2015) Stability and maturity of biowaste composts derived by small municipalities: Correlation among physical, chemical and biological indices. *Waste Manag* 44: 63-71. <https://doi.org/10.1016/j.wasman.2015.07.034>
- Petrica I, Šestan A, Šestan I (2009) Influence of initial moisture content on the composting of poultry manure with wheat straw. *Biosyst Eng* 10: 125-134. <https://doi.org/10.1016/j.biosystemseng.2009.06.007>
- Prasad M, Baumgarten A, Grunstaedl U, Ni Chualain D (2010) Recent developments in the measurement of stability and maturity of compost in Europe. Proceedings of the 7th International ORBIT 2010 Conference, Heraklion, Crete, June 29 - July 3, pp. 934-941
- Rasapoor M, Adl M, Pourazizi B (2016) Comparative evaluation of aeration methods for municipal solid waste composting from the perspective of resource management: A practical case study in Tehran, Iran. *J Environ Manag* 184: 528-534. DOI:10.1016/j.jenvman.2016.10.029
- Shen Y, Ren L, Li G, Chen T, Guo R (2011) Influence of aeration on CH₄, N₂O, and NH₃ emissions during aerobic composting of chicken manure and high C/N waste mixture. *Waste Manag* 31: 33-38. DOI:10.1016/j.wasman.2010.08.019
- Sweeten JM, Auvermann BW (2008) Composting manure and sludge. *Agrilife Extension E*. 479: 6-8
- Talib AT, Mokhtar MN, Baharuddin AS, Sulaiman A (2014) Effects of aeration rate on the degradation process of oil palm empty fruit bunch with kinetic-dynamic modeling. *Bioresour Technol* 169: 428-438. <https://doi.org/10.1016/j.biortech.2014.07.033>
- Tiquia SM, Tam NFY, Hodgkiss IJ (1996) Microbial activities during composting of spent pig-manure sawdust litter at different moisture contents. *Bioresour Technol* 55: 201-206. [https://doi.org/10.1016/0960-8524\(95\)00195-6](https://doi.org/10.1016/0960-8524(95)00195-6)
- Wang X, Pan S, Zhang Z, Lin X, Zhang Y, Chen S (2017) Effects of the feeding ratio of food waste on fed-batch aerobic composting and its microbial community. *Bioresour Technol* 224: 397-404. <https://doi.org/10.1016/j.biortech.2016.11.076>
- Wang S, Zeng Y (2018) Ammonia emission mitigation in food waste composting: A review. *Bioresour Technol* 248: 13-19. <https://doi.org/10.1016/j.biortech.2017.07.050>
- Wei YS, Fan YB, Wang MJ, Wang JS (2000) Composting and compost application in China. *Resour. Conserv. Recycl* 30 (4): 277-300. [https://doi.org/10.1016/S0921-3449\(00\)00066-5](https://doi.org/10.1016/S0921-3449(00)00066-5)
- Weithmann N, Moeller JN, Loeder MGJ, Piehl S, Laforsch C, Freitag R (2018) Organic fertilizer as a vehicle for the entry of microplastic into the environment. *Sci Adv* 4(4): 1-7. DOI:10.1126/sciadv.aap8060
- Yang S, Brandon AM, Andrew Flanagan JC, Yang J, Ning D, Cai S, Fan H, Wang Z, Ren J, Benbow E, Ren N, Waymouth RM, Zhou J, Criddle CS, Wu W (2018) Biodegradation of polystyrene wastes in yellow mealworms (larvae of *Tenebrio Molitor* Linnaeus): Factors affecting biodegradation rates and the ability of polystyrene-fed larvae to complete their life cycle. *Chemosphere* 191: 979-989. <https://doi.org/10.1016/j.chemosphere.2017.10.117>
- Yin Y, Gu J, Wang X, Zhang K, Hu T, Ma J, Wang Q (2018) Impact of copper on the diazotroph abundance and community composition during swine manure composting. *Bioresour Technol* 255: 257-265. DOI:10.1016/j.biortech.2018.01.120
- Yuan J, Chadwick D, Zhang D, Li G, Chen S, Luo W, Du L, He S, Peng S (2016) Effects of aeration rate on maturity and gaseous emissions during sewage sludge composting. *Waste Manag* 56: 403-410. <https://doi.org/10.1016/j.wasman.2016.07.017>
- Zhang H, Li G, Gu J, Wang G, Li Y, Zhang D (2016) Influence of aeration on volatile sulfur compounds (VSCs) and NH₃ emissions during aerobic composting of kitchen waste. *Waste Manag* 58: 369-375. <https://doi.org/10.1016/j.wasman.2016.08.022>
- Zhong Z, Bian F, Zhang X (2018) Testing composted bamboo residues with and without added effective microorganisms as a renewable alternative to peat in horticultural production. *Ind Crops Prod* 112: 602-607. <https://doi.org/10.1016/j.indcrop.2017.12.043>
- Zhou H, Zhao Y, Yang H, Zhu L, Cai B, Luo S, Cao J, Wei Z (2018) Transformation of organic nitrogen fractions with different molecular weights during different organic wastes composting. *Bioresour Technol* 262: 221-228. <https://doi.org/10.1016/j.biortech.2018.04.088>
- Zhu N (2007) Effect of low initial C/N ratio on aerobic composting of swine manure with rice straw. *Bioresour Technol* 98: 9-13. <https://doi.org/10.1016/j.biortech.2005.12.003>
- Zittel R, da Silva CP, Domingues CE, de Oliveira Stremel TR, de Almeida TE, Damiani GV, de Campos SX (2018) Treatment of smuggled cigarette tobacco by composting process in facultative reactors. *Waste Manag* 71: 115-121. <https://doi.org/10.1016/j.wasman.2017.10.023>