

UNIVERSITY *of* York

This is a repository copy of *Performance Ratio and Degradation Rate Analysis of 10-Year Field Exposed Residential Photovoltaic Installations in the UK and Ireland*.

White Rose Research Online URL for this paper:

<https://eprints.whiterose.ac.uk/177727/>

Version: Accepted Version

Article:

Dhimish, Mahmoud (2020) Performance Ratio and Degradation Rate Analysis of 10-Year Field Exposed Residential Photovoltaic Installations in the UK and Ireland. *Clean Technologies*. pp. 170-183. ISSN 2571-8797

<https://doi.org/10.3390/cleantechnol2020012>

Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk
<https://eprints.whiterose.ac.uk/>

1 Article

2 Performance ratio and degradation rate analysis of 10- 3 year field exposed residential photovoltaic 4 installations in the UK and Ireland

5 Mahmoud Dhimish ^{1,*}

6 ¹ Department of Engineering and Technology, Laboratory of Photovoltaic, University of Huddersfield,
7 Huddersfield HD1 3DH, UK; Mahmoud.dhimish@gmail.com

8 * Correspondence: Mahmoud.dhimish@gmail.com

9 Received: 10 September 2019, Revised: 25 April 2020.

10 **Abstract:** As photovoltaic (PV) penetration of the power grid increases, accurate predictions of
11 return on investment require accurate analysis of decreased operational power output over time.
12 Degradation rate in PV module performance must be known in order to predict power delivery.
13 This article presents the degradation rate over 10-years for seven different PV systems located in
14 England, Scotland, and Ireland. It was found that the lowest PV degradation rate of -0.4% to -0.6
15 %/year is obtained in the Irish PV sites. Higher PV degradation rate of -0.7% to -0.9%/year is found
16 in England, whereas the highest degradation rate of -1.0%/year is observed in relatively cold areas
17 including Aberdeen and Glasgow, located in Scotland. The main reason that the PV systems affected
18 by cold climate conditions had the highest degradation rate is due to the frequent hoarfrost and
19 heavy snow affecting these PV systems, which considerably affects the reliability and durability of
20 the PV modules and their performance. Additionally, in this article, we analyse the monthly mean
21 performance ratio (PR) for all examined PV systems. It was found that PV systems located in Ireland
22 and England are more reliable compared to those located in Scotland.

23 **Keywords:** Renewable Energy; Photovoltaics; Degradation; Reliability Analysis

24

25 1. Introduction

26 The ability to precisely predict the output power delivery over time is of vital importance to the
27 growth of the photovoltaic (PV) industry. Two key cost drivers are the efficiency with which sunlight
28 is converted into actual energy and how this relationship fluctuates over time. Accurate
29 quantification of power output decay over time, also known as degradation rate [1], is critical to all
30 stakeholders'/utility companies, investors, integrators, and researchers alike. Economically, PV
31 modules degradation rate are equally important, because a higher degradation rate interprets directly
32 into reduced output power produced by the system, thus reduces future cash flows [2].

33 Inaccuracies in determining degradation rate lead to amplify financial risks in the PV sector.
34 Technically, degradation mechanisms are essential to understand because they could ultimately lead
35 to PV system failures [3]. Typically, a 10% decline is considered a failure. However, there is no
36 compromise on the definition of failure [4], because a high-efficiency module degraded by 50% may
37 still have a higher efficiency than a non-degraded module from a less efficient technology.

38 The documentation of the degradation mechanisms through modelling and experiments in
39 principle directly leads to lifetime improvements of PV modules, as suggested by S. Kawai *et al.* [5].
40 Outdoor field-testing has played a significant role in measuring long-term lifetime and behaviour for
41 at least two reasons: it is the typical functioning environment for PV installations, and it is the only
42 way to correlate indoor testing apparatuses to outdoor results to forecast field performance.

43 Up to date, there is a lack of published work found in the literature which represents the analysis
44 of PV degradation rate across the United Kingdom. Therefore, in this article, the degradation rate of
45 seven PV systems installed in various locations in the UK were examined and comprehensively
46 compared over a period of ten years (2008 to 2017). Before moving to the methodology section, it is
47 indeed important to have an overview of the degradation rate across different regions in the world,
48 summarized as follows:

49 United States of America (USA): The USA is among the head five countries leading the PV
50 technology worldwide [6]. In 1977, the Department of Energy established the Solar Energy Research
51 Institute in Golden, Colorado. Outdoor testing of modules and sub-modules started at the Solar
52 Energy Research Institute in 1982. When amorphous silicon (a-Si) modules first became commercially
53 available, NREL began to report the degradation rate that was considerably higher than -1.0%/year
54 [7]. In [8] and [9], similar results of the PV degradation were found in small (<10 kWp) size PV
55 installations, followed by a yearly degradation rate of approximate -0.8 to -1.25%/year.

56 Europe: The terrestrial focus of the PV industry in Europe can be traced to the oil crisis of the
57 1970s. The development and installations of PV sites can be classified into publicly and privately
58 funded projects. The publicly-funded part in Europe can be additionally classified into the umbrella
59 organization of the Commission of the European Communities and individual national programs.
60 Never the less, various references indicate that the annual degradation rate in Spain and Italy is
61 between -0.8% to -1.1%/year [10] – [12], in Germany between -0.5% to -0.7%/year [13] and [14], in
62 Cyprus between -0.8% to -1.1%/year [15], in Greece between -0.9% to -1.13%/year [16], and finally in
63 Poland is always higher than -0.9%/year [17].

64 Asia: Chandel *et al.* [18] studied the degradation rate in India based on a PV system operated for
65 a period of 28 years. Based on their analysis, it was found that the degradation rate is equal to -
66 1.4%/year. Similar results found by Dubey *et al.* [19], where the degradation rate in southern India is
67 observed at -1.25%/year. Furthermore, in Thailand, the degradation rate was widely different,
68 ranging between -0.5% to -4.9%/year [20]. However, C. Dechthummarong *et al.* [21] found that the
69 degradation rate based on 15 years of PV operation in northern Thailand is equal to -1.5 %/year. The
70 degradation rate of PV modules in many other countries such as Japan, Singapore, and Republic of
71 Korea are reported in [22] – [24], the PV degradation rate is equal to -1.2%/year in Japan [22], -
72 2.0%/year in Singapore [23], and -1.3%/year in the Republic of Korea [24].

73 In summary, as a global point of view, the PV degradation rates varies from -0.2% to -2.0%/year.
74 Yet there is not enough evidence on the annual PV degradation rate in the region of the UK and
75 Ireland. Therefore, this study aims to fill in this gap of knowledge by evaluating seven different PV
76 systems located in various locations (England, Scotland, and Ireland). It was found that the average
77 annual degradation rates of the PV installations vary between -0.4% to -1.16%/year, contingent on the
78 environmental conditions.

79 2. Methodology

80 2.1. Description of the Examined PV systems

81 In this work, seven different PV installations were examined. The geographical distribution of
82 the PV systems is shown in Figure 1a and summarized in Table 1. Figure 1b presents a real picture of
83 the examined PV system located at Huddersfield (PV site C). All examined PV systems have an
84 identical configuration which is demonstrated in Figure 1c, as well as identical azimuth (-3° due to
85 South) and tilt angle of (39°). The PV installations comprise crystalline silicon PV modules with peak
86 power of 220 W, and they are configured in 2 PV strings connected in parallel, each comprises 9 PV
87 modules connected in series. All have the same PV capacity of 3960 W. The electrical characteristics,
88 including the peak power, voltage and current at maximum power point for the examined PV
89 modules, are shown in Table 2.

90 In the UK and Ireland, the dominant PV installations are made of crystalline silicon. For that
91 reason, in this study, we aim to analyse the performance of crystalline silicon PV installations made
92 of the same configuration, manufacture, and connected via a similar electrical component.

Table 1. Distribution of the Examined PV Systems

PV site	Location	UK	Ireland
A	Plymouth, England	✓	-
B	London, England	✓	-
C	Huddersfield, England	✓	-
D	Glasgow, Scotland	✓	-
E	Aberdeen, Scotland	✓	-
F	Dublin, Ireland	-	✓
G	Sligo, Ireland	-	✓

93 Furthermore, all observed PV systems are fitted with ICONICA maximum power point tracking
 94 (MPPT) unit. This device has the capability of enhancing the output power during partial shading
 95 conditions, the MPPT efficiency ranging from 97.5% to 99.2%. The MPPT unit is connected to a
 96 hybrid, pure sine wave inverter linked to the grid, and the inverter efficiency is ranging from 90% to
 97 94%.

98 The tested PV systems are categorized into three main groups; the first group contains PV sites
 99 A, B and C (located in England), second group comprises PV sites E and F (located in Scotland), the
 100 last group consists of two PV sites F and G (located in Ireland).

101 The solar irradiance (G) and ambient temperature (T) play a significant role in the performance
 102 and annual energy production for the PV modules. Since the examined PV sites are in different
 103 locations, it is worthy of addressing the locations weather and ambient temperature data. The average
 104 values of the irradiance and ambient temperature in all studied locations between the years 1981 –
 105 2010 is taken from [25] and presented in Figure 1a.

106 All examined PV systems sited with a weather station. The weather station measures the
 107 ambient temperature, wind speed, humidity, and solar irradiation. Onsite measurements of dc
 108 voltage and current are recorded by the maximum power point (MPPT) units, and at the inverter
 109 input sampled every 5 min; thus, the number of samples collected in each year is equal to 52,560
 110 samples. The comparison between degradation rates of the PV systems are observed over a period of
 111 10 years; 2008 to 2017.

Table 2. PV Module Electrical Characteristics

PV module parameter	Value
PV peak power	220 W
Voltage at maximum power point (V_{mpp})	28.7 V
Current at maximum power point (I_{mpp})	7.67 A
Open Circuit Voltage (V_{oc})	36.74 V
Short Circuit Current (I_{sc})	8.24 A

112 2.2. Power-Irradiance Analysis Technique

113 The Power-Irradiance technique is a method which compares the output measured power of a
 114 PV system with a corresponding irradiance level; usually full spectrum 0 to 1000 W/m². This
 115 technique depend on on the measured and simulated/theoretical output power of the examined PV
 116 system in order to visualize the degradation rate of the PV systems. It is worth noting that partial
 117 shading, hot-spots, micro-cracks, and other environmental factors are not considered while
 118 estimating the theoretical output power.

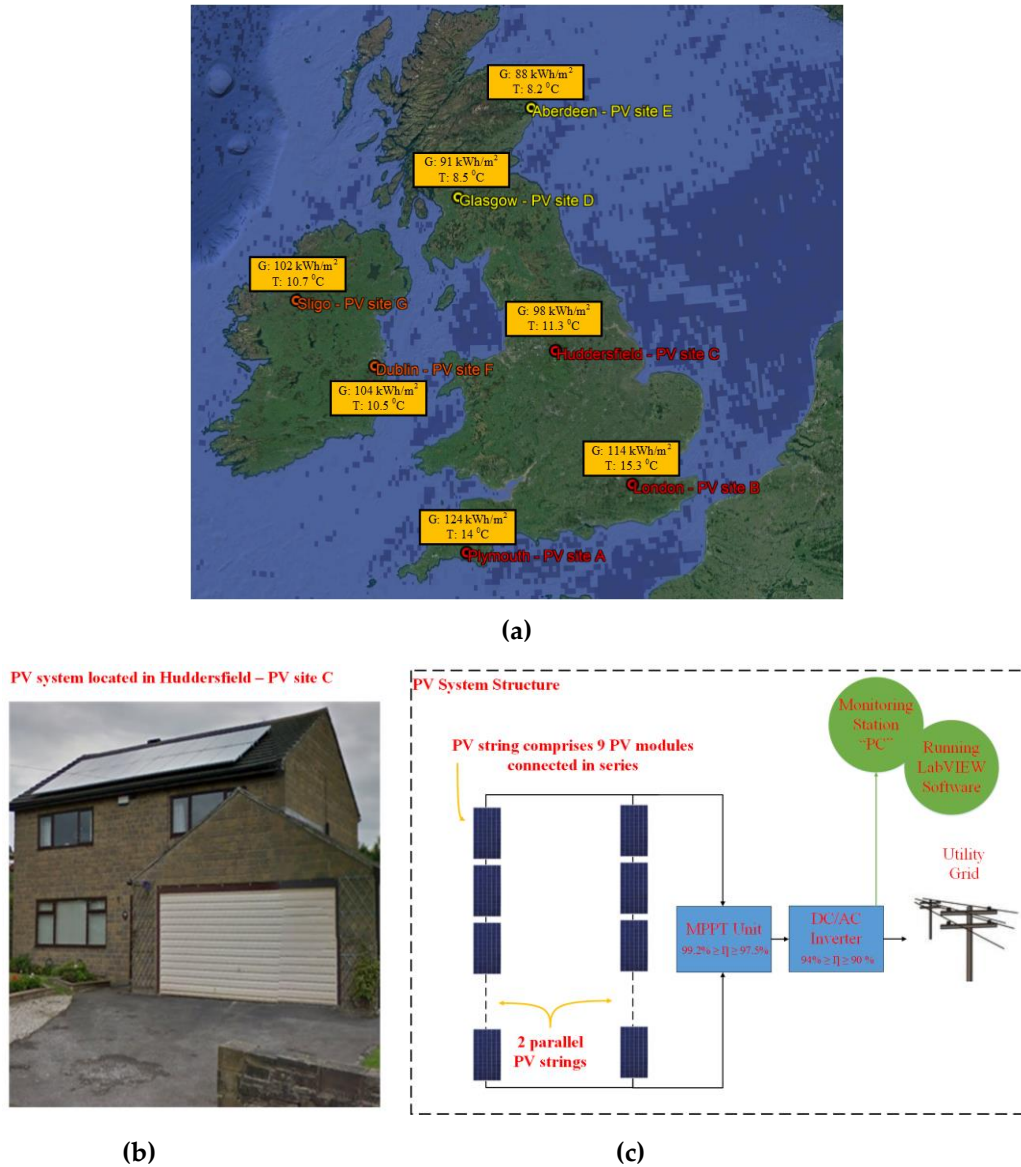


Figure 1. Examined PV systems configuration and its geographical representation: (a) Geographical distribution of the examined PV installations in the United Kingdom including the average irradiance (G) and temperature (T) over the last 30 years; (b) Real picture of the examined PV system installed at Huddersfield site – PV site C; (c) PV sites configuration that comprises two parallel PV string each consists of nine series connected PV modules.

119 The calculation of the theoretical power of the PV installations $P_{dc_{theoretical}}$ is determined using
 120 Eqs. (1) - (3), where the theoretical power depends on the measured plane-of-array irradiance G , and
 121 the PV module temperature T_c .

122 The results of the irradiance vs output power are presented using a full spectrum of the
 123 irradiance; 0 to 1000 W/m². However, in the analysis of the degradation rate, mainly using Eq. (2), the
 124 only irradiance from 250 W/m² to 1000 W/m² was considered. Because during the determination of
 125 the degradation which will be discussed later in the results section, at low irradiance values the slope
 126 of the power-irradiance would be expected to deviate; hence, resulting in inaccurate analysis of the
 127 degradation rate.

$$128 \quad P_{dc_{theoretical}} = N_{sm} \cdot N_{pm} \cdot P_{m_{theo}} \cdot G_{eff} \cdot (1 + K_v \cdot \Delta T) \cdot (1 - K_i \cdot \Delta T) \quad (1)$$

$$129 \quad G_{eff} = \frac{G}{G_n} \quad (2)$$

$$130 \quad \Delta T = T_c - T_n \quad (3)$$

131 where N_{sm} and N_{pm} are the number of PV modules connected in series and parallel respectively,
 132 the $P_{m_{theo}}$ is the measured peak power of the PV module under standard test conditions (STC), K_v
 133 and K_i are the voltage and current temperature coefficients respectively, these coefficients provided
 134 in the PV modules manufacturer datasheet. The last parameters, G_n and T_n are the reference
 135 irradiance and PV module temperature under STC (G : 1000 W/m², and T : 25 °C).

136 Linear regression equations are obtained using a Linear Correlation Approach (LCA) from the
 137 actual PV array dc output measured power for each year described by the following empirical Eq.
 138 (4).

$$139 \quad P_{dc\ measured} = A_{Gr} \cdot G + C \quad (4)$$

140 where $P_{dc\ measured}$ is the actual PV installations dc output measured power, A_{Gr} is the gradient, G
 141 is the plane of-array irradiance measured by the weather station, and C is the ordinate value of the
 142 $P_{dc\ measured}$ at $G = 1000$ W/m².

143 3. Results

144 3.1. Degradation Rate in England

145 The power-irradiance technique was applied to evaluate the degradation rate of the examined
 146 PV systems based on their dc output power. Figure 2 shows the power-irradiance profiles in three
 147 different years: 2008, 2013, and 2017. The blue points present the theoretical dc power obtained from
 148 Eqs. (1) – (3), whereas the orange points present the actual measured dc power.

149 Furthermore, Table 3 summarizes the yearly and total degradation rates of the examined PV
 150 systems. It was found that PV systems A and C had the highest degradation rate during the first year
 151 of operation; in 2008. Whereas, PV site B, located in London, had the highest yearly degradation rate
 152 of -0.95% in 2012.

Table 3. England PV systems Degradation Rate

Year	Plymouth		London		Huddersfield	
	Site A		Site B		Site C	
	Yearly	Cumulative	Yearly	Cumulative	Yearly	Cumulative
2008	-0.91	-0.91	-0.87	-0.87	-0.73	-0.73
2009	-0.71	-1.62	-0.85	-1.72	-0.55	-1.28
2010	-0.72	-2.34	-0.88	-2.6	-0.42	-1.7
2011	-0.73	-3.07	-0.80	-3.4	-0.58	-2.28
2012	-0.77	-3.84	-0.95	-4.35	-0.55	-2.83
2013	-0.73	-4.57	-0.92	-5.27	-0.47	-3.3
2014	-0.71	-5.28	-0.88	-6.15	-0.53	-3.83
2015	-0.73	-6.01	-0.85	-7.0	-0.43	-4.26
2016	-0.69	-6.7	-0.87	-7.87	-0.53	-4.79
2017	-0.75	-7.45	-0.93	-8.8	-0.51	-5.3
Average	-0.74%/year		-0.88%/year		-0.53%/year	

153 As can be noticed in Figure 2 and Table 3, there is almost a linear degradation rate for PV site A.
 154 The average degradation rate over the last ten years is equal to $-0.74\%/year$. The highest average
 155 degradation rate is observed in site B at $-0.88\%/year$. The PV system installed in Huddersfield (PV
 156 site C) has the minimum degradation rate compared to PV sites A and B; its annual degradation rate
 157 is equal to $-0.53\%/year$.

158 Another interesting observation found from the reported results in Table 3 that PV systems A
 159 and B, which are located in areas with relatively hot weather conditions have more degradation rates
 160 compared to the PV system installed in Huddersfield, which is located in a relatively cold area. On
 161 the other hand, in order to study the correlation between the degradation rates vs the environmental
 162 conditions, the next sub-section will evaluate the degradation rates of two different PV installations
 163 located in cold weather conditions (sited in Scotland).

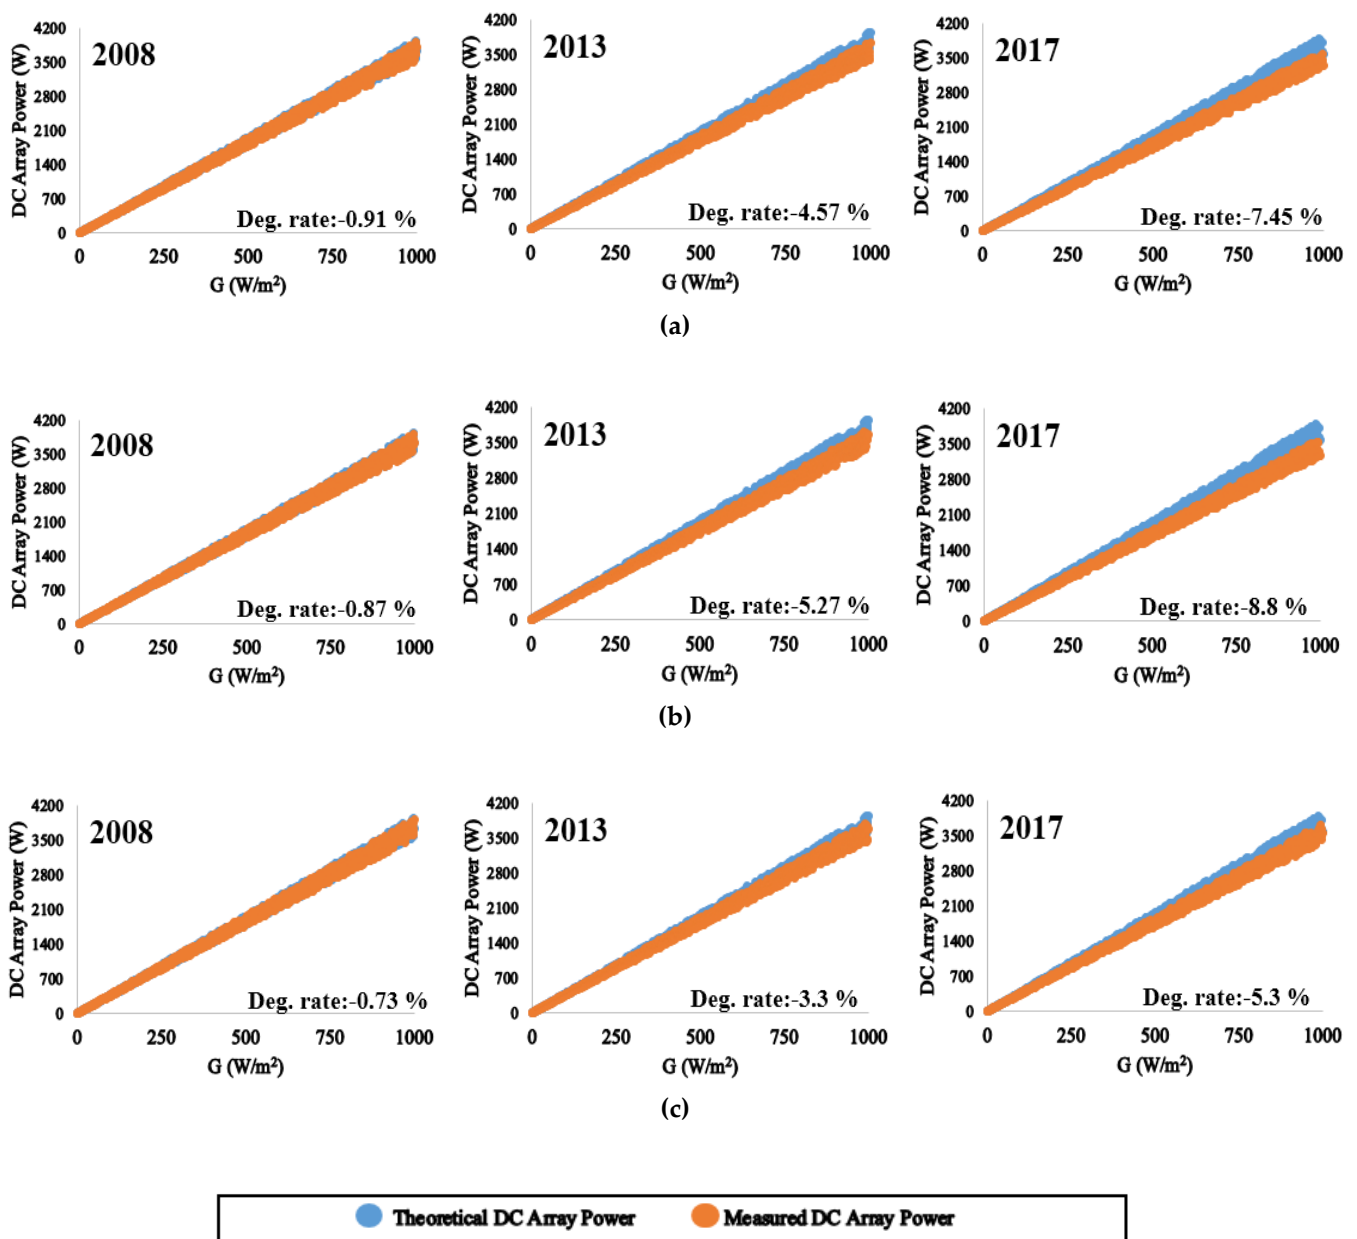


Figure 2. Cumulative degradation rate for PV systems A, B, and C in 2008, 2013, and 2017: (a) PV site A – Plymouth; (b) PV site B – London; (c) PV site C – Huddersfield.

164 3.2. Degradation Rate in Scotland

165 The annual and cumulative degradation rate from 2008 to 2017 for both sites D and E are
 166 presented in Table 4. It is evident that both PV sites had a maximum degradation rate in their first
 167 year of operation “2008”, the degradation rate is equal to -1.23% and -1.33% for site D, and E,
 168 respectively. The power-irradiance profile in 2008, 2013, and 2017 for both PV systems are shown in
 169 Figure 4. The degradation rate for the PV modules increases over the years. For example, in site D,
 170 the accumulative degradation rate increased from -1.23% to -10.59% from 2008 to 2017. However,
 171 there is a further reduction in the annual output power in Aberdeen compared to Glasgow. The
 172 degradation rate for Aberdeen PV system in 2008 is equal to -1.33%, and it increased to an
 173 accumulative of -11.62% in 2017.

Table 4. Scotland PV systems Degradation Rate Analysis

Year	Glasgow “Site D”		Aberdeen “Site E”	
	Yearly	Cumulative	Yearly	Cumulative
2008	-1.23	-1.23	-1.33	-1.33
2009	-1.15	-2.38	-1.19	-2.52
2010	-1.12	-3.5	-1.15	-3.67
2011	-1.08	-4.58	-1.22	-4.89
2012	-1.11	-5.69	-1.12	-6.01
2013	-0.93	-6.62	-1.05	-7.06
2014	-1.02	-7.64	-1.16	-8.22
2015	-0.92	-8.56	-1.15	-9.37
2016	-0.95	-9.51	-1.08	-10.45
2017	-1.08	-10.59	-1.17	-11.62
Average	-1.05%/year		-1.16%/year	

174 Remarkably, it was found that the yearly average degradation rate for Glasgow and Aberdeen
 175 PV installations are equal to -1.05% and -1.16%/year, respectively. This high degradation rate is
 176 related to the fact that both PV sites are in cold areas. The increase in the degradation rate is due to
 177 the effect of the heavy snow, rain, and high wind speed on the surface of the PV modules, thus there
 178 is a higher risk for PV hot spots [25], micro cracks [26] and [27], and damage in the surface of the PV
 179 modules. Figure 3a shows an actual image of broken glass for a PV module located in Aberdeen site
 180 due to hoarfrost (this image was captured in February 2018), whereas in Figure 3b two hot spots were
 181 observed in Glasgow PV system (these images were captured in June 2018). Therefore, in comparison
 182 to the degradation rates observed in the PV systems located in England, the PV systems located in
 183 Scotland had a higher degradation rate over the studied period.

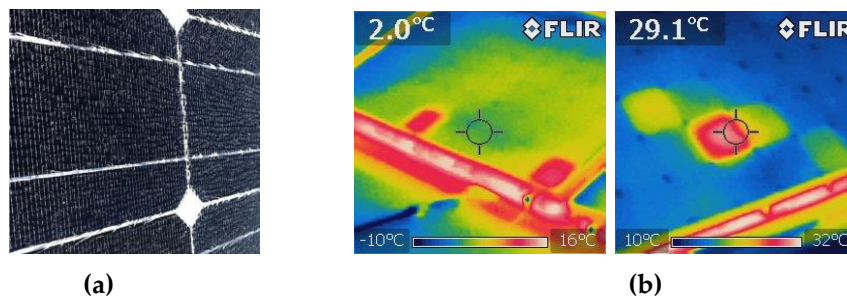


Figure 3. Example for the Impact of hoarfrost and heavy snow on PV modules: (a) PV module glass damage observed in Aberdeen site (PV site E) due to a hoarfrost weather condition; (b) Hot spots captured in two different PV modules in Glasgow site (PV site D) after a heavy snow weather condition.

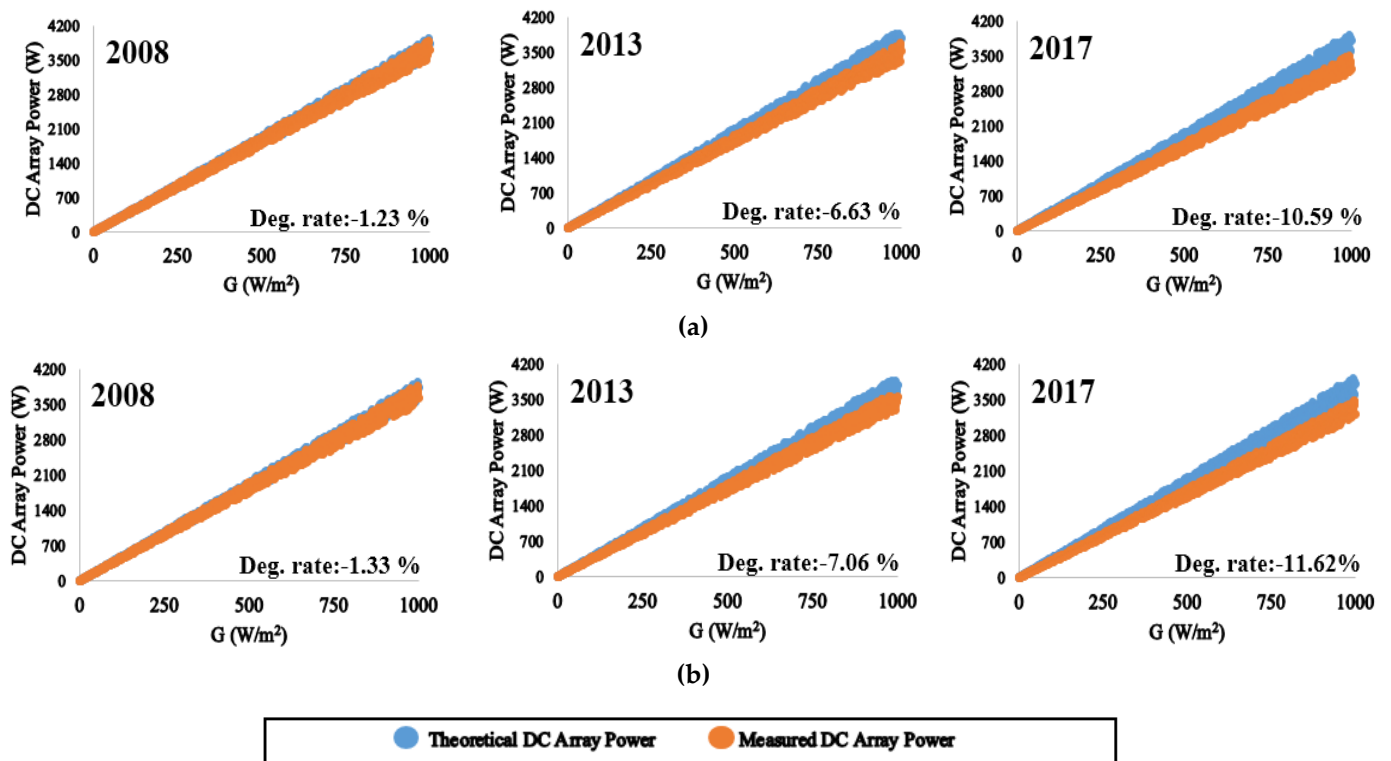


Figure 4. Cumulative degradation rate for PV systems D and E in 2008, 2013, and 2017: (a) PV site D – Glasgow; (b) PV site E – Aberdeen.

184 3.3. Degradation Rate in Ireland

185 The annual and cumulative degradation rate for site F and G are presented in Table 5. It is
 186 evident for both PV sites have a maximum degradation rate in their first year of operation “2008”
 187 which is equal to -0.69% and -0.72%, respectively. The power-irradiance profile in 2008, 2013, and
 188 2017 for both PV sites are shown in Figure 5. The degradation rate for the PV modules increases over
 189 the years. For example, in site F, the accumulative degradation rate increased from -0.69% to -5.58%
 190 from 2008 to 2017. However, there is more loss in the annual output power in the PV systems located
 191 in Sligo, where the degradation rate for this site in 2008 is equal to -0.72%, and it increased to an
 192 accumulative of -5.8% in 2017.

193 The yearly average degradation rate for both Irish PV installations is equal to -0.56 and -0.58
 194 %/year, respectively. Remarkably, the average yearly degradation rate for PV sites F and G over the
 195 last ten years is almost equal to the PV site C (located in Huddersfield). This result indicates that the
 196 weather conditions play a significant role in the degradation rates for PV modules. For example, PV
 197 systems located in Huddersfield, Dublin and Sligo relatively have the same degradation rate of the
 198 last ten years, where these locations are affected by the same irradiance and ambient temperature. By
 199 contrast with this result, it is possible to divide the cumulative degradation rate of all examined PV
 200 sites based on the weather conditions as follows:

- 201 • **UK-Based hot climate conditions:** Plymouth and London PV systems. The yearly average PV
 202 degradation rate is between -0.70% to -0.9%/year.
- 203 • **UK-Based average climate conditions:** Huddersfield, Dublin, and Sligo PV systems. The yearly
 204 average PV degradation rate is between -0.4% to -0.6 %/year.
- 205 • **UK-Based cold climate conditions:** Glasgow and Aberdeen PV systems. The yearly average PV
 206 degradation rate is always higher than -1.0%/year.

207 According to the literature review summary on page 2, our results indicate that PV installations
 208 in the UK and Ireland have relatively identical degradation rate compared to other counties affected
 209 by similar climate conditions. For example, in Germany [13] and Poland [17], the PV degradation
 210 rates are in the range of -0.5% to -1.5%/year, compared with our PV degradation results of -0.4 to -
 211 1.16%/year.

Table 5. Ireland PV systems Degradation Rate

Year	Dublin "Site F"		Sligo "Site G"	
	Yearly	Cumulative	Yearly	Cumulative
2008	-0.69	-0.69	-0.72	-0.72
2009	-0.55	-1.24	-0.58	-1.3
2010	-0.52	-1.76	-0.57	-1.87
2011	-0.53	-2.29	-0.57	-2.44
2012	-0.61	-2.9	-0.57	-3.01
2013	-0.62	-3.52	-0.55	-3.56
2014	-0.53	-4.05	-0.53	-4.09
2015	-0.48	-4.53	-0.53	-4.62
2016	-0.54	-5.07	-0.59	-5.21
2017	-0.51	-5.58	-0.62	-5.83
Average		-0.56%/year		-0.58%/year

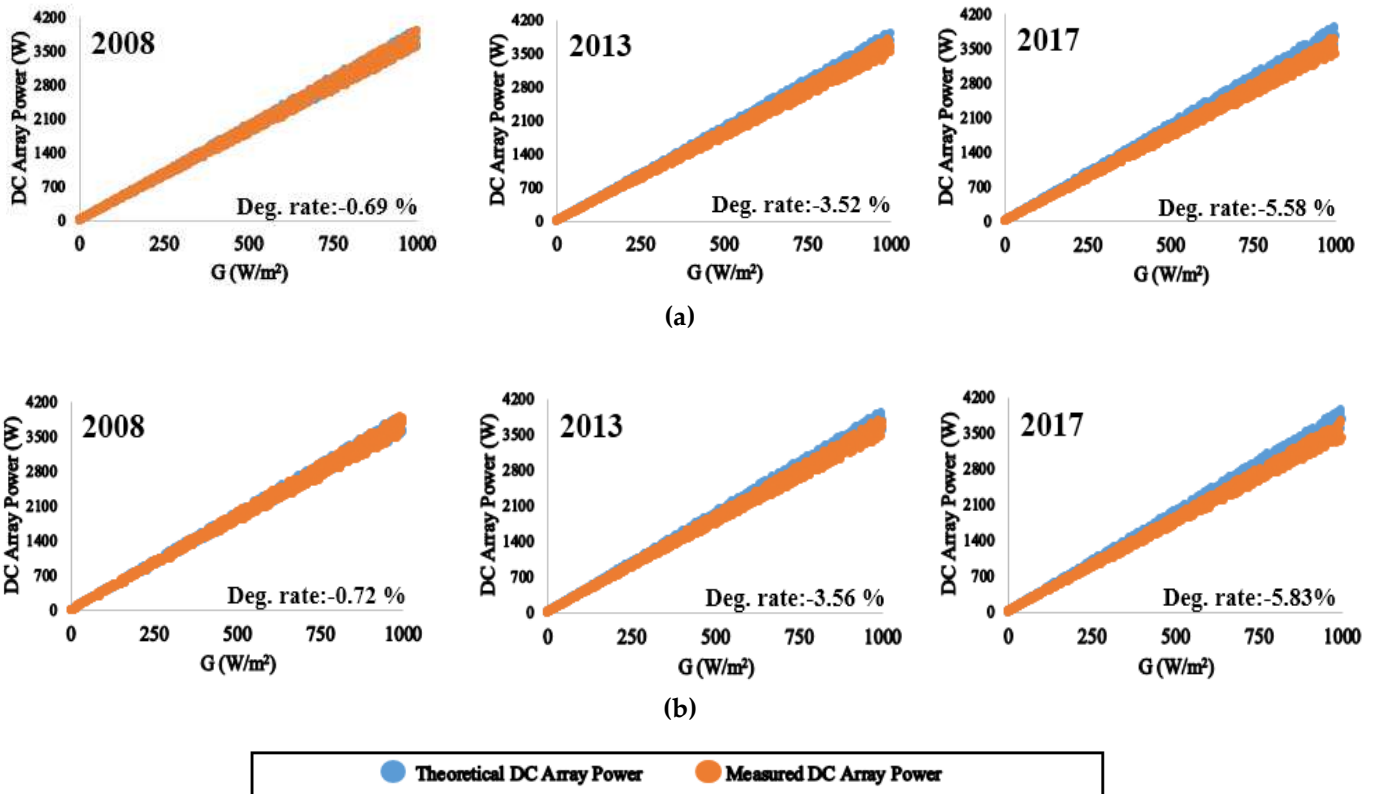


Figure 5. Cumulative degradation rate for PV systems F and G in 2008, 2013, and 2017: (a) PV site F – Dublin; (b) PV site G – Sligo.

212 4. Monthly Performance Ratio (PR) Analysis

213 In this section, the evaluation of the examined PV installations will be assessed using the
 214 performance ratio (PR) analysis. The PR is a widely used metric for comparing the relative
 215 performance of PV installations whose technology, capacity, design, and location differ [28] and [29].
 216 The PR is calculated using (5).

$$217 \quad PR = \frac{\eta_{measured}}{\eta_{theoretical}} = \frac{\frac{E}{G}}{\eta_{theoretical}} \quad (5)$$

218 where $\eta_{measured}$ and $\eta_{theoretical}$ are the actual measured efficiency and theoretical output efficiency
 219 of the examined PV installations, E is the output energy of the PV system (kWh), and G is the solar
 220 irradiance incident in the plant of the PV array (kWh).

221 The normal distribution graphs of the monthly PR for all examined PV systems are shown in
 222 Figure 6. The total number of samples is equal to 120 per location (twelve months \times ten years of PV
 223 operation). The shape of the obtained results is categorized by a normal distribution function,
 224 whereas the mean corresponds to the monthly mean of the PR over the studied period.


225 Figure 6a presents the PR of the PV systems installed in England. The mean PR value is equal to
 226 88.91%, 87.96%, and 87% for PV systems installed in Huddersfield, Plymouth, and London,
 227 respectively. This result is consistent with the results obtained by the Power-Irradiance technique
 228 described earlier in section 3.1. Huddersfield PV system has the lowest annual degradation rate of
 229 -5.03%/year, while the highest PV degradation rate of -0.88%/year is observed for the PV system
 230 located in London.

231 According to Figure 6b, PV systems in Scotland had the lowest PR ratio compared to all other
 232 examined PV systems, the monthly mean PR are equal to 86.15% and 85.46% for Glasgow and
 233 Aberdeen, respectively. This result is due to the high degradation rate of these PV systems; their
 234 annual degradation rate was always higher than -1.0%/year. This result also confirms that PV hot-
 235 spotting, heavy snow, and the hoarfrost affects the PR ratio of the entire PV systems installed in cold
 236 areas [32].


237 In the previous sections, we have demonstrated that the PV systems installed in Huddersfield,
 238 Dublin, and Sligo had almost identical annual degradation rates, varying from -0.53%/year in
 239 Huddersfield, -0.56%/year in Dublin, and -0.58%/year in Sligo. Consequently, according to results
 240 shown in Figure 6 a,c, the PV systems have nearly identical monthly mean PR ratios. In Huddersfield,
 241 it is equal to 88.91%, while in Dublin and Sligo, the monthly mean PR is equal to 88.78% and 88.57%,
 242 respectively.

243 In summary, this section confirms that the PV systems located in Ireland and England have
 244 better performance compared to both PV systems located in Scotland. Based on the technical report
 245 done by J. Leloux *et al.* [30], it was found that the monthly mean PR ratio of 5835 rooftop PV systems
 246 located in the UK is ranging from 81% to 83%. While, according to our findings, it was found that the
 247 monthly mean PR is always higher than 85%, there are two critical features of the higher rate of the
 248 PR observed in our study:


- 249 • All examined PV systems are fitted with efficient MPPT units. As was shown in Figure. 1c, these
 250 MPPT units have tracking efficiency ranging from 99.2% to 97.5%. Hence, the MPPT increases
 251 the annual yielded energy of the PV systems [33], particularly during partial shading scenarios,
 252 resulting in a higher PR ratio.
- 253 • One of the leading causes of output power loss in the PV systems is the conversion ratio of the
 254 dc-ac inverters, since they usually operate at low conversion limits, varying from 70% to 95%
 255 [31]. This is not a problem in our examined PV installations, since as noticed earlier in Figure. 1c,
 256 the PV systems are fitted with an efficient dc-ac inverter, with a conversion ratio always higher
 257 than 90%.

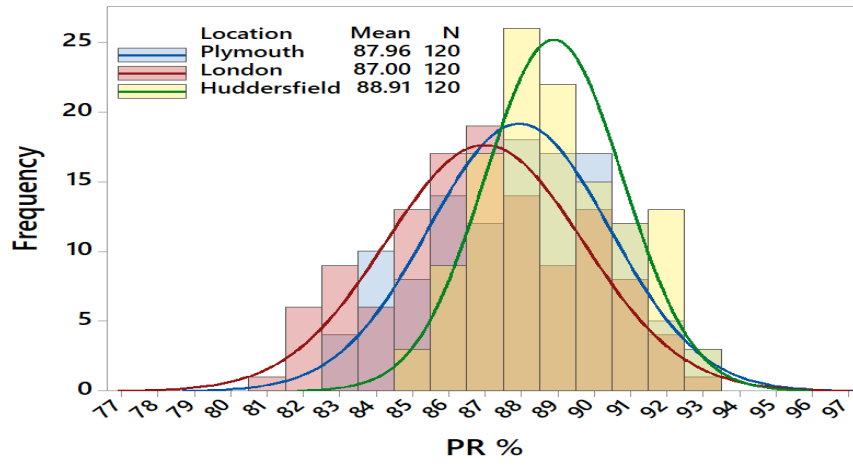

(a)

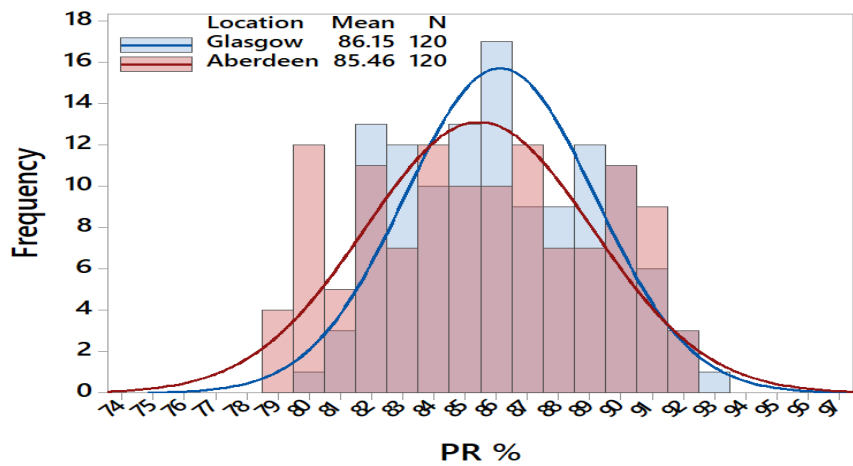

(b)

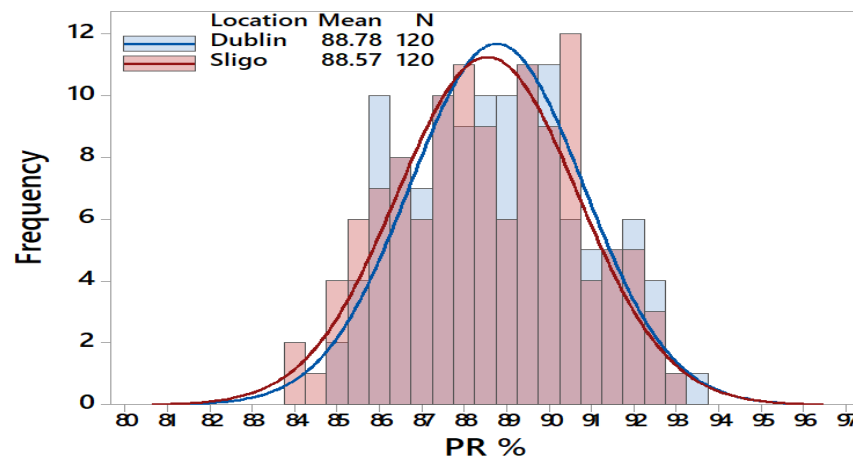

(c)

Figure 6. Performance Ratio (PR) analysis for all examined PV systems: (a) PV Systems installed in England; (b) PV systems installed in Scotland; (c) PV Systems installed in Ireland.


259 5. Summary of contributions

260 In this article, we presented a fundamental and straightforward approach to estimate the
 261 degradation rate in a typical PV installation. In order to compare the novelty and simplicity of our
 262 approach, the results of the degradation rate of Plymouth city was validated on a different, widely
 263 used, the degradation estimation technique of RdTool [34] developed by the national renewable
 264 energy laboratory (NREL).


265 This technique requires not only the temperature variance of the PV site, as our technique does,
 266 but also requires the following steps: data normalisation, filtering row data and aggregation.
 267 Therefore, the data analytics of the “degradation rate estimation” strongly depends on the actual data
 268 available on the PV site; hence, more data available with more time-stamp (data captured using 1min
 269 resolution or less) would typically result in an accurate prediction of the degradation rate. However,
 270 as recommended by [35] the estimation of the PV degradation is more accurate if the data aggregation
 271 is of 1-week to 1-month resolution. Therefore, both aggregation processes were used to analyse our
 272 available dataset from the Plymouth site.

273 The results of the degradation using the RdTool is shown in Figure 7. As can be seen in Figure
 274 7(a), the degradation rate of the PV site is equal to $-1.176\%/year$ without any data filtration; means
 275 that all aggregated data of the PV site is used for this analysis, while any missing data or inaccurate
 276 data has been considered. After the filtration process, which typically takes considerable time to do
 277 so, the degradation was as accurate as $-7.77\%/year$, close to our previous findings of $-0.74\%/year$ as
 278 shown in Figure 2a. The results of 1-month resolution without any data filtration is shown in Figure
 279 7(b), the estimated degradation is $-1.057\%/year$, while the degradation is estimated at $-0.69\%/year$
 280 after filtering the data samples.

281 In contrast with the above-mentioned results, the commonly used RdTool requires a significant
 282 effort of data filtration and aggregation in order to estimate as accurate as possible the degradation
 283 rate of PV installations. However, our proposed technique do not require this substantial amount of
 284 filtration of the missing data samples which makes the power-irradiance technique easy to adapt and
 285 simple to implement practically.

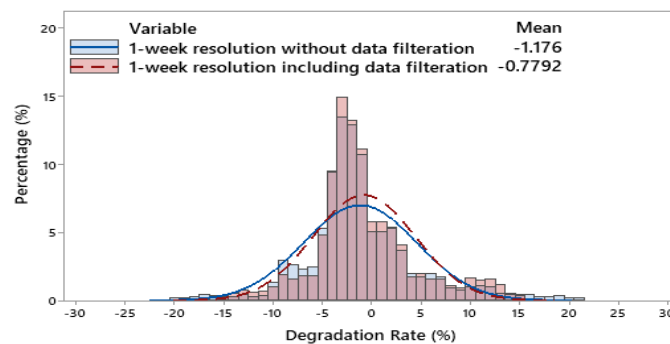

(a)

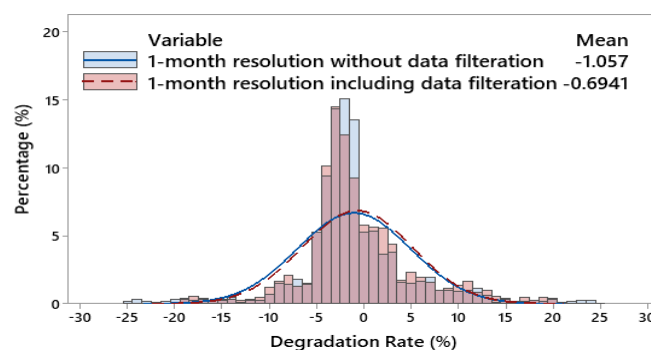

(b)

Figure 7. Degradation rate analysis for Plymouth city using RdTool [34]: (a) 1-week data resolution; (b) 1-month data resolution.

286 6. Conclusion

287 This article presented the analysis of the degradation rate for seven different PV systems
288 installed in various locations across England, Scotland, and Ireland. It was found that the lowest PV
289 degradation rate of -0.4% to -0.6%/year was obtained in the Irish PV sites. Higher PV degradation
290 rate of -0.7% to -0.9%/year was observed in the PV sites located in England. Whereas the highest PV
291 degradation rate of -1.0%/year was observed in cold areas such as Aberdeen and Glasgow, located in
292 Scotland. The main reason that the PV systems located in cold areas had the highest degradation rate
293 is due to the frequent hoarfrost and heavy snow affecting these PV systems, resulting in a reliability
294 and durability problems in the affected PV modules.

295 Furthermore, in this article, we have analyzed the performance ratio (PR) for all examined PV
296 systems, where it was found that the monthly mean PR for the PV systems located in Ireland and
297 England is always higher than 87%, whereas PV systems located in Scotland had the lowest monthly
298 mean PR in the range of 85% to 86%. In future, it is intended to compare our observations with various
299 PV systems installed in diverse locations across the globe, therefore enabling us to analyse the
300 degradation rate of PV systems affected by different weather conditions.

301 **Funding:** This research received no external funding.

302 **Conflict of Interest:** The author declares that the research was conducted in the absence of any
303 commercial or financial relationships that could be construed as a potential conflict of interest.

304 References

- 305 1. Dhimish, M.; Holmes, V.; Mehrdadi, B.; Dales, M.; & Mather, P. Detecting Defective Bypass
306 Diodes in Photovoltaic Modules using Mamdani Fuzzy Logic System. *Global Journal of Research
307 In Engineering*. 2017, 17(5).
- 308 2. La Monaca, S.; & Ryan, L. Solar PV where the sun doesn't shine: Estimating the economic
309 impacts of support schemes for residential PV with detailed net demand profiling. *Energy
310 policy*. 2017, 108, 731-741.
- 311 3. Dhimish, M.; Holmes, V.; Mehrdadi, B.; & Dales, M. Simultaneous fault detection algorithm for
312 grid-connected photovoltaic plants. *IET Renewable Power Generation*. 2017, 11(12), 1565-1575.
- 313 4. Dhimish, M.; & Badran, G. Current limiter circuit to avoid photovoltaic mismatch conditions
314 including hot-spots and shading. *Renewable Energy*. 2020, 145, 2201-2216.
- 315 5. Kawai, S.; Tanahashi, T.; Fukumoto, Y.; Tamai, F.; Masuda, A.; & Kondo, M. Causes of
316 Degradation Identified by the Extended Thermal Cycling Test on Commercially Available
317 Crystalline Silicon Photovoltaic Modules. *IEEE Journal of Photovoltaics*. 2017, 7(6), 1511-1518.
- 318 6. Phillips, C.; Elmore, R.; Melius, J.; Gagnon, P.; & Margolis, R. A data mining approach to
319 estimating rooftop photovoltaic potential in the US. *Journal of Applied Statistics*. 2019, 46(3), 385-
320 394.
- 321 7. Hacke, P.; Smith, R.; Terwilliger, K.; Glick, S.; Jordan, D.; Johnston, S.; et al. Testing and analysis
322 for lifetime prediction of crystalline silicon PV modules undergoing degradation by system
323 voltage stress. *IEEE 38th Photovoltaic Specialists Conference (PVSC) PART 2*. 2012, 1-8.
- 324 8. Halwachs, M.; Neumaier, L.; Vollert, N.; Maul, L.; Dimitriadis, S.; Voronko, Y.; et al. Statistical
325 evaluation of PV system performance and failure data among different climate zones.
326 *Renewable Energy*. 2019, 139, 1040-1060.
- 327 9. Jordan, D. C.; Sekulic, B.; Marion, B.; & Kurtz, S. R. Performance and aging of a 20-year-old
328 silicon PV system. *IEEE Journal of Photovoltaics*. 2015, 5(3), 744-751.
- 329 10. Kichou, S.; Abaslioglu, E.; Silvestre, S.; Nofuentes, G.; Torres-Ramírez, M.; & Chouder, A. Study
330 of degradation and evaluation of model parameters of micromorph silicon photovoltaic
331 modules under outdoor long term exposure in Jaén, Spain. *Energy conversion and management*.
332 2016, 120, 109-119.
- 333 11. Mir-Artigues, P.; Cerdá, E.; & del Río, P. Analysing the economic impact of the new renewable
334 electricity support scheme on solar PV plants in Spain. *Energy policy*. 2018, 114, 323-331.

- 335 12. Manganiello, P.; Balato, M.; & Vitelli, M. A survey on mismatching and aging of PV modules:
336 The closed loop. *IEEE Transactions on Industrial Electronics*. 2015, 62(11), 7276-7286.
- 337 13. Camus, C.; Adegbenro, A.; Ermer, J.; Suryaprakash, V.; Hauch, J.; & Brabec, C. J. Influence of
338 pre-existing damages on the degradation behavior of crystalline silicon photovoltaic modules.
339 *Journal of Renewable and Sustainable Energy*. 2019, 10(2), 021004.
- 340 14. Quansah, D.; Adaramola, M.; Takyi, G.; & Edwin, I. Reliability and degradation of solar PV
341 modules—case study of 19-year-old polycrystalline modules in Ghana. *Technologies*. 2017, 5(2),
342 22.
- 343 15. Pieri, E.; Kyprianou, A.; Phinikarides, A.; Makrides, G.; & Georghiou, G. E. Forecasting
344 degradation rates of different photovoltaic systems using robust principal component analysis
345 and ARIMA. *IET Renewable Power Generation*. 2017, 11(10), 1245-1252.
- 346 16. Naxakis, I.; Christodoulou, C.; Perraki, V.; & Pyrgioti, E. Degradation effects on single
347 crystalline silicon photovoltaic modules subjected to high impulse-voltages. *IET Science,
348 Measurement & Technology*. 2017, 11(5), 563-570.
- 349 17. Pietruszko, S. M.; Fetlinski, B.; & Bialecki, M. Analysis of the performance of grid connected
350 photovoltaic system. *34th IEEE Photovoltaic Specialists Conference (PVSC)*. 2009, 48-51.
- 351 18. Chandel, S. S.; Naik, M. N.; Sharma, V.; & Chandel, R. Degradation analysis of 28 year field
352 exposed mono-c-Si photovoltaic modules of a direct coupled solar water pumping system in
353 western Himalayan region of India. *Renewable energy*. 2015, 78, 193-202.
- 354 19. Chattopadhyay, S.; Dubey, R.; Kuthanazhi, V.; John, J. J.; Solanki, C. S.; Kottantharayil, A.; et
355 al. Visual degradation in field-aged crystalline silicon PV modules in India and correlation with
356 electrical degradation. *IEEE Journal of photovoltaics*. 2014, 4(6), 1470-1476.
- 357 20. Limmanee, A.; Udomdachanut, N.; Songtrai, S.; Kaewniyompanit, S.; Sato, Y.; Nakaishi, M.; et
358 al. Field performance and degradation rates of different types of photovoltaic modules: a case
359 study in Thailand. *Renewable Energy*. 2016, 89, 12-17.
- 360 21. Dechthummarong, C.; Wiengmoon, B.; Chenvidhya, D.; Jivacate, C.; & Kirtikara, K. Physical
361 deterioration of encapsulation and electrical insulation properties of PV modules after long-
362 term operation in Thailand. *Solar Energy Materials and Solar Cells*. 2010, 94(9), 1437-1440.
- 363 22. Ishii, T.; Choi, S.; Sato, R.; Chiba, Y.; & Masuda, A. Annual Degradation Rates of Recent c-Si PV
364 Modules under Subtropical Coastal Climate Conditions. *7th World Conference on Photovoltaic
365 Energy Conversion (WCPEC)(A Joint Conference of 45th IEEE PVSC, 28th PVSEC & 34th EU
366 PVSEC)*. 2018, 705-708.
- 367 23. Ye, J. Y.; Reindl, T.; Aberle, A. G.; & Walsh, T. M. Performance degradation of various PV
368 module technologies in tropical Singapore. *IEEE Journal of Photovoltaics*. 2014, 4(5), 1288-1294.
- 369 24. Lee, B.; Byun, J.; Choi, M. I.; Kang, B.; & Park, S. Degradation diagnosis system of photovoltaic
370 panels with mobile application. *IEEE Transactions on Consumer Electronics*. 2014, 60(3), 338-346.
- 371 25. Dhimish, M.; Holmes, V.; Mehrdadi, B., Dales, M., & Mather, P. (2017). Output-power
372 enhancement for hot spotted polycrystalline photovoltaic solar cells. *IEEE Transactions on
373 Device and Materials Reliability*. 2017, 18(1), 37-45.
- 374 26. Diyaf, A. G.; Mather, R. R.; & Wilson, J. I. Contacts on polyester textile as a flexible substrate
375 for solar cells. *IET Renewable Power Generation*. 2014, 8(5), 444-450.
- 376 27. Dhimish, M.. Micro cracks distribution and power degradation of polycrystalline solar cells
377 wafer: Observations constructed from the analysis of 4000 samples. *Renewable Energy*. 2020, 145,
378 466-477.
- 379 28. Kumar, N. M.; Kumar, M. R.; Rejoice, P. R.; & Mathew, M. Performance analysis of 100 kWp
380 grid connected Si-poly photovoltaic system using PVsyst simulation tool. *Energy Procedia*. 2017,
381 117, 180-189.
- 382 29. Dhimish, M.; Mather, P.; Holmes, V.; & Sibley, M. CDF modelling for the optimum tilt and
383 azimuth angle for PV installations: case study based on 26 different locations in region of the
384 Yorkshire UK. *IET Renewable Power Generation*, 13(3). 2018, 399-408.

- 385 30. Leloux, J.; Narvarte, L.; Pereira, A. D.; Leader, W. P.; Madrid, R.; SENES, C.; & de Navarra, P.
386 Analysis of the state of the art of PV systems in Europe. *Universidad Politécnica de Madrid:*
387 *Madrid, Spain*. 2015.
- 388 31. Planas, E.; Andreu, J.; Gárate, J. I.; de Alegría, I. M.; & Ibarra, E. AC and DC technology in
389 microgrids: A review. *Renewable and Sustainable Energy Reviews*. 2015, 43, 726-749.
- 390 32. Dhimish, M.; Mather, P. Exploratory evaluation of solar radiation and ambient temperature in
391 twenty locations distributed in United Kingdom. *Urban Climate*. 2019, 27, 179-192.
- 392 33. Dhimish, M. Assessing MPPT Techniques on Hot-Spotted and Partially Shaded Photovoltaic
393 Modules: Comprehensive Review Based on Experimental Data. *IEEE Transactions on Electron*
394 *Devices*. 2019, 66(3), 1132-1144.
- 395 34. NREL. Accurate Degradation Rate Calculation with RdTools.
396 <https://www.nrel.gov/pv/rdtools.html>.
- 397 35. Dhimish, M.; & Alrashidi, A. Photovoltaic Degradation Rate Affected by Different Weather
398 Conditions: A Case Study Based on PV Systems in the UK and Australia. *Electronics*. 2020, 9(4),
399 650.