

A Novel Hybrid Approach for Fast Block Based Motion Estimation

Shaifali Madan Arora¹, Kavita Khanna², Navin Rajpal^{3*}

¹Research Scholar, USICT, GGSIPU, Dwarka, & Assistant Professor, ECE Department, MSIT Janakpuri, New Delhi (India)

²Associate Professor, The NorthCap University Gurugram, Haryana (India)

³Professor, GGSIP University, Dwarka, Sector 16 C, New Delhi (India)

Received 26 December 2016 | Accepted 4 March 2017 | Published 30 March 2017



ABSTRACT

The current work presents a novel hybrid approach for motion estimation of various video sequences with a purpose to speed up the entire process without affecting the accuracy. The method integrates the dynamic Zero motion pre-judgment (ZMP) technique with Initial search centers (ISC) along with half way search termination and Small diamond search pattern. Calculation of the initial search centers has been shifted after the process of zero motion pre-judgment unlike most the previous approaches so that the search centers for stationary blocks need not be identified. Proper identification of ISC dismisses the need to use any fast block matching algorithm (BMA) to find the motion vectors (MV), rather a fixed search pattern such as small diamond search pattern is sufficient to use. Half way search termination has also been incorporated into the algorithm which helps in deciding whether the predicted ISC is the actual MV or not which further reduced the number of computations. Simulation results of the complete hybrid approach have been compared to other standard methods in the field. The method presented in the manuscript ensures better video quality with fewer computations.

KEYWORDS

Motion Estimation, Zero Motion Prejudgment, Initial Search Center, Decision Error, Peak Signal To Noise Ratio, Sum Of Absolute Differences.

DOI: 10.9781/ijimai.2017.03.011

I. INTRODUCTION

RAPID use of video based applications in broadcast and entertainment media has led to an overwhelming need to compress the video data. As a result many approaches came up towards video compression. Block based motion estimation is the most prevalent among the various techniques for motion estimation (ME). Due to the computational complexity of the ME process, an extensive research in the field has been conducted in the last two decades. Popularity of block based ME can be attributed to the simplicity and ease in hardware implementation of these algorithms. As a result, these algorithms have been used in many of the video coding standards including MPEG4 and H.264.

Block based motion estimation is based on the idea of reducing the temporal redundancy across the frames by matching the blocks in the current frame to the blocks in the reference frame in a specified search window. The brute force approach is to match all possible candidates in the search window and is known as full search [1]. This approach provides the optimum results but increases the computational overhead. The research then shifted over to finding the best match with the limited number of checking points in the search window. Three step search (TSS) [2], new three step search (NTSS) [3], four step search (4SS) [4] and diamond search (DS) [5] are the famous algorithms which resulted in high PSNR values and lesser computations. The main problem with all these approaches is of quality degradation due to trapping of search

process in local minima as they use a fixed pattern for search. Adaptive rood pattern search [6] found a way out to this complication by using other search patterns in accordance with the estimated behavior of the current block. There after many algorithms have been given in this category which helped in decreasing the number of search points via dynamic search paths. In all the block matching algorithms motion estimation is established by locating the ideal match for the current block. The matching criteria that is used most widely and in current work is the sum of absolute differences (SAD) which needs to be minimized in order to maximize the performance which is measured with peak signal to noise ratio (PSNR).

Development of various fixed and adaptive search pattern based algorithms reduce the computational burden but at the same time they compromise with the video quality. The main aim of any motion estimation algorithm is to reduce the number of computations without deteriorating the video quality. Zero motion judgement (ZMP) and initial search centre prediction (ISC) have been proven to be beneficial in accelerating the process of motion estimation. ZMP helps to identify the stationary blocks before the calculation of the actual motion vector and thus saves the computations for calculating the motion vectors of the stationary blocks. On the other hand ISC aims to find an initial location in the search window so that a refined search is carried around this point instead of centre of search window.

All the above proposed algorithms use the center of the search window for starting the process of finding the best matching block. It has been observed that there exists spatial as well as temporal coherence between the adjacent neighboring blocks and hence the motion of the current block can be predicted by utilizing the motion information of

* Corresponding author.

E-mail addresses: navin_rajpal@yahoo.com

the neighboring blocks. Using this information motion vector for the current block can be predicted. This predicted location is expected to be in the region of global minima, this reduces the number of search steps to attain global minima and thus the number of computations for motion estimation. Further, accuracy in determination of ZMP and ISC enhances the accuracy in determination of motion vectors which enhances the accuracy and quality of regenerated frame at the receiver end. Hence bit coding error, which refers to the difference in actual frame and regenerated frame at the receiver, should be reduced.

In the current work we have used a hybrid approach for fast block matching motion estimation. The idea is to firstly identify the stationary blocks and stop the search process for these blocks. For this purpose the dynamic threshold prediction technique as given in [7] has been used. The technique is not only simple but is also efficient in identifying the number of stationary blocks and thus helps to reduce the decision error.

After the identification of stationary blocks, initial search centers have been predicted with an approach as given in [8]. The advantage of this approach lies in its precise and accurate prediction of initial search centers which aids in speeding up the entire process of motion estimation.

Novelty of the proposed hybrid scheme is established with the help of increased PSNR, SSIM and search efficiency in comparison to various state-of-art algorithms in the field of fast block matching motion estimation. Also the number of computations is reduced when compared to the other standard methods

This paper is organized as follows. Section 2 describes the concepts of zero motion pre-judgment (ZMP) and dynamic threshold estimation technique of ZMP. General concept of initial search center (ISC) prediction along with the method of predicting ISC is given in section 3. A brief introduction to half way search termination and small diamond search algorithm are given in section 4 and 5 respectively. The detailed hybrid algorithm designed for the solution of the problem is presented in section 6. Simulation results along with the analysis and comparisons are shown in section 7. Section 8 concludes the presented work.

II. ZERO MOTION PRE-JUDGMENT

Zero motion pre-judgment has been extensively used in the literature to identify stationary blocks early in the video sequences so as to save unnecessary computations. It has been established in [6] that block distortion for stationary blocks is very less in comparison to moving blocks which plays a key role in identifying stationary blocks. The SAD value of the current block to the stationary block represents the block distortion and this SAD value is compared to a predetermined threshold for detecting stationary blocks. Different approaches in literature have used different thresholds for ZMP.

The concept of fixed threshold based Zero motion pre-judgment was firstly taken by Nie and Ma [6] while proposing adaptive rood pattern search algorithm. This approach is based on using a fixed threshold of 512 but using this threshold a large number of moving blocks could be detected as stationary blocks especially for slow motion sequences. The concept of fixed threshold has also been used by Luo et al [9] along with the search priority assigned to each point. The disadvantages of fixed threshold have led to the use of dynamic thresholds. Ahmed et al [10] have used an adaptive threshold which is determined by finding the highest or lowest of SAD values of the adjacent MBs based on specified conditions. Ismail et al [11] have used three level thresholds on the basis of three categories of SAD values. Dynamic early stop termination technique is also proposed in [11] to dynamically update the threshold by using the following equation [11]:

$$T_s = \min[\max(\text{SAD}_{0,0\text{avg}}, 400), \text{SAD}].\lambda + \varepsilon ; \quad (1)$$

where $\text{SAD}_{0,0\text{avg}}$ is the average of all the previous stationary blocks, λ is used to slow down or accelerate the ME process and ε is empirically taken as zero.

Two static thresholds based on motion contents have been given by Lin et al [12] which have been determined as per the static experimental results.

In yet another advancement of predicting threshold adaptively Ismail et al [13, 14] have given a formula based on average SAD scores of all the stationary blocks. The threshold value T_s is given as [13, 14]:

$$T_s = \min[\max(\text{SAD}_{\text{ISCavg}}, 512), \text{SAD}_{\text{ISCcurrent}}.\alpha + \beta ; \quad (2)$$

where parameters $\alpha = 0.75$ and $\beta = 128$.

But these thresholds do not guarantee the accurate results. A further refined dynamic threshold estimation technique given in [7] is based on the following observations:

1. A block which is having SAD below a particular threshold is not necessarily a stationary block.
2. SAD value of a stationary block w.r.t. its collocated block is least when compared to the SAD value of the stationary block with respect to its vertical and horizontal neighbors taken in the reference frame.

These drawbacks have been alleviated by using a two level threshold estimation technique given in [7]. We have used only a single level of the technique and incorporated in the proposed hybrid ME technique. The reason is that in [7] only the issue of ZMP has been taken up but here we are using other techniques along with ZMP to fasten the process of motion estimation. Use of both the levels incurs lot of complexity in terms of number of computations and thus only one level has been found sufficient when used with other techniques.

This single level of threshold determination for ZMP is explained with the help of following algorithm:

$$T_1 = \max(\text{SAD}_a, 256) * \alpha + \beta$$

if $\text{SAD}_c < T_1$

 check if SAD_c is equal to $\min(\text{SAD}_l, \text{SAD}_r, \text{SAD}_t, \text{SAD}_b)$

 then Declare the block as stationary

 if $\text{abs}(T_1 - \text{SAD}_c) < \alpha$

 then update SAD_a

 else SAD_a remains same,

 else Move to motion estimation algorithm

Here T_1 is determined by modifying equation (2) defined above. Here 256 is taken, instead of 512 in max operator so that moving blocks in slow motion sequences with small distortions can be appropriately determined. SAD_c is the SAD between the current block and its collocated block in the reference frame; SAD_l , SAD_r , SAD_t , SAD_b represent the SADs between current block w.r.t. its left, right, top and bottom neighboring blocks in the reference frame. SAD_a represents the average distortion which is initially given a value of 512 from the results in [6] for fixed threshold so as to find the first stationary block. This value is updated and assigned the SAD value of first stationary block encountered. Max operator assists to pursue changes in SAD_a . SAD_a is updated based on the difference between SAD_c and T_1 . If this difference is greater than α then SAD_c is not considered for updating the average distortion SAD_a . As a consequence the effect of very large or very small distortion values of the current stationary block would not affect the average variation of threshold. Parameters α is taken as 0.75 and β is taken as 128.

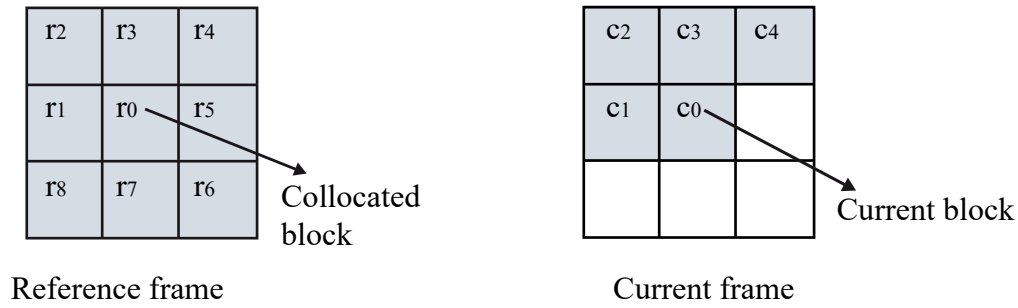


Fig. 1. Spatial and temporal neighbors of current block.

III. INITIAL SEARCH CENTER (ISC) PREDICTION

In most of the recent approaches using ZMP and ISC for fast motion estimation, initial search centers are identified before the stationary blocks. But using ZMP as a post processing step to ISC, leads to the identification of search centers even for the stationary blocks. This is the reason we have taken this step of predicting ISC after the ZMP.

Initial search center prediction helps in faster attainment of actual MV. ISC is predicted on the notion that there exist a lot of similarities in the neighboring video frames. These similarities may be spatial or temporal. Figure 1 shows the temporal and spatial neighboring relations.

Thus the current block will exhibit similar motion as compared to its surrounding blocks. So the motion prediction of the current block can be done from the motion of neighboring blocks in the current and temporal frame. Various methods have been proposed in literature for finding the ISC. A tabulated summary of these methods is given in [8].

The method used for ISC prediction in the current approach is the one given in [8]. This method has the following advantages over the previous methods:

1. The method makes use of the future points from reference frame to account for the fact that motion of an object is possible in any of the neighboring directions. No method in literature has used this concept.
2. The method works in two stages. First stage works by finding the suitable MVs whereas second stage finds the best among the previously found MVs.

A procedure used in [8] for finding the ISC is as follows:

- (1) Find an initial estimation of the motion vectors denoted by MPISC as:

$$\text{MPISC} = \text{median}(c_1, c_2, c_3, c_4, r_0, r_5, r_6, r_7, r_8) \quad (3)$$

Find the variation of MPISC with all the neighboring MVs (9 blocks):

$$V_i = \text{abs}(\text{MPISC}_x - c_{ix}/r_{ix}) + \text{abs}(\text{MPISC}_y - c_{iy}/r_{iy}) \quad (4)$$

The blocks for which $V_i > T_2$ are the suitable blocks for further processing; where $T_2 = 2$.

These candidate blocks are denoted by CISC_i (candidates for ISC).

- (2) Find SAD of the current block with MPISC and with all the CISC_i .

$$\text{SAD}_i = \text{SAD}(c_0, \text{MPISC}/\text{CISC}_i) \quad (5)$$

Minimum SAD implies that the probability of movement is in this particular direction. Therefore ISC is assigned MV in accordance to macro block with least SAD.

IV. HALF-WAY EARLY SEARCH TERMINATION

Predicted ISC can be the position of actual MV. If this can be detected early then search can be terminated early. To do so, the SAD value of the predicted ISC is checked, if it is below a predefined threshold T_d , then the current block may be assumed to have high correlation with that particular neighboring block. Same MV can be declared for this block as that of the best matched neighboring block and search is terminated thereafter saving huge computations. Threshold T_d in the proposed manuscript is taken same as that T_1 calculated above.

V. SMALL DIAMOND SEARCH (SDS) ALGORITHM

Once the initial search center is predicted with the proposed technique, there is high probability that it lies near the global minima. So the actual MV could be obtained by using a fixed and small search pattern to perform a refined search rather than using some fast BMA. Two types of fixed small search patterns have been defined in literature – four point pattern as in small diamond search (SDS) [15] and eight point square search pattern as in block based gradient descent search (BBGDS) [16]. We have used SDS rather than BBGDS to perform the refined search for MV. It is based on the comparative analysis of SDS and BBGDS given by Nee and Ma [6] indicating clearly that performance, in terms of PSNR, of both the algorithms is almost same whereas BBGDS incurs 40-80% more complexity in terms of number of calculations. Figure 2 shows the two fixed search patterns

So with the ISC and SDS, minimum distortion point (MDP) is obtained which is then considered as the new search center. This recursive procedure continues till the MDP is the center of the fixed SDS pattern or search window boundary is met.

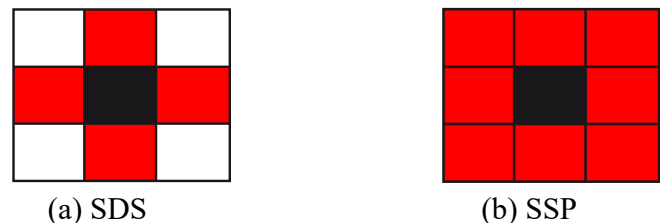


Fig. 2. Fixed small search patterns.

VI. PROPOSED HYBRID ME ALGORITHM

The proposed hybrid algorithm based on ZMP, ISC, Half way search termination and SDS works in following steps:

1. Find SAD_c of current block and its collocated block in the reference frame. If this $\text{SAD}_c < T_1$ AND SAD_c is equal to $\min(\text{SAD}_c, \text{SAD}_l, \text{SAD}_r, \text{SAD}_t, \text{SAD}_b)$, block is declared as stationary block. Search is terminated thereafter and go to step 7 otherwise go to step 2.

2. Find the MPISC = median ($c_1, c_2, c_3, c_4, r_0, r_5, r_6, r_7, r_8$) and identify the points using $V_i = \text{abs}(MPISC_x - c_{ix}/r_{ix}) + \text{abs}(MPISC_y - c_{iy}/r_{iy})$, which are distant apart from MPISC. The points for which V_i is above a threshold will be the candidate points for ISC (CISC) prediction.
3. Compute the SAD of C_0 with MPISC and CISCs and then find minimum SAD. Declare ISC as the point corresponding to minimum SAD.
4. Check whether ISC could be the location of actual MV by comparing its SAD with a predicted dynamic threshold. If true, declare the position of ISC as MV for current block and go to step 7 otherwise to next step.
5. Create a search pattern as shown in fig using four symmetrical horizontal and vertical points at distance unit distance around ISC. Compute minimum distortion point (MDP).
6. Set MDP from step 5 as the center for new unit size small diamond

search pattern including four symmetrical adjacent points in horizontal and vertical directions. The search is applied repeatedly using this new search pattern taking MDP at the center until the MDP comes out to be the center point of the search pattern or the search window boundary is met. The search is terminated at any point if $SAD < T_d$. Declare the displacement of this point from the center of search window as the MV for this block.

7. Exit

The steps followed in the proposed algorithm are depicted graphically in Figure 3.

VII. PERFORMANCE ANALYSIS AND COMPARISON RESULTS

The main goal of any algorithm is to lower the computational complexity while maintaining the video quality as that of FS algorithm. The performance of the proposed algorithm has been evaluate by doing

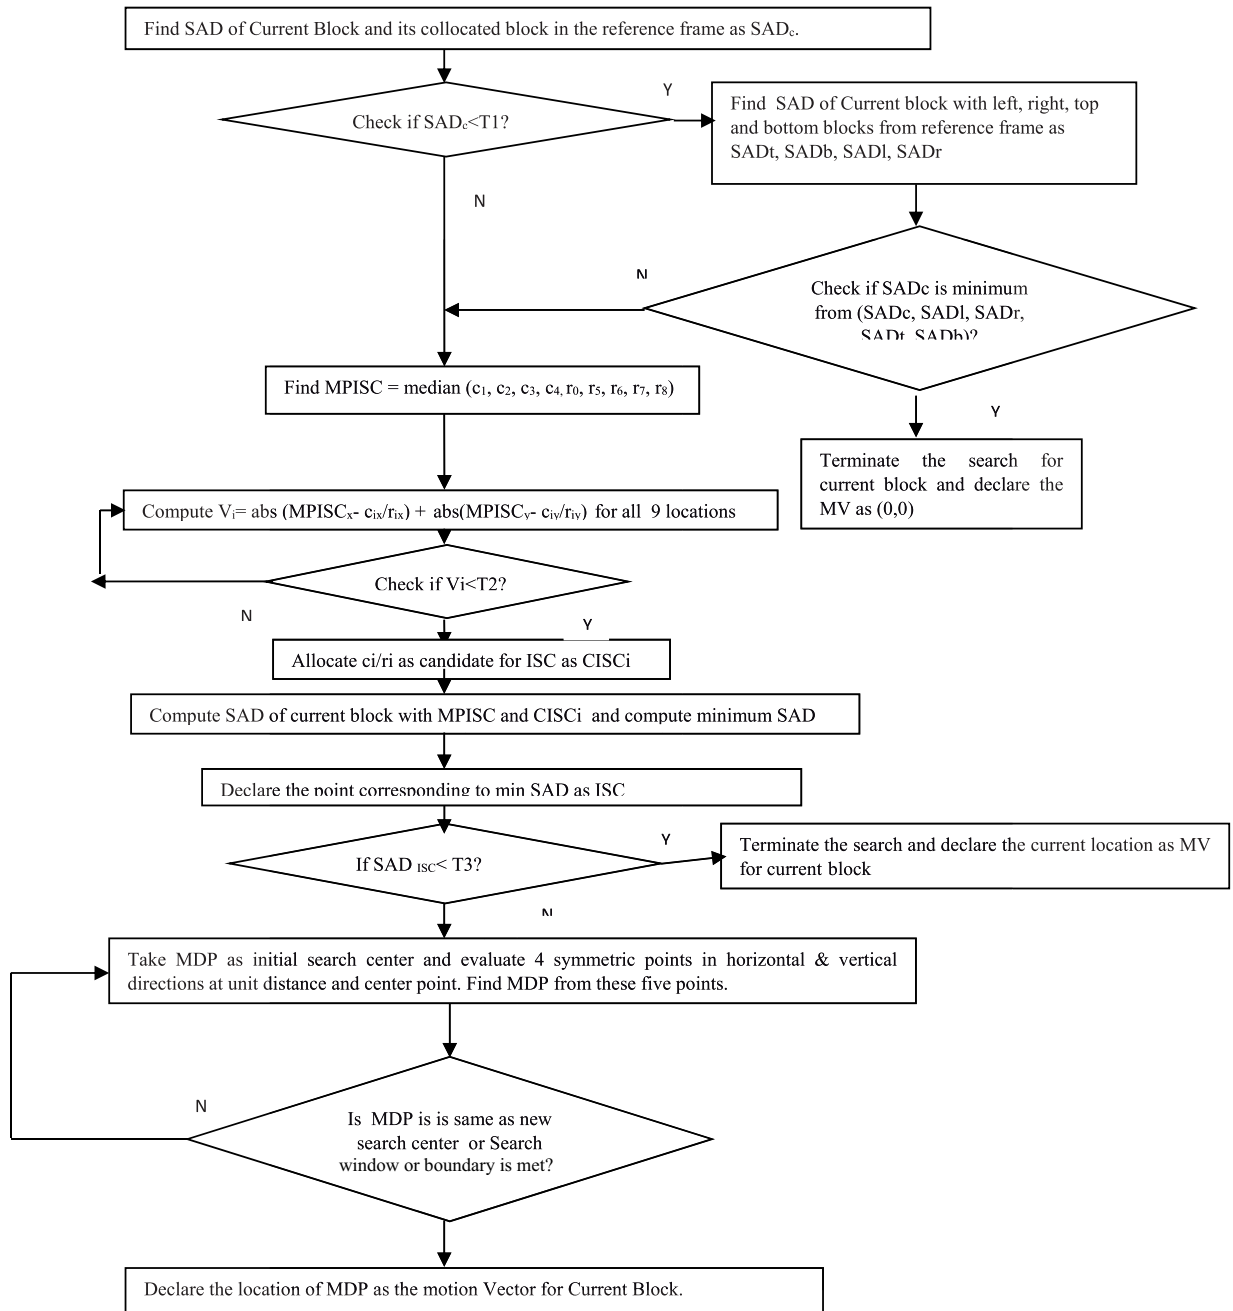


Fig. 3. Block diagram of the proposed algorithm.

simulations on various standard YUV test video sequences containing different motion characteristics, listed in Table 1. Experimental set up for simulations include a 15fps, size of ± 7 for search window and 16×16 for blocks. Proposed algorithm is compared with fixed size algorithms like FS, TSS, NTSS, 4SS, DS, and predictive motion based vector adaptive search pattern algorithms like ARPS, DPS and recently proposed APSP and FPS algorithms.

To measure the performance of proposed ME algorithm following parameters are evaluated – computational complexity and search efficiency, video quality in terms of average PSNR per frame, structural similarity index measurement (SSIM) per frame, average number of bits required per pixel to represent the residual frame (Difference between the actual and the motion compensated frame) and distance

between the actual and predicted Motion Vector.

Computational complexity of a ME algorithm can be evaluated in terms of average number of search points required per block to estimate the MVs.

Search efficiency can be evaluated by finding the distance between the actual MV obtained from FS algorithm and the estimated MV using a fast BMA.

$$Distance_actualMV_predictedMV(DAP) = \frac{(|MV_x - MV_{fx}| + |MV_y - MV_{fy}|)}{NB} \quad (6)$$

Where (MV_x, MV_y) , (MV_{fx}, MV_{fy}) represents MVs of FS algorithm and fast BMA resp; NB represents the total number of blocks in a frame.

TABLE I. TEST VIDEO SEQUENCES USED IN EXPERIMENT HAVING DIFFERENT MOTION CHARACTERISTICS

Sequence	Motion Characteristics
QCIF Video Sequences	
Akiyo, Clair, Miss America	Static Background with very small moving objects, maximum quasi stationary blocks
Salesman, Silent, Foreman	Static Background with objects having Large Motion
Football, Tennis	Background and Objects with Large motion in horizontal and vertical Directions
CIF Video Sequences	
News, Mother-Daughter	Static Background with small moving objects, maximum quasi stationary blocks
Hall	Static Background with large moving objects
Stefan, Mobile Calendar	Large motion in horizontal direction with Rich Motion Content
Highway	Large motion in vertical Directions

TABLE II. COMPARISON OF VARIOUS PARAMETERS FOR QCIF VIDEO SEQUENCES

Sequences	Parameters	FS	DS	ARPS	DPS	ASPS	FPS	Proposed
Akiyo	Comp	184.56	11.44	1.44	4.90	1.47	0.96	0.97
	PSNR	42.16	42.16	42.16	42.16	42.10	42.16	42.16
	SSIM	0.992	0.992	0.992	0.992	0.992	0.992	0.992
	DAP		0.20	0.33	0.20	0.40	0.37	0.30
Clair	Comp	184.56	11.48	1.39	5.05	1.45	0.96	0.98
	PSNR	42.75	42.69	42.68	42.68	42.57	42.61	42.68
	SSIM	0.991	0.991	0.991	0.991	0.991	0.991	0.991
	DAP		5.31	5.32	5.34	5.95	5.81	5.33
Miss America	Comp	184.56	12.21	2.01	6.24	1.48	1.49	1.76
	PSNR	40.62	40.62	40.53	40.39	39.49	39.95	40.57
	SSIM	0.981	0.981	0.981	0.981	0.981	0.981	0.981
	DAP		31.82	60.73	64.42	65.99	66.59	51.94
Silent	Comp	184.56	11.87	2.32	5.53	1.84	1.30	1.94
	PSNR	36.20	35.80	35.72	35.70	35.52	35.62	35.82
	SSIM	0.968	0.968	0.967	0.967	0.966	0.966	0.967
	DAP		6.32	7.86	7.62	11.60	11.34	6.20
Salesman	Comp	184.56	11.51	1.80	5.05	1.48	1.49	1.47
	PSNR	38.61	38.59	38.57	38.57	38.57	38.55	38.57
	SSIM	0.979	0.979	0.979	0.979	0.979	0.979	0.979
	DAP		0.37	0.80	0.70	0.77	0.93	0.63
Foreman	Comp	184.56	12.21	4.08	6.03	6.07	5.83	4.00
	PSNR	28.71	28.50	28.45	28.42	28.42	28.32	28.48
	SSIM	0.908	0.907	0.907	0.907	0.907	0.905	0.908
	DAP		26.93	39.53	39.27	40.93	42.93	30.57
Football	Comp	184.56	17.52	10.59	10.05	12.57	14.78	10.46
	PSNR	21.65	21.43	21.35	21.10	21.07	20.12	21.55
	SSIM	0.669	0.656	0.655	0.638	0.634	0.603	0.661
	DAP		94.06	98.66	113.34	129.94	171.32	83.36

Further Peak Signal to noise ratio (PSNR) is evaluated as [17, 18]:

$$PSNR = 10 \log_{10} \frac{Max^2}{MSE} \quad (7)$$

Where the value of Max is taken as 255 representing the maximum possible pixel value in a video frame. MSE is the mean square error between the original frame and the motion compensated frame. FS algorithm gives the best MVs, hence best video quality and maximum PSNR. Therefore provides standard PSNR with which the PSNR values calculated from other BMAs is compared.

Structural similarity index measurement (SSIM) is also a means to measure the similarity between two images. SSIM between the two blocks C (block in original frame) and R(block in motion compensated frame) is given as:

$$SSIM(C, R) = \frac{2(u_C u_R + p1)(2\sigma_{CR} + p2)}{(u_C^2 + u_R^2 + p1)(\sigma_C^2 + \sigma_R^2 + p2)} \quad (8)$$

It has been observed from fixed search pattern algorithms like TSS that these use fixed search points to attain actual MV. Early search termination and search near center feature is added in NTSS and 4SS to reduce the search points especially in slow motion sequences. DS algorithm incorporated above features along with special search pattern further lowered the search points and became the most favorable algorithm in various standards. ARPS with zero motion prejudgment and DPS algorithms modified the large diamond search pattern in DS and able to reduce the search points. Recently proposed ASPS and FPS

algorithms incorporated ISC & ZMP techniques to reduce the search points. In these algorithms ISC point is found first and then ZMP is implemented. However in case of slow motion sequences most of the blocks don't possess motion or are stationary. Therefore finding ISC before determining a block to be stationary or not would involve unnecessary ISC computations for ZMP. Therefore in the current approach ZMP is implemented first and ISC is calculated only for the blocks which are not stationary.

The simulation results are shown in Tables 2 and 3 for qcif and cif sequences respectively. Comparisons have been done on the basis of four parameters that are computations, PSNR, SSIM and distance between actual and predicted MV. It can be observed from the results that there is 9-11 times reduction in search locations with the proposed approach for very slow motion video sequences having stationary background like "Akiyo", "Clair", "Miss America" compared to DS algorithm in qcif video sequences. The reduction in CIF video sequences like "News" & "Mother-Daughter" is 6-7 times. Such high reduction in computations is possible because of accuracy in prediction of ISC which leads this predicted point to be in the region of global minima and search followed by small number of search points to attain the position of actual motion vector. The computations are slightly larger than recently proposed FPS algorithm because in the proposed ZMP technique, four additional neighboring points need to be checked. This small overhead increases accuracy in determination of slow moving blocks and stationary blocks otherwise very slow moving blocks whose distortion is less than dynamic threshold have high probability to be identified as stationary blocks. This influence

TABLE III. COMPARISON OF VARIOUS PARAMETERS FOR CIF VIDEO SEQUENCES

Sequences	Parameters	FS	DS	ARPS	DPS	ASPS	FPS	Proposed
Mother Daughter	Comp	204.28	13.60	2.56	6.77	2.19	2.55	2.82
	PSNR	39.85	39.70	39.65	39.55	39.00	38.78	39.68
	SSIM	0.973	0.973	0.972	0.972	0.968	0.969	0.972
	DAP		444.31	504.70	515.00	521.33	538.87	484.49
News	Comp	204.28	12.62	2.02	5.63	2.03	2.23	1.97
	PSNR	37.26	37.06	37.01	36.88	36.61	36.74	37.04
	SSIM	0.982	0.982	0.982	0.982	0.981	0.981	0.982
	DAP		27.77	42.49	34.29	63.03	56.60	36.54
Hall	Comp	204.28	13.02	7.34	6.27	6.083	6.6431	5.89
	PSNR	34.37	34.15	34.11	34.07	34.06	34.01	34.14
	SSIM	0.941	0.941	0.941	0.941	0.941	0.940	0.941
	DAP		161.13	213.53	244.33	226.67	270.80	193.50
Mobile Calender	Comp	204.28	15.22	6.41	8.30	7.29	7.01	7.39
	PSNR	33.88	33.60	33.50	33.20	32.67	32.24	33.53
	SSIM	0.933	0.931	0.930	0.927	0.920	0.915	0.931
	DAP		360.11	446.68	445.30	552.32	604.46	412.93
Highway	Comp	204.28	15.47	6.94	8.64	7.89	5.65	7.99
	PSNR	35.62	34.52	34.28	34.04	34.01	33.63	34.69
	SSIM	0.906	0.901	0.899	0.898	0.897	0.889	0.901
	DAP		586.798	686.010	662.727	727.697	874.970	650.465
Stefan	Comp	204.28	19.81	8.39	8.77	9.41	15.59	7.59
	PSNR	23.82	20.94	23.10	23.03	19.52	19.01	23.63
	SSIM	0.850	0.750	0.825	0.823	0.645	0.654	0.844
	DAP		994.50	437.90	392.30	1199.30	1481.20	271.10

can be observed as improvement in video quality in terms of PSNR, SSIM. For sequence like “Miss America”, “Mother-Daughter” there is appreciable improvement in PSNR to recently proposed FPS or ASPS algorithms. This improvement is possible because of accuracy in determination of actual motion vectors and reduction in trapping in local minima. Further the proposed algorithm shows appreciable improvement in search speed and video quality especially for fast motion sequences.

VIII. CONCLUSION

In this paper a hybrid technique for fast motion estimation is proposed. The technique is based on using improved dynamic techniques for determination of zero motion blocks, improved accuracy in prediction of initial search center prediction, early search termination and small diamond search pattern. Proposed technique enhances the video quality in terms of PSNR and SSIM. Further it increases the search efficiency and reduces the number of computations required to estimate the motion vectors. Simulation results show the superiority of the proposed technique to the existing techniques in literature.

REFERENCES

- [1] M. Ahmadi and M. Azadfar, “Implementation of fast motion estimation algorithms & comparison with full search method in H.264”, IJCSNS International Journal of Computer Science & Network Security, vol. 8(3), pp. 139-143, 2008.
- [2] T. Koga, K. Iinuma, A. Hirano, Y. Iijima and T. Ishiguru, “Motion compensated inter frame coding for video conferencing”, in Proc of NTC81. New Orleans, LA, pp. C9.6.1–C9.6.5, 1981.
- [3] R. Li, B. Zeng and M. L. Liou, “A new three step search algorithm for block motion estimation”, IEEE Transactions on Circuits and Systems for Video Technology, vol. 4, pp. 438-442, 1994.
- [4] L. Po and W. Ma, “A novel four step search algorithm for fast block Motion estimation”, IEEE Transactions on Circuits and Systems for Video Technology, vol. 6(3), pp. 313-317, 1996.
- [5] S. Zhu and K. Ma, “A new diamond search algorithm for fast block Matching motion estimation”, IEEE Transactions on Image Processing, vol. 9(2), pp. 287–317, 2000.
- [6] Yao Nie, and Kai-Kuang Ma, “Adaptive Rood Pattern Search for Fast Block-Matching Motion Estimation”, in IEEE Trans. on Image Processing, vol 11(12), pp. 1442 -1448, 2002.
- [7] Shaifali Madan Arora, Navin Rajpal and Kavita Khanna “A new approach with enhanced accuracy in zero motion prejudgment for motion estimation in real time applications”, Real Time Image Processing, Springer, 2016, pp 1-17, DOI: 10.1007/s11554-016- 0593-z.
- [8] Shaifali Madan Arora, Navin Rajpal, Kavita Khanna and Ravinder Purwar, “Improved Accuracy in Initial Search Center Prediction to Fasten Motion Estimation in h.264”, IETE journal of Research, Published online DOI: <http://dx.doi.org/10.1080/03772063.2016.1205962>.
- [9] Luo, Jun, Xiaohua Yang, and Liheng Liu, “A fast motion estimation algorithm based on adaptive pattern and search priority”, Multimedia Tools and Applications, vol. 74(24), pp. 11821–11836, 2015.
- [10] Ishfaq Ahmad, , Weiguo Zheng, Jiancong Luo, and Ming Liou, “A fast adaptive motion estimation algorithm”, Circuits and Systems for Video Technology, IEEE Transactions on, vol. 16(3), pp. 420-438, 2006.
- [11] Ismail, Yasser, Mohamed A. Elgamel, and Magdy A. Bayoumi, “Fast variable padding motion estimation using smart zero motion prejudgment technique for pixel and frequency domains”, Circuits and Systems for Video Technology, IEEE Transactions on, vol. 19(5), pp. 609-626, 2009.
- [12] Lin, Lili, I-Chyn Wey, and Jing-Hua Ding. “Fast predictive motion estimation algorithm with adaptive search mode based on motion type classification”, Signal, Image and Video Processing, vol. 10(1), pp. 171-180, 2016.
- [13] Yasser Ismail, Mohamed Elgamel and Magdy Bayoumi, “Adaptive techniques for a fast frequency domain motion estimation”, In Signal Processing Systems, 2007 IEEE Workshop on, pp. 331-336. IEEE, 2007.
- [14] Yasser Ismail, Jason B. McNeely, Mohsen Shaaban, Hanan Mahmoud

- and Magdy A. Bayoumi, “Fast motion estimation system using dynamic models for H. 264/AVC video coding”, Circuits and Systems for Video Technology, IEEE Transactions on, vol. 22(1), pp. 28-42, 2012.
- [15] S. Zhu and K.-K. Ma, “A new diamond search algorithm for fast block-matching motion estimation.” in Proc. 1997 Int. Conf. Information, Communications and Signal Processing (ICICS), vol. 1, Sept. 9–12, 1997, pp. 292–296.
- [16] Wang Y, Wang Y, Kuroda H, “A globally adaptive pixel decimation algorithm for block motion estimation”, IEEE Transactions on Circuits and Systems for Video Technology, vol. 7(3), pp. 477-488, 1997.
- [17] Kamble, Shailesh D., Nileshsingh V. Thakur, and Preeti R. Bajaj. “A Review on Block Matching Motion Estimation and Automata Theory based Approaches for Fractal Coding”, International Journal of Interactive Multimedia and Artificial Intelligence, vol. 4(2), pp.91-104, 2016.
- [18] Kamble, Shailesh D., Nileshsingh V. Thakur, and Preeti R. Bajaj. “Modified Three-Step Search Block Matching Motion Estimation and Weighted Finite Automata based Fractal Video Compression”, International Journal of Interactive Multimedia and Artificial Intelligence, vol. 4(4), pp. 27-39, 2017.



Shaifali Madan Arora

Dr Shaifali Madan Arora is an Assistant Professor at MSIT, New Delhi. She is a Ph. D from GGSIPU, Dwarka, New Delhi. She has done her B.Tech from GNDU, Amritsar, India and M.Tech from GNDEC, Ludhiana, India. She has teaching experience of more than 14 years. She is a life member of ISTE. Her areas of interest include Digital image and signal processing, Artificial intelligence, Microprocessors and controllers. She has various research publications in quality national and international conferences and journals.



Kavita Khanna

Dr. Kavita Khanna is, at present, an associate professor with North Cap University, Gurgaon, Haryana. She has done her doctorate from GGSIPU, Dwarka, New Delhi. She has 17 years of teaching experience during which she has published more than 30 research papers and guided 20 M. Tech students in their research work. Her research areas include artificial neural networks, digital image processing, computer graphics and design and analysis of algorithms. Apart from that she is working as a Radio Jockey with All India Radio FM Gold.



Navin Rajpal

Prof. Navin Rajpal is Professor at USICT, GGSIPU, New Delhi. He did his B. Sc. (Engineering) in Electronics & Communication from R.E.C. Kurukshetra, now known as NIT, Kurukshetra. He did his M. Tech and Ph.D. from Computer Science & Engineering Department, IIT, Delhi. He served in various capacities and has more than 24 years of experience in teaching and research. He has worked as Senior Scientific Officer for more than eight years at Centre for Applied Research in Electronics IIT Delhi on various sponsored and Consultancy projects. Before joining this university in July 2000 as Reader, he worked for more than 4 years as Assistant Professor at C.R. State College of Engineering, Murthal, where he was In-charge Computer Science and Engineering Department for about two years. In G.G.S. Indrapratha University he has worked as Reader, USICT and In-charge Computer Center from July 2000 to August 2004. He has also worked as Head CS&E at IGIT from Jan. 2005 to Dec. 2007. He has supervised several M. Tech. and nine Ph.D. Students. He has published / presented more than 100 research papers in National and International Journals / Conferences. He is a life member of CSI and ISTE. His areas of interest are Computer Vision, Image Processing, Pattern Recognition, Artificial Neural Networks, Computer Graphics, Algorithms Design and Digital Hardware Design.