

LOAD RATINGS FOR STANDARD BRIDGES

Final Report

For

TR-785

JANUARY 2021



TECHNICAL REPORT DOCUMENTATION PAGE



1. Report No. TR-785	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Load Rating for Standard Bridges – Final Report for TR-785		5. Report Date January 2021	
		6. Performing Organization Code	
7. Author(s) Stephen W. Moffitt, PE, orcid.org/0000-0002-8277-2279 Jon E. Peterson, PE, orcid.org/0000-0002-4378-762X Payton D. Seager, PE, orcid.org/0000-0002-2554-3015 Joseph T. Malloy, EI, orcid.org/0000-0002-7539-0213 Ryan P. Pritchard, EI, orcid.org/0000-0002-3359-9470 Shawn M. Muhle, EI, orcid.org/0000-0002-4009-940X Emmett M. Moffitt, orcid.org/0000-0002-6173-2323		8. Performing Organization Report No. Iowa Highway Research Board Project TR-785	
9. Performing Organization Name and Address HGM Associates Inc. 5022 S 114 th Street Omaha, NE 68144		10. Work Unit No.	
		11. Contract or Grant No. Iowa DOT Contract No. 709AD	
12. Sponsoring Agency Name and Address Iowa Department of Transportation Iowa Highway Research Board		13. Type of Report and Period Covered Final Report – March 16, 2020 thru December 31, 2020	
		14. Sponsoring Agency Code IDOT and IHRB	
15. Supplementary Notes Conducted in cooperation with the U.S. Department of Transportation, Federal Highway Administration. Project TR-785 was sponsored by the Iowa Highway Research Board and the Iowa Department of Transportation. The Iowa Highway Research Board approved expenditures to conduct the engineering study. The engineering determinations for this project were conducted by HGM Associates Inc.			
16. Abstract In this report, seventeen Iowa secondary and primary bridge standards for three types of bridges are rated utilizing the Load and Resistance Factor methodology and AASHTO BrR Bridge Rating software, Version 6.8.4.3001. Load ratings in this report are in compliance with the AASHTO Manual for Bridge Evaluation, 3rd Edition, with Interim Specifications through 2019, and the AASHTO LRFD Bridge Design Specifications, 8th Edition. All standards were rated as multilane structures with full impact load for design and legal trucks. Permit trucks were rated as Routine or Annual permits, >5000 ADTT in accordance with MBE Table B6A-45.			
17. Key Words Bridges, Bridge Load Rating, Bridge Load Posting, Bridge Rating Analysis		18. Distribution Statement No restrictions.	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 42 pages	22. Price

ENGINEERING STUDY
IOWA HIGHWAY RESEARCH BOARD
PROJECT TR-785

FINAL REPORT

LOAD RATING FOR STANDARD BRIDGES

IOWA DEPARTMENT OF TRANSPORTATION
AMES, IOWA 50010

BRIDGE LOAD RATINGS	
	<p>I hereby certify that this engineering document was prepared by me or under my direct personal supervision and I am a duly licensed Professional Engineer under the laws of the State of Iowa.</p> <p> 1/18/2021 Signature Date Stephen W. Moffitt</p> <p>License No. 13124 My license renewal date is December 31, 2021</p>

JANUARY 2021

TABLE OF CONTENTS

Acknowledgement4

Introduction.....5

Iowa Truck Diagrams7

Summary Ratings

 H Series10

 J Series28

 RS Series.....35

ACKNOWLEDGEMENT

Project TR-785 was sponsored by the Iowa Highway Research Board and the Iowa Department of Transportation. The Iowa Highway Research Board approved expenditures to conduct the engineering study. The engineering determinations for this project were conducted by HGM Associates Inc.

DISCLAIMERS

Federal and state laws prohibit employment and/or public accommodation discrimination on the basis of age, color, creed, disability, gender identity, national origin, pregnancy, race, religion, sex, sexual orientation or veteran's status. If you believe you have been discriminated against, please contact the Iowa Civil Rights Commission at 800-457-4416 or Iowa Department of Transportation's affirmative action officer. If you need accommodations because of a disability to access the Iowa Department of Transportation's services, contact the agency's affirmative action officer at 800-262-0003.

The opinions, findings, and conclusions expressed in this publication are those of the authors and not necessarily those of the Iowa Department of Transportation.

INTRODUCTION

- Load Rating: Evaluation of the capacity of a bridge to carry vehicle loads
- Standard Bridge: Bridge built according to standards issued by the Iowa Department of Transportation
- Inventory Rating: Load level which can safely utilize the bridge for an indefinite period of time
- Operating Rating: Maximum permissible load level for the bridge

A load rating states the load in tons which a vehicle can impose on a bridge. A load rating may also be expressed in terms of a Rating Factor which represents a ratio of the capacity of the bridge to the maximum response computed for the stated load. Changes in guidelines, standards, and customary uses of bridges require analyses of bridges to be updated and reevaluated.

In this report, seventeen secondary and primary bridge standards for three types of bridges are rated utilizing Load and Resistance Factor methodology and AASHTO BrR Bridge Rating software, Version 6.8.4.3001:

<u>Precast Beam</u>	<u>Reinforced Concrete Slab</u>	<u>Rolled Steel Beam</u>
H24-06	J24-06	RS40-10/14 (Original)
H30-06	J30-06	RS40-10/14 (2017 Revision)
H30SI-12	J40-06/14	
H40-06/14	J44-06/14	
H44-07/14		

The ratings apply only to those bridges which:

- (1) are built according to the applicable bridge standard plans
- (2) have no structural deterioration or damage
- (3) have no added wearing surface in excess of a one-half inch integral wearing surface

Load ratings in this report are in compliance with the AASHTO Manual for Bridge Evaluation, 3rd Edition, with Interim Specifications through 2019, and the AASHTO LRFD Bridge Design Specifications, 8th Edition. All standards were rated as multilane structures with full impact load for design and legal trucks. Permit trucks were rated as Routine or Annual permits, >5000 ADTT in accordance with MBE Table B6A-45.

The H Standards were rated as simple spans; negative moment reinforcing steel was not considered.

The J30-06 standards include an epoxy and non-epoxy coated reinforcement option. Both options were rated, and the values reported are the lowest value computed. As a result, the ratings from this table can be used for both the epoxy and non-epoxy coated reinforcement option.

The RS Standards were rated considering moment redistribution and using plastic section analysis. Bridges were modelled as composite in the positive moment region only. Longitudinal deck reinforcement was not considered effective. Splices were not analyzed.

The RS40-10/14 Standards listed below were revised in February, 2017. These revisions included changes to the diaphragm spacing and the addition of a diaphragm to the center span in the exterior bays near the pier. The revision had a significant effect on the load ratings, and ratings for both the Original and Revised 2017 versions are presented in this report.

<u>Standard</u>	<u>Length</u>	<u>Skew</u>
RS40-10/14	160'-0	20 and 30 degrees
RS40-10/14	180'-0	0, 20 and 30 degrees
RS40-10/14	200'-0	20 and 30 degrees
RS40-10/14	220'-0	0, 20 and 30 degrees

The proper use and application of these bridge ratings requires due consideration and evaluation by a qualified engineer of all relevant factors affecting these ratings. Anyone using any part of these bridge ratings assumes sole responsibility for their proper application.

References:

Manual for Bridge Evaluation, 3rd Edition

As amended by Interim Specifications through 2019,
prepared by Highway Subcommittee on Bridges and Structures
publ. American Association of State Highway and Transportation
Officials, Washington, D.C. , 2018.


AASHTO LRFD Bridge Design Specifications, 8th Edition

Prepared by Highway Subcommittee on Bridges and Structures
publ. American Association of State Highway and Transportation
Officials, Washington, D.C. 2017


IOWA TRUCK DIAGRAMS



Straight Truck

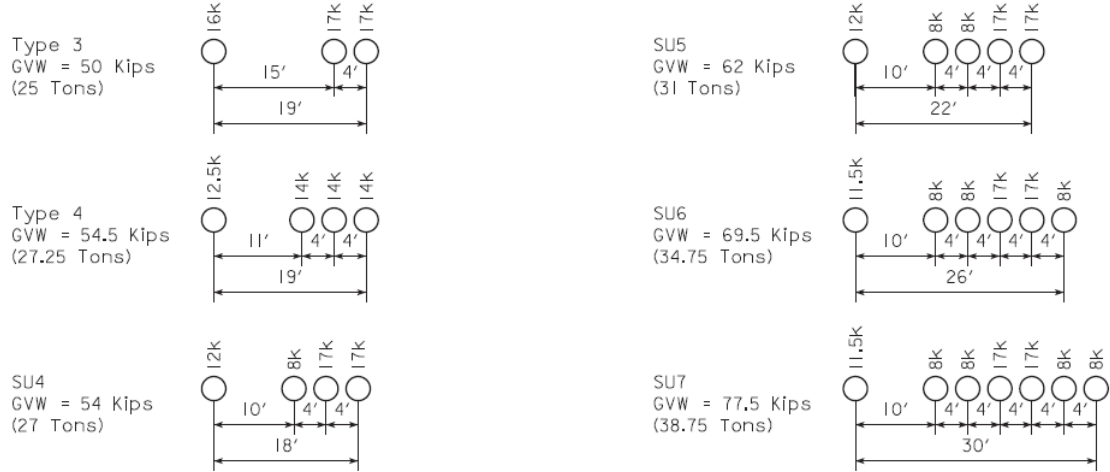

Truck + Semi Trailer

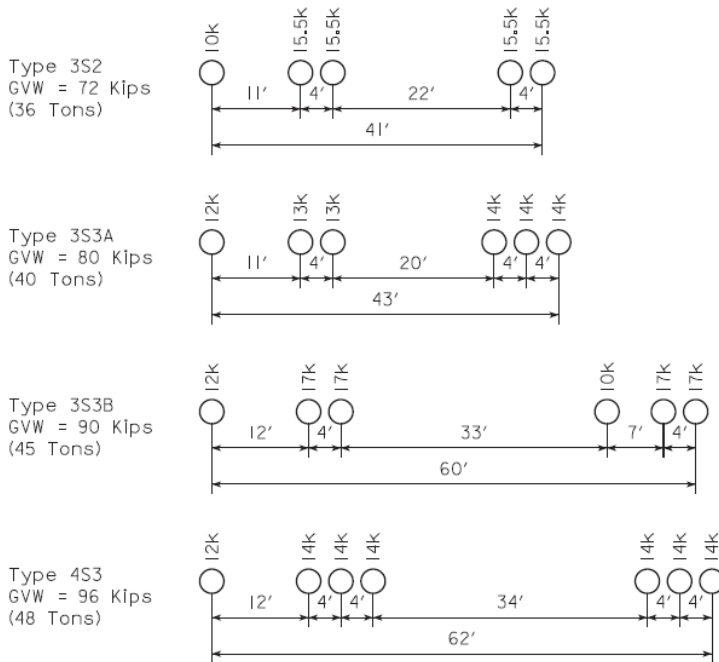


IOWA TRUCK DIAGRAMS




Truck + Full Trailer

Type 3-3
GVW = 80 Kips
(40 Tons)

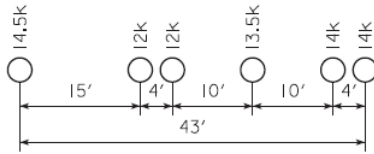


Type 5-2
GVW = 96 Kips
(48 Tons)

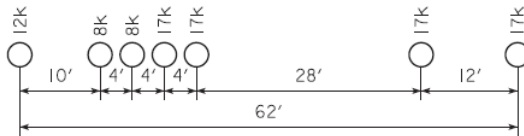


Emergency Vehicles

EV2
GVW = 57.5 Kips
(28.75 Tons)




EV3
GVW = 86 Kips
(43 Tons)



IOWA TRUCK DIAGRAMS

Annual Permit Trucks

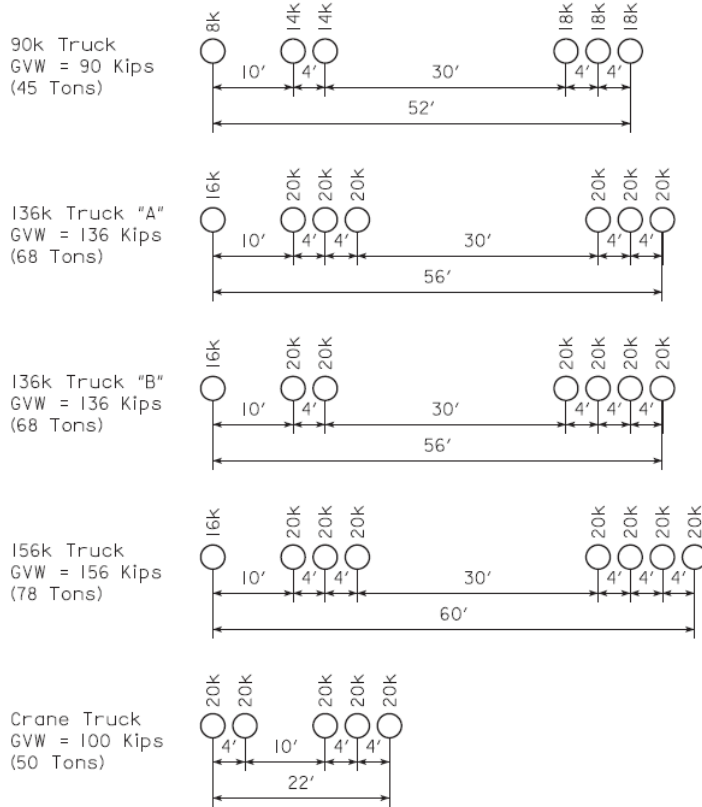

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H24-06, 0 and 15 Degree Skew, 2'-8 Open Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.80	1.69	1.75	1.69	1.78	1.90	1.96	1.96	1.97
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	SRV3 +M
Location	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 1 E	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 1 E	0.5L Sp 1 E
HL-93 Inv	1.39	1.24	1.35	1.31	1.31	1.47	1.41	1.33	1.33
Controlled by	STR1 +M	SRV3 +M	STR1 +M	STR1 +M	SRV3 +M	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 E
IA Type 4	45.6	40.2	47.8	46.8	45.0	49.8	49.6	47.8	47.8
IA Type 3	47.2	41.4	49.2	48.0	46.1	51.0	50.8	48.7	48.7
IA SU4	44.5	39.2	46.8	45.8	44.1	48.8	48.7	47.1	47.1
IA SU5	47.1	41.4	49.1	47.9	46.0	51.0	50.7	48.7	48.7
IA SU6	47.5	41.6	49.4	48.2	46.2	51.2	51.0	48.9	48.9
IA SU7	49.0	42.8	50.7	49.3	47.2	52.5	52.1	49.7	49.7
IA 3S3A	73.6	62.6	72.5	69.3	65.4	73.7	69.1	64.5	64.5
IA 3S2A	73.4	61.6	70.1	66.1	61.7	70.3	65.3	61.3	61.3
IA 3S3B	83.5	74.2	89.1	87.7	84.9	93.3	93.6	89.4	89.4
IA 4S3	81.7	71.8	85.5	83.6	80.3	88.9	88.6	83.9	83.9
IA 3-3	69.9	60.1	69.7	65.8	61.4	70.0	65.0	61.1	61.1
IA 5-2	73.0	64.0	76.1	74.2	70.0	78.9	74.9	70.8	70.8
IA EV2	47.5	41.6	49.4	48.2	46.2	51.3	51.0	48.8	48.8
IA EV3	45.9	40.4	48.1	47.0	45.2	50.0	49.8	48.0	48.0
90k	69.0	61.4	73.9	72.8	70.6	77.5	75.5	70.7	70.7
100k Crane	55.7	48.6	57.4	55.8	53.4	59.3	58.7	56.1	56.1
136k A	85.8	75.7	90.3	88.4	85.1	94.0	91.2	83.6	83.6
136k B	77.5	68.7	82.2	80.8	78.0	85.9	84.6	79.0	79.0
156k	88.9	78.8	94.3	92.6	89.5	98.6	97.0	89.4	89.4

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H24-06, 30 and 45 Degree Skew, 2'-8 Open Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.81	1.70	1.96	1.81	1.80	2.12	2.15	2.04	2.04
Controlled by	STR1 V	STR1 V	STR1 +M	STR1 V	STR1 V	STR1 +M	STR1 +M	STR1 V	STR1 V
Location	0.5L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.5L Sp 2 E	0.1L Sp 2 I	0.1L Sp 1 I
HL-93 Inv	1.40	1.31	1.51	1.40	1.39	1.63	1.55	1.46	1.46
Controlled by	STR1 V	STR1 V	STR1 +M	STR1 V	STR1 V	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.5L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 E
IA Type 4	50.2	43.9	52.7	51.3	49.1	55.4	54.7	52.3	52.3
IA Type 3	51.9	45.3	54.2	52.6	50.3	56.9	55.9	53.3	53.3
IA SU4	48.9	42.9	51.6	50.3	48.2	54.3	53.9	51.5	51.5
IA SU5	51.9	45.2	54.1	52.5	50.2	56.8	55.8	53.2	53.2
IA SU6	52.2	45.5	54.4	52.8	50.5	57.1	56.1	53.4	53.4
IA SU7	53.9	46.8	55.8	54.1	51.6	58.4	57.1	54.4	54.4
IA 3S3A	81.0	68.4	79.9	76.0	71.4	82.1	75.8	70.0	70.0
IA 3S2A	80.7	67.4	77.3	72.5	67.3	78.1	71.7	67.1	67.1
IA 3S3B	91.8	81.2	98.2	96.2	92.7	104.0	103.6	97.1	97.1
IA 4S3	89.9	78.6	94.2	91.6	87.7	99.0	97.7	91.6	91.6
IA 3-3	76.9	65.7	76.8	72.1	67.0	77.7	71.4	66.9	66.9
IA 5-2	80.3	70.0	83.8	81.4	76.4	87.9	82.3	77.4	77.4
IA EV2	52.2	45.5	54.4	52.8	50.5	57.1	56.1	53.4	53.4
IA EV3	50.5	44.2	53.0	51.5	49.3	55.7	55.0	52.5	52.5
90k	75.9	67.2	81.4	79.9	77.0	86.3	82.8	77.2	77.2
100k Crane	61.2	53.1	63.3	61.2	58.3	66.1	64.4	61.3	61.3
136k A	94.4	82.8	99.5	96.9	92.9	104.7	100.1	90.2	90.2
136k B	85.3	75.1	90.6	88.6	85.1	95.7	92.9	85.7	85.7
156k	97.8	86.2	103.9	101.6	97.6	109.8	106.5	96.6	96.6

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H30-06, 0 and 15 Degree Skew, 2'-8 Open Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.87	1.76	1.82	1.77	1.86	1.98	2.05	2.05	2.06
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M
Location	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 1 E	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 1 E	0.5L Sp 1 E
HL-93 Inv	1.45	1.32	1.41	1.37	1.40	1.53	1.50	1.42	1.42
Controlled by	STR1 +M	SRV3 +M	STR1 +M	STR1 +M	SRV3 +M	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 E
IA Type 4	48.4	42.7	50.6	49.6	47.8	52.6	52.5	50.9	50.9
IA Type 3	50.0	44.0	52.1	50.9	49.0	54.0	53.8	51.9	51.9
IA SU4	47.1	41.7	49.5	48.6	46.9	51.6	51.6	50.1	50.1
IA SU5	50.0	44.0	52.0	50.8	48.9	54.0	53.7	51.8	51.8
IA SU6	50.3	44.2	52.3	51.1	49.1	54.2	54.0	52.0	52.0
IA SU7	51.9	45.5	53.6	52.3	50.2	55.5	55.2	53.0	53.0
IA 3S3A	78.0	66.5	76.7	73.5	69.5	78.0	73.3	68.8	68.8
IA 3S2A	77.8	65.5	74.2	70.1	65.6	74.4	69.3	65.4	65.4
IA 3S3B	88.5	78.9	94.3	93.1	90.3	98.8	99.2	95.3	95.3
IA 4S3	86.6	76.3	90.5	88.6	85.4	94.1	93.8	89.5	89.5
IA 3-3	74.1	63.8	73.8	69.7	65.3	74.0	69.1	65.2	65.2
IA 5-2	77.4	68.0	80.5	78.7	74.4	83.5	79.6	75.4	75.4
IA EV2	50.3	44.2	52.3	51.1	49.2	54.2	54.0	52.0	52.0
IA EV3	48.7	42.9	50.9	49.8	48.0	52.9	52.8	51.1	51.1
90k	73.1	65.3	78.2	77.3	75.0	82.0	80.1	75.5	75.5
100k Crane	59.0	51.6	60.8	59.2	56.8	62.8	62.3	59.7	59.7
136k A	90.9	80.4	95.5	93.7	90.5	99.5	96.8	89.3	89.3
136k B	82.1	73.0	87.0	85.7	82.9	90.9	89.8	84.4	84.4
156k	94.2	83.7	99.8	98.2	95.1	104.3	103.0	95.5	95.5

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H30-06, 0 and 15 Degree Skew, 2'-10 Barrier Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.92	1.78	1.81	1.76	1.88	1.96	2.04	2.07	2.15
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M
Location	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I
HL-93 Inv	1.48	1.37	1.40	1.36	1.45	1.51	1.52	1.47	1.47
Controlled by	STR1 +M	SRV3 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.5L Sp 1 I	0.5L Sp 2 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 2 I	0.5L Sp 1 I
IA Type 4	49.2	44.3	51.2	50.3	49.9	52.0	52.0	52.5	52.5
IA Type 3	50.9	45.7	52.6	51.8	51.1	53.4	53.2	53.5	53.5
IA SU4	48.0	43.3	50.0	49.1	49.0	51.0	51.0	51.7	51.7
IA SU5	50.9	45.7	52.5	51.8	51.1	53.3	53.1	53.5	53.5
IA SU6	51.2	45.9	52.8	52.1	51.3	53.6	53.4	53.7	53.7
IA SU7	52.8	47.3	54.2	53.6	52.4	54.9	54.6	54.6	54.6
IA 3S3A	79.4	69.1	77.5	75.5	72.6	77.1	74.7	71.0	71.0
IA 3S2A	79.2	68.0	75.0	72.0	68.5	73.5	70.6	67.4	67.4
IA 3S3B	90.0	81.9	95.3	92.9	94.2	97.6	98.1	98.3	98.3
IA 4S3	88.1	79.3	91.4	89.9	89.2	92.9	92.8	92.3	92.3
IA 3-3	75.4	66.3	74.6	71.7	68.1	73.1	70.3	67.2	67.2
IA 5-2	78.7	70.7	81.3	80.1	77.7	82.5	80.9	77.7	77.7
IA EV2	51.2	45.9	52.8	52.1	51.3	53.6	53.4	53.7	53.7
IA EV3	49.6	44.6	51.4	50.6	50.1	52.3	52.2	52.7	52.7
90k	74.4	67.8	79.0	76.9	78.3	81.0	81.5	77.8	77.8
100k Crane	60.1	53.6	61.4	60.8	59.2	62.1	61.7	61.6	61.6
136k A	92.6	83.6	96.5	94.7	94.4	98.3	98.3	92.1	92.1
136k B	83.6	75.8	87.9	85.9	86.5	89.8	90.1	87.0	87.0
156k	95.9	87.0	100.9	98.6	99.3	103.0	103.3	98.5	98.5

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H30-06, 30 and 45 Degree Skew, 2'-8 Open Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.84	1.76	2.03	1.88	1.86	2.20	2.24	2.11	2.11
Controlled by	STR1 V	STR1 V	STR1 +M	STR1 V	STR1 V	STR1 +M	STR1 +M	STR1 V	STR1 V
Location	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.5L Sp 2 E	0.1L Sp 2 I	0.1L Sp 1 I
HL-93 Inv	1.42	1.36	1.57	1.45	1.44	1.69	1.64	1.55	1.55
Controlled by	STR1 V	STR1 V	STR1 +M	STR1 V	STR1 V	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 E
IA Type 4	53.0	46.6	55.7	54.3	52.1	58.5	58.0	55.5	55.5
IA Type 3	54.8	48.1	57.3	55.7	53.4	60.0	59.2	56.6	56.6
IA SU4	51.6	45.5	54.5	53.2	51.1	57.3	57.0	54.7	54.7
IA SU5	54.7	48.0	57.2	55.6	53.3	60.0	59.2	56.6	56.6
IA SU6	55.1	48.3	57.5	55.9	53.6	60.3	59.4	56.8	56.8
IA SU7	56.9	49.7	59.0	57.2	54.7	61.7	60.6	57.8	57.8
IA 3S3A	85.4	72.6	84.4	80.4	75.7	86.7	80.3	75.2	75.2
IA 3S2A	85.2	71.5	81.6	76.7	71.5	82.7	76.0	71.4	71.4
IA 3S3B	96.9	86.1	103.7	101.8	98.4	109.8	109.6	104.0	104.0
IA 4S3	94.8	83.4	99.6	97.0	93.1	104.6	103.6	97.7	97.7
IA 3-3	81.1	69.7	81.2	76.3	71.1	82.3	75.7	71.1	71.1
IA 5-2	84.7	74.3	88.6	86.1	81.1	92.8	87.2	82.3	82.3
IA EV2	55.1	48.3	57.5	55.9	53.6	60.3	59.4	56.8	56.8
IA EV3	53.3	46.9	56.0	54.6	52.4	58.8	58.3	55.8	55.8
90k	80.1	71.3	86.0	84.6	81.8	91.1	87.8	82.4	82.4
100k Crane	64.6	56.3	66.8	64.8	61.8	69.8	68.3	65.2	65.2
136k A	99.6	87.8	105.1	102.6	98.6	110.6	106.1	97.5	97.5
136k B	90.0	79.7	95.7	93.7	90.4	101.1	98.4	92.1	92.1
156k	103.2	91.4	109.8	107.5	103.6	115.9	112.9	104.3	104.3

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H30-06, 30 and 45 Degree Skew, 2'-10 Barrier Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.83	1.75	2.02	1.87	1.85	2.18	2.25	2.10	2.10
Controlled by	STR1 V	STR1 V	STR1 +M	STR1 V	STR1 V	STR1 +M	STR1 +M	STR1 V	STR1 V
Location	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.5L Sp 1 I	0.1L Sp 2 I	0.1L Sp 1 I
HL-93 Inv	1.42	1.35	1.55	1.44	1.43	1.68	1.67	1.60	1.60
Controlled by	STR1 V	STR1 V	STR1 +M	STR1 V	STR1 V	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.5L Sp 2 I	0.5L Sp 2 I	0.5L Sp 1 I
IA Type 4	54.1	48.5	56.3	55.6	54.4	57.8	57.5	57.3	57.3
IA Type 3	56.0	50.0	57.9	57.3	55.7	59.3	58.8	58.4	58.4
IA SU4	52.7	47.3	55.1	54.3	53.4	56.7	56.4	56.4	56.4
IA SU5	55.9	49.9	57.8	57.2	55.7	59.2	58.8	58.4	58.4
IA SU6	56.2	50.2	58.1	57.5	55.9	59.6	59.0	58.6	58.6
IA SU7	58.0	51.6	59.6	58.9	57.2	61.0	60.3	59.6	59.6
IA 3S3A	87.2	75.5	85.3	82.7	79.1	85.6	81.8	77.5	77.5
IA 3S2A	87.0	74.3	82.5	78.9	74.6	81.7	77.4	73.6	73.6
IA 3S3B	98.9	89.5	104.9	102.8	102.7	108.5	108.5	107.3	107.3
IA 4S3	96.8	86.7	100.6	99.5	97.2	103.3	102.6	100.7	100.7
IA 3-3	82.8	72.4	82.0	78.5	74.3	81.3	77.1	73.4	73.4
IA 5-2	86.5	77.2	89.5	88.5	84.7	91.7	88.8	84.9	84.9
IA EV2	56.2	50.2	58.1	57.5	55.9	59.6	59.1	58.6	58.6
IA EV3	54.5	48.7	56.6	56.0	54.7	58.1	57.7	57.5	57.5
90k	81.7	74.1	86.9	85.1	85.4	90.1	89.4	85.0	85.0
100k Crane	66.0	58.6	67.6	66.6	64.6	69.0	68.2	67.2	67.2
136k A	101.7	91.3	106.2	104.8	103.0	109.3	108.1	100.5	100.5
136k B	91.9	82.8	96.8	95.1	94.3	99.9	99.6	95.0	95.0
156k	105.4	95.0	111.0	109.1	108.2	114.5	114.3	107.5	107.5

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H30SI-12, 0 and 15 Degree Skew, 2'-8 Open Rail

Bridge Length

Truck	46'-8	55'-0	67'-6	80'-0	90'-0	100'-0	110'-0
HL-93 Oper	1.74	1.80	2.00	2.13	2.04	2.22	1.99
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR V
Location	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I	0.1L I
HL-93 Inv	1.34	1.32	1.41	1.42	1.48	1.39	1.31
Controlled by	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I
IA Type 4	45.8	42.8	48.3	50.8	54.8	53.1	51.2
IA Type 3	47.5	44.2	49.5	51.8	55.7	53.9	51.9
IA SU4	44.4	41.8	47.4	50.1	54.1	52.4	50.6
IA SU5	47.5	44.1	49.4	51.8	55.7	53.8	51.9
IA SU6	47.8	44.4	49.6	52.0	55.9	54.0	52.0
IA SU7	49.5	45.6	50.7	52.9	56.7	54.7	52.6
IA 3S3A	75.2	66.7	70.2	68.8	71.0	66.5	62.6
IA 3S2A	73.8	65.7	66.2	65.3	67.9	64.1	60.6
IA 3S3B	82.7	79.1	91.2	95.2	94.8	85.6	77.8
IA 4S3	82.0	76.6	86.3	89.4	89.7	81.1	74.3
IA 3-3	72.2	64.1	65.9	65.1	67.7	63.9	60.4
IA 5-2	73.5	68.3	75.2	75.3	77.7	71.9	67.0
IA EV2	47.8	44.4	49.6	52.0	55.9	54.0	52.0
IA EV3	46.1	43.1	48.5	51.0	55.0	53.2	51.3
90k	68.2	65.5	75.8	75.4	78.0	72.5	67.8
100k Crane	56.4	51.8	57.3	59.6	63.8	61.5	59.1
136k A	85.8	80.7	91.4	89.2	89.0	81.5	75.4
136k B	77.1	73.2	83.7	84.3	86.5	79.5	73.8
156k	88.4	84.0	96.0	95.4	95.9	87.7	80.2

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H30SI-12, 0 and 15 Degree Skew, 2'-10 Barrier Rail

Bridge Length

Truck	46'-8	55'-0	67'-6	80'-0	90'-0	100'-0	110'-0
HL-93 Oper	1.73	1.79	1.98	2.12	2.03	2.20	1.98
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 V
Location	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I	0.1L I
HL-93 Inv	1.33	1.30	1.39	1.40	1.46	1.37	1.28
Controlled by	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I
IA Type 4	45.3	42.3	47.6	50.0	53.9	52.1	50.1
IA Type 3	47.0	43.6	48.7	51.0	54.8	52.9	50.8
IA SU4	44.0	41.3	46.7	49.3	53.2	51.5	49.6
IA SU5	46.9	43.5	48.7	51.0	54.8	52.8	50.8
IA SU6	47.3	43.8	48.9	51.2	55.0	53.0	50.9
IA SU7	49.0	45.0	50.0	52.1	55.8	53.7	51.5
IA 3S3A	74.4	65.8	69.2	67.7	69.8	65.3	61.2
IA 3S2A	73.0	64.8	65.3	64.3	66.9	62.9	59.3
IA 3S3B	81.8	78.1	89.9	93.7	93.5	84.0	76.1
IA 4S3	81.1	75.6	85.0	88.0	88.3	79.6	72.7
IA 3-3	71.4	63.2	65.0	64.1	66.7	62.7	59.1
IA 5-2	72.7	67.4	74.1	74.1	76.5	70.6	65.6
IA EV2	47.3	43.8	48.9	51.2	55.0	53.0	50.9
IA EV3	45.6	42.5	47.8	50.2	54.1	52.2	50.2
90k	67.4	64.6	74.7	74.2	76.8	71.2	66.3
100k Crane	55.8	51.1	56.5	58.7	62.8	60.4	57.9
136k A	84.9	79.6	90.1	87.8	87.6	80.0	73.8
136k B	76.3	72.2	82.5	83.0	85.1	78.1	72.2
156k	87.5	82.9	94.7	93.9	94.4	86.1	78.5

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H30SI-12, 30 Degree Skew, 2'-8 Open Rail

Bridge Length

Truck	46'-8	55'-0	67'-6	80'-0	90'-0	100'-0	110'-0
HL-93 Oper	1.82	1.82	1.92	2.17	2.13	2.18	1.92
Controlled by	STR1 +M	STR V	STR V	STR V	STR1 +M	STR V	STR V
Location	0.5L I	0.1L I	0.1L I	0.1L I	0.5L I	0.1L I	0.1L I
HL-93 Inv	1.40	1.37	1.47	1.48	1.54	1.44	1.35
Controlled by	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I
IA Type 4	47.8	44.5	50.1	52.8	57.0	55.0	52.9
IA Type 3	49.7	45.9	51.4	53.9	58.0	55.9	53.7
IA SU4	46.4	43.5	49.2	52.0	56.2	54.4	52.4
IA SU5	49.6	45.8	51.3	53.8	57.9	55.8	53.6
IA SU6	50.0	46.1	51.5	54.0	58.1	56.0	53.8
IA SU7	51.8	47.4	52.7	55.0	59.0	56.7	54.4
IA 3S3A	78.6	69.4	72.9	71.5	73.8	69.0	64.7
IA 3S2A	77.1	68.3	68.8	67.9	70.7	66.4	62.6
IA 3S3B	86.4	82.2	94.7	98.9	98.6	88.8	80.5
IA 4S3	85.7	79.6	89.6	92.9	93.3	84.1	76.8
IA 3-3	75.5	66.6	68.5	67.6	70.5	66.3	62.5
IA 5-2	76.8	71.0	78.1	78.3	80.9	74.6	69.3
IA EV2	50.0	46.1	51.5	54.0	58.1	56.0	53.8
IA EV3	48.2	44.8	50.4	53.0	57.2	55.2	53.1
90k	71.2	68.1	78.7	78.4	81.1	75.2	70.1
100k Crane	59.0	53.8	59.5	62.0	66.4	63.8	61.2
136k A	89.7	83.9	94.9	92.7	92.6	84.5	77.9
136k B	80.6	76.1	86.9	87.6	89.9	82.5	76.3
156k	92.4	87.3	99.7	99.1	99.8	90.9	83.0

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H30SI-12, 30 Degree Skew, 2'-10 Barrier Rail

Bridge Length

Truck	46'-8	55'-0	67'-6	80'-0	90'-0	100'-0	110'-0
HL-93 Oper	1.80	1.82	1.91	2.16	2.11	2.17	1.90
Controlled by	STR1 +M	STR1 V	STR1 V	STR1 V	STR1 +M	STR1 V	STR1 V
Location	0.5L I	0.1L I	0.1L I	0.1L I	0.5L I	0.1L I	0.1L I
HL-93 Inv	1.39	1.35	1.44	1.45	1.52	1.42	1.32
Controlled by	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I	0.5L I
IA Type 4	47.3	43.9	49.4	52.0	56.1	54.0	51.8
IA Type 3	49.1	45.3	50.6	53.0	57.0	54.8	52.5
IA SU4	45.9	42.9	48.5	51.2	55.3	53.4	51.3
IA SU5	49.0	45.2	50.6	53.0	57.0	54.8	52.5
IA SU6	49.4	45.5	50.8	53.2	57.2	55.0	52.6
IA SU7	51.2	46.8	51.9	54.1	58.1	55.7	53.3
IA 3S3A	77.8	68.4	71.8	70.4	72.6	67.7	63.3
IA 3S2A	76.2	67.3	67.8	66.8	69.6	65.2	61.3
IA 3S3B	85.4	81.1	93.3	97.4	97.2	87.2	78.7
IA 4S3	84.7	78.5	88.3	91.4	91.8	82.5	75.2
IA 3-3	74.6	65.7	67.5	66.6	69.3	65.1	61.2
IA 5-2	75.9	70.0	76.9	77.0	79.6	73.2	67.8
IA EV2	49.4	45.5	50.8	53.2	57.2	55.0	52.6
IA EV3	47.7	44.2	49.7	52.2	56.3	54.2	52.0
90k	70.5	67.2	77.5	77.2	79.8	73.8	68.6
100k Crane	58.3	53.1	58.7	61.0	65.4	62.6	59.9
136k A	88.7	82.7	93.5	91.3	91.1	83.0	76.3
136k B	79.7	75.1	85.7	86.2	88.5	81.0	74.7
156k	91.4	86.1	98.3	97.6	98.2	89.2	81.2

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H40-06/14, 0 and 15 Degree Skew, 2'-8 Open Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.74	1.63	1.70	1.64	1.72	1.84	1.90	1.90	1.97
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M
Location	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 1 E	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 1 E	0.5L Sp 1 E
HL-93 Inv	1.34	1.20	1.31	1.26	1.27	1.42	1.37	1.30	1.32
Controlled by	STR1 +M	SRV3 +M	STR1 +M	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 E
IA Type 4	44.1	38.8	46.3	45.8	43.6	47.8	47.7	46.4	47.3
IA Type 3	45.6	40.0	47.6	47.0	44.6	49.1	48.8	47.3	48.2
IA SU4	42.9	37.9	45.3	44.9	42.8	46.9	46.8	45.7	46.5
IA SU5	45.5	40.0	47.5	47.0	44.6	49.0	48.8	47.3	48.2
IA SU6	45.8	40.2	47.8	47.2	44.8	49.3	49.0	47.5	48.3
IA SU7	47.3	41.4	49.0	48.3	45.8	50.5	50.1	48.3	49.2
IA 3S3A	71.0	60.5	70.1	67.9	63.3	70.9	67.0	62.8	64.0
IA 3S2A	70.8	59.6	67.8	64.8	59.8	67.6	63.4	59.7	60.7
IA 3S3B	80.6	71.7	86.2	85.2	82.3	89.8	90.0	87.0	88.5
IA 4S3	78.9	69.5	82.7	81.9	77.8	85.5	85.2	81.6	83.1
IA 3-3	67.5	58.1	67.4	64.4	59.5	67.3	63.1	59.5	60.5
IA 5-2	70.5	61.9	73.6	72.7	67.8	75.9	72.7	68.8	70.0
IA EV2	45.8	40.2	47.8	47.2	44.8	49.3	49.0	47.5	48.3
IA EV3	44.4	39.1	46.5	46.0	43.8	48.1	47.9	46.6	47.4
90k	66.6	59.4	71.5	70.5	68.4	74.5	73.2	68.9	70.1
100k Crane	53.7	46.9	55.5	54.7	51.7	57.1	56.6	54.5	55.5
136k A	82.8	73.2	87.3	86.6	82.4	90.4	88.5	81.5	82.9
136k B	74.8	66.4	79.5	78.8	75.6	82.6	82.1	77.0	78.4
156k	85.8	76.2	91.2	90.4	86.7	94.8	94.2	87.1	88.7

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H40-06/14, 0 and 15 Degree Skew, 2'-10 Barrier Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.79	1.66	1.69	1.64	1.76	1.83	1.91	1.94	2.04
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M
Location	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I
HL-93 Inv	1.38	1.23	1.30	1.27	1.31	1.41	1.38	1.32	1.32
Controlled by	STR1 +M	SRV3 +M	STR1 +M	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.5L Sp 1 I	0.5L Sp 2 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 2 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 2 I	0.5L Sp 1 I
IA Type 4	44.5	39.8	46.3	45.6	44.9	47.4	47.2	47.3	47.3
IA Type 3	46.1	41.0	47.7	47.1	46.0	48.6	48.3	48.2	48.2
IA SU4	43.4	38.8	45.3	44.6	44.1	46.4	46.3	46.5	46.5
IA SU5	46.0	40.9	47.6	47.0	45.9	48.5	48.3	48.1	48.1
IA SU6	46.3	41.2	47.9	47.3	46.1	48.8	48.5	48.3	48.3
IA SU7	47.8	42.4	49.1	48.6	47.1	49.9	49.5	49.2	49.2
IA 3S3A	71.8	61.9	70.2	69.7	65.2	70.2	67.5	63.9	63.9
IA 3S2A	71.6	61.0	67.9	66.5	61.6	66.9	63.9	60.7	60.7
IA 3S3B	81.5	73.5	86.3	84.3	84.7	88.9	89.0	88.5	88.5
IA 4S3	79.7	71.1	82.8	81.6	80.2	84.6	84.3	83.1	83.1
IA 3-3	68.2	59.5	67.5	66.1	61.3	66.6	63.6	60.5	60.5
IA 5-2	71.2	63.4	73.7	72.8	69.9	75.1	73.3	70.0	70.0
IA EV2	46.3	41.2	47.9	47.3	46.1	48.8	48.5	48.3	48.3
IA EV3	44.8	40.0	46.6	45.9	45.1	47.6	47.4	47.4	47.4
90k	67.3	60.8	71.6	69.8	70.4	73.8	73.8	70.1	70.1
100k Crane	54.3	48.1	55.6	55.2	53.3	56.5	56.0	55.4	55.4
136k A	83.7	74.9	87.5	86.0	84.9	89.5	89.2	82.9	82.9
136k B	75.6	68.0	79.7	78.0	77.8	81.8	81.8	78.3	78.3
156k	86.8	78.0	91.4	89.5	89.3	93.8	93.8	88.7	88.7

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H40-06/14, 30 and 45 Degree Skew, 2'-8 Open Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.72	1.63	1.90	1.76	1.74	2.06	2.09	1.97	1.99
Controlled by	STR1 V	STR1 V	STR1 +M	STR1 V	STR1 V	STR1 +M	STR1 +M	STR1 V	STR1 V
Location	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 2 E	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.5L Sp 2 E	0.1L Sp 2 I	0.1L Sp 1 I
HL-93 Inv	1.33	1.26	1.46	1.36	1.34	1.59	1.51	1.42	1.44
Controlled by	STR1 V	STR1 V	STR1 +M	STR1 V	STR1 V	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 2 E	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 E
IA Type 4	48.6	42.6	51.1	50.2	47.7	53.5	53.0	50.9	51.6
IA Type 3	50.3	43.9	52.6	51.5	48.8	54.9	54.3	51.9	52.6
IA SU4	47.3	41.6	50.0	49.2	46.8	52.4	52.0	50.1	50.8
IA SU5	50.2	43.9	52.5	51.5	48.8	54.8	54.2	51.9	52.6
IA SU6	50.5	44.1	52.8	51.7	49.0	55.1	54.5	52.1	52.8
IA SU7	52.2	45.4	54.2	53.0	50.1	56.4	55.6	53.0	53.7
IA 3S3A	78.4	66.4	77.5	74.4	69.3	79.2	73.8	68.9	69.8
IA 3S2A	78.2	65.3	75.0	71.0	65.4	75.6	69.7	65.4	66.3
IA 3S3B	88.9	78.7	95.3	94.2	90.0	100.3	100.1	95.3	96.7
IA 4S3	87.0	76.2	91.4	89.8	85.2	95.5	94.7	89.5	90.7
IA 3-3	74.4	63.7	74.5	70.6	65.1	75.2	69.5	65.2	66.1
IA 5-2	77.7	67.9	81.3	79.7	74.2	84.8	80.0	75.4	76.4
IA EV2	50.5	44.1	52.8	51.7	49.0	55.1	54.5	52.1	52.8
IA EV3	48.9	42.9	51.4	50.5	47.9	53.7	53.3	51.1	51.8
90k	73.5	65.1	79.0	78.2	74.8	83.3	80.6	75.5	76.5
100k Crane	59.3	51.5	61.4	59.9	56.6	63.8	62.7	59.7	60.5
136k A	91.4	80.2	96.5	94.9	90.2	101.0	97.4	89.3	90.6
136k B	82.5	72.8	87.9	86.8	82.7	92.3	90.4	84.4	85.6
156k	94.7	83.5	100.8	99.5	94.8	105.9	103.7	95.5	96.9

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H40-06/14, 30 and 45 Degree Skew, 2'-10 Barrier Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.72	1.63	1.89	1.75	1.74	2.05	2.12	1.96	1.96
Controlled by	STR1 V	STR1 V	STR1 +M	STR1 V	STR1 V	STR1 +M	STR1 +M	STR1 V	STR1 V
Location	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.5L Sp 1 I	0.1L Sp 2 I	0.1L Sp 1 I
HL-93 Inv	1.33	1.26	1.46	1.35	1.34	1.57	1.52	1.45	1.45
Controlled by	STR1 V	STR1 V	STR1 +M	STR1 V	STR1 V	SRV3 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.1L Sp 2 I	0.1L Sp 2 I	0.5L Sp 1 I	0.5L Sp 2 I	0.5L Sp 2 I	0.5L Sp 1 I
IA Type 4	49.2	43.6	51.2	50.8	49.1	52.9	52.4	51.8	51.8
IA Type 3	50.9	45.0	52.7	52.4	50.3	54.3	53.7	52.8	52.8
IA SU4	47.9	42.6	50.1	49.6	48.2	51.9	51.5	51.0	51.0
IA SU5	50.8	44.9	52.6	52.3	50.3	54.2	53.6	52.8	52.8
IA SU6	51.1	45.2	52.9	52.6	50.5	54.5	53.9	53.0	53.0
IA SU7	52.8	46.5	54.3	54.1	51.6	55.8	55.1	53.9	53.9
IA 3S3A	79.3	68.0	77.7	76.4	71.4	78.4	74.4	70.1	70.1
IA 3S2A	79.1	66.9	75.1	72.9	67.4	74.8	70.3	66.6	66.6
IA 3S3B	89.9	80.6	95.5	93.8	92.8	99.3	99.0	97.1	97.1
IA 4S3	88.0	78.1	91.6	90.8	87.8	94.6	93.6	91.1	91.1
IA 3-3	75.3	65.3	74.7	72.6	67.1	74.4	70.0	66.4	66.4
IA 5-2	78.6	69.6	81.5	81.0	76.5	84.0	80.7	76.8	76.8
IA EV2	51.1	45.2	52.9	52.6	50.5	54.5	53.9	53.0	53.0
IA EV3	49.5	43.9	51.5	51.1	49.4	53.2	52.7	52.0	52.0
90k	74.3	66.8	79.1	77.7	77.1	82.4	81.3	76.9	76.9
100k Crane	60.0	52.8	61.5	61.4	58.3	63.1	62.2	60.8	60.8
136k A	92.4	82.2	96.7	95.7	93.0	100.0	98.2	90.9	90.9
136k B	83.5	74.6	88.1	86.8	85.2	91.4	90.9	85.9	85.9
156k	95.8	85.6	101.0	99.6	97.7	104.8	104.3	97.3	97.3

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H44-07/14, 0 and 15 Degree Skew, 2'-8 Open Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.87	1.76	1.82	1.77	1.85	1.98	2.04	2.05	2.09
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M
Location	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 1 E	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 1 E	0.5L Sp 1 E
HL-93 Inv	1.45	1.32	1.41	1.36	1.41	1.53	1.53	1.43	1.43
Controlled by	STR1 +M	SRV3 +M	STR1 +M	STR1 +M	SRV3 +M	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 E
IA Type 4	48.4	42.9	50.8	49.8	48.1	52.8	52.8	51.3	51.3
IA Type 3	50.0	44.2	52.2	51.1	49.3	54.2	54.1	52.3	52.3
IA SU4	47.1	41.9	49.7	48.8	47.2	51.8	51.8	50.5	50.5
IA SU5	50.0	44.2	52.2	51.1	49.2	54.2	54.0	52.2	52.2
IA SU6	50.3	44.4	52.5	51.3	49.4	54.4	54.3	52.4	52.4
IA SU7	51.9	45.7	53.8	52.5	50.5	55.7	55.5	53.4	53.4
IA 3S3A	78.0	66.8	77.0	73.8	69.9	78.3	74.9	69.4	69.4
IA 3S2A	77.8	65.8	74.5	70.4	66.0	74.7	70.8	65.9	65.9
IA 3S3B	88.5	79.2	94.6	93.5	90.8	99.1	99.7	96.0	96.0
IA 4S3	86.6	76.7	90.8	89.0	85.9	94.4	94.3	90.1	90.1
IA 3-3	74.1	64.1	74.0	70.1	65.7	74.3	70.6	65.7	65.7
IA 5-2	77.4	68.4	80.8	79.1	74.9	83.8	81.3	76.0	76.0
IA EV2	50.3	44.4	52.5	51.3	49.4	54.4	54.3	52.4	52.4
IA EV3	48.7	43.2	51.1	50.1	48.3	53.1	53.0	51.5	51.5
90k	73.1	65.6	78.5	77.6	75.5	82.3	81.9	76.1	76.1
100k Crane	59.0	51.9	61.0	59.4	57.1	63.0	62.7	60.2	60.2
136k A	90.9	80.8	95.9	94.2	91.0	99.9	98.9	90.0	90.0
136k B	82.1	73.3	87.3	86.0	83.4	91.3	91.5	85.0	85.0
156k	94.2	84.1	100.2	98.7	95.7	104.7	105.0	96.2	96.2

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H44-07/14, 0 and 15 Degree Skew, 2'-10 Barrier Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.92	1.78	1.81	1.76	1.89	1.97	2.04	2.08	2.19
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M
Location	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I
HL-93 Inv	1.48	1.37	1.40	1.36	1.46	1.52	1.53	1.48	1.48
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 2 I	0.5L Sp 1 I
IA Type 4	49.5	44.7	51.5	50.6	50.4	52.4	52.4	53.1	53.1
IA Type 3	51.2	46.1	53.0	52.1	51.6	53.8	53.7	54.1	54.1
IA SU4	48.2	43.6	50.4	49.4	49.4	51.3	51.4	52.3	52.3
IA SU5	51.1	46.0	52.9	52.1	51.5	53.7	53.6	54.1	54.1
IA SU6	51.5	46.3	53.2	52.4	51.8	54.0	53.8	54.3	54.3
IA SU7	53.1	47.6	54.6	53.9	52.9	55.3	55.0	55.2	55.2
IA 3S3A	79.8	69.6	78.0	76.1	73.2	77.6	76.2	71.8	71.8
IA 3S2A	79.6	68.5	75.5	72.6	69.1	74.1	71.9	68.2	68.2
IA 3S3B	90.5	82.6	95.9	93.4	95.1	98.3	98.9	99.4	99.4
IA 4S3	88.6	79.9	92.1	90.4	90.0	93.6	93.6	93.3	93.3
IA 3-3	75.8	66.8	75.0	72.2	68.8	73.7	71.5	68.0	68.0
IA 5-2	79.1	71.2	81.9	80.6	78.4	83.1	81.6	78.6	78.6
IA EV2	51.5	46.3	53.2	52.4	51.8	54.0	53.8	54.3	54.3
IA EV3	49.8	45.0	51.8	50.9	50.6	52.7	52.6	53.3	53.3
90k	74.8	68.3	79.5	77.3	79.0	81.6	82.2	78.7	78.7
100k Crane	60.4	54.0	61.8	61.1	59.8	62.5	62.2	62.3	62.3
136k A	93.0	84.2	97.2	95.3	95.3	99.0	99.1	93.1	93.1
136k B	84.1	76.4	88.5	86.4	87.3	90.5	90.8	88.0	88.0
156k	96.4	87.6	101.5	99.2	100.2	103.8	104.2	99.6	99.6

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H44-07/14, 30 Degree Skew, 2'-8 Open Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.95	1.83	1.91	1.85	1.93	2.07	2.11	2.13	2.17
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M
Location	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 1 E	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 1 E	0.5L Sp 1 E
HL-93 Inv	1.50	1.37	1.47	1.42	1.46	1.60	1.59	1.49	1.49
Controlled by	STR1 +M	SRV3 +M	STR1 +M	STR1 +M	SRV3 +M	STR1 +M	SRV3 +M	SRV3 +M	SRV3 +M
Location	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 1 E	0.5L Sp 2 E	0.5L Sp 1 I	0.5L Sp 2 E	0.5L Sp 2 E	0.5L Sp 1 E
IA Type 4	50.4	44.6	52.9	51.8	49.9	55.3	56.2	53.2	53.2
IA Type 3	52.1	45.9	54.4	53.1	51.1	56.7	57.4	54.3	54.3
IA SU4	49.1	43.5	51.8	50.8	49.0	54.2	55.3	52.4	52.4
IA SU5	52.0	45.9	54.4	53.1	51.1	56.7	57.3	54.2	54.2
IA SU6	52.4	46.2	54.7	53.4	51.3	56.9	57.6	54.5	54.5
IA SU7	54.1	47.5	56.1	54.6	52.4	58.3	58.7	55.4	55.4
IA 3S3A	81.2	69.4	80.2	76.7	72.6	81.9	77.8	72.0	72.0
IA 3S2A	81.0	68.3	77.6	73.2	68.5	78.1	73.6	68.4	68.4
IA 3S3B	92.1	82.3	98.6	97.2	94.2	103.7	106.4	99.7	99.7
IA 4S3	90.2	79.7	94.6	92.6	89.2	98.8	100.4	93.6	93.6
IA 3-3	77.1	66.6	77.1	72.8	68.2	77.7	73.3	68.2	68.2
IA 5-2	80.6	71.0	84.2	82.2	77.7	87.7	84.5	78.9	78.9
IA EV2	52.4	46.2	54.7	53.4	51.3	57.0	57.6	54.5	54.5
IA EV3	50.7	44.8	53.2	52.1	50.2	55.6	56.4	53.5	53.5
90k	76.1	68.1	81.8	80.7	78.3	86.1	85.1	79.0	79.0
100k Crane	61.4	53.9	63.5	61.8	59.2	66.0	66.2	62.5	62.5
136k A	94.7	83.9	99.9	97.9	94.5	104.5	102.8	93.4	93.4
136k B	85.6	76.2	91.0	89.5	86.6	95.5	95.4	88.3	88.3
156k	98.1	87.4	104.4	102.6	99.3	109.5	109.4	99.9	99.9

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

PPCB Bridge Standards Load Rating Summary - LRFR Rating Method

H44-07/14, 30 Degree Skew, 2'-10 Barrier Rail

Truck	Bridge Length								
	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
HL-93 Oper	1.95	1.86	1.90	1.84	1.96	2.06	2.11	2.17	2.21
Controlled by	STR1 V	STR1 +M	STR1 +M	STR1 +M	STR1 V	STR1 +M	STR1 +M	STR1 +M	STR1 V
Location	0.1L Sp 2 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.1L Sp 2 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 1 I	0.1L Sp 1 I
HL-93 Inv	1.50	1.43	1.46	1.42	1.51	1.59	1.63	1.54	1.54
Controlled by	STR1 V	SRV3 +M	STR1 +M	STR1 +M	STR1 V	STR1 +M	STR1 +M	SRV3 +M	SRV3 +M
Location	0.1L Sp 2 I	0.5L Sp 2 I	0.5L Sp 1 I	0.5L Sp 1 I	0.1L Sp 2 I	0.5L Sp 1 I	0.5L Sp 1 I	0.5L Sp 2 I	0.5L Sp 1 I
IA Type 4	51.5	46.4	53.7	52.8	52.3	54.8	58.0	55.1	55.1
IA Type 3	53.3	47.9	55.2	54.5	53.5	56.3	59.2	56.2	56.2
IA SU4	50.2	45.3	52.5	51.6	51.3	53.7	57.1	54.3	54.3
IA SU5	53.2	47.8	55.1	54.4	53.5	56.2	59.2	56.1	56.1
IA SU6	53.6	48.1	55.4	54.7	53.7	56.5	59.4	56.4	56.4
IA SU7	55.3	49.5	56.9	56.3	54.9	57.8	60.6	57.4	57.4
IA 3S3A	83.1	72.3	81.3	79.1	76.0	81.2	80.3	74.6	74.6
IA 3S2A	82.9	71.2	78.6	75.5	71.7	77.5	76.0	70.8	70.8
IA 3S3B	94.3	85.8	100.0	97.6	98.7	102.9	109.9	103.2	103.2
IA 4S3	92.2	83.0	95.9	94.5	93.4	98.0	103.6	96.9	96.9
IA 3-3	78.9	69.4	78.2	75.1	71.4	77.1	75.7	70.6	70.6
IA 5-2	82.4	74.0	85.3	84.2	81.4	87.0	87.2	81.6	81.6
IA EV2	53.6	48.1	55.4	54.7	53.7	56.5	59.4	56.4	56.4
IA EV3	51.9	46.7	53.9	53.1	52.5	55.1	58.3	55.3	55.3
90k	77.9	71.0	82.9	80.8	82.0	85.4	87.8	81.8	81.8
100k Crane	62.9	56.1	64.4	63.7	62.0	65.4	68.3	64.7	64.7
136k A	96.9	87.5	101.3	99.5	98.9	103.6	106.1	96.7	96.7
136k B	87.5	79.4	92.2	90.3	90.6	94.7	98.4	91.4	91.4
156k	100.4	91.0	105.8	103.6	104.0	108.6	112.9	103.4	103.4

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

Slab Bridge Standards Load Rating Summary - LRFR Rating Method

J24-06, 2'-8 Open Rail, All Skews

Truck	Bridge Length								
	70	80	90	100	110	120	130	140	150
HL-93 Oper	1.59	1.50	1.50	1.54	1.45	1.54	1.59	1.68	1.60
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.5L Sp 2	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2
HL-93 Inv	1.23	1.15	1.16	1.19	1.12	1.19	1.23	1.30	1.23
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.5L Sp 2	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2
IA Type 4	61.6	56.0	54.7	55.5	52.3	54.7	56.2	59.0	59.1
IA Type 3	61.3	58.4	57.3	58.0	55.2	57.5	58.9	61.6	61.0
IA SU4	57.6	53.0	52.2	53.1	50.4	52.9	54.5	57.4	57.5
IA SU5	64.5	58.5	57.0	57.7	54.6	56.9	58.4	61.1	60.9
IA SU6	67.3	60.5	58.6	59.1	56.7	58.9	60.1	62.8	61.6
IA SU7	73.7	65.5	62.7	62.7	60.1	62.8	63.9	66.5	63.9
IA 3S3A	85.9	84.1	84.2	87.8	81.9	87.1	90.9	96.6	95.3
IA 3S2A	84.1	84.4	79.8	89.9	83.0	87.4	90.4	95.5	90.4
IA 3S3B	99.8	92.8	95.4	98.6	91.5	97.0	100.8	101.9	97.9
IA 4S3	106.1	100.8	100.6	102.2	93.6	97.8	100.6	101.0	97.3
IA 3-3	95.4	104.2	98.2	108.8	100.6	99.8	101.7	100.9	92.8
IA 5-2	102.6	93.8	91.4	92.6	84.5	88.2	90.4	94.7	98.3
IA EV2	57.8	55.1	55.7	56.7	53.1	54.3	57.2	60.1	60.8
IA EV3	57.9	55.1	54.5	55.4	52.9	55.4	56.9	59.7	59.3
90k	81.7	76.2	76.6	79.6	74.3	79.0	82.3	87.5	94.1
100k Crane	79.5	80.1	75.4	74.2	71.2	73.0	73.5	76.0	73.4
136k A	115.4	106.3	104.3	106.2	97.5	102.2	105.2	106.3	103.2
136k B	100.6	92.3	91.1	93.4	86.2	90.9	94.2	99.5	102.3
156k	114.8	105.9	104.6	107.2	98.9	104.3	108.0	108.5	105.2

HL-93 ratings are reported as Rating Factors, all others are Tons.

Slab Bridge Standards Load Rating Summary - LRFR Rating Method

J30-06, 2'-8 Open Rail, All Skews

Truck	Bridge Length								
	70	80	90	100	110	120	130	140	150
HL-93 Oper	1.65	1.55	1.56	1.61	1.51	1.51	1.66	1.67	1.68
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.5L Sp 2	0.4L Sp 1	0.7L Sp1	0.4L Sp 1	0.7L Sp1	0.5L Sp 2
HL-93 Inv	1.27	1.20	1.20	1.24	1.17	1.17	1.28	1.29	1.30
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.5L Sp 2	0.4L Sp 1	0.7L Sp1	0.4L Sp 1	0.7L Sp1	0.5L Sp 2
IA Type 4	63.7	58.2	56.7	57.9	54.4	55.8	58.7	60.6	62.0
IA Type 3	63.4	60.5	59.4	60.4	57.5	57.1	61.4	62.5	64.1
IA SU4	59.6	55.1	54.2	55.4	52.5	54.6	56.9	59.4	60.3
IA SU5	67.0	60.8	59.2	60.2	56.8	58.0	60.9	62.8	64.0
IA SU6	69.8	62.9	60.8	61.6	59.1	60.0	62.7	64.8	64.7
IA SU7	76.4	68.1	65.1	65.4	62.5	64.2	66.7	68.3	67.1
IA 3S3A	89.2	87.2	80.0	85.6	85.3	89.4	94.8	89.3	98.6
IA 3S2A	87.2	87.8	75.8	82.5	86.5	91.1	94.4	87.0	94.9
IA 3S3B	103.1	96.4	99.0	102.4	95.3	98.0	99.5	85.8	92.2
IA 4S3	109.6	104.6	104.4	106.3	97.4	102.0	98.7	85.0	91.6
IA 3-3	99.0	108.3	93.3	99.8	104.5	97.1	104.0	94.8	97.5
IA 5-2	106.5	97.2	94.8	96.3	88.0	91.9	94.3	85.5	92.5
IA EV2	59.7	58.8	57.8	57.6	55.2	52.9	58.8	58.5	62.1
IA EV3	59.8	57.1	56.5	57.8	55.1	54.7	59.3	60.1	62.2
90k	84.7	79.0	79.5	82.7	77.3	82.3	85.9	83.8	92.0
100k Crane	82.5	83.2	78.3	77.4	74.2	72.7	76.7	77.4	77.0
136k A	119.4	110.1	107.7	104.4	101.5	103.8	101.8	89.5	97.2
136k B	104.4	95.6	94.6	97.1	89.8	93.8	98.3	88.7	96.3
156k	118.6	109.7	108.5	111.2	103.0	107.6	105.2	91.4	99.0

HL-93 ratings are reported as Rating Factors, all others are Tons.

Use this table for both the epoxy and non-epoxy coated reinforcement options.

Slab Bridge Standards Load Rating Summary - LRFR Rating Method

J30-06, 2'-10 Barrier Rail, All Skews

Truck	Bridge Length								
	70	80	90	100	110	120	130	140	150
HL-93 Oper	1.64	1.55	1.55	1.60	1.51	1.51	1.65	1.67	1.67
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.5L Sp 2	0.4L Sp 1	0.7L Sp1	0.4L Sp 1	0.7L Sp1	0.5L Sp 2
HL-93 Inv	1.27	1.19	1.20	1.24	1.16	1.17	1.28	1.29	1.29
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.5L Sp 2	0.4L Sp 1	0.7L Sp1	0.4L Sp 1	0.7L Sp1	0.5L Sp 2
IA Type 4	63.5	57.9	56.5	57.6	54.1	55.7	58.3	60.5	61.6
IA Type 3	63.2	60.3	59.2	60.1	57.2	57.0	61.1	62.4	63.6
IA SU4	59.4	54.9	53.9	55.1	52.3	54.5	56.6	59.3	59.9
IA SU5	66.7	60.5	58.9	59.9	56.5	57.9	60.6	62.6	63.5
IA SU6	69.6	62.6	60.5	61.3	58.8	59.9	62.4	64.7	64.3
IA SU7	76.1	67.8	64.8	65.1	62.2	64.1	66.3	68.2	66.7
IA 3S3A	88.6	86.8	79.3	84.8	84.9	89.3	94.3	88.1	98.5
IA 3S2A	86.6	87.2	75.1	81.8	86.0	90.7	93.9	85.8	94.3
IA 3S3B	102.8	96.0	98.6	102.0	94.8	97.9	98.4	84.7	91.0
IA 4S3	109.3	104.2	104.0	105.8	96.9	101.4	97.6	83.9	90.5
IA 3-3	98.3	107.5	92.5	98.9	103.5	97.0	103.9	93.6	96.8
IA 5-2	106.1	96.8	94.4	95.9	87.5	91.4	93.8	84.4	91.3
IA EV2	59.5	58.5	57.5	57.3	54.9	52.8	58.7	58.4	62.0
IA EV3	59.6	56.9	56.3	57.5	54.8	54.6	59.0	60.1	61.8
90k	84.4	78.7	79.1	82.3	76.9	81.9	85.5	82.7	90.8
100k Crane	81.9	82.9	77.9	77.0	73.8	72.6	76.3	77.3	76.5
136k A	119.1	109.7	106.7	103.4	100.9	102.8	100.7	88.3	95.9
136k B	104.0	95.3	94.2	96.7	89.3	93.7	97.7	87.5	95.1
156k	118.3	109.3	108.1	110.2	102.5	107.5	104.1	90.2	97.8

HL-93 ratings are reported as Rating Factors, all others are Tons.

Use this table for both the epoxy and non-epoxy coated reinforcement options.

Slab Bridge Standards Load Rating Summary - LRFR Rating Method

J40-06/14, 2'-8 Open Rail, All Skews

Truck	Bridge Length								
	70	80	90	100	110	120	130	140	150
HL-93 Oper	1.72	1.63	1.64	1.70	1.60	1.70	1.76	1.85	1.79
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 -M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	Pier	0.5L Sp 2
HL-93 Inv	1.33	1.26	1.27	1.31	1.23	1.31	1.36	1.43	1.38
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 -M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	Pier	0.5L Sp 2
IA Type 4	66.6	61.3	60.1	61.2	57.4	60.3	62.1	65.3	66.2
IA Type 3	66.3	63.5	62.9	63.9	60.7	63.4	65.0	68.2	68.3
IA SU4	62.3	58.0	57.3	58.6	55.4	58.3	60.2	63.6	64.3
IA SU5	70.4	64.0	62.7	63.7	60.0	62.7	64.5	67.7	68.2
IA SU6	73.4	66.2	64.4	65.1	62.3	64.9	66.4	69.5	69.0
IA SU7	80.4	71.7	68.9	69.2	66.0	69.2	70.6	73.6	71.6
IA 3S3A	93.6	91.5	84.4	90.5	90.1	96.0	100.4	95.2	106.6
IA 3S2A	91.6	92.3	80.0	87.2	91.3	96.3	99.9	92.7	101.2
IA 3S3B	107.8	101.5	104.1	107.9	100.6	106.8	105.7	91.5	98.3
IA 4S3	114.6	109.8	109.8	111.9	102.8	107.8	104.9	90.7	97.8
IA 3-3	103.9	114.0	98.4	105.5	110.6	114.1	113.2	101.1	103.9
IA 5-2	112.0	102.0	99.7	101.5	92.8	97.1	99.8	91.1	98.8
IA EV2	62.5	61.7	61.2	60.7	58.3	61.3	63.2	66.5	68.0
IA EV3	62.6	59.9	59.9	61.1	58.2	61.0	62.8	66.1	66.3
90k	88.6	82.9	83.6	87.1	81.6	87.0	91.0	89.4	98.2
100k Crane	86.6	87.7	82.9	81.8	78.3	80.4	81.2	84.2	82.2
136k A	125.0	115.6	113.6	110.3	107.1	110.2	108.2	95.4	103.7
136k B	109.6	100.4	99.5	102.3	94.8	100.2	104.0	94.6	102.8
156k	124.1	115.1	114.1	117.4	108.7	114.9	111.8	97.5	105.7

HL-93 ratings are reported as Rating Factors, all others are Tons.

Slab Bridge Standards Load Rating Summary - LRFR Rating Method

J40-06/14, 2'-10 Barrier Rail, All Skews

Truck	Bridge Length								
	70	80	90	100	110	120	130	140	150
HL-93 Oper	1.72	1.62	1.64	1.70	1.59	1.69	1.76	1.83	1.78
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 -M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	Pier	0.5L Sp 2
HL-93 Inv	1.33	1.25	1.27	1.31	1.23	1.30	1.35	1.41	1.38
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 -M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	Pier	0.5L Sp 2
IA Type 4	66.5	61.1	59.9	61.0	57.3	60.1	61.9	65.1	65.9
IA Type 3	66.2	63.4	62.8	63.7	60.5	63.2	64.8	67.9	68.0
IA SU4	62.2	57.9	57.2	58.4	55.3	58.1	60.1	63.3	64.1
IA SU5	70.3	63.9	62.5	63.5	59.8	62.5	64.2	67.5	67.9
IA SU6	73.3	66.1	64.2	64.9	62.1	64.7	66.2	69.2	68.7
IA SU7	80.2	71.5	68.7	69.0	65.8	69.0	70.4	73.3	71.3
IA 3S3A	93.2	91.3	84.0	90.0	89.8	95.7	100.0	94.4	105.8
IA 3S2A	91.2	92.0	79.6	86.8	91.0	96.0	99.6	92.0	100.8
IA 3S3B	107.7	101.3	103.8	107.6	100.3	106.5	105.1	90.8	97.6
IA 4S3	114.4	109.5	109.5	111.6	102.5	107.5	104.2	90.0	97.1
IA 3-3	103.5	113.5	97.9	105.0	110.1	113.8	112.8	100.3	103.5
IA 5-2	111.7	101.8	99.5	101.2	92.6	96.8	99.5	90.4	98.0
IA EV2	62.4	61.6	61.0	60.5	58.1	61.1	63.0	66.3	67.7
IA EV3	62.5	59.8	59.7	60.9	58.0	60.8	62.6	65.8	66.1
90k	88.5	82.7	83.4	86.9	81.4	86.7	90.7	88.7	97.5
100k Crane	86.2	87.5	82.7	81.6	78.1	80.2	81.0	83.9	81.8
136k A	124.8	115.3	113.1	109.7	106.8	109.5	107.5	94.7	102.9
136k B	109.4	100.1	99.2	102.0	94.5	99.9	103.7	93.8	102.0
156k	123.9	114.9	113.8	117.0	108.4	114.6	111.1	96.7	104.9

HL-93 ratings are reported as Rating Factors, all others are Tons.

Slab Bridge Standards Load Rating Summary - LRFR Rating Method

J44-06/14, 2'-8 Open Rail, All Skews

Truck	Bridge Length								
	70	80	90	100	110	120	130	140	150
HL-93 Oper	1.75	1.66	1.67	1.74	1.63	1.73	1.80	1.89	1.83
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 -M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	Pier	0.5L Sp 2
HL-93 Inv	1.35	1.28	1.29	1.34	1.26	1.33	1.39	1.46	1.41
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 -M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	Pier	0.5L Sp 2
IA Type 4	67.7	62.5	61.3	62.5	58.6	61.5	63.4	66.7	67.7
IA Type 3	67.5	64.7	64.2	65.3	61.9	64.7	66.4	69.6	69.9
IA SU4	63.4	59.1	58.5	59.8	56.6	59.5	61.5	64.9	65.9
IA SU5	71.7	65.3	63.9	65.0	61.2	64.0	65.8	69.1	69.8
IA SU6	74.8	67.5	65.7	66.5	63.6	66.2	67.8	71.0	70.6
IA SU7	81.8	73.1	70.3	70.6	67.3	70.7	72.1	75.2	73.3
IA 3S3A	95.3	93.1	86.1	92.4	91.9	98.0	102.5	97.5	109.2
IA 3S2A	93.2	94.1	81.6	89.1	93.1	98.3	102.0	95.0	103.6
IA 3S3B	109.6	103.5	106.0	110.0	102.6	109.0	108.2	93.7	100.8
IA 4S3	116.5	111.7	111.9	114.1	104.9	110.0	107.3	92.9	100.2
IA 3-3	105.8	116.1	100.4	107.8	112.8	116.6	115.7	103.5	106.4
IA 5-2	114.0	103.8	101.6	103.4	94.7	99.1	101.9	93.4	101.2
IA EV2	63.5	62.8	62.4	61.9	59.5	62.6	64.5	67.9	69.6
IA EV3	63.6	61.0	61.0	62.4	59.4	62.3	64.1	67.5	67.9
90k	90.1	84.4	85.1	88.8	83.3	88.8	92.9	91.6	100.7
100k Crane	88.1	89.4	84.6	83.5	79.9	82.1	82.9	86.0	84.1
136k A	127.1	117.6	115.9	112.6	109.3	112.6	110.7	97.8	106.3
136k B	111.4	102.2	101.3	104.3	96.7	102.3	106.2	96.9	105.4
156k	126.2	117.2	116.2	119.6	110.9	117.3	114.4	99.8	108.3

HL-93 ratings are reported as Rating Factors, all others are Tons.

Slab Bridge Standards Load Rating Summary - LRFR Rating Method

J44-06/14, 2'-10 Barrier Rail, All Skews

Truck	Bridge Length								
	70	80	90	100	110	120	130	140	150
HL-93 Oper	1.75	1.65	1.67	1.73	1.62	1.72	1.79	1.88	1.83
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 -M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	Pier	0.5L Sp 2
HL-93 Inv	1.35	1.28	1.29	1.34	1.25	1.33	1.38	1.45	1.41
Controlled by	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 +M	STR1 -M	STR1 +M
Location	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	0.5L Sp 2	0.4L Sp 1	0.4L Sp 1	0.4L Sp 1	Pier	0.5L Sp 2
IA Type 4	67.6	62.3	61.1	62.3	58.4	61.3	63.2	66.5	67.5
IA Type 3	67.3	64.5	64.0	65.1	61.7	64.5	66.2	69.4	69.7
IA SU4	63.2	59.0	58.3	59.6	56.4	59.3	61.3	64.7	65.6
IA SU5	71.5	65.1	63.8	64.8	61.0	63.8	65.6	68.9	69.6
IA SU6	74.6	67.3	65.5	66.3	63.4	66.0	67.6	70.7	70.3
IA SU7	81.7	72.9	70.1	70.4	67.1	70.4	71.8	74.9	73.0
IA 3S3A	94.9	92.9	85.7	91.9	91.6	97.7	102.1	96.7	108.4
IA 3S2A	92.8	93.7	81.2	88.6	92.8	98.0	101.7	94.2	103.2
IA 3S3B	109.4	103.2	105.8	109.7	102.3	108.7	107.5	93.0	100.0
IA 4S3	116.3	111.5	111.6	113.8	104.6	109.7	106.6	92.2	99.5
IA 3-3	105.3	115.6	99.9	107.2	112.4	116.3	115.3	102.8	106.0
IA 5-2	113.8	103.6	101.3	103.1	94.4	98.8	101.6	92.6	100.4
IA EV2	63.4	62.7	62.2	61.7	59.3	62.4	64.3	67.7	69.3
IA EV3	63.5	60.8	60.9	62.2	59.2	62.1	63.9	67.2	67.6
90k	89.9	84.2	84.9	88.6	83.0	88.5	92.6	90.9	99.9
100k Crane	87.8	89.1	84.3	83.3	79.6	81.8	82.7	85.7	83.8
136k A	126.8	117.4	115.4	112.1	108.9	112.0	110.0	97.0	105.5
136k B	111.2	101.9	101.1	104.0	96.4	101.9	105.9	96.1	104.6
156k	126.0	116.9	115.9	119.3	110.6	116.9	113.7	99.1	107.5

HL-93 ratings are reported as Rating Factors, all others are Tons.

RS Bridge Standards Load Rating Summary - LRFR Rating Method

RS40-10/14 (Original), 2'-10 Barrier Rail, 0 Degree Skew

Truck	Bridge Length									
	160	180	200	220	240	260	280	300	320	340
HL-93 Oper	1.61	0.93	1.49	0.83	1.45	1.53	1.46	1.49	1.52	1.44
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
HL-93 Inv	1.24	0.71	1.15	0.64	1.12	1.18	1.13	1.15	1.18	1.11
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
IA Type 4	59.8	49.6	59.9	52.7	73.5	70.3	70.3	72.6	74.5	77.1
IA Type 3	61.6	50.3	61.4	53.3	75.0	71.6	71.5	73.7	75.7	78.2
IA SU4	58.4	49.5	58.8	52.6	72.4	69.3	69.4	71.7	73.7	76.2
IA SU5	61.5	50.2	61.3	53.1	74.9	71.5	71.5	73.7	75.6	78.1
IA SU6	62.0	50.5	61.7	53.4	75.3	71.9	71.7	73.9	75.8	78.4
IA SU7	63.8	51.0	63.1	53.8	76.7	73.1	72.9	75.1	76.9	79.4
IA 3S3A	76.7	59.4	85.2	59.4	98.1	91.7	89.9	91.2	92.3	94.1
IA 3S2A	74.5	58.7	81.3	59.1	94.0	88.3	86.7	88.2	89.5	91.4
IA 3S3B	75.5	56.2	90.7	62.1	104.4	118.1	113.6	113.3	112.9	113.6
IA 4S3	74.9	55.3	89.4	61.2	102.7	113.0	108.9	108.9	108.7	109.7
IA 3-3	78.6	58.2	81.6	58.7	94.3	88.5	86.9	88.3	89.6	91.5
IA 5-2	74.4	55.3	89.5	61.7	104.8	98.9	96.5	97.6	98.2	99.9
IA EV2	61.7	50.0	61.5	53.0	75.1	71.8	71.6	73.9	75.8	78.3
IA EV3	60.1	50.1	60.2	53.1	73.8	70.6	70.5	72.8	74.7	77.3
90k	74.8	56.4	91.5	64.3	106.2	99.0	96.9	98.1	99.0	100.8
100k Crane	72.7	56.5	71.6	59.6	86.7	82.6	82.2	84.6	86.7	89.4
136k A	79.0	59.4	96.9	66.9	113.6	113.9	110.4	110.7	111.0	112.3
136k B	78.6	58.8	95.9	66.2	112.6	109.4	106.7	107.7	108.2	109.8
156k	80.7	60.3	98.2	67.7	114.9	121.8	117.5	117.5	117.3	118.3

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

RS Bridge Standards Load Rating Summary - LRFR Rating Method

RS40-10/14 (Original), 2'-10 Barrier Rail, 10 and 20 Degree Skew

Bridge Length

Truck	160	180	200	220	240	260	280	300	320	340
HL-93 Oper	1.61	0.86	0.83	0.72	1.45	1.53	1.46	1.49	1.52	1.44
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
HL-93 Inv	1.24	0.66	0.64	0.55	1.12	1.18	1.13	1.15	1.17	1.11
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
IA Type 4	59.8	46.3	48.9	45.8	73.5	70.3	70.3	72.6	74.6	77.1
IA Type 3	61.6	46.9	49.7	46.2	75.0	71.6	71.5	73.8	75.7	78.2
IA SU4	58.4	46.1	48.8	45.6	72.4	69.3	69.4	71.7	73.7	76.3
IA SU5	61.5	46.8	49.3	46.0	74.9	71.6	71.4	73.7	75.6	78.1
IA SU6	62.0	47.1	49.6	46.3	75.3	71.9	71.8	74.0	75.9	78.4
IA SU7	63.8	47.6	50.0	46.6	76.7	73.2	72.9	75.1	77.0	79.4
IA 3S3A	76.6	55.2	56.5	51.5	98.0	91.7	89.9	91.2	92.3	94.1
IA 3S2A	74.4	54.8	56.0	51.1	94.0	88.3	86.7	88.2	89.5	91.4
IA 3S3B	75.4	52.7	56.9	53.9	104.3	118.1	113.5	113.3	112.8	113.6
IA 4S3	74.8	51.6	56.1	53.0	102.8	113.0	108.9	108.9	108.8	109.6
IA 3-3	78.5	54.2	55.7	50.9	94.2	88.5	86.8	88.3	89.6	91.5
IA 5-2	74.3	51.6	56.0	53.5	104.7	98.9	96.5	97.5	98.3	99.9
IA EV2	61.7	46.6	49.1	45.9	75.1	71.7	71.6	73.9	75.8	78.3
IA EV3	60.1	46.7	49.5	46.3	73.8	70.6	70.5	72.8	74.8	77.3
90k	74.7	52.6	58.0	56.9	106.1	99.0	96.9	98.1	99.0	100.8
100k Crane	72.7	52.7	55.4	51.8	86.7	82.6	82.2	84.6	86.7	89.4
136k A	78.9	55.4	60.8	58.0	113.7	113.9	110.3	110.8	111.0	112.3
136k B	78.5	54.8	60.0	57.4	112.6	109.4	106.7	107.7	108.2	109.7
156k	80.6	56.3	61.6	58.7	114.4	121.8	117.5	117.6	117.3	118.3

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

RS Bridge Standards Load Rating Summary - LRFR Rating Method

RS40-10/14 (Original), 2'-10 Barrier Rail, 30 Degree Skew

Truck	Bridge Length									
	160	180	200	220	240	260	280	300	320	340
HL-93 Oper	1.64	0.81	0.76	0.60	1.48	1.56	1.48	1.52	1.55	1.47
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
HL-93 Inv	1.20	0.63	0.59	0.47	1.14	1.20	1.14	1.17	1.20	1.13
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
IA Type 4	61.5	43.8	45.2	40.5	75.5	72.1	72.1	74.4	76.4	79.0
IA Type 3	63.4	44.3	45.6	41.1	77.0	73.5	73.3	75.6	77.5	80.1
IA SU4	60.1	43.6	45.0	40.4	74.3	71.1	71.1	73.5	75.5	78.1
IA SU5	63.3	44.2	45.5	40.8	76.9	73.4	73.2	75.5	77.4	80.0
IA SU6	63.8	44.5	45.8	41.0	77.3	73.7	73.5	75.8	77.7	80.2
IA SU7	65.7	44.9	46.2	41.3	78.8	75.0	74.7	76.9	78.8	81.3
IA 3S3A	78.3	52.1	52.1	45.5	100.4	94.1	92.1	93.5	94.4	96.3
IA 3S2A	76.1	51.8	51.7	45.2	96.5	90.5	88.9	90.4	91.6	93.6
IA 3S3B	77.1	49.4	52.2	47.7	106.6	121.1	116.3	116.1	115.5	116.3
IA 4S3	76.5	48.7	51.5	47.0	105.1	115.9	111.6	111.6	111.3	112.3
IA 3-3	80.4	51.8	51.4	45.0	96.8	90.7	89.0	90.5	91.7	93.7
IA 5-2	76.0	48.7	51.5	47.4	107.0	101.5	98.9	99.9	100.6	102.3
IA EV2	63.5	43.9	45.3	40.8	77.1	73.6	73.4	75.7	77.6	80.2
IA EV3	61.8	44.2	45.5	41.0	75.8	72.4	72.3	74.6	76.6	79.2
90k	76.4	49.7	53.3	50.4	108.9	101.6	99.3	100.5	101.3	103.2
100k Crane	74.8	49.8	51.2	45.8	89.0	84.7	84.3	86.7	88.8	91.5
136k A	80.7	52.3	55.8	51.3	116.2	116.8	113.0	113.5	113.6	115.0
136k B	80.3	51.8	55.2	50.8	115.1	112.2	109.3	110.3	110.7	112.4
156k	82.4	53.2	56.6	52.0	117.0	124.9	120.3	120.4	120.1	121.1

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

RS Bridge Standards Load Rating Summary - LRFR Rating Method

RS40-10/14 (Original), 2'-10 Barrier Rail, 45 Degree Skew

Truck	Bridge Length									
	160	180	200	220	240	260	280	300	320	340
HL-93 Oper	1.71	1.60	1.56	1.56	1.52	1.60	1.50	1.56	1.60	1.51
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
HL-93 Inv	1.32	1.23	1.20	1.20	1.17	1.24	1.16	1.20	1.23	1.16
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
IA Type 4	63.9	61.3	63.6	68.6	78.2	74.6	74.5	76.8	78.8	81.5
IA Type 3	65.8	62.9	65.1	70.1	79.8	76.0	75.8	78.1	79.9	82.6
IA SU4	62.4	60.0	62.4	67.4	77.0	73.6	73.5	75.9	77.8	80.6
IA SU5	65.7	62.8	65.0	70.0	79.7	75.9	75.7	78.0	79.8	82.5
IA SU6	66.2	63.2	65.4	70.4	80.1	76.3	76.0	78.3	80.1	82.8
IA SU7	68.2	64.9	67.0	71.9	81.6	77.6	77.3	79.5	81.3	83.9
IA 3S3A	80.6	89.6	89.5	94.1	103.4	97.2	95.2	96.5	97.4	99.3
IA 3S2A	78.3	86.0	86.0	90.1	99.9	93.6	91.8	93.3	94.5	96.6
IA 3S3B	79.4	86.6	95.3	104.6	109.8	125.2	118.5	119.6	119.2	120.0
IA 4S3	78.8	85.5	93.8	102.9	108.2	119.7	115.2	115.1	114.8	115.8
IA 3-3	83.0	86.5	86.3	90.2	100.2	93.8	91.9	93.4	94.5	96.6
IA 5-2	78.1	85.3	94.1	102.1	110.2	104.9	102.3	103.1	103.8	105.5
IA EV2	65.9	63.0	65.2	70.1	79.8	76.1	75.9	78.1	80.0	82.7
IA EV3	64.2	61.5	63.8	68.8	78.5	74.8	74.7	77.1	78.9	81.7
90k	78.6	87.1	96.0	101.8	112.7	105.0	102.6	103.7	104.5	106.5
100k Crane	77.6	73.8	75.9	81.3	92.2	87.6	87.1	89.6	91.5	94.4
136k A	83.0	91.6	101.8	112.7	119.7	120.7	116.8	117.2	117.2	118.6
136k B	82.7	90.7	100.7	111.4	118.4	116.1	113.0	113.8	114.2	115.9
156k	84.8	93.1	103.2	113.1	120.4	129.1	124.0	124.3	123.9	124.9

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

RS Bridge Standards Load Rating Summary - LRFR Rating Method

RS40-10/14 (Revised 2017), 2'-10 Barrier Rail, 0 Degree Skew

Truck	Bridge Length									
	160	180	200	220	240	260	280	300	320	340
HL-93 Oper	1.61	1.52	1.49	1.48	1.45	1.53	1.46	1.49	1.52	1.44
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
HL-93 Inv	1.24	1.17	1.15	1.14	1.12	1.18	1.13	1.15	1.18	1.11
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
IA Type 4	59.8	57.5	59.9	64.6	73.5	70.3	70.3	72.6	74.5	77.1
IA Type 3	61.6	59.1	61.4	66.1	75.0	71.6	71.5	73.7	75.7	78.2
IA SU4	58.4	56.3	58.8	63.5	72.4	69.3	69.4	71.7	73.7	76.2
IA SU5	61.5	59.0	61.3	66.0	74.9	71.5	71.5	73.7	75.6	78.1
IA SU6	62.0	59.4	61.7	66.4	75.3	71.9	71.7	73.9	75.8	78.4
IA SU7	63.8	61.0	63.1	67.8	76.7	73.1	72.9	75.1	76.9	79.4
IA 3S3A	76.7	85.0	85.2	88.8	98.1	91.7	89.9	91.2	92.3	94.1
IA 3S2A	74.5	81.1	81.3	85.0	94.0	88.3	86.7	88.2	89.5	91.4
IA 3S3B	75.5	82.4	90.7	99.6	104.4	118.1	113.6	113.3	112.9	113.6
IA 4S3	74.9	81.2	89.4	98.0	102.7	113.0	108.9	108.9	108.7	109.7
IA 3-3	78.6	81.3	81.6	85.2	94.3	88.5	86.9	88.3	89.6	91.5
IA 5-2	74.4	81.1	89.5	96.3	104.8	98.9	96.5	97.6	98.2	99.9
IA EV2	61.7	59.2	61.5	66.2	75.1	71.8	71.6	73.9	75.8	78.3
IA EV3	60.1	57.8	60.2	64.9	73.8	70.6	70.5	72.8	74.7	77.3
90k	74.8	82.7	91.5	96.1	106.2	99.0	96.9	98.1	99.0	100.8
100k Crane	72.7	69.3	71.6	76.7	86.7	82.6	82.2	84.6	86.7	89.4
136k A	79.0	87.0	96.9	107.1	113.6	113.9	110.4	110.7	111.0	112.3
136k B	78.6	86.2	95.9	106.1	112.6	109.4	106.7	107.7	108.2	109.8
156k	80.7	88.5	98.2	108.6	114.9	121.8	117.5	117.5	117.3	118.3

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

RS Bridge Standards Load Rating Summary - LRFR Rating Method

RS40-10/14 (Revised 2017), 2'-10 Barrier Rail, 10 and 20 Degree Skew

Bridge Length

Truck	160	180	200	220	240	260	280	300	320	340
HL-93 Oper	1.60	1.52	1.49	1.48	1.45	1.53	1.46	1.49	1.52	1.44
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
HL-93 Inv	1.24	1.17	1.15	1.14	1.12	1.18	1.13	1.15	1.17	1.11
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
IA Type 4	59.8	57.5	60.0	64.6	73.5	70.3	70.3	72.6	74.6	77.1
IA Type 3	61.6	59.0	61.4	66.0	75.0	71.6	71.5	73.8	75.7	78.2
IA SU4	58.4	56.3	58.9	63.5	72.4	69.3	69.4	71.7	73.7	76.3
IA SU5	61.5	58.9	61.3	65.9	74.9	71.6	71.4	73.7	75.6	78.1
IA SU6	62.0	59.4	61.8	66.3	75.3	71.9	71.8	74.0	75.9	78.4
IA SU7	63.8	61.0	63.2	67.7	76.7	73.2	72.9	75.1	77.0	79.4
IA 3S3A	76.6	84.2	84.7	88.2	98.0	91.7	89.9	91.2	92.3	94.1
IA 3S2A	74.4	80.5	81.0	84.6	94.0	88.3	86.7	88.2	89.5	91.4
IA 3S3B	75.4	82.3	91.0	99.5	104.3	118.1	113.5	113.3	112.8	113.6
IA 4S3	74.8	81.2	89.5	98.0	102.8	113.0	108.9	108.9	108.8	109.6
IA 3-3	78.7	81.1	81.5	85.0	94.2	88.5	86.8	88.3	89.6	91.5
IA 5-2	74.3	81.1	89.5	95.8	104.7	98.9	96.5	97.5	98.3	99.9
IA EV2	61.7	58.9	61.3	65.9	75.1	71.7	71.6	73.9	75.8	78.3
IA EV3	60.1	57.8	60.2	64.9	73.8	70.6	70.5	72.8	74.8	77.3
90k	74.7	82.7	91.0	95.5	106.1	99.0	96.9	98.1	99.0	100.8
100k Crane	72.7	69.3	71.7	76.7	86.7	82.6	82.2	84.6	86.7	89.4
136k A	78.8	87.0	97.1	107.1	113.7	113.9	110.3	110.8	111.0	112.3
136k B	78.5	86.2	95.9	105.9	112.6	109.4	106.7	107.7	108.2	109.7
156k	80.6	88.4	98.4	108.5	114.4	121.8	117.5	117.6	117.3	118.3

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

RS Bridge Standards Load Rating Summary - LRFR Rating Method

RS40-10/14 (Revised 2017), 2'-10 Barrier Rail, 30 Degree Skew

Truck	Bridge Length									
	160	180	200	220	240	260	280	300	320	340
HL-93 Oper	1.64	1.55	1.52	1.51	1.48	1.56	1.48	1.52	1.55	1.47
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
HL-93 Inv	1.27	1.19	1.17	1.17	1.14	1.20	1.14	1.17	1.20	1.13
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
IA Type 4	61.5	59.1	61.5	66.3	75.5	72.1	72.1	74.4	76.4	79.0
IA Type 3	63.4	60.7	63.0	67.7	77.0	73.5	73.3	75.6	77.5	80.1
IA SU4	60.1	57.9	60.3	65.2	74.3	71.1	71.1	73.5	75.5	78.1
IA SU5	63.3	60.6	62.9	67.7	76.9	73.4	73.2	75.5	77.4	80.0
IA SU6	63.8	61.0	63.3	68.0	77.3	73.7	73.5	75.8	77.7	80.2
IA SU7	65.7	62.6	64.7	69.5	78.8	75.0	74.7	76.9	78.8	81.3
IA 3S3A	78.4	86.3	86.5	90.3	100.4	94.1	92.1	93.5	94.4	96.3
IA 3S2A	76.1	82.6	82.9	86.7	96.5	90.5	88.9	90.4	91.6	93.6
IA 3S3B	77.1	84.2	92.7	101.7	106.6	121.1	116.3	116.1	115.5	116.3
IA 4S3	76.5	83.1	91.3	100.1	105.1	115.9	111.6	111.6	111.3	112.3
IA 3-3	80.6	83.4	83.5	87.3	96.8	90.7	89.0	90.5	91.7	93.7
IA 5-2	76.0	83.0	91.4	98.1	107.0	101.5	98.9	99.9	100.6	102.3
IA EV2	63.5	60.4	62.7	67.6	77.1	73.6	73.4	75.7	77.6	80.2
IA EV3	61.8	59.4	61.7	66.5	75.8	72.4	72.3	74.6	76.6	79.2
90k	76.3	84.7	93.0	97.7	108.9	101.6	99.3	100.5	101.3	103.2
100k Crane	74.8	71.2	73.4	78.6	89.0	84.7	84.3	86.7	88.8	91.5
136k A	80.6	89.0	99.0	109.5	116.2	116.8	113.0	113.5	113.6	115.0
136k B	80.2	88.2	97.9	108.3	115.1	112.2	109.3	110.3	110.7	112.4
156k	82.4	90.5	100.4	110.9	117.0	124.9	120.3	120.4	120.1	121.1

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.

RS Bridge Standards Load Rating Summary - LRFR Rating Method

RS40-10/14 (Revised 2017), 2'-10 Barrier Rail, 45 Degree Skew

Bridge Length

Truck	160	180	200	220	240	260	280	300	320	340
HL-93 Oper	1.71	1.60	1.56	1.56	1.52	1.60	1.50	1.56	1.60	1.51
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
HL-93 Inv	1.32	1.23	1.20	1.20	1.17	1.24	1.16	1.20	1.23	1.16
Controlled by	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E	STR1 -M E
Location	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier	Pier
IA Type 4	63.9	61.3	63.6	68.6	78.2	74.6	74.5	76.8	78.8	81.5
IA Type 3	65.8	62.9	65.1	70.1	79.8	76.0	75.8	78.1	79.9	82.6
IA SU4	62.4	60.0	62.4	67.4	77.0	73.6	73.5	75.9	77.8	80.6
IA SU5	65.7	62.8	65.0	70.0	79.7	75.9	75.7	78.0	79.8	82.5
IA SU6	66.2	63.2	65.4	70.4	80.1	76.3	76.0	78.3	80.1	82.8
IA SU7	68.2	64.9	67.0	71.9	81.6	77.6	77.3	79.5	81.3	83.9
IA 3S3A	80.6	89.6	89.5	94.1	103.4	97.2	95.2	96.5	97.4	99.3
IA 3S2A	78.3	86.0	86.0	90.1	99.9	93.6	91.8	93.3	94.5	96.6
IA 3S3B	79.4	86.6	95.3	104.6	109.8	125.2	118.5	119.6	119.2	120.0
IA 4S3	78.8	85.5	93.8	102.9	108.2	119.7	115.2	115.1	114.8	115.8
IA 3-3	83.0	86.5	86.3	90.2	100.2	93.8	91.9	93.4	94.5	96.6
IA 5-2	78.1	85.3	94.1	102.1	110.2	104.9	102.3	103.1	103.8	105.5
IA EV2	65.9	63.0	65.2	70.1	79.8	76.1	75.9	78.1	80.0	82.7
IA EV3	64.2	61.5	63.8	68.8	78.5	74.8	74.7	77.1	78.9	81.7
90k	78.6	87.1	96.0	101.8	112.7	105.0	102.6	103.7	104.5	106.5
100k Crane	77.6	73.8	75.9	81.3	92.2	87.6	87.1	89.6	91.5	94.4
136k A	83.0	91.6	101.8	112.7	119.7	120.7	116.8	117.2	117.2	118.6
136k B	82.7	90.7	100.7	111.4	118.4	116.1	113.0	113.8	114.2	115.9
156k	84.8	93.1	103.2	113.1	120.4	129.1	124.0	124.3	123.9	124.9

HL-93 ratings are reported as Rating Factors, all others are Tons.

E and I designation in the location cells refer to Exterior and Interior beams.