



6-2019


## Exact Reliability for Consecutive k-out-of-r-from-n: F System with Equal and Unequal Components Probabilities

Yaser Amirian  
*Shahid Beheshti University*

Ahmad Khodadadi  
*Shahid Beheshti University*

Omid Chatrabgoun  
*Malayer University*

Follow this and additional works at: <https://digitalcommons.pvamu.edu/aam>

 Part of the [Numerical Analysis and Computation Commons](#), and the [Statistics and Probability Commons](#)

### Recommended Citation

Amirian, Yaser; Khodadadi, Ahmad; and Chatrabgoun, Omid (2019). Exact Reliability for Consecutive k-out-of-r-from-n: F System with Equal and Unequal Components Probabilities, *Applications and Applied Mathematics: An International Journal (AAM)*, Vol. 14, Iss. 1, Article 7.  
Available at: <https://digitalcommons.pvamu.edu/aam/vol14/iss1/7>

This Article is brought to you for free and open access by Digital Commons @PVAMU. It has been accepted for inclusion in *Applications and Applied Mathematics: An International Journal (AAM)* by an authorized editor of Digital Commons @PVAMU. For more information, please contact [hvkoshy@pvamu.edu](mailto:hvkoshy@pvamu.edu).



## Exact Reliability for Consecutive $k$ -out-of- $r$ -from- $n$ : $F$ System with Equal and Unequal Components Probabilities

<sup>1\*</sup>Yaser Amirian, <sup>2</sup>Ahmad Khodadadi and <sup>3</sup>Omid Chatrabgoun

<sup>1,2</sup> Department of Statistics

Faculty of Mathematical Sciences and Statistics

Shahid Beheshti University

Tehran, Iran

<sup>1</sup>[y\\_amirian@sbu.ac.ir](mailto:y_amirian@sbu.ac.ir); <sup>2</sup>[a\\_khodadadi@sbu.ac.ir](mailto:a_khodadadi@sbu.ac.ir);

<sup>3</sup>Department of Statistics

Faculty of Mathematical Sciences and Statistics

Malayer University

Malayer, Iran

[omid.6423@yahoo.com](mailto:omid.6423@yahoo.com);

\*Corresponding Author

Received: September 28, 2018; Accepted: May 22, 2019

### Abstract

A consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  system consists of  $n$  linear ordered components such that the system fails if and only if there exist a set of  $r$  consecutive linear component that contains at least  $k$  failed components. Consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  system has been considered in many fields such as reliability analysis. All recent efforts in this area have been focused on acquiring band or approximation for their reliability such that less attention has been paid to their closed form and exact reliability in the literature. In the present paper, with designing an innovative algorithm the exact reliability for extensive class of consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  system is obtained. Specially this task for equal and unequal components probabilities is done. Finally, the numerical results for calculating the exact reliability in extensive class of this strategic systems were applied.

**Keywords:** Exact reliability; Consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  system; Equal components probabilities; Unequal components probabilities; Innovative algorithm

**MSC 2010 No.:** 90B25, 60K10, 62N05

## 1. Introduction

**Table 1.** Notations

$k$	Minimum number of components in $r$ consecutive that failure will lead to failure of the system $k \leq r$
$r$	A window of $r$ consecutive out of $n$ components $r \leq n$
$n$	Number of components in the system
$p$	Equal probability components
$p_i$	Probability of component $i$ , $i = 1, 2, \dots, n$
$X_i$	Situation of component $i$
$\mathbf{X}$	Vector of component states $X_i$ , $i = 1, 2, \dots, n$
$Y_i$	The sum of $r$ component $X_i + X_{i+1} + \dots + X_{i+r-1}$
$\mathbf{Y}$	The vector of $Y_i$ , $i = 1, 2, \dots, n - r + 1$
$t_i$	Sample values of component $i$
$\mathbf{t}$	Sample value of vector $t_i$ , $i = 1, 2, \dots, n$
$C$	Producer algorithms of vectors $\mathbf{t}$
$R_{n,r,k,p}$	The reliability of the system for $n, r, k, p$

Industry development requires a need to design update systems and their optimal management, particularly the systems that are frequently used at the macro level and strategic conditions. One of the known systems in this area is consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  system that was presented by Tong (1985). A consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  system consists of  $n$  linear ordered components such that the system fails if and only if there exist a set of  $r$  consecutive linear component that contains at least  $k$  failed components.

Such a system can be used in many applied sciences. For example their applications are in the radar detection, in quality control and in inspection procedures. The two systems consecutive- $k$ -out-of- $r$ -from- $n$ :  $F$  and consecutive  $(r - k + 1)$ -out-of- $r$ -from- $n$ :  $G$  have the same performance (Kuo et al., 1990). The consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  system involves a consecutive  $k$ -out-of- $n$ :  $F$  system (when  $k = r$ ) and  $k$ -out-of- $n$ :  $F$  system (when  $r = n$ ) as special cases. This system consists of many subsets which have many applications (see e.g. Chiang and Niu (1981), Kao (1982), Chao and Lin (1984), Chiang and Chiang (1986), Hwang (1989), Shen and Zuo (1994), Kuo et al. (1990), Kuo and Zuo (2003)).

Obtaining the reliability has been one of the most important goal of this system in the recent years (See e.g. Radwan et al. (2011), Habib et al. (2007), Eryilmaz (2009), Habib and Szantai (2000), Daus and Beiu (2015), Gokdere et al. (2016), Kounias and Sfakianakis (1991), Koutras and Papastavridis (1993), Malinowski and Preuss (1995, 1995), Papastavridis (1988), Papastavridis and Koutras (1993), Papastavridis and Sfakianakis (1991), Sfakianakis (1993), Sfakianakis et al. (1992), Szantai and Aziz(1997)). Because of disability in obtaining exact reliability, all efforts have been attracted to the approximation of reliability and getting the band. On the other hand, most existing researches also considered systems with equal probabilities component while this could be expanded to unequal probabilities. Indeed, the problem of obtaining exact reliability under more general conditions has been less considered.

The main contributions of the present paper are as follows. At first, for the consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  system an exact distribution for the  $r$  dependent components is calculated, then with the use of it, exact reliability for this type of system that consists of many sub-systems is calculated. In fact, this work is done under realistic conditions which, to our knowledge allows, this issue has not been addressed previously. Also, in this paper a general innovative algorithm is designed that provides appropriate response for different situations of the consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  system.

For convenience in the contents of this article, signs and notations that are frequently used are presented in Table 1.

Then, the paper is organized as follows: In the second section, we deal with the exact reliability for general consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  system with equal probability component. In Section 3, similar to Section 2, we present the exact reliability for this system with unequal probability component. Section 4 is devoted to the numerical results and compare with existing results that explain performance of the obtained results in Section 2 and 3. Section 5 is dedicated to the application of our results in two real-world examples. Finally, in the last section some conclusions are stated.

## 2. Exact Reliability with Equal Components Probabilities

In this section, consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  systems with equal probability component have been considered. A consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  system consists of  $n$  linear ordered components such that the system fails if and only if there exist a set of  $r$  consecutive linear component that contains at least  $k$  failed components.

Let  $X_i, i = 1, \dots, n$ , is system component, independent identically Bernoulli distribution with success probability  $p$ ,  $B(p)$ , with equal probability features. In the considered system, active or inactive of the entire system depends on performance of  $r$  consecutive components and not to the each of the individual component. So, we decompose the system to possible  $r$  consecutive components as

$$Y_i = X_i + X_{i+1} + \dots + X_{i+r-1}, \quad i = 1, 2, \dots, n - r + 1,$$

which  $Y_i$  is binomial  $r$  and  $p$  distribution,  $Y_i \sim b(r, p)$ . And  $Y_i$  for  $i = 1, 2, \dots, n - r + 1$ , in  $Y$  vector,  $(Y_1, Y_2, \dots, Y_{n-r+1})$ , are dependent with binomial  $r$  and  $p$  distribution. The system works properly if each  $Y_i$  has at least  $r - k + 1$  active components. In order to find the exact reliability of the system, the joint distribution of  $(Y_1, Y_2, \dots, Y_{n-r+1})$  is calculated in the following theorem.

### Theorem 2.1.

Let  $X_i \sim B(p)$ ; for all  $i = 1, 2, \dots, n$ , is the system component, and accordingly  $Y_i$  for  $i = 1, 2, \dots, n - r + 1$ , is defined as follows:

$$Y_i = X_i + X_{i+1} + \dots + X_{i+r-1}, \quad i = 1, 2, \dots, n - r + 1, \quad (1)$$

which  $Y_i$  are dependent and identically distributed with  $b(r, p)$ . The joint distribution of

$(Y_1, Y_2, \dots, Y_{n-r+1})$  is

$$P_{Y_1, Y_2, \dots, Y_{n-r+1}}(y_1, y_2, \dots, y_{n-r+1}) = \sum_C p^{\sum_{i=1}^n t_i} (1-p)^{n-\sum_{i=1}^n t_i},$$

which operator  $C$  determines considered  $\mathbf{t} = (t_1, t_2, \dots, t_n)$  using an innovative algorithm. Of course, for the sake of textual unity, we postpone exact definition  $C$  to the final step of proof.

**Proof:**

To calculate joint distribution  $(Y_1, Y_2, \dots, Y_{n-r+1})$ , we can write

$$P_1 = P(Y_1 = y_1, Y_2 = y_2, \dots, Y_{n-r+1} = y_{n-r+1}) = P_{Y_1, Y_2, \dots, Y_{n-r+1}}(y_1, y_2, \dots, y_{n-r+1}).$$

We replace  $X_i$ ,  $i = 1, 2, \dots, n$ ,

$$P_1 = P(X_1 + X_2 + \dots + X_r = y_1, \dots, X_{n-r+1} + X_{n-r+2} + \dots + X_n = y_{n-r+1}).$$

We use conditional probability

$$P_1 = \sum_{t_1=0}^1 \dots \sum_{t_n=0}^1 P(X_1 + \dots + X_r = y_1, \dots, X_{n-r+1} + \dots + X_n = y_{n-r+1} | X_1 = t_1, \dots, X_n = t_n) \\ \times P(X_1 = t_1, \dots, X_n = t_n),$$

which sum on  $t_i$ ,  $i = 1, 2, \dots, n$  should follows conditions below

$$t_i + t_{i+1} + \dots + t_{i+r-1} = y_i, \quad \forall i = 1, 2, \dots, n-r+1, \quad (2)$$

so despite these conditions,

$$P_{Y_1, Y_2, \dots, Y_{n-r+1}}(y_1, y_2, \dots, y_{n-r+1}) = \sum_{t_1=0}^1 \sum_{t_2=0}^1 \dots \sum_{t_n=0}^1 P(X_1 = t_1, X_2 = t_2, \dots, X_n = t_n),$$

it has two states that can be considered as follows.

**State 1:** We start condition (2) such that  $X_1, X_2, \dots, X_{r-1}$ , is equaled to their sample values. Then  $X_r$  is replaced with a function of these sample values, and then  $X_{r+1}, X_{r+2}, \dots, X_n$  is obtained as a function of the previous sample values.

$$P_1 = \sum_{t_1=0}^1 \dots \sum_{t_n=0}^1 P(X_1 = t_1, \dots, X_{r-1} = t_{r-1}, X_r = y_1 - (t_1 + t_2 + \dots + t_{r-1}), X_{r+1} = y_2 - y_1 \\ + t_1, \dots, X_n = y_{n-r+1} - y_{n-r} + t_{n-r}).$$

We use the independence of  $X_i, i = 1, 2, \dots, n,$

$$P_1 = \sum_{t_1=0}^1 \dots \sum_{t_{r-1}=0}^1 \sum_{y_1-(t_1+t_2+\dots+t_{r-1})=0}^1 \sum_{y_2-y_1+t_1=0}^1 \dots \sum_{y_{n-r+1}-y_{n-r}+t_{n-r}=0}^1 P(X_1 = t_1) \dots$$

$$\times P(X_{r-1} = t_{r-1})P(X_r = y_1 - (t_1 + t_2 + \dots + t_{r-1}))P(X_{r+1} = y_2 - y_1 + t_1) \dots$$

$$\times P(X_n = y_{n-r+1} - y_{n-r} + t_{n-r}),$$

and according to  $t_i,$

$$P_1 = \sum_{t_1=0}^1 \dots \sum_{t_{r-1}=0}^1 \sum_{(t_1+t_2+\dots+t_{r-1})=y_1-1}^{y_1} \sum_{t_1=y_1-y_2}^{y_1-y_2+1} \dots \sum_{t_{n-r}=y_{n-r}-y_{n-r+1}}^{y_{n-r}-y_{n-r+1}+1} P(X_1 = t_1) \dots$$

$$\times P(X_{r-1} = t_{r-1})P(X_r = y_1 - (t_1 + \dots + t_{r-1}))P(X_{r+1} = y_2 - y_1 + t_1) \dots$$

$$\times P(X_n = y_{n-r+1} - y_{n-r} + t_{n-r}),$$

we put the  $X_i$  distribution value, for  $i = 1, 2, \dots, n,$

$$P_1 = \sum_{t_1=0}^1 \dots \sum_{t_{r-1}=0}^1 \sum_{(t_1+\dots+t_{r-1})=y_1-1}^{y_1} \sum_{t_1=y_1-y_2}^{y_1-y_2+1} \dots \sum_{t_{n-r}=y_{n-r}-y_{n-r+1}}^{y_{n-r}-y_{n-r+1}+1} \left[ p^{t_1}(1-p)^{1-t_1} \right] \dots$$

$$\times \left[ p^{t_{r-1}}(1-p)^{1-t_{r-1}} \right] \left[ p^{y_1-(t_1+t_2+\dots+t_{r-1})}(1-p)^{1-y_1+(t_1+t_2+\dots+t_{r-1})} \right] \dots$$

$$\times \left[ p^{y_{n-r+1}-y_{n-r}+t_{n-r}}(1-p)^{1-y_{n-r+1}+y_{n-r}-t_{n-r}} \right].$$

So,

$$P_1 = \sum_{t_1=0}^1 \dots \sum_{t_{r-1}=0}^1 \sum_{(t_1+t_2+\dots+t_{r-1})=y_1-1}^{y_1} \sum_{t_1=y_1-y_2}^{y_1-y_2+1} \dots \sum_{t_{n-r}=y_{n-r}-y_{n-r+1}}^{y_{n-r}-y_{n-r+1}+1} \left[ p^{\sum_{i=1}^n t_i} (1-p)^{n-\sum_{i=1}^n t_i} \right].$$

**State 2:** We start condition (2) such that  $X_n, X_{n-1}, \dots, X_{n-r+2},$  is equaled to their sample values, on the contrary trend State 1. Then  $X_{n-r+1}$  is replaced with a function of these sample values, and then  $X_{n-r}, X_{n-r-1}, \dots, X_1$  is obtained as a function of the previous sample values.

$$P_1 = \sum_{t_1=0}^1 \dots \sum_{t_n=0}^1 P(X_n = t_n, \dots, X_{n-r+2} = t_{n-r+2}, X_{n-r+1} = y_{n-r+1} - (t_n + t_{n-1} + \dots$$

$$+ t_{n-r+2}), X_{n-r} = y_{n-r} - y_{n-r+1} + t_n, \dots, X_1 = y_1 - y_2 + t_{r+1}).$$

We use the independence of  $X_i, i = 1, 2, \dots, n,$

$$\begin{aligned}
P_1 &= \sum_{t_n=0}^1 \dots \sum_{t_{n-r+2}=0}^1 \sum_{y_{n-r+1}-(t_{n-r+2}+t_{n-r+3}+\dots+t_n)=0}^1 \sum_{y_{n-r}-y_{n-r+1}+t_n=0}^1 \dots \sum_{y_1-y_2+t_{r+1}=0}^1 P(X_n = t_n) \dots \\
&\times P(X_{n-r+2} = t_{n-r+2}) P(X_{n-r+1} = y_{n-r+1} - (t_{n-r+2} + t_{n-r+3} + \dots + t_n)) \\
&\times P(X_{n-r} = y_{n-r} - y_{n-r+1} + t_n) \dots P(X_1 = y_1 - y_2 + t_{r+1}),
\end{aligned}$$

and according to  $t_i$ ,

$$\begin{aligned}
P_1 &= \sum_{t_n=0}^1 \dots \sum_{t_{n-r+2}=0}^1 \sum_{(t_{n-r+2}+t_{n-r+3}+\dots+t_n)=y_{n-r+1}-1}^{y_{n-r+1}} \sum_{t_n=y_{n-r+1}-y_{n-r}}^{y_{n-r+1}-y_{n-r}+1} \dots \sum_{t_{r+1}=y_2-y_1}^{y_2-y_1+1} P(X_n = t_n) \dots \\
&\times P(X_{n-r+2} = t_{n-r+2}) P(X_{n-r+1} = y_{n-r+1} - (t_{n-r+2} + t_{n-r+3} + \dots + t_n)) \\
&\times P(X_{n-r} = y_{n-r} - y_{n-r+1} + t_n) \dots P(X_1 = y_1 - y_2 + t_{r+1}),
\end{aligned}$$

we put the  $X_i$  distribution value, for  $i = 1, 2, \dots, n$ ,

$$\begin{aligned}
P_1 &= \sum_{t_n=0}^1 \dots \sum_{t_{n-r+2}=0}^1 \sum_{(t_{n-r+2}+t_{n-r+3}+\dots+t_n)=y_{n-r+1}-1}^{y_{n-r+1}} \sum_{t_n=y_{n-r+1}-y_{n-r}}^{y_{n-r+1}-y_{n-r}+1} \dots \sum_{t_{r+1}=y_2-y_1}^{y_2-y_1+1} \left[ p^{t_n} (1-p)^{1-t_n} \right] \dots \\
&\times \left[ p^{t_{n-r+2}} (1-p)^{1-t_{n-r+2}} \right] \left[ p^{y_{n-r+1}-(t_{n-r+2}+t_{n-r+3}+\dots+t_n)} (1-p)^{1-y_{n-r+1}+(t_{n-r+2}+t_{n-r+3}+\dots+t_n)} \right] \\
&\times \left[ p^{y_{n-r}-y_{n-r+1}+t_n} (1-p)^{1-y_{n-r}+y_{n-r+1}-t_n} \right] \dots \left[ p^{y_1-y_2+t_{r+1}} (1-p)^{1-y_1+y_2-t_{r+1}} \right].
\end{aligned}$$

So,

$$P_1 = \sum_{t_n=0}^1 \dots \sum_{t_{n-r+2}=0}^1 \sum_{(t_{n-r+2}+t_{n-r+3}+\dots+t_n)=y_{n-r+1}-1}^{y_{n-r+1}} \sum_{t_n=y_{n-r+1}-y_{n-r}}^{y_{n-r+1}-y_{n-r}+1} \dots \sum_{t_{r+1}=y_2-y_1}^{y_2-y_1+1} \left[ p^{\sum_{i=1}^n t_i} (1-p)^{n-\sum_{i=1}^n t_i} \right].$$

Other states are similar to these two states and do not create a new structure, and our response for joint distribution  $(Y_1, Y_2, \dots, Y_{n-r+1})$  is subscription state 1 and state 2 such that leads to the following

$$P_{Y_1, Y_2, \dots, Y_{n-r+1}}(y_1, y_2, \dots, y_{n-r+1}) = \sum_C p^{\sum_{i=1}^n t_i} (1-p)^{n-\sum_{i=1}^n t_i}, \quad (3)$$

which

$$C = \{(t_1, t_2, \dots, t_n) | \text{Algorithm 1}\},$$

**Algorithm 1.**

- 1)  $\forall i, t_i \in \{0, 1\}$ ,
- 2)  $t_1 \in \{y_1 - y_2, y_1 - y_2 + 1\}$ ,  
 $t_2 \in \{y_2 - y_3, y_2 - y_3 + 1\}, \dots$ ,  
 $t_r \in \{y_r - y_{r+1}, y_r - y_{r+1} + 1\}$ ,
- 3)  $t_{n-r+1} \in \{y_{n-2r+2} - y_{n-2r+1}, y_{n-2r+2} - y_{n-2r+1} + 1\}$ ,  
 $t_{n-r+2} \in \{y_{n-2r+3} - y_{n-2r+2}, y_{n-2r+3} - y_{n-2r+2} + 1\}, \dots$ ,  
 $t_n \in \{y_{n-r+1} - y_{n-r}, y_{n-r+1} - y_{n-r} + 1\}$ ,
- 4)  $t_{r+1} \in \{\{y_{r+1} - y_{r+2}, y_{r+1} - y_{r+2} + 1\} \cap \{y_2 - y_1, y_2 - y_1 + 1\}\}$ ,  
 $t_{r+2} \in \{\{y_{r+2} - y_{r+3}, y_{r+2} - y_{r+3} + 1\} \cap \{y_3 - y_2, y_3 - y_2 + 1\}\}, \dots$ ,  
 $t_{n-r} \in \{\{y_{n-r} - y_{n-r+1}, y_{n-r} - y_{n-r+1} + 1\} \cap \{y_{n-2r+1} - y_{n-2r}, y_{n-2r+1} - y_{n-2r} + 1\}\}$ ,
- 5)  $t_i + t_{i+1} + \dots + t_{i+r-1} = y_i; \quad \forall i = 1, 2, \dots, n - r + 1$ .

Algorithm 1 provides different vectors  $\mathbf{t} = (t_1, t_2, \dots, t_n)$  related to  $k$  and  $n$ , and resulted vectors  $\mathbf{t}$  lie on the (3) and completes proof. ■

Now, the system will be active if and only if for each  $Y_i, i = 1, 2, \dots, n - r + 1$  at least there exist  $r - k + 1$  active components. So, the reliability function equals to

$$R_{n,r,k,p} = P_{Y_1, Y_2, \dots, Y_{n-r+1}}(\forall i = 1, 2, \dots, n-r+1; y_i \geq r-k+1) = P_{Y_1, Y_2, \dots, Y_{n-r+1}}(\forall i; y_i > r-k). \quad (4)$$

This reliability can be calculated exactly using Theorem (2.1).

Note that if  $k = r$ , the system will be changed to consecutive  $k$ -out-of- $n$ :  $F$  system with same structure such that its reliability function as a special case (4) is as

$$R_{n,r,k,p} = P_{Y_1, Y_2, \dots, Y_{n-r+1}}(\forall i; y_i > 0).$$

Also, if  $r = n$ , the system will be changed to  $k$ -out-of- $n$ :  $F$  system which its reliability function again is as

$$R_{n,r,k,p} = P_{Y_1}(y_1 \geq n - k + 1) = P\left(\sum_{i=1}^n X_i \geq n - k + 1\right),$$

which it is usual and known reliability function in the literature.

### 3. Exact Reliability with Unequal Components Probabilities

In this section with the another point of view which may be realistic in applications, we consider the exact reliability of the system. Indeed we assume that components of the system have unequal probability to active. This condition is realistic than equal probability component since each of the



components may be under certain conditions. For example consider waves transfer stations which are under different circumstances. Finally, we bring up following theorem similar to Theorem (2.1).

**Theorem 3.1.**

Let  $X_i \sim B(p_i)$ ; for all  $i = 1, 2, \dots, n$ , is the system component with unequal probabilities, and  $Y_i$  for  $i = 1, 2, \dots, n - r + 1$ , is defined as (1) which  $Y_i$ s are dependent, but not identically distributed. The joint distribution of  $(Y_1, Y_2, \dots, Y_{n-r+1})$  is

$$P_{Y_1, Y_2, \dots, Y_{n-r+1}}(y_1, y_2, \dots, y_{n-r+1}) = \sum_C \left[ \prod_{i=1}^n \left[ p_i^{t_i} (1 - p_i)^{1-t_i} \right] \right],$$

which operator  $C$  is same as previous in Theorem (2.1).

**Proof:**

Again we consider two states for proof.

**State 1:** The steps of this state is exactly similar to State 1 in Theorem (2.1) such that only unequal probabilities components replace, so

$$P_2 = P(Y_1 = y_1, Y_2 = y_2, \dots, Y_{n-r+1} = y_{n-r+1}) = P_{Y_1, Y_2, \dots, Y_{n-r+1}}(y_1, y_2, \dots, y_{n-r+1}).$$

We put the  $X_i$  distribution value, for  $i = 1, 2, \dots, n$ ,

$$P_2 = \sum_{t_1=0}^1 \dots \sum_{t_{r-1}=0}^1 \sum_{(t_1+\dots+t_{r-1})=y_1-1}^{y_1} \sum_{t_1=y_1-y_2}^{y_1-y_2+1} \dots \sum_{t_{n-r}=y_{n-r}-y_{n-r+1}}^{y_{n-r}-y_{n-r+1}+1} \left[ p_1^{t_1} (1 - p_1)^{1-t_1} \right] \dots \left[ p_n^{t_n} (1 - p_n)^{1-t_n} \right],$$

so,

$$P_2 = \sum_{t_1=0}^1 \dots \sum_{t_{r-1}=0}^1 \sum_{(t_1+t_2+\dots+t_{r-1})=y_1-1}^{y_1} \sum_{t_1=y_1-y_2}^{y_1-y_2+1} \dots \sum_{t_{n-r}=y_{n-r}-y_{n-r+1}}^{y_{n-r}-y_{n-r+1}+1} \left[ \prod_{i=1}^n \left[ p_i^{t_i} (1 - p_i)^{1-t_i} \right] \right].$$

**State 2:** Again this state unequal probabilities components replace, so

$$P_2 = P(Y_1 = y_1, Y_2 = y_2, \dots, Y_{n-r+1} = y_{n-r+1}) = P_{Y_1, Y_2, \dots, Y_{n-r+1}}(y_1, y_2, \dots, y_{n-r+1}).$$

We put the  $X_i$  distribution value, for  $i = 1, 2, \dots, n$ ,

$$P_2 = \sum_{t_n=0}^1 \dots \sum_{t_{n-r+2}=0}^1 \sum_{(t_{n-r+2}+t_{n-r+3}+\dots+t_n)=y_{n-r+1}-1}^{y_{n-r+1}} \sum_{t_n=y_{n-r+1}-y_{n-r}}^{y_{n-r+1}-y_{n-r}+1} \dots \sum_{t_{r+1}=y_2-y_1}^{y_2-y_1+1} \left[ p_1^{t_1} (1 - p_1)^{1-t_1} \right] \dots \times \left[ p_n^{t_n} (1 - p_n)^{1-t_n} \right],$$

so,

$$P_2 = \sum_{t_n=0}^1 \dots \sum_{t_{n-r+2}=0}^1 \sum_{(t_{n-r+2}+\dots+t_n)=y_{n-r+1}-1}^{y_{n-r+1}} \sum_{t_n=y_{n-r+1}-y_{n-r}}^{y_{n-r+1}-y_{n-r}+1} \dots \sum_{t_{r+1}=y_2-y_1}^{y_2-y_1+1} \left[ \prod_{i=1}^n \left[ p_i^{t_i} (1-p_i)^{1-t_i} \right] \right].$$

Other states are similar to these two states and do not create a new structure, and our response for joint distribution  $(Y_1, Y_2, \dots, Y_{n-r+1})$  is subscription state 1 and state 2 such that leads to the following

$$P_{Y_1, Y_2, \dots, Y_{n-r+1}}(y_1, y_2, \dots, y_{n-r+1}) = \sum_C \left[ \prod_{i=1}^n \left[ p_i^{t_i} (1-p_i)^{1-t_i} \right] \right].$$

Note that with replacement of this joint probability distribution, we can obtain exact reliability formula similar to (4). ■

## 4. Numerical Results

This section set out to the numerical results to obtain the exact reliability in equal and unequal component probability conditions. Indeed, the numerical results have been applied to show performance and efficiency of the obtained results in the previous sections. In the equal component probability condition, the exact reliability is calculated for fixed  $n$ ,  $r$  and  $p$  and different  $k$  in Tables 2 and 3. Also the exact reliability is calculated for fixed  $n$ ,  $k$  and  $p$  and different  $r$  in Tables 4 and 5. Then the exact reliability is calculated for fixed  $n$ ,  $r$  and  $k$  and different  $p$  in Tables 6, 7 and 8. After that the exact reliability is calculated for fixed  $r$ ,  $k$  and  $p$  and different  $n$  in Tables 9, 10 and 11. Also the exact reliability is calculated for different  $n$ ,  $r$ ,  $k$  and  $p$  Table in 12. In the following, the reliability graph against  $k$  is plotted to see  $k$  changes and is reported in Figure 1. The reliability graph against  $r$  is plotted to see  $r$  changes and is reported in Figure 2. Then the reliability graph against  $p$  is plotted to see  $p$  changes and is reported in Figure 3. Finally the reliability graph against  $n$  is plotted to see  $n$  changes and is reported in Figure 4. Also, the exact reliability with unequal component probability is calculated for different  $n$ ,  $r$ ,  $k$  and  $p$  vector, which is realistic than equal component probability. The resulted calculations is reported in Tables 13 and 14 such that components probability is chosen randomly. In the following, a brief comparison was made between the results and the results of the previous authors, and it is reported in Table 15. If interested readers wish to programming codes, the authors can provide them which written in MATLAB R2104a.

## 5. Application

In this section we apply obtained results in the present paper for two real-world examples.

### Example 5.1.

This real-world application is based on the process of Safran Chemical Paint Company plant in Kermanshah city, Islamic Republic of Iran. In the producing line, filling machine is configured such that when the box is placed under it, 1 Liter (L) paint is poured in the first box and then

another boxes fill in the same way. Sometimes cutting tool of the machine causes problem and does not perform well ( $1 - p = 0.05$ ), and 2 L paint is poured, but the capacity of each box is just 1.25 L. So, the remaining paint back to the tank. This situation occurs because 0.25 L extra capacity is provided for each box to mix with other materials in application. Then the boxes are closed by automatic machine, and for the final packaging stay on strap consecutively. The strap is designed such that can withstand up to 10 L, and at any moment 9 boxes is moving on it ( $r = 9$ ). The strap stops when at least 5 boxes have over limit weight ( $k = 5$ ). The company fills 100 boxes in each shift ( $n = 100$ ). Based on the reliability function (4),  $R_{100,9,5,0.95} = 0.998491$ , and this is reliability function for consecutive 5-out-of-9-from-100:  $F$  system.

### Example 5.2.

Suppose there are 12 electricity transfer stations between the two cities(A and B) which transfer electricity from A to B. These stations are in two different situations:

- 1)They are damaged which do not amplify the current, and only transmit part of it.
- 2)They are intact, which in addition to its current is completely strengthened.

To transmit current from A to B, at least two stations should be intact of each three alternative stations. The studies have shown that the probability that the station is damaged is 0.01; in fact, this equates to:

$$2 - out - of - 3 - from - 12 : F system,$$

which is at each station in two possible situations: damaged and intact, and component probability is 0.99.

The reliability of the system that transfer the current to B city is equal to

$$R_{12,3,2,0.99} = 0.9979465.$$

## 6. Conclusion

In the present article, we have tried to obtain the exact reliability, unlike existing research, for consecutive  $k$ -out-of- $r$ -from  $n$ :  $F$  system in the equal and unequal components probability. In fact, with the help of presented pattern in this paper the exact and closed form reliability for such a system has been achieved that involves many sub-systems. Also, an algorithm to obtain possible values of dependent  $r$  consecutive is suggested. The method proposed in this paper can apply simply, and numerical results showed the efficiency and high performance of the proposed method. Finally, we wish to extend our method to obtain the exact reliability for multistate consecutive  $k$ -out-of- $r$ -from  $n$ :  $F$  system.

## REFERENCES

- Chao, M. T. and Lin, G. D. (1984). Economical design of large consecutive- $k$ -out-of- $n$ :  $F$  systems, IEEE Transactions on Reliability, Vol. 33, pp. 411–413.
- Chiang, D. T. and Chiang, R. F. (1986). Relayed communication via consecutive- $k$ -out-of- $n$ :  $F$  system, IEEE Transactions on Reliability, Vol. 35, pp. 65–67.
- Chiang, D. T. and Niu, S. C. (1981). Reliability of consecutive- $k$ -out-of- $n$ :  $F$  system, IEEE Transactions on Reliability, Vol. 30, pp. 87–89.
- Daus, L. and Beiu, V. (2015). Lower and upper reliability bounds for consecutive- $k$ -out-of- $n$  :  $F$  systems, IEEE Transactions on Reliability, Vol. 64, pp. 1128–1135.
- Eryilmaz, S. (2009). Reliability properties of consecutive  $k$ -out-of- $n$  systems of arbitrarily dependent components, Reliability Engineering and System Safety, Vol. 94, pp. 350–356.
- Gokdere, G., Gurcan, M. and Kilic, M. B. (2016). A new method for computing the reliability of consecutive  $k$ -out-of- $n$ : $F$  systems, De Gruyter open, Vol. 14, pp. 166–170.
- Habib, A., Al-Seedy, R. O. and Radwan, T. (2007). Reliability evaluation of multi-state consecutive  $k$ -out-of- $r$ -from- $n$ :  $G$  system, Applied Mathematical Modelling, Vol. 31, pp. 2412–2423.
- Habib, A. and Szantai, T. (2000). New bounds on the reliability of the consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  System, Reliability Engineering and System Safety, Vol. 68, No. 2, pp. 97–104.
- Hwang, F. K. (1989). Invariant permutations for consecutive- $k$ -out-of- $n$  cycles, IEEE Transactions on Reliability, Vol. 38, pp. 65–67.
- Kao, S. C. (1982). Computing reliability from warranty. Proceedings of the 1982 American Statistical Association, Section on Statistical Computing, pp. 309–312.
- Kounias, S. and Sfakianakis, M. (1991). The reliability of a linear system and its connection with the generalized birthday problem, Statistica Applicata, Vol. 3, pp. 531–543.
- Koutras, M.V. and Papastavridis, S.G. (1993). Application of the Stein-Chen method for bounds and limit theorems in the reliability of coherent structures, Naval Research Logistics, Vol. 40, pp. 617–631.
- Kuo, W., Zhang, W. and Zuo, M. J. (1990). A consecutive  $k$ -out-of- $n$ :  $G$ : The mirror image of a consecutive  $k$ -out-of- $n$ :  $F$  system, IEEE Transactions on Reliability, Vol. 39, pp. 244–253.
- Kuo, W. and Zuo, M. J. (2003). *Optimal Reliability Modeling: Principles and Applications*, John Wiley & Sons, New York.
- Malinowski, J. and Preuss, W. (1995). A recursive algorithm evaluating the exact reliability of a consecutive- $k$ -within- $m$ -out-of- $n$ :  $F$  system, microelectronics reliability, Vol. 35, pp. 1461–1465.
- Malinowski, J. and Preuss, W. (1995). On the reliability of generalized consecutive systems-A survey, International Journal of Reliability Quality and Safety Engineering, Vol. 2, No. 2, pp. 187–201.
- Papastavridis, S. (1988). Weibull limit for the reliability of consecutive- $k$ -within- $m$ -out-of- $n$  system, Advances in Applied Probability, Vol. 20, pp. 690–692.
- Papastavridis, S. and Koutras, M.V. (1993). Bounds for reliability of consecutive- $k$ -within- $m$ -out-of- $n$  systems, IEEE Transactions on Reliability, Vol. 42, pp. 156–160.

- Papastavridis, S. and Sfakianakis, M.E. (1991). Optimal arrangement and importance of the components in a consecutive- $k$ -out-of- $r$ -from- $n$ :  $F$  system, IEEE Transactions on Reliability, Vol. 40, pp. 277–279.
- Radwan, T., Habib, A., Alseedy, R. and Elsherbeny, A. (2011). Bounds for increasing multi-state consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  system with equal components probabilities, Applied Mathematical Modelling, Vol. 35, pp. 2366–2373.
- Sfakianakis, M. (1993). Optimal arrangement of components in a consecutive  $k$ -out-of- $r$ -from- $n$ :  $F$  system, microelectronics reliability, Vol. 33, pp. 1573–1578.
- Sfakianakis, M., Kounias, S. and Hillaris, A. (1992). Reliability of a consecutive- $k$ -out-of- $r$ -from- $n$ :  $F$  system, IEEE Transactions on Reliability, Vol. 41, pp. 442–447.
- Shen, J. and Zuo, M. J. (1994). Optimal design of series consecutive- $k$ -out-of- $n$ :  $G$  system with age-dependent minimal repair, Reliability Engineering and System Safety, Vol. 45, pp. 277–283.
- Szantai, T. and Aziz, H. (1997). Correction to: reliability of a consecutive-  $k$ -out-of- $r$ -from- $n$ :  $F$  system, IEEE Transactions on Reliability, Vol. 46, pp. 282.
- Tong, Y. L. (1985). Rearrangement inequality for the longest run with an application to network reliability, Journal of Applied Probability, Vol. 22, pp. 286–393.

**Table 2.** Exact reliability for  $n = 12$ ,  $r = 5$ , and  $p = 0.95$ .

$k$	1	2	3	4	5
$R_{n,r,k,p}$	.54036	.92387	.99447	.99981	1.00000

**Table 3.** Exact reliability for  $n = 13$ ,  $r = 9$ , and  $p = 0.9$ .

$k$	1	2	3	4	5	6	7	8	9
$R_{n,r,k,p}$	.25419	.65273	.89827	.98059	.99754	.99979	.99999	1.00000	1.00000

**Table 4.** Exact reliability for  $n = 11$ ,  $k = 3$ , and  $p = 0.85$ .

$r$	3	4	5	6	7	8	9	10	11
$R_{n,r,k,p}$	.97381	.93959	.90542	.87429	.84643	.82209	.80197	.78709	.77881

**Table 5.** Exact reliability for  $n = 14$ ,  $k = 4$ , and  $p = 0.9$ .

$r$	5	6	7	8	9	10	11	12	13	14
$R_{n,r,k,p}$	.99670	.99317	.98868	.98352	.97799	.97236	.96692	.96204	.95817	.95587

**Table 6.** Exact reliability for  $n = 13$ ,  $r = 6$ , and  $k = 3$ .

$p$	0.25	0.5	0.75	0.8	0.9	0.95	0.99
$R_{n,r,k,p}$	.00038	.06079	.56372	.71270	.94208	.99093	.99991

**Table 7.** Exact reliability for  $n = 12$ ,  $r = 9$ , and  $k = 3$ .

$p$	0.25	0.5	0.75	0.8	0.9	0.95	0.99
$R_{n,r,k,p}$	.00015	.03345	.45403	.61579	.90953	.98455	.99984

**Table 8.** Exact reliability for  $n = 11$ ,  $r = 5$ , and  $k = 2$ .

$p$	0.25	0.5	0.75	0.8	0.9	0.95	0.99
$R_{n,r,k,p}$	.00006	.01660	.29721	.43621	.77915	.93128	.99673

**Table 9.** Exact reliability for  $r = 8$ ,  $k = 4$ , and  $p = 0.9$ .

$n$	8	9	10	11	12	13	14	15
$R_{n,r,k,p}$	.99498	.99291	.99096	.98907	.98721	.98536	.98352	.98168

**Table 10.** Exact reliability for  $r = 10$ ,  $k = 4$ , and  $p = 0.9$ .

$n$	10	11	12	13	14	15	16	17
$R_{n,r,k,p}$	.98720	.98319	.97944	.97585	.97236	.96892	.96553	.96215

**Table 11.** Exact reliability for  $r = 6$ ,  $k = 3$ , and  $p = 0.85$ .

$n$	6	7	8	9	10	11	12	13	14
$R_{n,r,k,p}$	.95266	.93504	.91901	.90377	.88893	.87429	.85974	.84537	.83124

**Table 12.** Exact reliability for equal component probabilities for different  $n$ ,  $r$ ,  $k$  and  $p$ .

$n$	$r$	$k$	$p_1$	$R_{n,r,k,p_1}$	$p_2$	$R_{n,r,k,p_2}$	$p_3$	$R_{n,r,k,p_3}$
6	4	3	0.8	0.94310	0.9	0.99152	0.95	0.99885
6	3	2	0.8	0.75366	0.9	0.92510	0.95	0.97944
8	4	3	0.8	0.91488	0.9	0.98684	0.95	0.99818
8	6	3	0.8	0.83952	0.9	0.97142	0.95	0.99576
10	5	4	0.8	0.97376	0.9	0.99796	0.95	0.99986
11	7	4	0.8	0.91960	0.9	0.99229	0.95	0.99941
11	8	3	0.8	0.68115	0.9	0.93053	0.95	0.98861
12	4	2	0.8	0.45097	0.9	0.79227	0.95	0.93710
12	8	4	0.8	0.87930	0.9	0.98721	0.95	0.99897
13	9	6	0.8	0.99149	0.9	0.99979	0.95	1.00000
13	5	3	0.8	0.77414	0.9	0.95866	0.95	0.99385
14	4	2	0.8	0.38844	0.9	0.75771	0.95	0.92531
14	12	3	0.8	0.47159	0.9	0.85234	0.95	0.97237
15	5	2	0.8	0.30731	0.9	0.69873	0.95	0.90200
15	11	6	0.8	0.97320	0.9	0.99920	0.95	0.99998

**Table 13.** Exact reliability for unequal component probabilities for different  $n, r, k$  and  $p$  vector.

$n$	$r$	$k$	$p$	$R_{n,r,k,p}$
10	7	2	$p = \{0.8, 0.9, 0.9, 0.95, 0.9, 0.8, 0.7, 0.8, 0.9, 0.9\}$	0.59146
12	6	4	$p = \{0.8, 0.95, 0.9, 0.95, 0.9, 0.8, 0.8, 0.8, 0.95, 0.95, 0.95, 0.95\}$	0.99164
6	4	2	$p = \{0.85, 0.8, 0.95, 0.9, 0.95, 0.9\}$	0.90001
9	3	2	$p = \{0.95, 0.9, 0.85, 0.8, 0.8, 0.95, 0.95, 0.95, 0.8\}$	0.84227
13	6	3	$\begin{cases} p_1 = p_2 = p_5 = p_6 = p_9 = p_{10} = p_{13} = 0.9 \\ p_3 = p_4 = p_7 = p_8 = p_{11} = p_{12} = 0.8 \end{cases}$	0.84920
14	11	8	$\begin{cases} p_1 = p_2 = p_5 = p_6 = p_9 = p_{10} = p_{13} = p_{14} = 0.9 \\ p_3 = p_4 = p_7 = p_8 = p_{11} = p_{12} = 0.8 \end{cases}$	0.99999
12	10	7	$\begin{cases} p_1 = p_2 = p_5 = p_6 = p_9 = p_{10} = 0.9 \\ p_3 = p_4 = p_7 = p_8 = p_{11} = p_{12} = 0.8 \end{cases}$	0.99975
11	6	3	$\begin{cases} p_1 = p_2 = p_5 = p_6 = p_9 = p_{10} = 0.9 \\ p_3 = p_4 = p_7 = p_8 = p_{11} = 0.8 \end{cases}$	0.88227
10	5	3	$p_i = 0.95 \quad i \neq 8 \quad \& \quad p_8 = 0.8$	0.99205
14	12	8	$p_i = 0.95 \quad i \neq 8 \quad \& \quad p_8 = 0.8$	1.00000
13	4	3	$p_i = 0.95 \quad i \neq 8 \quad \& \quad p_8 = 0.8$	0.99365
12	7	5	$p_i = 0.95 \quad i \neq 8 \quad \& \quad p_8 = 0.8$	0.99993
9	7	4	$p_i \text{ is random } \& \quad 0.8 \leq p_i \leq 1$	0.98675
12	6	3	$p_i \text{ is random } \& \quad 0.8 \leq p_i \leq 1$	0.90991
14	8	5	$p_i \text{ is random } \& \quad 0.8 \leq p_i \leq 1$	0.99826
15	12	3	$p_i \text{ is random } \& \quad 0.8 \leq p_i \leq 1$	0.85637


**Table 14.** Exact reliability for unequal component probabilities for different  $n, r, k$  and  $p$  vector.

$n$	$r$	$k$	$p$	$R_{n,r,k,p}$
10	8	5	$p_i = 0.9 \quad i \neq 3, 6 \quad \& \quad p_3 = 0.75 \quad \& \quad p_6 = 0.99$	0.99914
12	9	4	$p_i = 0.9 \quad i \neq 3, 6 \quad \& \quad p_3 = 0.75 \quad \& \quad p_6 = 0.99$	0.98299
13	9	5	$p_i = 0.9 \quad i \neq 3, 6 \quad \& \quad p_3 = 0.75 \quad \& \quad p_6 = 0.99$	0.99785
14	9	6	$p_i = 0.9 \quad i \neq 3, 6 \quad \& \quad p_3 = 0.75 \quad \& \quad p_6 = 0.99$	0.99983
15	11	4	$p_{\text{odd}} = 0.95 \quad \& \quad p_{\text{even}} = 0.9$	0.98658
14	10	4	$p_{\text{odd}} = 0.95 \quad \& \quad p_{\text{even}} = 0.9$	0.99017
12	8	6	$p_{\text{odd}} = 0.95 \quad \& \quad p_{\text{even}} = 0.9$	1.00000
11	6	4	$p_{\text{odd}} = 0.95 \quad \& \quad p_{\text{even}} = 0.9$	0.99859
15	11	8	$p_1 = 0.99 \quad \& \quad p_i = p_{i-1} - 0.01 \quad \forall i = 2, 3, \dots, n$	1.00000
14	8	4	$p_1 = 0.99 \quad \& \quad p_i = p_{i-1} - 0.01 \quad \forall i = 2, 3, \dots, n$	0.99166
13	9	5	$p_1 = 0.99 \quad \& \quad p_i = p_{i-1} - 0.01 \quad \forall i = 2, 3, \dots, n$	0.99936
12	5	3	$p_1 = 0.99 \quad \& \quad p_i = p_{i-1} - 0.01 \quad \forall i = 2, 3, \dots, n$	0.98447



**Table 15.** Comparison exact reliability for equal component probabilities for different  $k$ ,  $r$ , and  $n$ , with the results obtained by Sfakianakis et. al., 1992 \* and Habib and Szantai, 2000 \*\*.

$n$	$r$	$k$	$p$	$R_{n,r,k,p}$	$1 - R_{n,r,k,p}$	$R_{old}^{**}$	$1 - R_{old}^*$
10	7	2	0.25	0.00008	0.99992		$0.993 \leq R \leq 1.000$
10	7	5	0.5	0.62207	0.37793		$0.364 \leq R \leq 0.393$
10	7	5	0.75	0.96979	0.03021		$0.030 \leq R \leq 0.033$
15	7	5	0.75	0.94295	0.05705		$0.047 \leq R \leq 0.068$
15	7	5	0.75	0.942955		$0.942484 \leq R \leq 0.943516$	
15	10	4	0.75	0.60546	0.39454		$0.367 \leq R \leq 0.471$
15	10	4	0.75	0.605462		$0.603743 \leq R \leq 0.606257$	
15	10	5	0.75	0.83148	0.16852		$0.152 \leq R \leq 0.196$
15	10	6	0.75	0.94857	0.05143		$0.045 \leq R \leq 0.058$
15	10	7	0.5	0.66620	0.33380		$0.321 \leq R \leq 0.421$
15	12	9	0.25	0.23227	0.76773		$0.745 \leq R \leq 0.781$

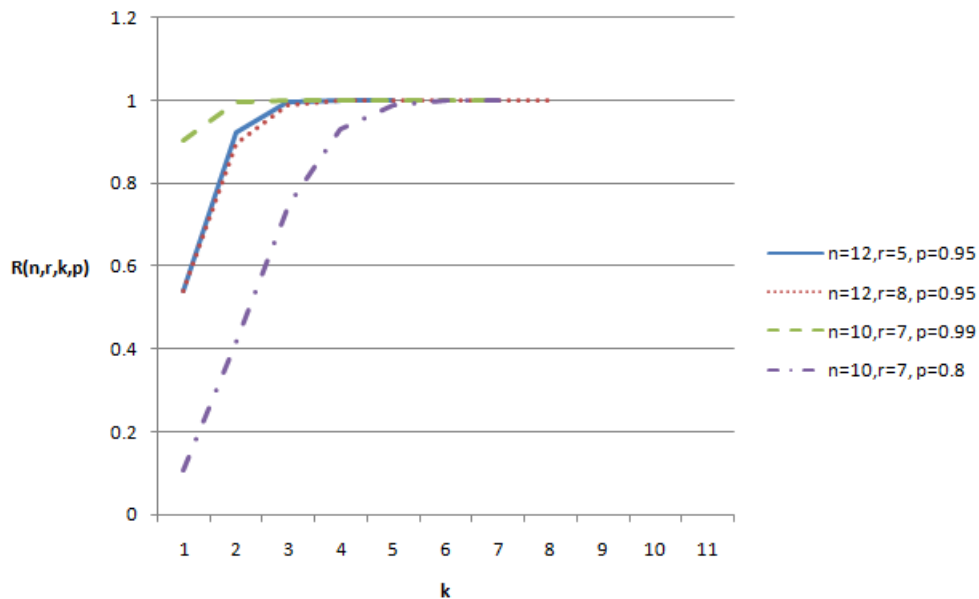

**Figure 1.** Reliability graph versus  $k$

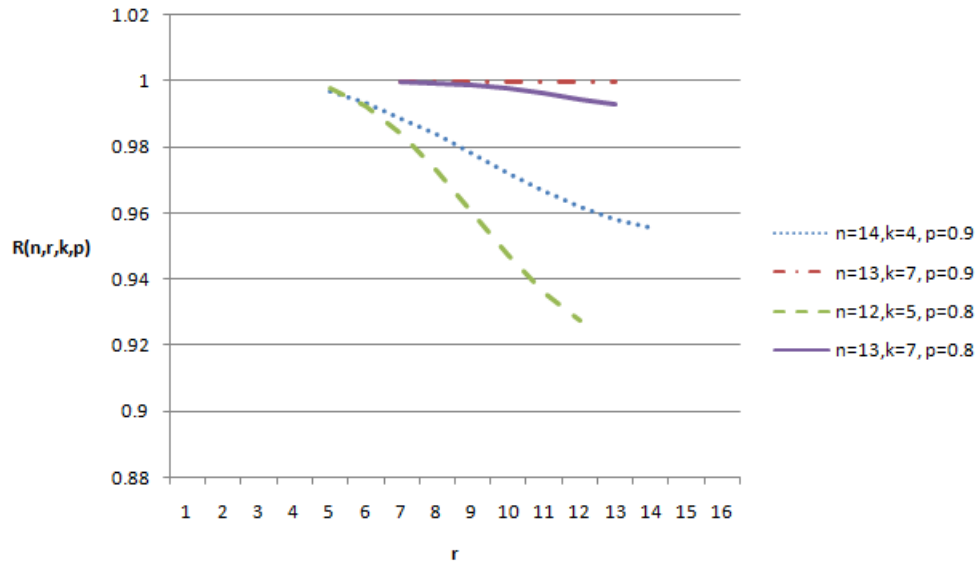


Figure 2. Reliability graph versus r

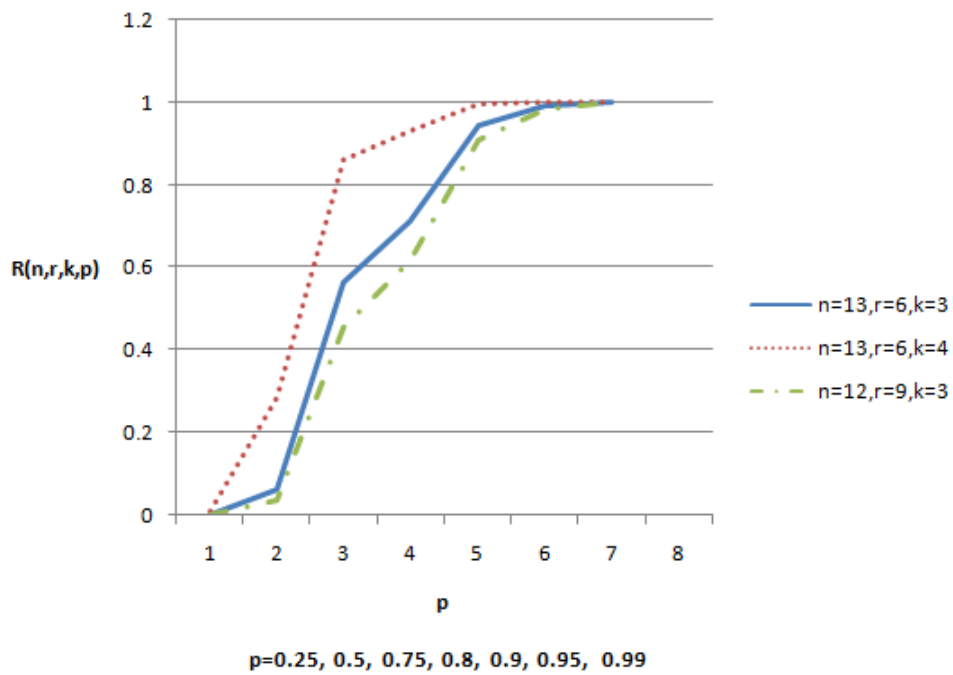


Figure 3. Reliability graph versus p

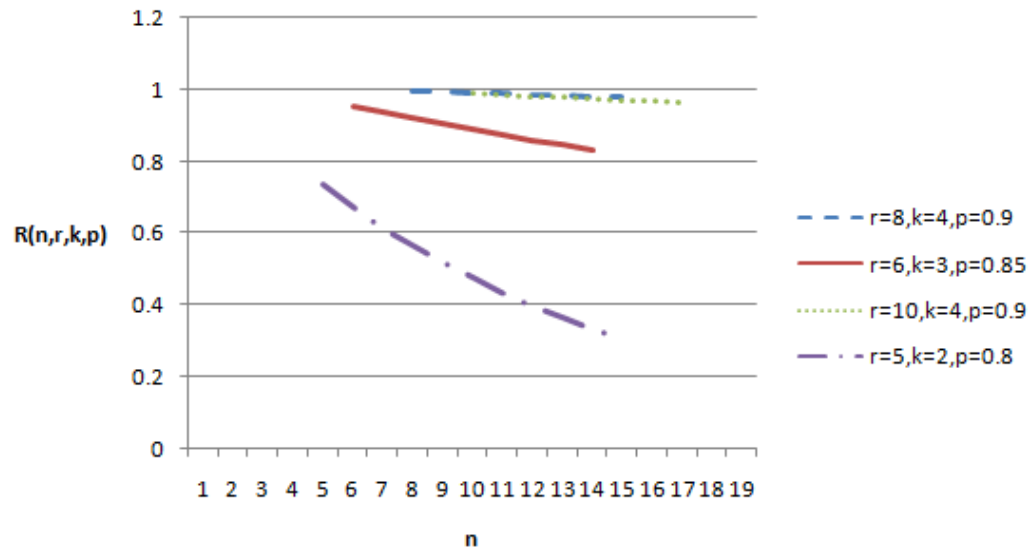


Figure 4. Reliability graph versus n