



Aalborg Universitet

AALBORG UNIVERSITY
DENMARK

Novel Propagation Strategy of *Saccharomyces cerevisiae* for Enhanced Xylose Metabolism during Fermentation on Softwood Hydrolysate

Dobrescu, Andreea-Cristina; Veras, Henrique César Teixeira; Varrone, Cristiano; Knudsen, Jan Dines

Published in:
Fermentation

DOI (link to publication from Publisher):
[10.3390/fermentation7040288](https://doi.org/10.3390/fermentation7040288)

Creative Commons License
CC BY 4.0

Publication date:
2021

Document Version
Publisher's PDF, also known as Version of record

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Dobrescu, A-C., Veras, H. C. T., Varrone, C., & Knudsen, J. D. (2021). Novel Propagation Strategy of *Saccharomyces cerevisiae* for Enhanced Xylose Metabolism during Fermentation on Softwood Hydrolysate. *Fermentation*, 7(4), [288]. <https://doi.org/10.3390/fermentation7040288>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.



Article

Novel Propagation Strategy of *Saccharomyces cerevisiae* for Enhanced Xylose Metabolism during Fermentation on Softwood Hydrolysate

Andrea Cristina Dobrescu ^{1,2}, Henrique César Teixeira Veras ¹, Cristiano Varrone ² and Jan Dines Knudsen ^{1,*}

¹ Terranol A/S, A.C. Meyers Vænge 15, 2450 Copenhagen, Denmark; c.andreaddobrescu@gmail.com (A.C.D.); hv@terranol.com (H.C.T.V.)

² Section for Sustainable Biotechnology, Aalborg University Copenhagen, 2450 Copenhagen, Denmark; cva@bio.aau.dk

* Correspondence: jdk@terranol.com

Abstract: An economically viable production of second-generation bioethanol by recombinant xylose-fermenting *Saccharomyces cerevisiae* requires higher xylose fermentation rates and improved glucose–xylose co-consumption. Moreover, xylose-fermenting *S. cerevisiae* recognises xylose as a non-fermentable rather than a fermentable carbon source, which might partly explain why xylose is not fermented into ethanol as efficiently as glucose. This study proposes propagating *S. cerevisiae* on non-fermentable carbon sources to enhance xylose metabolism during fermentation. When compared to yeast grown on sucrose, cells propagated on a mix of ethanol and glycerol in shake flasks showed up to 50% higher xylose utilisation rate (in a defined xylose medium) and a double maximum fermentation rate, together with an improved C5/C6 co-consumption (on an industrial softwood hydrolysate). Based on these results, an automated propagation protocol was developed, using a fed-batch approach and the respiratory quotient to guide the ethanol and glycerol-containing feed. This successfully produced 71.29 ± 0.91 g/L yeast with an average productivity of 1.03 ± 0.05 g/L/h. These empirical findings provide the basis for the design of a simple, yet effective yeast production strategy to be used in the second-generation bioethanol industry for increased fermentation efficiency.

Keywords: second-generation bioethanol; softwood hydrolysate; *Saccharomyces cerevisiae*; automated propagation strategy; non-fermentable carbon sources; C5/C6 co-consumption; xylose



Citation: Dobrescu, A.C.; Veras, H.C.T.; Varrone, C.; Knudsen, J.D. Novel Propagation Strategy of *Saccharomyces cerevisiae* for Enhanced Xylose Metabolism during Fermentation on Softwood Hydrolysate. *Fermentation* **2021**, *7*, 288. <https://doi.org/10.3390/fermentation7040288>

Academic Editor: Nhuan Nghiem

Received: 5 November 2021

Accepted: 28 November 2021

Published: 29 November 2021

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2021 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

The transportation sector accounts for 15% of the total greenhouse gas emissions [1] and it relies heavily on fossil fuels, with petroleum products providing 94% of total energy consumed in the sector in 2017 [2]. To address this issue, the Renewable Energy Directive Recast set a target of renewables in the transportation sector of minimum 14% by 2030 [3]. Two important mitigation options have been identified in this sector, namely blended biofuels and electricity from renewable sources [4]. However, even in the most optimistic scenario, electric vehicles are predicted to make up a maximum 60% of the market share in the next decade, leaving the transportation industry still heavily reliant on internal combustion engines fuelled by gasoline [5]. In light of this scenario, advances in biofuel production are of particular urgency, as they provide a smaller CO₂ impact than petroleum products and are compatible with the already existing fuel distribution infrastructure and engines [6]. Bioethanol is the main biofuel used in current combustion engines worldwide [7]. Currently, it is mainly produced from agricultural crops, such as sugar cane, sugar beet, and corn [8]. These substrates are generally costly and compete with food supplies and arable land allocation, thus raising ethical and sustainable development concerns [9]. As a consequence, over the past few decades, dedicated energy crops and agricultural and forestry residues have gained interest as feedstock for bioethanol production, leading

to the development of second-generation bioethanol [10]. However, the production of second-generation bioethanol is even more challenging than that of first-generation ethanol due to the complexity of the biomass sources used [11].

The production of second-generation bioethanol involves the fermentation of lignocellulose derived C6 sugars, e.g., glucose, mannose, and C5 sugars, e.g., xylose, arabinose, by specialised microorganisms [12]. The yeast *Saccharomyces cerevisiae* is often employed due to its robustness, fermentation capacity and resistance to stress factors found in industrial processes [13]. Wild-type *S. cerevisiae* strains are, however, not able to utilise xylose, which is the second most abundant sugar found in lignocellulosic biomass [14]; therefore, considerable efforts have been made to produce recombinant strains able to efficiently ferment this sugar [15]. Despite extensive research, xylose consumption rates in the recombinant strains are still lower than those of C6 sugars, and its metabolisation into ethanol is comparatively poor [16]. One important bottleneck in the development of efficient xylose-fermenting strains is the co-consumption of C5 and C6 sugars, which is necessary in order to reduce fermentation time and compete with existing industrial processes [17]. However, xylose is usually consumed only following significant glucose depletion, mainly due to the repressive effect of glucose on xylose uptake and metabolism [18,19]. It was observed that the response induced by xylose does not resemble the one caused by the presence of the fermentable carbon source glucose [20]. Rather, it induced several genes involved in the metabolism of non-fermentable carbon sources, such as ethanol or glycerol [21]. This may, in fact, provide part of the explanation to the poor metabolisation of xylose into ethanol [22].

In bioethanol production processes, a considerable amount of yeast, produced during the propagation step, is required to inoculate the fermentation medium. The preferred substrate for propagation is molasses, where the main sugar component is sucrose [23]. However, due to the Crabtree effect, which manifests in overflow metabolism and decreased biomass yields, efficient yeast propagation on molasses requires that the sucrose concentration is kept below 0.1% (*w/v*) and the aeration rates are maintained at more than 1 vvm (volume of air per volume of medium per minute) [24]. Such strict monitoring conditions become a challenge at industrial scale, where microorganisms are subjected to fluctuations of substrate and oxygen concentrations, due to imperfect mixing [25]. To avoid the Crabtree effect and obtain high biomass concentration and yield, aerobic fed-batch systems with a concentrated feed stream are generally employed [26,27]. Another strategy to avoid overflow metabolism is controlling the feed rate by the respiratory quotient (RQ), defined as the ratio between the CO₂ evolution rate and the oxygen uptake rate of the culture. RQ values for the oxidation of any carbon source can be theoretically calculated based on the reaction stoichiometry [28]. Different RQ values are obtained depending on the utilised carbon source and the products formed [29]. When using molasses as substrate, keeping the RQ to a value of 1 during the cultivation aims to maintain metabolism in a state optimised for biomass formation [30]. During the propagation process, the RQ can be calculated and recorded online, based on oxygen and CO₂ content in the outlet gas, measured by gas analysis [31].

Besides its role in the production of yeast biomass, the propagation process has also recently been used to adapt *S. cerevisiae* to the fermentation medium. Yeast exposed to lignocellulosic hydrolysates during propagation showed improved inhibitor tolerance, higher ethanol yield and productivity, and improved xylose-fermenting capacity during subsequent fermentation [32–35]. These traits were achieved by short-term adaptation, where exposure to lignocellulosic inhibitors results in the induction of genes that express a resistance phenotype [32,36]. However, the downside of this strategy is that the presence of inhibitors in the propagation medium results in decreased biomass yields [32,37].

An alternative use of short-term adaptation through propagation is the substitution of molasses with another carbon source. An interesting choice would be the use of a non-fermentable carbon source, due to the similar metabolic response to xylose imposed on xylose-fermenting *S. cerevisiae* [22]. Verstrepen and co-workers proposed combining sucrose

with mannitol or sorbitol during propagation, in order to confer a better stress resistance and a faster fermentation rate [38]. However, these two non-fermentable carbon sources are unsuitable for industrial use due to their high costs [39]. A potential substrate could be ethanol, which holds the substantial advantage of higher biomass yields for *S. cerevisiae* (0.61 g/g) compared to sucrose (0.51 g/g) [40]. However, it is well-known that ethanol can inhibit cell division and specific growth rates even at relatively low concentrations [41]. To counteract the stress imposed by ethanol, a compatible solute, such as glycerol, could be added to the ethanol-containing medium [42].

Using ethanol and glycerol as substrates would offer some additional advantages over traditional, sucrose-based propagations. These non-fermentable carbon sources do not exert the Crabtree effect, which in turn avoids the need for strict substrate monitoring strategies, which are inevitable in carbohydrate-based cultures [43]. Moreover, growth on sucrose is known to decrease the stress resistance of yeast cells by triggering the activation of the Ras/cAMP/PKA pathway [38,44]. This is an undesirable trait, since industrial fermentations exert a wide range of stress factors on fermenting microorganisms [45], and it could be avoided by using a propagation medium containing ethanol and glycerol.

The first objective of this applied study was to exploit the fact that xylose-fermenting *S. cerevisiae* senses xylose as non-fermentable and aim to improve its xylose utilisation by propagating it on two alternative non-fermentable carbon sources, ethanol and glycerol. The commercial C5/C6-fermenting *S. cerevisiae* strain cV-110 was employed for this purpose, which is proprietary to Terranol A/S. Following propagation on either ethanol and glycerol or on sucrose, the yeast was subsequently used for fermentations in serum vials on glucose, xylose, or glucose/xylose defined media, as well as batch fermentations on softwood hydrolysate in controlled bioreactors. The sugar consumption rates, ethanol and by-product yields were calculated. Based on the results obtained, the second objective of this study was to develop a propagation protocol applying an automated feed control. This was designed in fed-batch mode, using the RQ to control the feed and ethanol and glycerol as substrate. To the authors' knowledge, this is the first study addressing the automated propagation of *S. cerevisiae* on these two substrates.

2. Materials and Methods

2.1. Yeast Strain and Maintenance

The industrial *S. cerevisiae* strain used in this study, cV-110, was kindly provided by Terranol A/S, Copenhagen, Denmark. This strain is based on *S. cerevisiae* Meyen ex E.C. Hansen strain, which has been genetically modified by the insertion of a gene encoding a xylulokinase from *Scheffersomyces stipitis* (previously *Pichia stipitis*), *Ps-Xks1*, as well as the genes *LIMR* (xylose 1-epimerase) and *LlXI* (xylose isomerase) from *Lactococcus lactis*, all under the control of native *S. cerevisiae* promoters and terminators. Furthermore, three *S. cerevisiae* genes were overexpressed in the genome of this strain: *Rki1* (ribose-5-phosphate isomerase), *Tkl1* (transketolase), and *Tal1* (transaldolase). The strain has also undergone extensive evolutionary adaptation to optimise its C5/C6 co-fermentation capacity, the tolerance towards inhibitors, and eliminate unwanted by-products [46,47]. The yeast was stored at 4 °C on agar plates (20 g/L agar, 20 g/L peptone, 10 g/L yeast extract, 20 g/L ethanol, 20 g/L glycerol) and replated at least once a month from a 15% glycerol stock stored at −80 °C.

2.2. Yeast Pre-Culture

cV-110 was propagated in baffled shake flasks on YP medium (10 g/L yeast extract, 20 g/L peptone, 1 g/L MgSO₄·7 H₂O, pH 5.5) containing either 50 g/L sucrose or 40 g/L ethanol and 10 g/L glycerol. The flasks were inoculated with yeast collected from agar plates and incubated in an orbital shaker at 30 °C and 120 rpm. The cultivation time varied between 18 and 48 h to ensure that cells were collected during the exponential growth phase. Yeast propagated on sucrose is hereafter referred to as YPS cells, and yeast propagated on ethanol and glycerol as YPEG cells.

2.3. Fermentation on Defined Media

YPS or YPEG cells were inoculated into defined media, containing 3.08 g/L urea, 0.80 g/L KCl, 1.79 g/L diammonium phosphate, 0.60 g/L MgSO₄·7 H₂O, 50 mg/L ampicillin, citrate buffer at pH 5.5 and either ~110 g/L glucose, 110 g/L xylose, or a combination of 66 g/L glucose and 44 g/L xylose. Vitamins and trace elements were added according to Verduyn et al. [48]: 15.00 mg/L EDTA, 4.50 mg/L ZnSO₄·7 H₂O, 1.00 mg/L MnSO₄·H₂O, 0.70 mg/L CoSO₄·7 H₂O, 0.30 mg/L CuSO₄·5 H₂O, 0.40 mg/L Na₂MoO₄·H₂O, 4.50 mg/L CaCl₂·2 H₂O, 3.00 mg/L FeSO₄·7 H₂O, 1.00 mg/L H₃BO₃, 0.10 mg/L KI. 4 g/L cell dry weight (gDW/L) was used, and the cells were washed twice with sterile Milli-Q water before inoculation. The experiments were carried out in triplicates in 60 mL serum vials containing 10 mL medium, sealed with rubber stoppers, pierced with a needle to allow CO₂ escape, and incubated at 30 °C and 150 rpm. Weight loss was monitored at discrete timepoints throughout the entire length of each experiment.

2.4. Fermentation on Hydrolysate

Batch cultivations were performed in 2 L Biostat B plus laboratory fermentors (Sartorius Stedim Biotech, Goettingen, Germany), using a working volume of 0.67 L. The softwood hydrolysate used as substrate was kindly provided by SEKAB E-technology (Örnsköldsvik, Sweden). This was produced from spruce sawdust using an SO₂ pretreatment and contained approximately 52 g/L glucose, 15 g/L xylose, 38 g/L mannose, and 6 g/L acetic acid. The hydrolysate was inoculated with 4 gDW/L YPS or YPEG cells, which were washed twice with sterile Milli-Q water before inoculation.

The hydrolysate was supplemented with nutrients, vitamins, and trace elements in concentrations that can support maximum cell growth considering the concentration of carbon provided. In order to calculate the growth requirements, the average nutrient content of yeast (*w/w*) was considered as 9.08% nitrogen, 2.10% potassium, 2.00% phosphorus, 0.39% sulphur, and 0.23% magnesium [24]. The concentration of each compound was calculated as described in Equation (1). Due to the Crabtree effect, the biomass yield on sugars was considered 0.1 g/g [49].

$$\text{Compound (g/L)} = \frac{\text{Nutrient content of yeast (\%)} \cdot \text{Carbon source (g/L)} \cdot \text{Biomass yield (g/L)}}{\text{Nutrient content of compound (\%)}} \quad (1)$$

Accordingly, 3.08 g/L urea, 0.80 g/L KCl, 1.79 g/L diammonium phosphate, 0.60 g/L MgSO₄·7 H₂O, and 50 mg/L ampicillin were added. The vitamins and trace elements were based on Verduyn et al. [48]: 15.00 mg/L EDTA, 4.50 mg/L ZnSO₄·7 H₂O, 1.00 mg/L MnSO₄·H₂O, 0.70 mg/L CoSO₄·7 H₂O, 0.30 mg/L CuSO₄·5 H₂O, 0.40 mg/L Na₂MoO₄·H₂O, 4.50 mg/L CaCl₂·2 H₂O, 3.00 mg/L FeSO₄·7 H₂O, 1.00 mg/L H₃BO₃, 0.10 mg/L KI.

The reactor was continuously sparged with 0.05 L/min nitrogen gas (Air Liquide, Taasttrup, Denmark). The exhaust gas was diluted with 0.45 L/min compressed atmospheric air and transported to an Innova 1316A-3 multi-gas monitor (LumaSense Technologies A/S, Ballerup, Denmark) where the concentrations of CO₂, ethanol, and oxygen were quantified. The output data of the fermentation was monitored using the supervisory control and data acquisition system Sartorius Multi Fermentor Control System MFCS/Win 3.0 (Sartorius Stedim Biotech, Goettingen, Germany). The culture temperature was maintained at 30 °C, the stirring at 250 rpm, and the pH at 5.5 using 6 M NaOH and 2 M H₂SO₄. For the fermentations using YPEG and YPS cells, off-line samples were taken at different timepoints in order to cover the entire fermentation course. The reproducibility of the process was ensured by following the CO₂ off-gas pattern. All fermentations were performed in duplicates.

2.5. Cell Propagation on Ethanol and Glycerol

The propagation was performed in fed-batch mode in a 2 L Biostat B plus laboratory fermentor (Sartorius Stedim Biotech, Goettingen, Germany) and controlled by MFCS/Win.

The propagation was initiated by the inoculation of 8 gDW/L YPS cells into 360 mL batch medium, containing 8 g/L sucrose, 23.49 g/L urea, 6.12 g/L KCl, 13.64 g/L diammonium phosphate, 4.58 g/L MgSO₄·7 H₂O, and 50 mg/L ampicillin. The vitamins and trace elements were based on Verduyn et al. (1992): 75.00 mg/L EDTA, 22.50 mg/L ZnSO₄·7H₂O, 5.00 mg/L MnSO₄·H₂O, 3.50 mg/L CoSO₄·7 H₂O, 1.50 mg/L CuSO₄·5 H₂O, 2.00 mg/L Na₂MoO₄·H₂O, 22.50 mg/L CaCl₂·2 H₂O, 15.00 mg/L FeSO₄·7 H₂O, 5.00 mg/L H₃BO₃, 0.50 mg/L KI. The concentration of each compound was calculated as described by Equation (1), where the biomass yield on ethanol was considered 0.61 [49] and it was assumed that no growth on glycerol would occur [25].

The reactor was sparged with sterile air at 1 vvm, and the exhaust gas was transported to an Innova 1316A-3 multi-gas monitor. The feed was controlled by the RQ value, which was calculated using measured output data from the gas analyser according to Equations (2)–(4).

$$OUR = \frac{F_{in}}{V} \cdot \left(C_{O_2,in} - C_{O_2,out} \cdot \frac{C_{I,in}}{C_{I,out}} \right) \quad (2)$$

$$CER = \frac{F_{in}}{V} \cdot \left(C_{CO_2,out} \cdot \frac{C_{I,in}}{C_{I,out}} \right) \quad (3)$$



$$RQ = \frac{CER}{OUR} \quad (4)$$

where F_{in} represents the inlet gas flow (L/min); V volume of the fermentation broth (L); $C_{O_2,in}$ and $C_{I,in}$ concentrations of oxygen and inert gas in the inlet gas (mmol/L), respectively; $C_{O_2,out}$, $C_{CO_2,out}$ and $C_{I,out}$ concentrations of oxygen, CO₂ and inert gas in the outlet gas (mmol/L), respectively.

The RQ was maintained in the range of 0.22–0.69, and feed was pumped into the reactor for 105 s when an RQ value outside of this range was registered, corresponding to a total of 1.93 g ethanol and 0.48 g glycerol. The composition of the feed was similar to the batch feed, except that 200 g/L ethanol and 50 g/L glycerol were used as carbon source instead of sucrose. The oxygen partial pressure of the culture was continuously monitored using a pO₂ sensor (Hamilton VisiFerm DO ECS, Gräfelfing, Germany). The stirring in the reactor was constant at 1600 rpm, the pH was adjusted to 5.5 using 6 M NaOH and 2 M H₂SO₄, and the temperature was maintained at 30 °C. The propagations were performed in duplicates.

2.6. Stoichiometry

The stoichiometric reactions of biomass production from ethanol, glycerol, or both ethanol and glycerol were considered (Equations (5)–(7)) to derive the theoretical correlation between biomass yield and RQ (Equations (8)–(10)). The molar fraction of ethanol and glycerol in the feed was considered when both substrates were provided. The atomic composition of biomass was set as C₇H₁₁NO₃, with a molar weight of 157 g/mol, according to Watteeuw et al. [50].



$$Y_{biomass/ethanol} (g/g) = \frac{6 RQ - 4}{15 RQ - 14} \cdot \frac{M_{biomass}}{M_{ethanol}} \quad (8)$$

$$Y_{biomass/glycerol} (g/g) = \frac{7 RQ - 6}{15 RQ - 14} \cdot \frac{M_{biomass}}{M_{glycerol}} \quad (9)$$

$$Y_{biomass/ethanol + glycerol} (g/g) = \frac{6.875 RQ - 4.750}{15 RQ - 14} \cdot \frac{M_{biomass}}{M_{ethanol} + 0.125 M_{glycerol}} \quad (10)$$

where M_{biomass} , M_{glycerol} , and M_{ethanol} represent the molar mass of biomass, glycerol, and ethanol, respectively.

2.7. Analytical Methods

Samples for optical density and dry weight were analysed directly, while samples for HPLC were kept at $-20\text{ }^{\circ}\text{C}$ before analysis. Cell growth was monitored by measuring optical density at 600 nm using a spectrophotometer (Shimadzu UV-1800, Kyoto, Japan). Dry weight was determined by washing the cells twice with distilled water and subsequently drying them in a HE73 moisture analyser (Mettler Toledo, Columbus, OH, USA) at a temperature of $105\text{ }^{\circ}\text{C}$. During HPLC analysis, ethanol and glycerol were separated with an HPX-87H ion-exchange column (Bio-Rad, Hercules, CA, USA) at a temperature of $60\text{ }^{\circ}\text{C}$, using a 4 mM H_2SO_4 mobile phase at a flow rate of 0.6 mL/min. Glucose, xylose, and mannose were separated with an HPX-87P column (Bio-Rad, Hercules, CA, USA) at a temperature of $70\text{ }^{\circ}\text{C}$, using Milli-Q water as mobile phase at a flow rate of 0.5 mL/min. All compounds were quantified using a refractive index detector (RID-6A; Shimadzu, Kyoto, Japan).

3. Results and Discussion

3.1. Fermentation on Defined Glucose/Xylose Media

The first objective of this study was to determine if propagating the *S. cerevisiae* yeast strain cV-110 on non-fermentable carbon sources would improve subsequent xylose fermentation. To achieve this, the yeast was propagated in shake-flasks in complex media containing either sucrose or ethanol and glycerol as carbon source. Yeast propagated on sucrose will be referred to as YPS cells, and yeast propagated on ethanol and glycerol as YPEG cells.

The fermentation performance of YPS and YPEG cells was initially investigated on defined media containing glucose, xylose, or a mixture of glucose and xylose. The vial weight loss was monitored during the process. As such, the weight loss rate could be calculated, which is indicative of the CO_2 production rate and equivalent to the fermentation rate [51]. YPEG cells showed a 30% faster CO_2 production rate in the glucose-xylose medium compared to YPS cells, and a 50% faster rate in the xylose medium (Table 1). No significant difference was observed between the two types of cells in the glucose medium. The improved fermentation rates of YPEG cells in media containing xylose might be explained by the yeast metabolic state upon inoculation. It has previously been described how several genes, mostly involved in (i) glucose transport and phosphorylation, e.g., *HXK1* [20,22,52,53], *HXK2* [20,54–56], *HXT5* and *HXT13* [21,22,52,54,56], (ii) gluconeogenesis, e.g., *FBP1* [20–22,52,53,55–57], *PCK1* [20–22,54,56], (iii) TCA and glyoxylate cycles, e.g., *CIT2* [52,55,56], *ICL1* [20,22,52,56], and (iv) electron transport chain, e.g., *CYC3* and *CYC7* [52,56], are regulated in the same direction, i.e., up- or downregulated, by xylose and non-fermentable carbon sources. Since the metabolic machinery necessary for efficient xylose utilisation is also induced by ethanol and glycerol, the resulting phenotype is expected to readily ferment xylose upon transition from an ethanol/glycerol culture. In contrast, cells collected from a sugar-based culture must undergo significant metabolic changes in order to ferment xylose [52]. Thus, it is believed that the higher xylose consumption rate displayed by YPEG cells can be attributed to a better prepared phenotype for xylose fermentation.

Table 1. Maximum fermentation rates and product yields at the end of fermentations on defined media in serum vials. The yeast was collected from a sucrose (YPS) preculture or an ethanol and glycerol (YPEG) preculture. The initial sugar concentration was 110 g/L, with a weight ratio of glucose to xylose of 3:2 in the medium containing both sugars. The substrates were fully depleted when experiments were ceased. Averages and standard deviations of three individual experiments are presented.

Media	Preculture	Max. Substrate Degradation Rate (g/L/h)	Final Ethanol Titre (g/L)	Ethanol Yield (g/g)	Glycerol Yield (g/g)
Glucose	YPS	4.75 ± 0.04	45.13 ± 1.07	0.39 ± 0.01	0.09 ± 0.00
	YPEG	4.73 ± 0.10	44.57 ± 0.24	0.38 ± 0.00	0.12 ± 0.00
Xylose	YPS	1.62 ± 0.18	46.74 ± 1.18	0.39 ± 0.00	0.07 ± 0.00
	YPEG	2.54 ± 0.11	45.81 ± 0.64	0.38 ± 0.01	0.10 ± 0.00
Glucose–Xylose	YPS	3.19 ± 0.23	46.10 ± 0.31	0.40 ± 0.00	0.11 ± 0.00
	YPEG	4.14 ± 0.02	45.45 ± 0.43	0.39 ± 0.00	0.12 ± 0.00

Similar ethanol titres, ranging from 44.57 to 46.74 g/L, were produced by both types of cells in the three media, corresponding to ethanol yields between 0.38 and 0.40 g/g. However, YPEG cells produced significantly more glycerol in all three cases, with yields between 0.10 and 0.12 g/g, compared to yields between 0.07 and 0.11 g/g obtained by YPS cells. This difference was most prominent in the xylose medium, where YPEG cells produced 45% more glycerol than YPS cells (Table 1). The observed excess of glycerol is an indication of surplus NADH. Biomass production generates excess NADH during the biosynthesis of amino acids and organic acids. Under anaerobic conditions, and without the addition of an alternative redox sink, NADH can only be re-oxidised by the formation of glycerol [58]. The higher glycerol yields displayed by YPEG cells could be correlated to a higher TCA activity. Cell growth on non-fermentable carbon upregulates genes involved in the TCA cycle and electron transport chain [59]. These pathways are expressed even under anaerobic conditions in the presence of xylose [52,56], presumably to allow fast utilisation of oxygen when it becomes available [21]. Thus, growth on ethanol and glycerol could have upregulated the TCA cycle, which in turn was the cause of the excess glycerol observed during xylose fermentation. Thus, the novel propagation strategy provides a faster fermentation process in a xylose-containing medium at the expense of increased glycerol production.

3.2. Fermentation on Softwood Hydrolysate

The performance of YPS and YPEG cells was further examined on an industrial feedstock of SO₂-pretreated softwood hydrolysate. The fermentations were carried out in batch mode at a working volume of 0.67 L in controlled bioreactor, using the softwood hydrolysate as substrate at an initial sugar concentration of 105 g/L. Sugar consumption and product formation were monitored throughout the course of the fermentation.

As seen during fermentations on defined media, the overall glycerol yield for YPEG cells (0.13 ± 0.00 g/g) was higher than that of YPS cells (0.03 ± 0.00 g/g) (Table 2). This was accompanied by higher biomass yields for YPEG cells (0.03 ± 0.00 g/g). On the other hand, no biomass growth was detected when YPS cells were used. The increased biomass and glycerol yields were thought to occur at the expense of ethanol production. However, it was surprising to notice that there was no significant difference between the ethanol yields produced by the two types of cells (Table 2). This is explained by the slightly different carbon recoveries calculated, i.e., 97.4 ± 0.1% for YPS cells and 102.6 ± 2.5 for YPEG cells (Table S1). Overall, the ethanol productivity of YPEG cells was 25% higher than that of YPS cells. As observed during the fermentations on defined media in Section 3.1, YPEG cells improved the productivity of the process at the expense of higher by-product yields, i.e., glycerol and biomass.

Table 2. Product yields of fermentations performed with YPS and YPEG cells on softwood hydrolysate in a 0.67 L controlled bioreactor. Averages and standard deviations of two individual experiments are presented.

Preculture	Ethanol Productivity (g/L/h)	Ethanol Yield (g/g)	Glycerol Yield (g/g)	Biomass Yield (g/g)
YPS	1.19 ± 0.02	0.47 ± 0.01	0.03 ± 0.00	0.00 ± 0.00
YPEG	1.47 ± 0.01	0.45 ± 0.01	0.13 ± 0.00	0.03 ± 0.00

The CO₂ production rate is proportional to the overall sugar consumption rate, where the peak of the CO₂ production rate pinpoints the time of the highest overall sugar conversion [60]. The maximum CO₂ production rate of YPEG cells (3.28 ± 0.42 g/L/h) was detected after 18 h (Figure 1), and the rate was roughly double compared to that of YPS cells (1.55 ± 0.00 g/L/h). The higher sugar consumption rate achieved by YPEG cells can be partly attributed to the higher biomass yield (Table 2). However, even when the substrate consumption rate is normalised to the cell concentration present in the reactor throughout the course of the fermentations, it still remains higher for YPEG cells (Figure S1). The faster fermentation rate displayed by YPEG cells allowed the process to terminate after 30 h, which is 25% earlier than the fermentation using YPS cells. After 21 h of fermentation, three hours after the CO₂ peak was detected for the YPEG cells, glucose was completely depleted and residual xylose and mannose concentrations were 3.1 and 6.0 g/L, respectively. In comparison, at the same timepoint, the concentrations of residual glucose, xylose, and mannose for YPS cells were 5.5, 7.1, and 23.9 g/L, respectively.

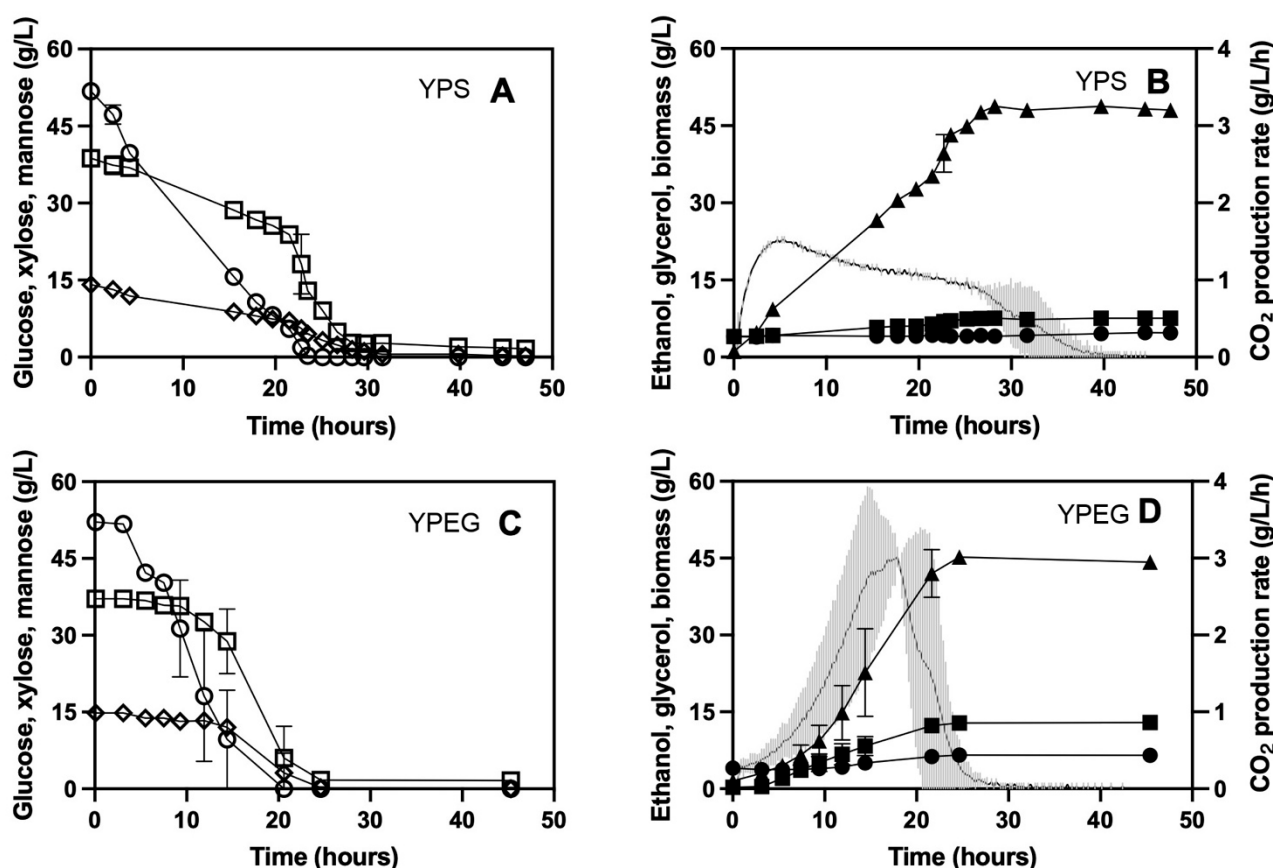


Figure 1. Substrate consumption and product formation over the course of 48 h of fermentation using (A,B) YPS cells and (C,D) YPEG cells. Glucose (○), xylose (◇), mannose (□), ethanol (▲), glycerol (■), biomass (●), and CO₂ (—). Standard deviations derived from two independent experiments are indicated by error bars. For the fermentations using YPS cells, metabolite samples were taken at different timepoints for each duplicate, which means that standard deviations are only available for selected data points. The CO₂ exhaust was continuously monitored during all fermentations, and it is an indicator of the overall sugar conversion rate. The grey shadow depicts the standard deviation of the CO₂ curve.

As explained in Section 3.1, the main reason for the different sugar consumption patterns displayed YPS and YPEG cells is thought to be the different metabolic states upon inoculation. Since propagation can be considered a form of short-term adaptation (Nielsen et al., 2015), it is expected that YPEG cells would further adapt to the substrate provided over the course of a long fermentation, e.g., in continuous mode, and lose the advantage they had over YPS cells. For this reason, the faster fermentation rate observed in this study can mainly be of importance when fermentations are performed in batch mode. The batch mode displays the lowest ethanol productivity compared to continuous and fed-batch approaches [60,61]. By extension, the batch phase of a continuous or fed-batch fermentation is bound to be the least productive step. Thus, a practical application of using YPEG cells is decreasing the process time of a batch fermentation or, even more relevant, shortening the batch phase of a continuous or fed-batch fermentation, by up to 25%. Additionally, the fermentation can be initiated with a small batch volume, thus decreasing the amount of yeast required and reducing the costs associated with yeast production. Once the sugars are consumed, the more productive fed-batch or continuous mode can commence. Not only would such an improvement lead to a faster process, but also serve as a safeguard against contamination. The faster sugar consumption would decrease the risk of contamination, for example by lactic acid bacteria, an often-encountered contaminant in ethanol fermentations [62].

Another interesting feature of YPEG cells is the improved co-consumption of C6 and C5 sugars. The presence of glucose in the fermentation medium represses the utilisation of other less preferred carbon sources, whose consumption generally begins only following substantial glucose depletion [18,19]. During fermentation using YPEG cells, the consumption of mannose and xylose started at higher glucose concentration compared to the fermentation using YPS cells. Specifically, increased mannose and xylose utilisation was initiated at glucose concentrations of approximately 18 and 6 g/L for YPEG and YPS cells, respectively. The enhanced co-consumption can also be attributed to the growth on non-fermentable carbon sources of YPEG cells, which leads to the downregulation of *HXX2* and upregulation of *HXX1* [20], as well as the upregulation of *HXT5* and *HXT13* transporter genes [21,56]. These characteristics have been previously linked to improved glucose-xylose co-consumption [63], which in turn increased the productivity of the process by decreasing the fermentation time [54].

3.3. Development of a Novel Propagation Protocol on Ethanol and Glycerol

Based on the improved fermentation characteristics of YPEG cells, the second objective of this study was to address the upscaling potential of the novel propagation strategy. Thus, an automated propagation protocol, using ethanol and glycerol as carbon sources, was developed. To the authors' knowledge, this is the first study addressing the automated propagation of *S. cerevisiae* on these two substrates.

The propagation was performed in fed-batch mode under aerobic conditions, which is the most common strategy for the propagation of *S. cerevisiae* [27]. The feed was controlled using the respiratory quotient (RQ), which was calculated online using the output data provided by a gas analyser (Equations (2)–(4)). It is known that different RQs are observed depending on the substrate used, as well as the products formed [29]. When using molasses-based media, the RQ is ideally maintained between 1.00 and 1.09, to avoid the Crabtree effect and overflow metabolism [24]. In order to select the most appropriate RQ boundaries for an ethanol and glycerol-containing feed, the stoichiometric relation between RQ and theoretical biomass yield was examined (Figure 2). According to these calculations, the RQ can vary between 0.00 and 0.69, where an RQ of 0 corresponds to the maximum biomass yield of 0.93 g/g, and an RQ of 0.69 indicates no biomass formation. Hence, the upper RQ boundary was taken as 0.69. However, it is physiologically impossible to obtain an RQ of 0, as this would imply that biomass production occurred independent of CO₂ production (according to Equation (7)), whereas biomass formation is always coupled to the production of CO₂ [64]. In order to define a lower boundary, the experimental study of Watteeuw

and co-workers [50], which investigated the production of *Candida utilis* from ethanol in a fed-batch process, was considered. The authors described that maximum growth on ethanol and cell maintenance on ethanol correspond to RQ values of 0.22 and 0.67, respectively. A similar relation between RQ and cell yield of yeast propagated on glycerol was not found in literature. Thus, the lower RQ boundary was taken as 0.22. The final boundaries were defined as 0.22 and 0.69. The boundaries were not narrowed further, since the purpose of the experiment was to empirically assess if propagation on these two substrates controlled by the RQ is possible, and further narrowing the boundaries could complicate this assessment. Adjusting the boundaries would thus be a later potential optimisation question.

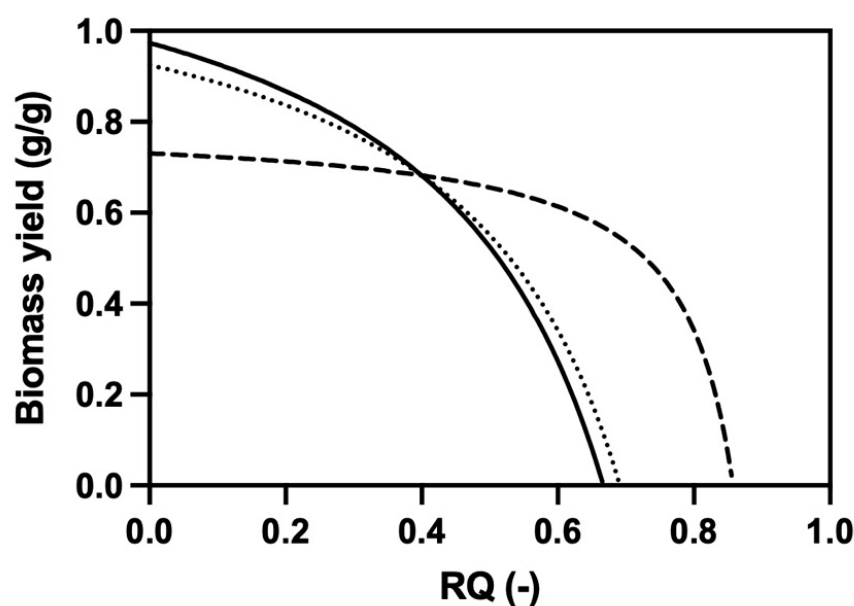


Figure 2. Stoichiometric relation between RQ and biomass yield on ethanol (—), glycerol (- -), or the combination of ethanol and glycerol provided in the feed (····), i.e., a molar ratio of ethanol:glycerol of 8:1. The three curves were calculated using Equations (8)–(10).

The feeding was initiated when the measured RQ was outside of the two boundaries, i.e., 0.22 and 0.69, after which the feed-pump was turned off and remained turned off while the RQ stayed within the previously defined range. This on/off switch resulted in more frequent fluctuations as the propagation proceeded (Figure 3), which translated into more frequent feeding. Moreover, the RQ progressively increased as more biomass was formed. This can be explained by the fact that the growth rate of the cells decreases (Figure S2), which is known to correlate to increasing maintenance energy [65,66], and according to Watteuw and colleagues [50], an increasing maintenance energy corresponds to an increasing RQ value. The reason for the decreasing growth rate is oxygen limitation as observed by the gradually decreasing oxygen partial pressure (Figure S3) [29].

The strategy successfully produced 71.3 ± 0.9 gDW/L biomass, with a productivity of 1.03 ± 0.05 gDW/L/h (Table 3). Two other studies were found that studied the propagation of *S. cerevisiae* on one of these substrates. The only other known propagation protocol on ethanol produced 18 g/L biomass, with a productivity of 0.38 gDW/L/h [50]. More promising results were achieved by Raj and colleagues [67], who developed a propagation protocol for *S. cerevisiae* using glycerol supplemented with yeast extract, and obtained a maximum cell density of 132 g/L with a productivity of 5.5 g/L/h. However, the use of yeast extract renders the process uneconomical at industrial scale [68]. In comparison, the feed used in this study provided nutrients in the form of a minimal medium, which significantly decreases the cost [69]. Another study using the RQ to guide the feed of a fed-batch propagation process, but with glucose as substrate, produced a slightly higher

biomass yield of 86.7 g/L with a productivity of 2.7 g/L/h, which was more than double compared to the productivity observed in the current study [70]. At the same time, the biomass yield obtained in this study is $47.75 \pm 0.64\%$ of the maximum theoretical yield, leaving potential for improvement (Table 3). All this suggests that the developed set-up could be further optimised to produce higher cell concentrations with higher productivities. Still, the current protocol provides a simple and automated basis for yeast propagation on ethanol and glycerol.

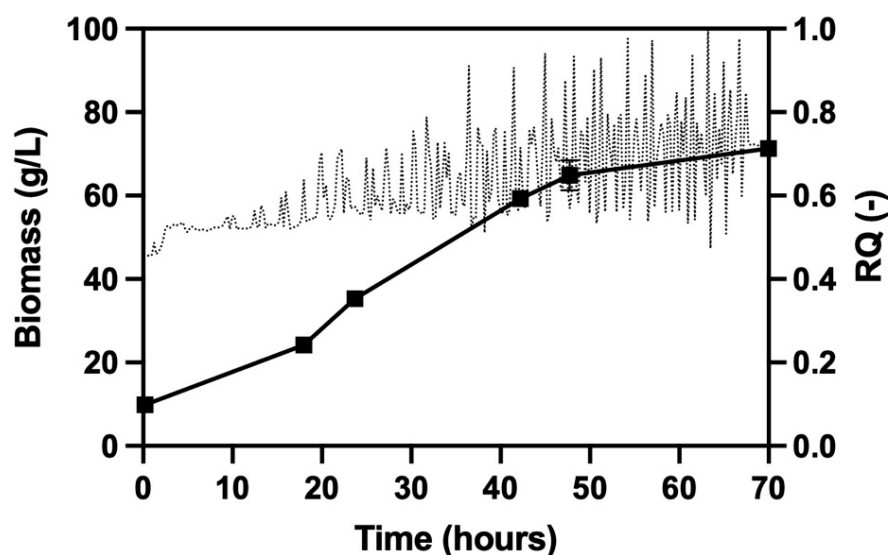


Figure 3. Biomass concentration (■) obtained throughout the course of the propagation in fed-batch mode. The RQ (·····) represents the ratio between the CO₂ produced and the oxygen consumed. The values are averages of two duplicates. Standard deviations of biomass concentrations are shown.

Table 3. Relevant process parameters observed during propagation of *S. cerevisiae* cV-110 on ethanol and glycerol in fed-batch mode in an automatic bioreactor.

Process Parameter	Value ± Std
Average biomass yield (g/g)	0.39 ± 0.00
Percent biomass yield (%) ¹	47.8 ± 0.64
Average volumetric productivity (g/L/h)	1.03 ± 0.05
Final biomass concentration (g/L)	71.3 ± 0.91
Ethanol consumed (g/L)	174 ± 28.9
Glycerol consumed (g/L)	43.2 ± 7.14

¹ The percent biomass yield was calculated as the ratio between the observed biomass yield and the maximum theoretical biomass yield corresponding to an RQ of 0.22, which was imposed as the minimum RQ boundary. The maximum theoretical yield was calculated according to Equation (10).

A potential optimisation strategy could be restricting the RQ boundaries in a way to keep RQ as low as possible, since this would maximise biomass yields according to their stoichiometric relation (Figure 2). It is unclear, however, how this would affect the productivity of the process. Nonetheless, it is important to acknowledge that demand for oxygen will unavoidably exceed the supply capacity when sparging with atmospheric air, and thus the biomass productivity is inevitably limited by oxygen transfer between gas and liquid [71]. This effect could be counteracted by supplementing or substituting the air supply with pure oxygen [72], or by aerating the culture using microbubbles [71,73]. Similarly, altering the type and configuration of the impellers used could further increase oxygen transfer [74,75]. Once the protocol is optimised, a detailed economic analysis should be performed in a future study to assess the feasibility of the process at industrial scale.

It was unclear what proportion of the glycerol provided would be consumed during the process, since most *S. cerevisiae* strains have been described as poor glycerol-growers,

especially in synthetic media [25,76]. However, all carbon provided was consumed by the end of the propagation, which included 43.2 ± 7.1 g/L glycerol (Table 3). In other studies, glycerol uptake was improved when glucose was present in the culture medium [77,78]. This implies that the presence of ethanol in the feed most probably improved the glycerol uptake. A further analysis could be pursued in a future study, but assessing glycerol uptake during the propagation was beyond the scope of this paper.

Overall, the current study developed the first propagation protocol on two non-conventional carbon sources, ethanol and glycerol. Its automatic feed feature required minimal user supervision on a feed containing inexpensive nutrients, thus showing potential for large-scale applications.

4. Conclusions

The fermentation performance of an industrial xylose-fermenting strain of *Saccharomyces cerevisiae*, cV-110, was evaluated following propagation on sucrose (YPS cells) or ethanol and glycerol (YPEG cells). YPEG cells showed a 50% higher fermentation rate in a defined xylose medium in serum vials, compared to YPS cells. Moreover, YPEG cells displayed a double maximum sugar utilisation rate and superior co-consumption of C5 and C6 sugars, during fermentations on an industrial softwood hydrolysate in batch mode, in a 0.67 L bioreactor. This ensured a 25% shorter fermentation time compared to YPS cells. Based on these promising results, this study also addressed the development of the first automated fed-batch propagation protocol using ethanol and glycerol as substrates. The respiratory quotient was successfully applied to guide the feed rate, and 71.29 ± 0.91 g/L yeast was produced on a minimal medium, with an average productivity of 1.03 ± 0.05 g/L/h.

Supplementary Materials: The following are available online at <https://www.mdpi.com/article/10.3390/fermentation7040288/s1>, Figure S1, Figure S2 and Figure S3. Figure S1: Specific sugar consumption rates normalised to the biomass concentration observed during bioreactor fermentations on softwood hydrolysate using YPS cells (●) and YPEG cells (■). Figure S2: Cell growth rate during propagation on ethanol and glycerol using the novel propagation strategy. Figure S3: Oxygen tension (pO₂) registered during propagation.

Author Contributions: Conceptualisation, J.D.K.; methodology, A.C.D., J.D.K.; software, J.D.K.; formal Analysis, A.C.D.; investigation, A.C.D., H.C.T.V.; writing—original draft preparation, A.C.D.; writing—review and editing, A.C.D., J.D.K., H.C.T.V., C.V.; visualisation, A.C.D.; supervision, J.D.K. All authors have read and agreed to the published version of the manuscript.

Funding: This research was funded by the European Union's Horizon 2020 research and innovation programme under grant agreement No 869879.

Institutional Review Board Statement: Not applicable.

Informed Consent Statement: Not applicable.

Data Availability Statement: Not applicable.

Acknowledgments: The authors are thankful to Birgitte Rønnow and Thomas Hvid Andersen for their constructive input and support during the project. SEKAB E-technology (Örnsköldsvik, Sweden) is gratefully acknowledged for providing the applied hydrolysate.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Sharma, B.; Larroche, C.; Dussap, C. Comprehensive assessment of 2G bioethanol production. *Bioresour. Technol.* **2020**, *313*, 123630. [CrossRef] [PubMed]
2. European Union 2020. *Energy Policy Review*; International Energy Agency: France, Paris, 2020.
3. Directive (EU). 2018/2001 of the European Parliament and of the Council on the promotion of the use of energy from renewable resources (recast). *Off. J. Eur. Union* **2018**, *L 328/82*, 125–127.
4. European Union 2020. Trends and projections in Europe 2020. In *Tracking Progress Towards Europe's Climate and Energy Targets*; No 13/2020; European Environment Agency: Luxembourg, 2020.

5. Biofuels Digest. Available online: <https://www.biofuelsdigest.com/bdigest/2021/08/25/the-fuel-economy-rule-an-epa-that-wont-see-hear-or-speak-to-the-facts/> (accessed on 29 September 2021).
6. Agarwal, A.K. Biofuels (alcohols and biodiesel) applications as fuels for internal combustion engines. *Prog. Energy Combust. Sci.* **2007**, *33*, 233–271. [[CrossRef](#)]
7. Del Pecchia, M.; Pessina, V.; Berni, F.; D’Adamo, A.; Fontanesi, S. Gasoline-Ethanol blend formulation to mimic laminar flame speed and auto-ignition quality in automotive engines. *Fuel* **2020**, *264*, 116741. [[CrossRef](#)]
8. Ayodele, B.V.; Alsaffar, M.A.; Mustapa, S.I. An overview of integration opportunities for sustainable bioethanol production from first-And second-Generation sugar-Based feedstocks. *J. Clean. Prod.* **2020**, *245*, 118857. [[CrossRef](#)]
9. Callegari, A.; Bolognesi, S.; Cecconet, D.; Capodaglio, A.G. Production technologies, current role, and future prospects of biofuels feedstocks: A state-Of-The-Art review. *Crit. Rev. Environ. Sci. Technol.* **2020**, *50*, 384–436. [[CrossRef](#)]
10. Saini, J.K.; Saini, R.; Tewari, L. Lignocellulosic agriculture wastes as biomass feedstocks for second-generation bioethanol production: Concepts and recent developments. *3 Biotech* **2015**, *5*, 337–353. [[CrossRef](#)] [[PubMed](#)]
11. Balan, V. Current Challenges in Commercially Producing Biofuels from Lignocellulosic Biomass. *ISRN Biotechnol.* **2014**, *2014*, 463074. [[CrossRef](#)]
12. Pasin, T.M.; de Almeida, P.Z.; de Almeida Scarcella, A.S.; da Conceição Infante, J.; de Teixeira de Moraes Polizeli de Lourdes, M. Bioconversion of Agro-Industrial Residues to Second-Generation Bioethanol. In *Biorefinery of Alternative Resources: Targeting Green Fuels and Platform Chemicals*; Nanda, S., Vo, D.N., Sarangi, P.K., Eds.; Springer: Singapore, 2020; pp. 23–47.
13. Kwak, S.; Jin, Y. Production of fuels and chemicals from xylose by engineered *Saccharomyces cerevisiae*: A review and per-spective. *Microb. Cell Fact.* **2017**, *16*, 82. [[CrossRef](#)] [[PubMed](#)]
14. Favaro, L.; Jansen, T.; van Zyl, W.H. Exploring industrial and natural *Saccharomyces cerevisiae* strains for the bio-based economy from biomass: The case of bioethanol. *Crit. Rev. Biotechnol.* **2019**, *39*, 800–816.
15. Kim, S.R.; Park, Y.; Jin, Y.; Seo, J. Strain engineering of *Saccharomyces cerevisiae* for enhanced xylose metabolism. *Biotechnol. Adv.* **2013**, *31*, 851–861. [[CrossRef](#)]
16. Vilela, L.; de Araujo, V.; Paredes, R.; Bon, E.; Torres, F.; Neves, B.; Eleutherio, E. Enhanced xylose fermentation and ethanol production by engineered *Saccharomyces cerevisiae* strain. *AMB Express* **2015**, *5*, 1–7. [[CrossRef](#)] [[PubMed](#)]
17. Hoang Nguyen Tran, P.; Ko, J.K.; Gong, G.; Um, Y.; Lee, S. Improved simultaneous co-fermentation of glucose and xylose by *Saccharomyces cerevisiae* for efficient lignocellulosic biorefinery. *Biotechnol. Biofuels* **2020**, *13*, 12. [[CrossRef](#)] [[PubMed](#)]
18. Subtil, T.; Boles, E. Competition between pentoses and glucose during uptake and catabolism in recombinant *Saccharomyces cerevisiae*. *Biotechnol. Biofuels* **2012**, *5*, 14. [[CrossRef](#)]
19. Bergdahl, B.; Sandström, A.G.; Borgström, C.; Boonyawan, T.; van Niel, E.W.J.; Gorwa-Grauslund, M.F. Engineering Yeast Hexokinase 2 for Improved Tolerance Toward Xylose-Induced Inactivation. *PLoS ONE* **2013**, *8*, e75055. [[CrossRef](#)] [[PubMed](#)]
20. Salusjärvi, L.; Kankainen, M.; Soliymani, R.; Pitkänen, J.; Penttilä, M.; Ruohonen, L. Regulation of xylose metabolism in re-combinant *Saccharomyces cerevisiae*. *Microb. Cell Fact.* **2008**, *7*, 18. [[CrossRef](#)]
21. Alff-Tuomala, S.; Salusjärvi, L.; Barth, D.; Oja, M.; Penttilä, M.; Pitkänen, J.; Ruohonen, L.; Jouhten, P. Xylose-Induced dynamic effects on metabolism and gene expression in engineered *Saccharomyces cerevisiae* in anaerobic glucose-Xylose cultures. *Appl. Microbiol. Biotechnol.* **2016**, *100*, 969–985. [[CrossRef](#)]
22. Jin, Y.-S.; Laplaza, J.M.; Jeffries, T.W. *Saccharomyces cerevisiae* Engineered for Xylose Metabolism Exhibits a Respiratory Response. *Appl. Environ. Microbiol.* **2004**, *70*, 6816–6825. [[CrossRef](#)] [[PubMed](#)]
23. Rose, A.H.; Vijayalakshmi, G. Baker’s Yeast. In *Biochemistry and Genetics of Yeast*; Bacila, M., Horecker, B.L., Stoppani, A.O.M., Eds.; Academic Press: New York, NY, USA, 1978; Volume 2, pp. 385–387.
24. Ingledew, W.M. *The Alcohol Textbook*, 5th ed.; Nottingham Univ. Press: Nottingham, UK, 2009; pp. 152–156.
25. Ochoa-Estopier, A.; Lesage, J.; Gorret, N.; Guillouet, S.E. Kinetic analysis of a *Saccharomyces cerevisiae* strain adapted for improved growth on glycerol: Implications for the development of yeast bioprocesses on glycerol. *Bioresour. Technol.* **2011**, *102*, 1521–1527. [[CrossRef](#)] [[PubMed](#)]
26. Beudecher, R.F.; van Dam, H.W.; van der Plaat, J.B.; Vellega, K. Developments in baker’s yeast production. In *Yeast Biotechnology and Biocatalysis*; Verachtert, H., de Mot, R., Eds.; Marcel Dekker: New York, NY, USA, 1990; pp. 103–146.
27. Jørgensen, H.; Olsson, L.; Rønnow, B.; Palmqvist, E. Fed-Batch cultivation of baker’s yeast followed by nitrogen or carbon starvation: Effects on fermentative capacity and content of trehalose and glycogen. *Appl. Microbiol. Biotechnol.* **2002**, *59*, 310–317.
28. Doran, P.M. Bioprocess. In *Engineering Principles*; Academic Press: London, UK, 1995; pp. 75–79.
29. Heyman, B.; Tulke, H.; Putri, S.P.; Fukusaki, E.; Büchs, J. Online monitoring of the respiratory quotient reveals metabolic phases during microaerobic 2,3-butanediol production with *Bacillus licheniformis*. *Eng. Life Sci.* **2020**, *20*, 133–144. [[CrossRef](#)]
30. Tippmann, S.; Scalcinati, G.; Siewers, V.; Nielsen, J. Production of farnesene and santalene by *Saccharomyces cerevisiae* using fed-Batch cultivations with RQ-controlled feed. *Biotechnol. Bioeng.* **2016**, *113*, 72–81. [[CrossRef](#)] [[PubMed](#)]
31. Li, X.; Yu, C.; Yao, J.; Wang, Z.; Lu, S. An Online Respiratory Quotient-Feedback Strategy of Feeding Yeast Extract for Efficient Arachidonic Acid Production by *Mortierella alpina*. *Front. Bioeng. Biotechnol.* **2018**, *5*, 83. [[CrossRef](#)]
32. Nielsen, F.; Tomás-Pejó, E.; Olsson, L.; Wallberg, O. Short-term adaptation during propagation improves the performance of xylose-fermenting *Saccharomyces cerevisiae* in simultaneous saccharification and co-fermentation. *Biotechnol. Biofuels* **2015**, *8*, 219. [[CrossRef](#)]

33. Van Dijk, M.; Erdei, B.; Galbe, M.; Nygård, Y.; Olsson, L. Strain-dependent variance in short-term adaptation effects of two xylose-fermenting strains of *Saccharomyces cerevisiae*. *Bioresour. Technol.* **2019**, *292*, 121922. [[CrossRef](#)] [[PubMed](#)]
34. Alkasrawi, M.; Rudolf, A.; Lidén, G.; Zacchi, G. Influence of strain and cultivation procedure on the performance of simultaneous saccharification and fermentation of steam pretreated spruce. *Enzyme Microb. Tech.* **2006**, *38*, 279–286. [[CrossRef](#)]
35. Zhang, K.; Wells, P.; Liang, Y.; Love, J.; Parker, D.A.; Botella, C. Effect of diluted hydrolysate as yeast propagation medium on ethanol production. *Bioresour. Technol.* **2019**, *271*, 1–8. [[CrossRef](#)] [[PubMed](#)]
36. Li, B.; Yuan, Y. Transcriptome shifts in response to furfural and acetic acid in *Saccharomyces cerevisiae*. *Appl. Microbiol. Biotechnol.* **2010**, *86*, 1915–1924. [[CrossRef](#)]
37. Viegas, C.A.; Sa-Correia, I. Activation of plasma membrane ATPase of *Saccharomyces cerevisiae* by octanoic acid. *J. Gen. Microbiol.* **1991**, *137*, 645–651. [[CrossRef](#)] [[PubMed](#)]
38. Verstrepen, K.J.; Iserentant, D.; Malcorps, P.; Derdelinckx, G.; Van Dijck, P.; Winderickx, J.; Pretorius, I.S.; Thevelein, J.M.; Delvaux, F.R. Glucose and sucrose: Hazardous fast-food for industrial yeast? *Trends Biotechnol.* **2004**, *22*, 531–537. [[CrossRef](#)]
39. Randež-Gil, F.; Córcoles-Sáez, I.; Prieto, J.A. Genetic and Phenotypic Characteristics of Baker's Yeast: Relevance to Baking. *Annu. Rev. Food Sci. Technol.* **2013**, *4*, 191–214. [[CrossRef](#)]
40. Verduyn, C.; Stouthamer, A.H.; Scheffers, W.A.; Van Dijken, J.P. A theoretical evaluation of growth yields of yeasts. *Antonie van Leeuwenhoek* **1991**, *59*, 49–63. [[CrossRef](#)] [[PubMed](#)]
41. Stanley, D.; Bandara, A.; Fraser, S.; Chambers, P.J.; Stanley, G.A. The ethanol stress response and ethanol tolerance of *Saccharomyces cerevisiae*. *J. Appl. Microbiol.* **2010**, *109*, 13–24. [[CrossRef](#)] [[PubMed](#)]
42. Welsh, D.T. Ecological significance of compatible solute accumulation by micro-organisms: From single cells to global climate. *FEMS Microbiol. Rev.* **2000**, *24*, 263–290. [[CrossRef](#)] [[PubMed](#)]
43. Klein, M.; Islam, Z.; Knudsen, P.B.; Carrillo, M.; Swinnen, S.; Workman, M.; Nevoigt, E. The expression of glycerol facilitators from various yeast species improves growth on glycerol of *Saccharomyces cerevisiae*. *Metab. Eng. Commun.* **2016**, *3*, 252–257. [[CrossRef](#)]
44. Rolland, F.; de Winde, J.H.; Lemaire, K.; Boles, E.; Thevelein, J.M.; Winderickx, J. Glucose-induced cAMP signalling in yeast requires both a G-protein coupled receptor system for extracellular glucose detection and a separable hexose kinase-dependent sensing process. *Mol. Microbiol.* **2000**, *38*, 348–358. [[CrossRef](#)]
45. Saini, P.; Beniwal, A.; Kokkiligadda, A.; Vij, S. Response and tolerance of yeast to changing environmental stress during ethanol fermentation. *Process. Biochem.* **2018**, *72*, 1–12. [[CrossRef](#)]
46. Microorganism Expressing Xylose Isomerase. U.S. Patent WO/2010/070549, December 2010.
47. Microorganism Expressing Aldose-1-Epimerase. U.S. Patent WO/2010/001363, July 2009.
48. Verduyn, C.; Postma, E.; Scheffers, W.A.; Van Dijken, J.P. Effect of benzoic acid on metabolic fluxes in yeasts: A continuous-culture study on the regulation of respiration and alcoholic fermentation. *Yeast* **1992**, *8*, 501–517. [[CrossRef](#)]
49. Verduyn, C. Physiology of yeasts in relation to biomass yields. *Antonie van Leeuwenhoek* **1991**, *60*, 325–353. [[CrossRef](#)] [[PubMed](#)]
50. Watteuw, C.M.; Armiger, W.B.; Ristroph, D.L.; Humphrey, A.E. Production of single cell protein from ethanol by fed-batch process. *Biotechnol. Bioeng.* **1979**, *21*, 1221–1237. [[CrossRef](#)]
51. Ruiz, H.A.; Silva, D.P.; Ruzene, D.S.; Lima, L.F.; Vicente, A.A.; Teixeira, J.A. Bioethanol production from hydrothermal pre-treated wheat straw by a flocculating *Saccharomyces cerevisiae* strain—Effect of process conditions. *Fuel* **2012**, *95*, 528–536. [[CrossRef](#)]
52. Matsushika, A.; Goshima, T.; Hoshino, T. Transcription analysis of recombinant industrial and laboratory *Saccharomyces cerevisiae* strains reveals the molecular basis for fermentation of glucose and xylose. *Microb. Cell Factories* **2014**, *13*, 16. [[CrossRef](#)] [[PubMed](#)]
53. Shen, Y.; Hou, J.; Bao, X. Enhanced xylose fermentation capacity related to an altered glucose sensing and repression network in a recombinant *Saccharomyces cerevisiae*. *Bioengineered* **2013**, *4*, 435–437. [[CrossRef](#)] [[PubMed](#)]
54. Papapetridis, I.; Verhoeven, M.D.; Wiersma, S.J.; Gouiaan, M.; van Maris, A.J.A.; Pronk, J.T. Laboratory evolution for forced glucose-Xylose co-Consumption enables identification of mutations that improve mixed-Sugar fermentation by xylose-fermenting *Saccharomyces cerevisiae*. *FEMS Yeast Res.* **2018**, *18*, foy056. [[CrossRef](#)] [[PubMed](#)]
55. Runquist, D.; Hahn-Hägerdal, B.; Bettiga, M. Increased expression of the oxidative pentose phosphate pathway and gluconeogenesis in anaerobically growing xylose-utilizing *Saccharomyces cerevisiae*. *Microb. Cell Fact.* **2009**, *8*, 49. [[CrossRef](#)] [[PubMed](#)]
56. Zeng, W.-Y.; Tang, Y.-Q.; Gou, M.; Xia, Z.-Y.; Kida, K. Transcriptomes of a xylose-utilizing industrial flocculating *Saccharomyces cerevisiae* strain cultured in media containing different sugar sources. *AMB Express* **2016**, *6*, 1–13. [[CrossRef](#)] [[PubMed](#)]
57. Mittelman, K.; Barkai, N. The Genetic Requirements for Pentose Fermentation in Budding Yeast. *G3 Genes Genomes Genet.* **2017**, *7*, 1743–1752. [[CrossRef](#)]
58. Van Dijken, J.P.; Scheffers, W.A. Redox balances in the metabolism of sugars by yeasts. *FEMS Microbiol. Lett.* **1986**, *32*, 199–224. [[CrossRef](#)]
59. Daran-Lapujade, P.; Jansen, M.L.A.; Daran, J.; van Gulik, W.; de Winde, J.H.; Pronk, J.T. Role of Transcriptional Regulation in Controlling Fluxes in Central Carbon Metabolism of *Saccharomyces cerevisiae*. A chemostat culture study. *J. Biol. Chem.* **2004**, *279*, 9125–9138. [[CrossRef](#)] [[PubMed](#)]
60. Knudsen, J.D.; Rønnow, B. Extended fed-batch fermentation of a C5/C6 optimised yeast strain on wheat straw hydrolysate using an online refractive index sensor to measure the relative fermentation rate. *Sci. Rep.* **2020**, *10*, 6705. [[CrossRef](#)] [[PubMed](#)]

61. Margono, M.; Kaavessina, M.; Khushairi Mohd Zahari, M.A.; Hisyam, A. Continuous Bioethanol Production Using Uncontrolled Process in a Laboratory Scale of Integrated Aerobic–Anaerobic Baffled Reactor. *Period. Polytech. Chem. Eng.* **2019**, *64*, 172–178. [[CrossRef](#)]
62. Beckner, M.L.; Ivey, M.; Phister, T.G. Microbial contamination of fuel ethanol fermentations. *Letts. Appl. Microbiol.* **2011**, *53*, 387–394. [[CrossRef](#)]
63. Lane, S.; Xu, H.; Oh, E.J.; Kim, H.; Lesmana, A.; Jeong, D.; Zhang, G.; Tsai, C.-S.; Jin, Y.-S.; Kim, S.R. Glucose repression can be alleviated by reducing glucose phosphorylation rate in *Saccharomyces cerevisiae*. *Sci. Rep.* **2018**, *8*, 2613. [[CrossRef](#)] [[PubMed](#)]
64. Hagman, A.; Säll, T.; Compagno, C.; Piškur, J. Yeast “Make-Accumulate-Consume” Life Strategy Evolved as a Multi-Step Process That Predates the Whole Genome Duplication. *PLoS ONE* **2013**, *8*, e68734. [[CrossRef](#)]
65. Pirt, S.J. The maintenance energy of bacteria in growing cultures. *Proc. R. Soc. Lond. Ser. B Boil. Sci.* **1965**, *163*, 224–231. [[CrossRef](#)]
66. Vos, T.; Hakkaart, X.D.V.; de Hulster, A.F.; van Maris, A.J.A.; Pronk, J.T.; Daran-Lapujade, P.A.S. Maintenance-energy requirements and robustness of *Saccharomyces cerevisiae* at aerobic near-Zero specific growth rates. *Microb. Cell Factories* **2016**, *15*, 111. [[CrossRef](#)] [[PubMed](#)]
67. Raj, A.E.; Kumar, H.S.S.; Kumar, S.U.; Misra, M.C.; Ghildyal, N.P.; Karanth, N.G. High-Cell-Density Fermentation of Re-combinant *Saccharomyces cerevisiae* Using Glycerol. *Biotechnol. Prog.* **2002**, *18*, 1130–1132.
68. Ferreira, A.D.; Mussatto, S.I.; Cadete, R.M.; Rosa, C.A.; Silva, S.S. Ethanol production by a new pentose-fermenting yeast strain, *Scheffersomyces stipitidis* UFMG-IMH 43.2, isolated from the Brazilian forest. *Yeast* **2011**, *28*, 547–554. [[CrossRef](#)]
69. Sperotto, G.; Stasiak, L.G.; Godoi, J.P.M.G.; Gabiatti, N.C.; de Souza, S.S. A review of culture media for bacterial cellulose production: Complex, chemically defined and minimal media modulations. *Cellulose* **2021**, *28*, 2649–2673. [[CrossRef](#)]
70. Lorenz, E.; Schmach, M.; Stahl, U.; Senz, M. Enhanced incorporation yield of cysteine for glutathione overproduction by fed-batch fermentation of *Saccharomyces cerevisiae*. *J. Biotechnol.* **2015**, *216*, 131–139. [[CrossRef](#)]
71. Raghavendran, V.; Webb, J.P.; Cartron, M.L.; Springthorpe, V.; Larson, T.R.; Hines, M.; Mohammed, H.; Zimmerman, W.B.; Poole, R.K.; Green, J. A microbubble-sparged yeast propagation–fermentation process for bioethanol production. *Biotechnol. Biofuels* **2020**, *13*, 1–104. [[CrossRef](#)]
72. Shiloach, J.; Fass, R. Growing *E. coli* to high cell density—A historical perspective on method development. *Biotechnol. Adv.* **2005**, *23*, 345–357. [[CrossRef](#)]
73. Hanotu, J.; Kong, D.; Zimmerman, W.B. Intensification of yeast production with microbubbles. *Food Bioprod. Process.* **2016**, *100*, 424–431. [[CrossRef](#)]
74. Devi, T.T.; Kumar, B. Mass transfer and power characteristics of stirred tank with Rushton and curved blade impeller. *Eng. Sci. Technol. Int. J.* **2017**, *20*, 730–737. [[CrossRef](#)]
75. Schaepe, S.; Kuprijanov, A.; Sieblist, C.; Jenzsch, M.; Simutis, R.; Lübbert, A. kLa of stirred tank bioreactors revisited. *J. Biotechnol.* **2013**, *168*, 576–583. [[CrossRef](#)] [[PubMed](#)]
76. Aßkamp, M.R.; Klein, M.; Nevoigt, E. *Saccharomyces cerevisiae* exhibiting a modified route for uptake and catabolism of glycerol forms significant amounts of ethanol from this carbon source considered as ‘non-fermentable’. *Biotechnol. Biofuels* **2019**, *12*, 257. [[CrossRef](#)] [[PubMed](#)]
77. Lages, F.; Lucas, C. Contribution to the physiological characterization of glycerol active uptake in *Saccharomyces cerevisiae*. *Biochim. Biophys. Acta* **1997**, *1322*, 8–18.
78. Sutherland, F.C.W.; Lages, F.; Lucas, C.; Luyten, K.; Albertyn, J.; Hohmann, S.; Prior, B.A.; Kilian, S.G. Characteristics of Fps1-dependent and -independent glycerol transport in *Saccharomyces cerevisiae*. *J. Bacteriol.* **1997**, *179*, 7790–7795. [[CrossRef](#)]