

ECOLOGY, ENVIRONMENT AND CONSERVATION

VOL. 24 (2) : 2018

CONTENTS

- 555–564 Investigating of cultivating the autumn sugar beet in Fars Province (Zarghan), Iran
—*Adibifard, N., Habibi, D., Bazrafshan, M., Taleghani, D., Ilkaee, M.N.*
- 565–571 Histological changes resulting from the use of sublethal concentrations from insecticide Abamectin in the common carp (*Cyprinus carpio* L.1758)
—*Ahmed Jasim Mohammed, Shaimaa Abdul-Kareem, Aseel Najeeb Ajaweed, Ayat Munaf Hameed and Beadaa Abdlaqader Mahdii*
- 572–578 Using landsat 8 OLI data to predict and Mapping soil salinity for part of an-Najaf Governorate
Ebtihal T. AL-Khakani, Watheq F.Al-Janabi, Sa'ad R. Yousif and Hamziya M. Al-Kazaali
- 579–584 Tourism economic advantages in the physical and functional transformations of rural settlements in the Central District of Lahijan, Iran
—*Mohadese Hatami Shah Khali and Hamid Jafari*
- 585–591 Factors influencing satisfaction in housing area infrastructure management service in Pampang Riverbanks, Indonesia
—*Darwis Baso, Antariksa, Harsuko Riniwati and H. Andi Tamsil*
- 592–597 Numerical study of flow pattern in rectangular channels with side intake
—*Ali Saeidpur and Saeid Shabanlou*
- 598–606 The potential of constructed wetland as wastewater treatment technology for sustainable small industry of Coffee processing in Indonesia
—*Erina Rahmadyanti, Elizabeth Titiek Winanti, Dewie Tri Wijayati Wardoyo and Diah Wulandari*
- 607–613 The impact of traditional gold mining in Gumelar Banyumas, Indonesia
—*Muslihudin Muslihudin, Azis Nur Bambang, Eko Hendarto and Thomas Triadi Putranto*
- 614–620 The variability of productive traits estimation in Kalmyk cattle
—*Anatoly Foadovich Shevkhuzhev, Foat Galimovich Kayumov, Nikolay Pavlovich Gerasimov and Dagir Ramazanovich Smakuev*
- 621–627 Application of chicken manure compost as organic fertilizer to improve the quality and productivity of Potato (*Solanum Tuberosum* L.)
—*Yohanes Setiyo, Ketut Ayu Yuliadhi, I Gusti Ayu Lani Triani, I Dewa Gde Mayun Permana, Ida Bagus Wayan Gunam and Nyoman Semadi Antara*
- 628–631 The role of international organizations in the development of environmental rights
—*Safdar Zeinali and Mehdi Abbasi Sarmadi*
- 632–635 A comparative study of the role of tourism in the development of entrepreneurship in rural areas (Case study: villages in central district of Rasht), Iran
—*Masoume Bloki Asli, Mohammadali Ahmadian and Hamid Jafari*
- 636–640 Adaptation problems in adverse ecological zones
—*E.A. Vasilenko, V.I. Dolgova, G.Yu. Golieva, V.K. Shayakhmetova and I.E. Yemelyanova*
- 641–645 Evaluate toxicity of oxamyl pesticide by using albino Mice
—*Maad Nizar Mahdi and Ahmed Jasim Mohammed*
- 646–650 Impact of different policy levels changes on dianthalexin content in *Dianthus caryophyllus* L.
—*Bushra M. J. Alwash, Sattar A. Shlahi and Sumaya F. Hamad*
- 651–657 Interpretation of land use and land cover at lowland area using by NDVI and NDBI
—*Andriani, Dinar Dwi Anugerah Putranto, Azhar Kholiq Affandi and Eddy Ibrahim*

- 658–662 Water balance model for environment supportive power simulation (case study at Kota Malang), Indonesia
—*Bambang Suharto, Ruslan Wirosedarmo and Liliya Dewi Susanawati*
- 663–672 Preferences for settlement improvement in urban Riparian Indonesia
—*Maya Fitri, Sugeng Triyadi and Ismet B. Harun*
- 673–680 Spatial analysis of soil texture and peat soil by NDSI method at swamp area of Banyuasin District, Indonesia
—*Indrayani, Erika Buchari, Dinar D.A. Putranto and Edward Saleh*
- 681–685 Frondiferous mosses of *Acer trautvettery* community in the Caucasus
—*Kh. M. Khetagurov, G.Ya. Doroshina, I.A. Nikolaev, A.B. Bazaev, A.V. Gryazkin and A.G. Vaniev*
- 686–692 Assessment of genetic diversity in Oat (*Avena sativa* L.) genotypes using agromorphological traits under drought stress condition
—*Midia Naleyni and Seyed Mehdi Safavi*
- 693–702 Energy conservation along with generation expansion planning – A solution for Tamil Nadu, India electrical Power shortage
—*A. Bhuvanesh, S.T. Jaya Christa and S. Kannan*
- 703–714 Enumerate the groundwater contamination and confiscation of benzene by column study – A lead effectual approach
M. Senthil Kumar, G.V.T. Gopalakrishna, V. Sivasankar and K. Omine
- 715–720 The scientific basis of changes in the composition and properties of meadow saline soil of the foothill plains of the Ili Alatau during a long postmeliorative period
—*Zhainagul Yertayeva, Saginbay Kaldybaev and Aigul Beketova*
- 721–726 An overview related to the different approaches of synthesis of different metallic nanoparticles with various advantages in modern science
—*Monika Sharma, Ishita Yadav and Chandra Kant Sharma*
- 727–732 Eco-biology and Life cycle study of common grass yellow butterfly (*Eurema hecabe*) from the fringe areas of Mumbai, India
—*Swapnesh Rangnekar, Anurag Mistry and Aparna Ghadigaonkar*
- 733–737 Comparative yield performance of rice varieties (high yielding and hybrids) under drought prone conditions in Jharkhand
—*Yogesh Kumar and M.S. Anantha*
- 738–744 Mechanical properties of high strength concrete using eco-friendly construction materials
—*V. Arivudamai and R. Velkennedy*
- 745–750 West-kazakhstan region forest and environmental status of Floodplain Forests
—*Rosa Maratovna Bakessova, Erzhan Zhunusovich Kentbayev and Botagoz Aidarbekovna Kentbayeva*
- 751–757 Visible light based photocatalytic degradation of ambient NO₂ using doped nanophotocatalyst
—*Vinod Kumar R. and S. Karthikeyan*
- 758–762 Magnitude of carbon in different viral proteins
—*Parul Johri, Mala Trivedi and Mohammed Haris Siddiqui*
- 763–767 Effects of automobile exhaust pollution (From 2-stroke and 4-stroke Engine vehicles) on the haematological parameters of female rat during winter season
—*Sukhvinder Kaur*
- 768–772 Evaluation of physico-chemical properties of rice straw and rice husk-derived biochar
—*Kanku Deka, B.K. Medhi, G.G. Kandali, R. Das, K. Pathak, L. Sarkar and K.D. Nath*


-
- 773–778 Technology of spring rape cultivation in Kazakhstan
—*Altynay Burkhatovna Abuova, Saniya Abiltaevna Tulkubayeva, Marat Bulatovich Tashmukhamedov, Ivan Viktorovich Sidorik and Yuriy Valerievich Tulayev*
- 779–784 Design of hybrid power control using exotic adaptive neuro-fuzzy inference system for hybrid renewable applications
—*K. Mahendran and S.U. Prabha*
- 785–789 DNA based investigation of century old freshwater sponge species from Indian Museum tank
—*Shibananda Rath, Vikas Kumar, Shantanu Kundu, Kaomud Tyagi and Boni Amin Laskar*
- 790–798 Critical risk factors associated with construction Projects of Tamilnadu, India
—*Thirumuruga Poiyamozhi M.V.V. and P.S. Kumar*
- 799–806 *Jalkund* an alternative potential rainwater harvesting structure in Wokha district, Nagaland – a case study
—*Laishram Kanta Singh, Kangjam Sonamani Singh and S. Roma Devi*
- 807–818 Environmental applications: Effective analysis of land classification for change detection of satellite images in Chennai region, India
—*N. Prabhakaran, S.S. Ramakrishnan and N.R. Shanker*
- 819–823 Efficient operation of desalination plant for Thermal power plants
—*Soyatoslav Andreevich Bushumov, Tatyana Germanovna Korotkova, Svetlana Yurevna Ksandopulo and Svetlana Dmitrievna Burlaka*
- 824–833 Stimulus of agro-industrial waste to make eco-concrete-A review
—*S. Praveenkumar and G. Sankarasubramanian*
- 834–839 Analysis of groundwater for potability at coconut husk retting area, Kanyakumari District, T.N., India
—*I. Jessy Mol and T. Baskaran*
- 840–848 Assessment of phytodiversity and their socio-economic dimensions from the submersed zone of Naitwar-Mori hydroelectric power project in tons Valley, Garhwal Himalaya, India
—*Dinesh Singh Rawat, Radha Ballabha and C.S. Rana*
- 849–855 Effect of sewage water irrigation on soil properties: A case study of Parakkai Lake in Tamil Nadu, India
—*S. Sahaya Vasanthi and S. Adish Kumar*
- 856–860 Toxicant stress on protein and ascorbic acid contents in different tissues of freshwater bivalve *Parreysia cylindrica* from different reservoirs of Nashik District, India
—*Balasaheb Rahane and Resham Bhalla*
- 861–874 Performance of irrigation canal before and after rehabilitation – A case study
—*K. Punithavel, N. Mahendran and P.K. Suresh*
- 875–881 Histopathological changes in the heart and blood of Indian major carp *Catla catla* (Hamilton, 1822) exposed to Cadmium nanoparticles
—*S. Sangeetha, S. Deeparani and V. Padma Priya*
- 882–886 Experimental investigation on a compression Ignition engine fueled with corn biodiesel with diesel blends under different compression ratio
—*S. Nagaraja, C. Krishnaraj, K. Sooryaprakash and M. Sathish Kumar*
- 887–895 Framework for environmental impact assessment (EIA) in urban detailed plans, case study: Tehran, Iran
—*Ali Reza Sadeghi, Elham Zabetian and Elham Nahavandi*





-
- 896–903 Application of amalgamated SSF & UASB in greywater treatment – A revolutionary approach
—*B. Venkatesan, S. Praveen and M. Senthil Kumar*
- 904–908 Effect of Zn on anocatalyst on biodiesel synthesis from different feedstock
—*C. Chinnasamy and D. Tamilselvam P.*
- 909–915 Eco-friendly high strength concrete production using silica mineral waste as fine aggregate – An ecological approach
—*Selvaraj Kumar P., Murthi P., Gobinath R. and Paul Awoyera*
- 916–923 Performance analysis of diesel engine using corn oil biodiesel and preheating of Inlet Air: The Taguchi approach
—*V. Gopinath and P. Shanmughasundaram*
- 924–936 Application of GIS techniques in Mapping of flood and erosion risk areas
—*Olumuyiwa Idowu Ojo, Masengo Francois Ilunga and Isaiah Oluwakayode Ogunwobi*
- 937–946 Analysis of maximum velocity, bed shear, and sediment distribution towards the effect of groyne placement
—*Pitojo Tri Juwono, Dian Sisinggih and Iskandar*
- 947–951 Performance and emission analysis of VCR single cylinder four stroke DI diesel engine using Punnagam oil
—*K. Murugan¹, R. Thirumalai and K. Rajkumar*
- 952–959 Measuring cultural development degree in Ardabil province (IRI), Iran
—*Gholam Reza Miri, Simin Abafat and Parisaghaderi*
- 960–967 The effect of molting hormone (20-hydroxyecdysone) on molting of mud crab (*Scylla Olivacea* Herbst, 1976)
—*Andi Tamsil and Hasnidar*
- 968–975 The vulnerability analysis of mangrove forest status as a Tourism Area
—*Nuddin Harahab, Harsuko Riniwati and Zainal Abidin*
- 976–982 Citizens color preferences in the Urban landscape based on participation-based approach
—*Elham Zabetian, Ali Reza Sadeghi and Arsam Salahi Moghadam*
- 983–989 Comparison of properties of rubberized concrete and conventional concrete
—*C.V. Bindu, V.M. Shanthi, R. Selvaraj, M. Praveen Kumar and U.M. Adhithyalakshmi*
- 990–992 Characterization of Pressmud and Rice Husk combination for adsorption of Heavy metals from waste acid generated from the processing of E-waste by informal sector
—*Vikrant Srivastava and K.N. Sheth*
- 993–1000 Theoretical foundations of deigning residential garden tower with an approach to ecology design in Mashhad
—*Hamid Ghadiri Sardasht and Amir Farajollahi Rod*

Ecology, Environment and Conservation

12

H Index

| | |
|---|---|
| Country | India - IIII SIR Ranking of India |
| Subject Area and Category | Agricultural and Biological Sciences Ecology, Evolution, Behavior and Systematics Environmental Science Ecology Nature and Landscape Conservation |
| Publisher | EM International |
| Publication type | Journals |
| ISSN | 0971765X |
| Coverage | 1997-2019 |
| Scope | Published Quarterly Since 1995. Ecology, Environment and Conservation is published in March, June, September and December every year. ECOLOGY, ENVIRONMENT AND CONSERVATION is one of the leading International environmental journal. It is widely subscribed in India and abroad by Institutions and Individuals in education and research as well as by Industries, Govt. Departments and Research Institutes. |
|  | Homepage How to publish in this journal |

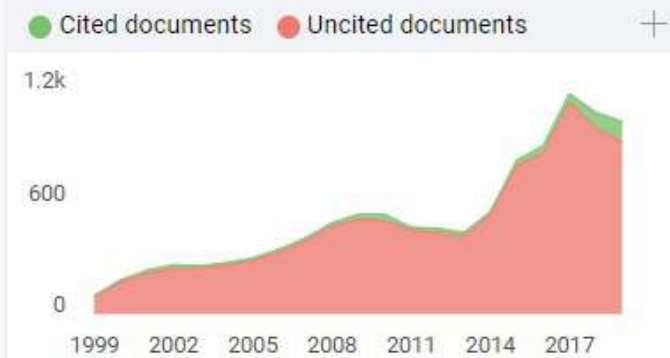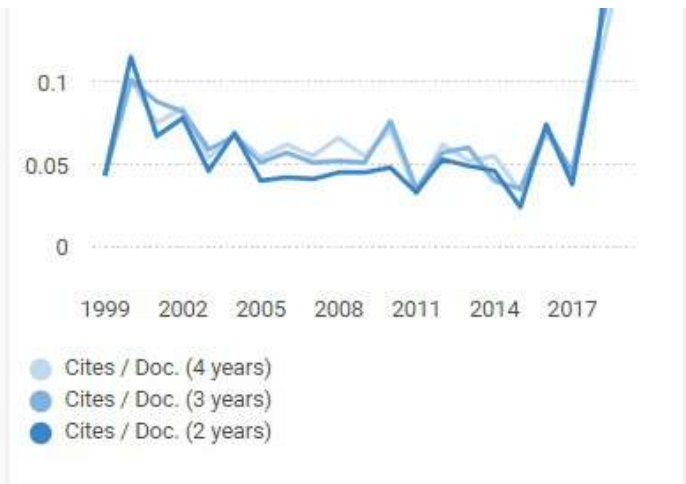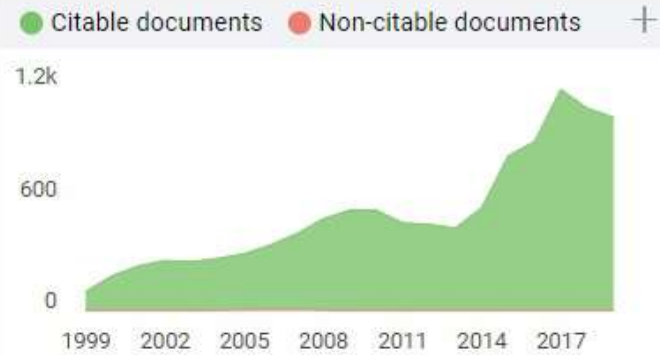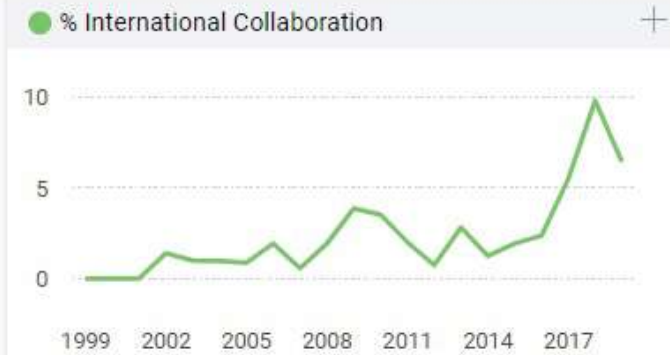

Ecology, Environment and Conservation

Q4 Ecology
best quartile

SJR 2019
0.14

powered by scimagojr.com

← Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scima
```

Spatial analysis of soil texture and peat soil by NDSI method at swamp area of Banyuasin District, Indonesia

Indrayani^{1,2}, Erika Buchari³, Dinar D.A. Putranto³ and Edward Saleh⁴

¹*Environmental Science Postgraduate Program of Sriwijaya University, Palembang, Indonesia*

²*Civil Engineering Department, State Polytechnic of Sriwijaya, Palembang, Indonesia*

³*Civil Engineering Department, Faculty of Engineering, Sriwijaya University, Palembang, Indonesia*

⁴*Agriculture Engineering Department, Faculty of Agriculture, Sriwijaya University, Palembang, Indonesia*

(Received 9 November, 2017; accepted 30 December, 2017)

ABSTRACT

Road construction in the swampy area should certainly face many problems related to the soil characteristics that are composed of soft soils. The understanding of soil condition to swamp areas is needed to determine the road trace and can be done using the remote sensing technology. The use of Normalized Difference Soil Index (NDSI) method is an alternative to the characterizing of the soil condition. The location of soil sampling is determined by NDSI, while the specific gravity, property index, and soil texture is analyzed by laboratory analysis. The classification of solid condition using NDSI method on composite band 65 obtained the range of reflectance values ranging (-1.0336) – (-0.4582) for water body, (-0.4582) – (-0.0645) for not openspaces and (-0.0645) – (0.4300) for open spaces. The classification of soil characteristics in the swamp area in Banyuasin regency consists of 3 classes, which are clay type with diameter <0.002 mm, medium soil with diameter 0.002 – 0.075 mm, and slightly rough for fine sandy soil with diameter 0.075 – 0.425 mm. In addition, in the study area, the peat depth is approximately measured as 50 – 100 cm and 100 – 200 cm.

Key words : Spatial analysis, Soil texture, Peatland, Citra Landsat 8, NDSI

Introduction

The development of the swampy area continuously increases as a form of limited productive land used to fulfill the human needs. Some government efforts have been developed in the developing swamp areas included various sectors such as plantation, agriculture, and fisheries activities. To support the development of swamp areas, the construction of road infrastructure is a necessity, but the main problem faced in the implementation of road construction in the swamp area is the problem of soil characteristics which are generally soft soils and very soft soils

which mostly consist of peatlands (Suriadikarta and Sutriadi, 2007; Arsyad *et al.*, 2014). The road construction built on the expansive ground generates many problems such as the damaging to the road pavement which requires high cost during the construction, maintenance, and rehabilitation cost before the pavement reaches the age of the plan etc. (Harry, 2007; Suryoto *et al.*, 2017). Furthermore, these problems are needed in consideration of road construction in the swamp area. In order to find out the condition of the land in the study field, it is necessary to investigate the soil characteristics where any investigation will require enormous costs. To re-

Corresponding author's email: iiend_sumantri@yahoo.com

duce the cost, some technology can be used to help the field investigation such as Geographical Information System (GIS). GIS using remote sensing technology is one of the economic alternatives which can find out the potential land cover (Wondrade *et al.*, 2014; Karakus *et al.*, 2015). One of the remote sensing technologies that can be used for the recognition of soil characteristics is Landsat image 8 (Li and Chen, 2014).

Landsat 8 in remote sensing technology has onboard operational land imager (OLI) and thermal infra red sensor (TIRS) sensor which have a total of 11 channels which consists of 9 channels (band 1-9) located on OLI and 2 channels bands 10 and 11 on TIRS (Lapan, 2015; USGS, 2016). Some methods are used in the interpretation of the image using the wavelength method such as Normalized Different Vegetation Index (Gandhi *et al.*, 2015), Normalized Different Wetness Index-NDWI (Haikal, 2014), and Normalized Different Soil Index-NDSI (Deng *et al.*, 2015). According to Deng *et al.*, (2015), The development of a spectral sample of vegetation and soil samples is conducted to distinguish normalized indexes for increasing soil information. These differences can be interpreted using the NDSI method. The study aimed to obtain the thematic map showing the location of soil and peat texture to facilitate the decision making in determining the road trace which traversed at a location in the swamp area.

Materials and Methods

Study Area

The study is located at Banyuasin regency which is between $1^{\circ} 37'32.12''$ to $3^{\circ} 09'15.03''$ LS and $104^{\circ} 02'21.79''$ to $105^{\circ} 33'38.5''$ BT. Banyuasin is one regency which has wide swamp area where the area has 1.183.299 hectares or approximately 12.18% of the total area of South Sumatera province (Kabupaten Banyuasin, 2011). Fig. 1 shows the administrative maps of Banyuasin regency.

Classification Method

In this study, the interpretation of Landsat 8 image that downloaded from the United States Geological Survey on the scene: path 124/row 062 is used to obtain the classification of open area, unopened area, and waters. The image data processing is processed through stages: (i) pre-processing (cutting the image that serves to limit the area of research and

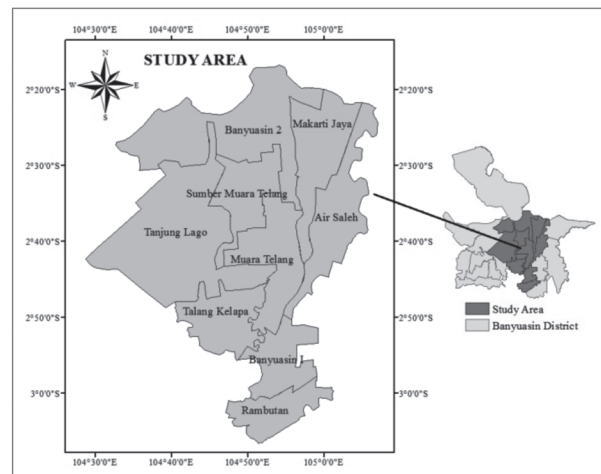


Fig. 1. Study Area

reduce the size of image files as well as geometric and radiometric correction; (ii) data processing (color composite, digital image interpretation for sharpening, smoothing filter, contrast, multispectral classification on Landsat image 8) and NDSI transformation; and (iii) field test stages and laboratory tests to obtain the specific gravity, properties index, and soil texture.

Soil texture and peat texture analysis are observed through soil moisture field by separating open area and unopened area based on NDSI value, by combining band 5 (NIR) at wavelength 0.845 – 0.885 and band 6 (SWIR) at length 1.560 – 1.660 waves which are shortwave infrared can be useful for notifying the soil on the surface conditions of the earth. The equation showed below.

$$\text{NDSI} = (\text{SWIR} - \text{NIR}) / (\text{SWIR} + \text{NIR})$$

The characteristics of OLI sensor on satellite landsat 8 has 9 bands namely band 1 (costal aerosol) with wavelength 0.433 – 0.453; band 2 (blue) with wavelength 0.450 – 0.515; band 3 (green) with wavelength 0.525 – 0.600; band 4 (red) with wavelength 0.630 – 0.680; band 5 (NIR) with wavelength 0.845 – 0.885; band 6 (SWIR 1) with wavelength 1.560 – 1.660; band 7 (SWIR 2) with wavelength 2.100 – 2.300; band 8 (panchromatic) with wavelength 0.500 – 0.680; and band 9 (cirrus) with wavelength 1.360 – 1.390 (Lapan, 2015).

Results

Classification of Open Spaces, Not Open Spaces, and Water Body

In this study, the NDSI method is used to classify

unopened area which is the vegetation and settlement areas), open area (land), and waters area. The main problem occurred in the study area is the type of land which is a vegetated swamp area. The emitted wave will directly affect the vegetation and interrupt the process of classifying by NDSI. Soil and peat soil texture classification is characterized using laboratory analysis and then approached using land map from Landsystem (Sukarman *et al.*, 2013), Sumatra Peat Map from Wetland Indonesia (Wahyunto *et al.*, 2003), and peat area map of Banyuasin regency (Kabupaten Banyuasin, 2017).

In order to distinguish unopened area (vegetation and settlement), open area (land), and waters area, the samples are taken in Landsat image with a combination of 6 and 5 band composites, as in Fig. 2a. Fig. 2b shows the average reflectance value in band 5 (NIR) and band 6 (SWIR). Furthermore, the reflectance value is used to determine the characteristics of land as the open, unopened, or waters area. Both SWIR band spectrum 6 with wavelength 1.560 – 1.600 μm and NIR spectrum on band 5 with wavelength 0.845 – 0.885 μm have low reflectance value when exposed at water area, that is 0.0161 at SWIR and 0.0444 on NIR. The spectral value on the SWIR

spectrum in band 6 tends to rise in open area or if it is exposed to a ground object, ie, equal to 0.2735. While the spectral value in band 5 rises in the unopened area (vegetation and settlement) that is equal to 0.2815 and decreased in the open area or if the object is hit by 0.2195.

The NDSI value shows the difference between SWIR in band 6 and NIR in band 5. The negative average value of NDSI indicates that the area is unopened area whereas the positive average values indicate the open area (the object is exposed to the soil). Fig. 3 showed the values of NDSI in each classification. Furthermore, the classification of NDSI is divided into 3 classes. The reflectance value of each classification can be seen in Table 1. From Table 1, it can be analyzed that the classification is based on

Table 1. Classification of the Reflektan Value to differentiate open spaces, not openspaces, and water body

| No. | Classification | Reflectance Value |
|-----|-----------------|-------------------------|
| 1. | Water Body | (- 1,0336) – (- 0,4582) |
| 2. | Not Open Spaces | (- 0,4582) – (- 0,0645) |
| 3. | Open Spaces | (- 0,0645) – (0,4300) |

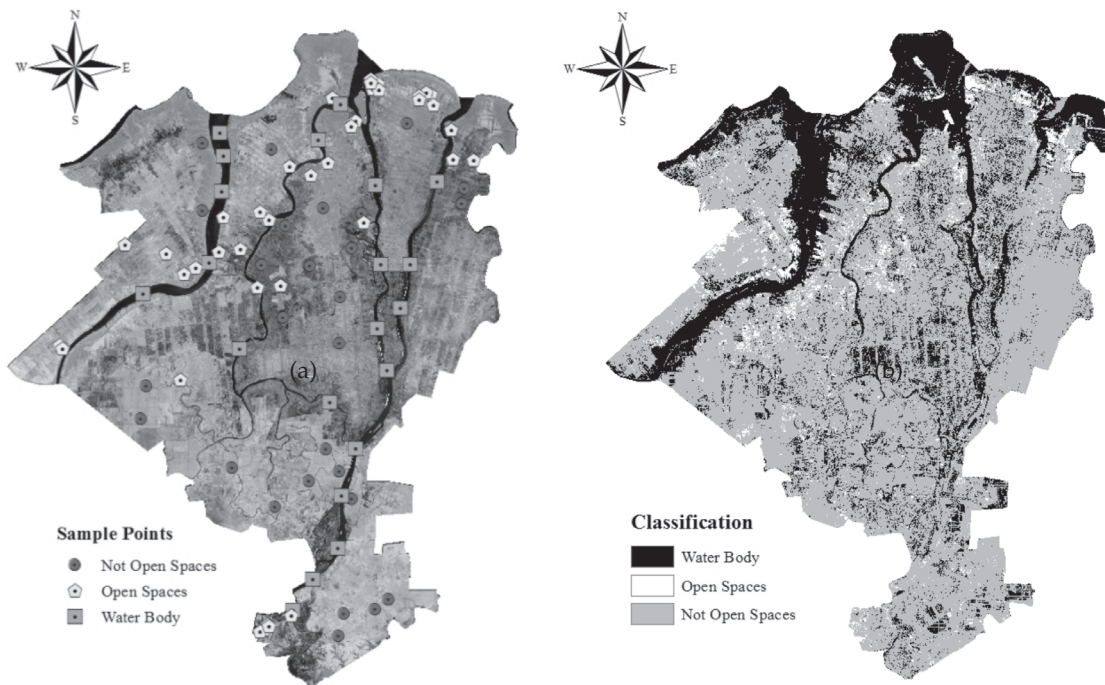


Fig. 2. Soil conditions identification on the composite Band 65. (a) sample point of the determination of Reflectance Value, (b) classification result of open spaces, not openspaces, and water body.

the reflectance value of the waters area, the unopened area (vegetation and settlement), and the open area (ground object), as in Fig.3.

Fig. 3 shows that the highly vegetated area tends to classified into the waters area because in the areas with dense vegetation, there will have a high wetness level due to water level contained in the leaf. Furthermore, the spectrum in band 6 reflects the small spectral value if it is exposed to water. The accuracy in the interpreting of the condition of open area is carried out using confusion matrix. The method will compare the matching data result of classification of open area with the result data of inspection directly in the field.

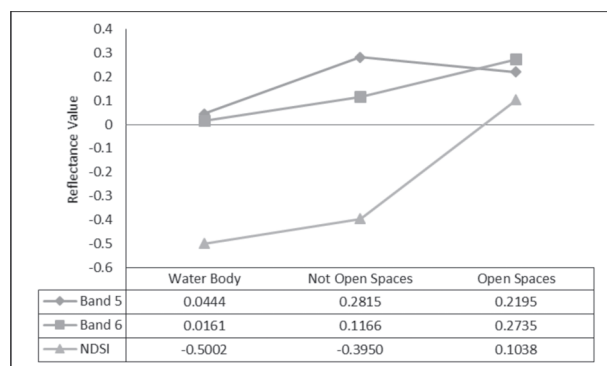


Fig. 3. The Reflectance value in Band 6 (SWIR), Band 5 (NIR) and NDSI

The test accuracy of open spaces, not open spaces, and waterbody

Field measurements are conducted from February to April 2017. The measurements are conducted at 30 sample points which determined by direct landuse and inundation checks. Fig. 4 represents the description of the condition of the open area. The accuracy of the classification results is tested using a confusion matrix, as in Table 2. From Table 2, it can be seen that the percentage of the overall rate is 86.67%

which indicates that the classification results of not open spaces (vegetation and settlement), open spaces (land), and water body can be used in the making of soil condition thematic maps in the swamp areas based on the reflectance value classification.

Soil and Peat Soil Texture Tests

Soil and peat soil texture classification are carried out by taking some soil samples in the open and unopened areas. Soil samples are taken at 10 locations in which each location is taken 3 points in several study area using handbore. Furthermore, the property index testing is performed to determine the soil type and soil texture based on AASHTO classification. The location point of soil sampling is presented in Fig. 5. The results of properties index testing and filter analysis are shown in Table 3.

According to wetland map (Wahyunto *et al.*, 2003), location 6 is a peat area with a depth of <50 cm, whereas at location 1 and location 5 are peat soil with a depth of 50-100 cm. The laboratory analysis shows that the soil characteristics at location 1, and location 5 are clay grayed soil whereas at location 6 shows the clay type soil. Laboratory tests are also done by measuring the soil density. The results show that the density of soil at location 1, and location 5 and 6 are 2.66 and 2.46, respectively. Based on the soil density, it can be concluded that in the study area, the existing soil type is not kinds of peat soil because the peat soil has a low soil density.

Soil and Peat Texture Classification

The classification of soil texture in the study area is divided into 3 classes: fine soil for loamy soil, fine soil for dense soils (based on laboratory test results showing that in swamp areas consisting of clay and clay soil), and peat. The peatland classification is taken from Wetland Peatland Data of Indonesia in

Table 2. The confusion matrix on the classification of open spaces, not openspaces, and water body

| Description | Reference Data (Field Data) | | | Sum | User Accuracy | |
|---------------------|-----------------------------|-------------|------------|-------|---------------|-------|
| | Not Open Spaces | Open Spaces | Water Body | | | |
| Classification Data | Not Open Spaces | 13 | 1 | 1 | 15 | 86,67 |
| | Open Spaces | 1 | 10 | 0 | 11 | 90,91 |
| | Water Body | 1 | 0 | 3 | 4 | 75,00 |
| | Sum | 15 | 11 | 4 | 30 | |
| | Produser's Accuracy | 86,67 | 90,91 | 75,00 | | 86,67 |

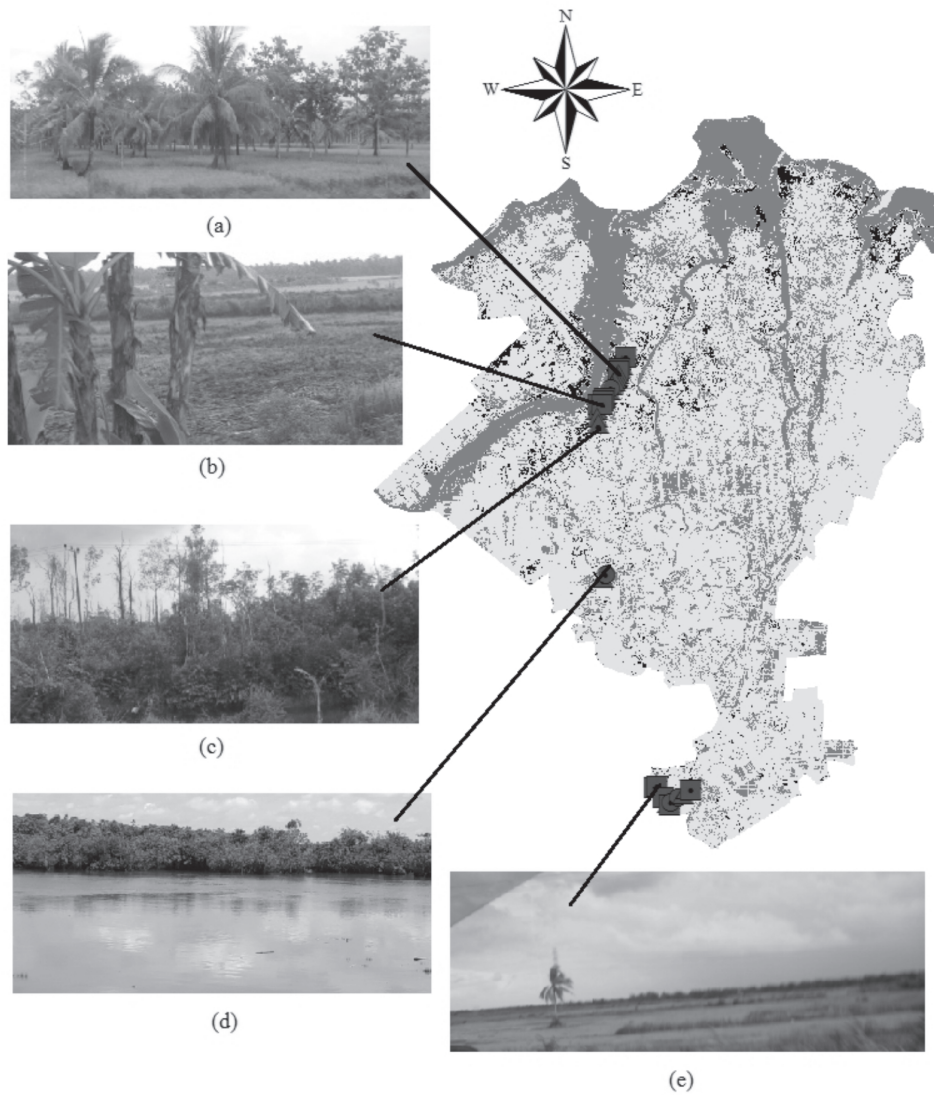


Fig. 4. Cross Check of Classification (a) Not Open Spaces (Field Rice and Plantation); (b) Open Spaces (Preparation for Field Rice); (c) Not Open Spaces (Shurb); (d) Water Body (River); (e) Open Spaces (Field)

Table 3. Test results and analysis of Filter Properties Index based on AASHTO classification.

| No | Description | Score Avarange | | | Granules Size (mm) |
|----|-------------|------------------|---------------------|---------------------------------|--------------------|
| | | Specific Gravity | Soil Classification | Soil Type Classification | |
| 1 | Location 1 | 2.66 | A-4 | Silty Soil | 0.002 - 0.075 |
| 2 | Location 2 | 2.59 | A2-4 | Silty or clayey gravel and sand | 0.075 – 0.425 |
| 3 | Location 3 | 2.68 | A-4 | Silty Soil | 0.002 - 0.075 |
| 4 | Location 4 | 2.60 | A-6 | Clayey Soil | < 0.002 |
| 5 | Location 5 | 2.46 | A-5 | Silty Soil | 0.002 - 0.075 |
| 6 | Location 6 | 2.46 | A-7 | Clayey Soil | < 0.002 |
| 7 | Location 7 | 2.42 | A-5 | Silty Soil | 0.002 - 0.075 |
| 8 | Location 8 | 2.53 | A-7 | Clayey Soil | < 0.002 |
| 9 | Location 9 | 2.21 | A-7 | Clayey Soil | < 0.002 |
| 10 | Location 10 | 2.17 | A-7 | Clayey Soil | < 0.002 |

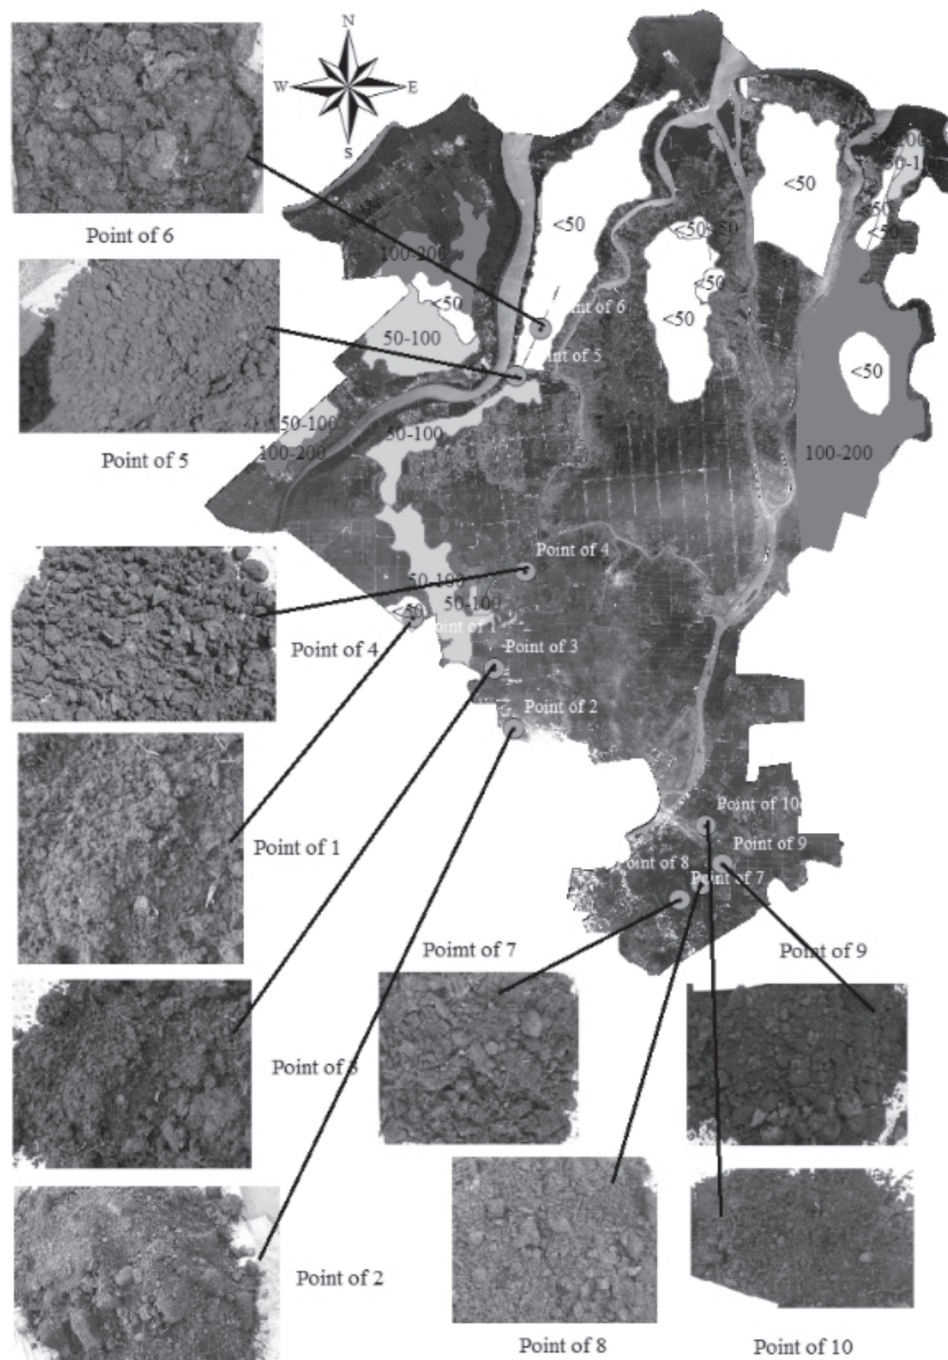


Fig. 5. Soil Sampling Locations

Sumatera region (Wahyunto *et al.*, 2003) which has a depth of 100 – 200 cm. Peat depth specifications are based on unused depths in agricultural and plantation activities. While the classification of soil texture is determined based on the results of research in the laboratory and compared with the landscape map

(Sukarman *et al.*, 2013). The results show that the texture of the soil present in the swamp area consists of fine structure and slightly fine, so the classification of soil is only divided into 3 classes: fine texture for clay soil with grain size <0.002 mm, slightly smooth texture for soil with grain size of 0.002-0.075,

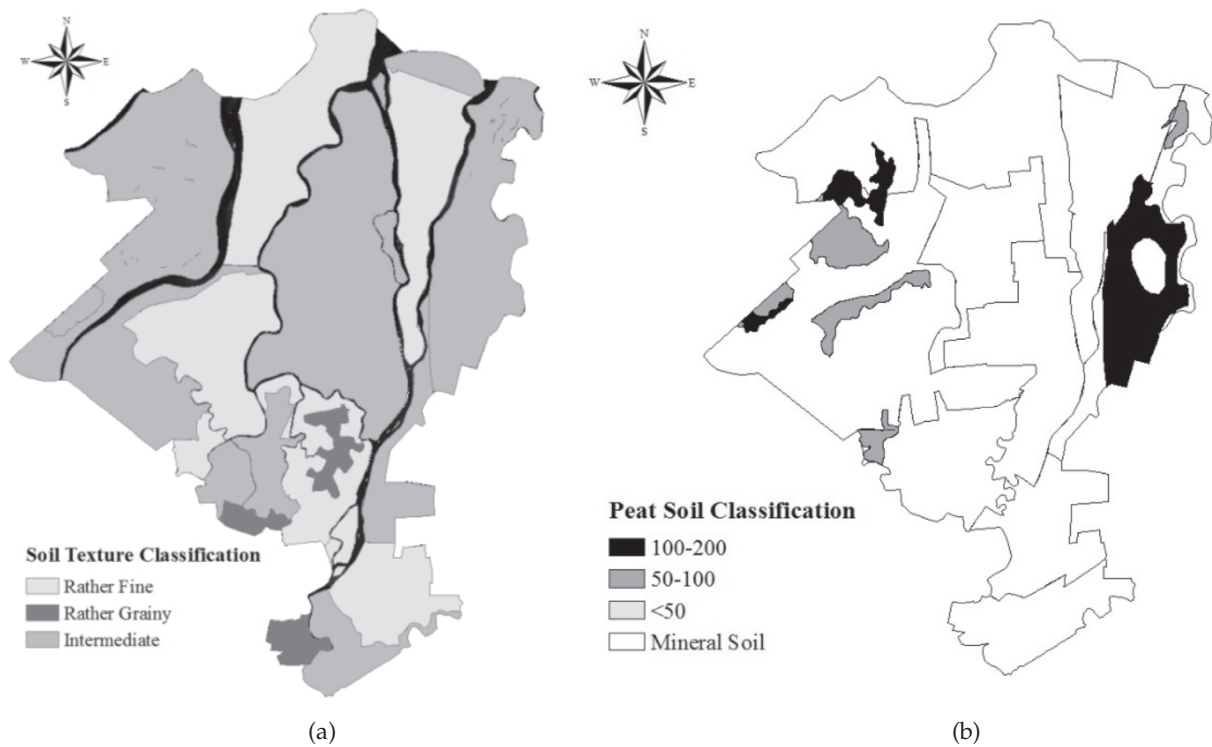


Fig. 6. Result of classification. (a) Soil texture, (b) Peat soil.

and peat soil. The delineation of soil texture is based on the river boundary. The classification of soil texture and peat soil can be seen in Fig. 6.

Discussion

Potitthep *et al.*, (2005) calculated NDSI to find the relationship between groundwater and soil contents from infrared waves and near infrared waves. Two shortwave infrared channels and long waves from MODIS on channels 5 and 6 are selected. The results show that groundwater content at 10 cm depth has the best linear relationship with channel 6 based NDSI.

The NDSI method can not determine the soil texture and peat soil classification because the wavelength is not directly exposed to the soil object. According to Deng *et al.*, (2015), the development of spectral values of vegetation and soil is carried out to distinguish the normalized index of the soil. These differences can be interpreted using the NDSI method but the classification can only be determined for identification the open area, unopened area, and waters. The recognition of soil and peat

texture are conducted by laboratory tests based on samples which are taken in the open areas obtained from the results of classification. Based on the classification obtained from the laboratory test, the texture of the soil in the swamp area in Banyuwasin reGENCY consists of the clay; clay greyed soil and fine sand. From the classification of soil conditions using the NDSI method, the composite band 65 obtained the range of reflectance values (-1.0336) – (-0.4582) for waters, (-0.4582) – (-0.0645) for the unopened area and (-0.0645) – (0.4300) for open area. The soil classification in swamp area is divided into 3 classes: soft for clay type with diameter <0.002 mm, medium for soil with diameter 0.002 – 0.075 mm, and rather rough for sandy soil with diameter 0.075 – 0.425 mm. While the peat soil has a depth between 50 – 100 cm and 100 – 200 cm.

Conclusion

Based on the classification of soil conditions using the NDSI method, the composite band 65 obtained the range of reflectance values (-1.0336) – (-0.4582) for water body, (-0.4582) – (-0.0645) for not open

spaces, and (-0.0645) – (0.4300) for open spaces. The soil classification in the swamp area is divided into 3 classes based on the diameter of soil: soft for clay type with diameter <0.002 mm, medium for soil with diameter 0.002 – 0.075 mm, and rather rough for sandy soil with diameter 0.075 – 0.425 mm. The peat soil has a depth between 50 – 200 cm.

References

- Arsyad, D.M. and Saidi, B.B. dan Enrizal. 2014. Pengembangan Inovasi Pertanian di Lahan Rawa Pasang Surut Mendukung Kedaulatan Pangan. *Pengembangan Inovasi Pertanian*. 7(4) : 169-176.
- Deng, Y., Wu, C., Miaoli and Chen, R. 2015. RNDSI : A Ratio Normalized Different Soil Index for Remote Sensing of Urban/ Suburban Environments. *International Journal of Applied Earth Observation and Geoinformation*. 39: 40 – 48.
- Gandhi, M.G., Parthiban, S., Thummalu, N. and Christy, A. 2015. NDVI : Vegetation Change Detection Using Remote Sensing and GIS – A Case Study of Wellore District. *Procedia Computer Science*. 57:1199 – 1210.
- Haikal, T. 2014. *Analisis Normalized Difference Wetness Index (NDWI) dengan Menggunakan Data Citra Satelit Landsat 5 TM (Studi Kasus : Provinsi Jambi Path/Row : 125/61)*. Tesis. Departemen Geofisikadan Meteorologi. Fakultas Matematikadan Ilmu Pengetahuan Alam, Bogor: Institut Pertanian Bogor.
- Harry, C.H. 2007. *Kajian Sebab-sebab Kerusakan Perkerasan Jalan di Ruas Jalan Demak-Kudus Terkait dengan Karakteristik Tanah-Dasar (Subgrade)*. Prosiding Konferensi Nasional Transportasi dan Geoteknik. Jurusan Teknik Sipil, Fakultas Teknik. Yogyakarta: Universitas Gadjah Mada.
- Karakus, C.B., Cerit, O. and Kavak, K.S. 2015. Determination of Landuse/ Cover Changes and Landuse Potential Sivas City and its Surroundings Using Geographical Information System (GIS) and Remote Sensing (RS). *Procedia Earth and Planetary Science*. 15: 454-461.
- Kabupaten Banyuasin, 2011. *Rencana Tata Ruang Wilayah Kabupaten Banyuasin 2011 – 2031*. Badan Perencanaan Pembangunan Daerah dan Penelitian Pengembangan. Pangkalan Balai: Kabupaten Banyuasin.
- Kabupaten Banyuasin, 2017. *Area Gambut Banyuasin*. Badan Perencanaan Pembangunan Daerah dan Penelitian Pengembangan. Pangkalan Balai: Kabupaten Banyuasin.
- Lapan, 2015. *Pedoman Pemanfaatan Data Landsat-8 untuk Deteksi Daerah Tergenang Banjir (Inundated Area)*. Pusat Pemanfaatan Penginderaan Jauh. Jakarta: Lembaga Penerbangan dan Antariksa Nasional.
- Li, S. and Chen, X. 2014. A New Bare-Soil Index For Rapid Mapping Developing Areas Using Landsat 8 Data. *The International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*. 40(4) : 139-144.
- Potitthep, S., Ishii, R. and Suzuki, R. 2010. *The Potential of Normalized Difference Soil Index (NDSI) for Soil Water Content Estimation in Mongolia*. Postdoctoral Researcher. Japan Agency for Marine-Earth Science and Technology. Kanagawa: Research Institute for Global Change.
- Sukarman, Nugroho, K. and dan Sulaeman, Y. 2013. Perkembangan dan Permasalahan Sistem Klasifikasi Tanah di Indonesia. *Jurnal Sumberdaya Lahan*. 7(2) : 97-112.
- Suriadikarta, D.A. and dan Sutriadi, M.T. 2007. Jenis-Jenis Lahan Berpotensi Untuk Pengembangan Pertanian di Lahan Rawa. *Jurnal Litbang Pertanian*. 26 (3) : 115-122.
- Suryoto, Siswoyo, D.P. and Setyawan, A. 2017. The evaluation of functional performance of national roadway using three types of pavement assessments methods. *Procedia Engineering*. 171 : 1435-1442.
- Wahyunto, Ritung, S. dan Subagjo, H. 2003. *Maps of Area of Peatland Distribution and Carbon Content in Sumatera, 1990 – 2002*. Bogor: Wetlands International - Indonesia Programme and Wildlife Habitat Canada (WHC).
- Wondrade, N., Dick, Q.B. and Tveite, H. 2014. GIS Based Mapping of Land Cover Changes Utilizing Multi-Temporal Remote Sensed Image Data In Lake Hawassa Watershed, Ethiopia. *Environ Monit Assess*. 186 : 1765-1780.
- USGS. 2016. *Landsat 8 (L8) Data Users Handbook*. U.S. Geological Survey. South Dakota: Department of the Interior.