

# Northumbria Research Link

Citation: Ahmad, Ahmad Mohammad, Rodriguez-Trejo, Sergio, Hafeez, Mian Atif, Dawood, Nashwan, Kassem, Mohamad and Naji, Khalid (2022) Drivers for energy analysis towards a BIM-enabled information flow. Smart and Sustainable Built Environment. ISSN 2046-6099 (In Press)

Published by: Emerald

URL: <https://doi.org/10.1108/SASBE-07-2021-0129> <<https://doi.org/10.1108/SASBE-07-2021-0129>>

This version was downloaded from Northumbria Research Link:  
<http://nrl.northumbria.ac.uk/id/eprint/48125/>

Northumbria University has developed Northumbria Research Link (NRL) to enable users to access the University's research output. Copyright © and moral rights for items on NRL are retained by the individual author(s) and/or other copyright owners. Single copies of full items can be reproduced, displayed or performed, and given to third parties in any format or medium for personal research or study, educational, or not-for-profit purposes without prior permission or charge, provided the authors, title and full bibliographic details are given, as well as a hyperlink and/or URL to the original metadata page. The content must not be changed in any way. Full items must not be sold commercially in any format or medium without formal permission of the copyright holder. The full policy is available online: <http://nrl.northumbria.ac.uk/policies.html>

This document may differ from the final, published version of the research and has been made available online in accordance with publisher policies. To read and/or cite from the published version of the research, please visit the publisher's website (a subscription may be required.)

# DRIVERS FOR ENERGY ANALYSIS TOWARDS A BIM-ENABLED INFORMATION FLOW

## ABSTRACT

### Design/methodology/approach

The paper presents a set of Key Performance Indicators (KPIs) extracted from the developed Energy Analysis (EA) process maps and interviews with expert stakeholders. These KPIs stem from the literature review and link to the benefits of EA through industry expert review. The study includes; i) Development and validation of EA process maps adjusted to requirements from different stakeholders. ii) KPIs aligned with the EA process map. iii) Identification of the drivers that can facilitate lifecycle information exchange. iv) Opportunities and obstacles for EA within Building Information Modelling (BIM) enabled projects.

### Purpose

EA within a BIM enables consistent data integration in central repositories and eases information exchange, reducing rework. However, data loss during information exchange from different BIM uses or disciplines is frequent. Therefore, a holistic approach for different BIM uses enables a coherent lifecycle information flow. The lifecycle information flow drives the reduction of data loss and model rework and enhances the seamless re-use of information. The latter requires a specification of the EA KPIs and integrating those in the process.

### Findings

This paper depicts a viable alternative for EA process maps and KPIs in a BIM-enabled AEC design industry. The findings of this paper showcase the need for an EA within BIM with these KPIs integrated for a more effective process conforming to the current OpenBIM Alliance guidance and contributing towards sustainable lifecycle information flow.

### Research limitations/implications

The limitation of the research is the challenge of generalising the developed EA process maps; however, it can be adjusted to fit defined organisational use. The findings deduced from the developed EA process map only show KPIs to have the ability to facilitate adequate information flow during EA.

### Practical implications

The AEC industry will benefit from the findings of this primary research as they will be able to contrast their process maps and KPIs to those developed in the paper.

### Social implications

This paper benefits the societal values in energy analysis for the built environment in the design stages. The subsequent lifecycle information flow will help achieve a consistent information set and decarbonised built environment.

### Originality/value

The paper offers a practical overview of process maps and KPIs to embed EA into BIM, reducing the information loss and rework needed in the practice of this integration. The applicability of the solution is contrasted by consultation with experts and literature.

## 47 **1. INTRODUCTION**

48 Building Information Modelling (BIM) facilitates the production, management, and exchange of  
49 digital data types throughout the lifecycle of a built asset (Sacks et al., 2018; Hafeez et al., 2021).

50 Energy Analysis (EA) is a process that aims to obtain an asset energy model from early to the  
51 detailed design stages. EA works at various project stages to forecast the energy demand and  
52 improve the building performance during the operational phase. However, traditional EA involves  
53 challenges as the error-prone manually elaborated simulation models and the complex  
54 calculations requiring up-to-date project information (Choi et al., 2016). In conjunction with BIM,  
55 EA enables a coordinated energy model with the rest of the building components and disciplines  
56 (Sattler et al., 2019).

57 The built environment is responsible for 20% to 40% of the global primary energy use (IEA,  
58 2019; Perez-Lombard et al., 2008; Saidur, 2009; Shi et al., 2011). EA aims to contribute to  
59 achieving the desired energy profile for buildings in the future energy positive neighbourhoods  
60 (Crosbie et al., 2010; Ala-Juusela, M. 2016) and to follow the path towards net-zero energy  
61 buildings and green design, which is gaining momentum in Europe, Canada, and Japan (Dian et  
62 al., 2021). The choice of BIM components and parameters such as walls, windows, G-values, U-  
63 values, surface area, building orientation, and use-regime significantly impact the effectiveness  
64 of EA, which results are improved when conducted in a standardised fashion (Jin et al., 2019).  
65 For example, glazing surface and type of windows can be part of an optimization process in BIM,  
66 enhancing the performance by up to 10% of the building energy load (Sawyer, 2014). That is  
67 possible by exchanging BIM data from design authoring tools to the EA environment. Thus, the  
68 parameterization of building components becomes an invaluable design advantage that enables  
69 the integration of energy analysis within a BIM-enabled framework.

70

71 Passive design and energy-efficient systems can improve the building performance and its  
72 lifecycle costs (LCC) (Sawyer, 2014; Rodriguez-Ubinas et al., 2014). A dedicated BIM process  
73 facilitates consistency in sharing information from the design authoring tools into EA and other  
74 disciplines, informing the overall design process. The EA process analyses and ensures that  
75 performance is consistent with the client requirements and the design phase and helps make  
76 informed decisions virtually before the construction process starts (Rodriguez-Trejo et al., 2017;  
77 Choi et al., 2018).

78 Baldwin et al. (2010) demonstrated the positive impact of process improvement by overhauling  
79 and adding steps to advantage certain aspects of the processes in a study focused on industrial  
80 stakeholders. These changes permeate all the areas of the information flow in the Architectural,  
81 Engineering, and Construction (AEC) industry. Research and industry have argued the potential  
82 benefits of using BIM (Barlish and Sullivan, 2012; Jin et al., 2019; Zhang et al., 2018), which  
83 recently is gaining momentum in the Building Performance Assessment (BPA) and EA (Jin et al.,  
84 2019).

85

86 Kreider and Messner (2013) defined EA as "a process in the facility design phase in which one  
87 or more building energy simulation programs use a properly adjusted BIM model to conduct  
88 energy assessments for the current building design". Traditionally, architects focused on design,  
89 form, and space and did not consider EA a standard process (Shi et al., 2016). However, late  
90 trends in AEC promote integrating EA into the design, considering the lifecycle energy  
91 quantification through facility management and operation when exploring design alternatives at  
92 the conceptual design phase (Gao et al., 2019; Xu et al. 2021; Xu et al., 2021; Zhuang et al. 2021).

93

94 EA requires a comprehensive understanding of up-to-date environmental and boundary  
95 conditions, as well as the client priorities. Therefore, the definition of key performance indicators

96 (KPIs) and adequate scales selection is a cornerstone to EA and project success at design stages  
97 (Rodriguez-Trejo et al., 2017; Xu et al., 2021).

98 This study aims to indicate the gap in existing process maps. It further addresses the need for  
99 lifecycle information flow within a BIM-enabled project as depicted by Charour et al. (2021).  
100 The lifecycle information flow drivers enable seamless use of the information in other BIM Uses  
101 at the design and construction stages. Information shared across the different project stages adds  
102 meaning and value within the various BIM Uses (Lack or faulty information sharing hinders the  
103 value of BIM and increases project inconsistencies and rework. The paper presents EA KPIs from  
104 a literature review and then links to the benefits of EA through industry expert review. This paper  
105 devises a unified standard BIM process for EA used to fill the gaps found in the current literature  
106 to enable the adequate application of the process maps. A set of drivers related to the process  
107 maps are derived and then validated through a set of semi-structured interviews. As a conclusion  
108 from the paper, the main drivers to improve information exchange in the EA BIM use are depicted.  
109 The benefits and challenges for EA within BIM will be presented, classified, and analysed in the  
110 remainder of the paper. The study aims not to develop an EA process map but to identify possible  
111 lifecycle factors linked to the EA process map that would allow model re-use with minimal or no  
112 model rework. Section 2 presents the benefits and challenges of EA within the BIM process  
113 context and the gaps in the EA process and information flow found in the literature. Section 3  
114 describes the overall methodology followed in the paper. Section 4 describes the EA process maps  
115 developed in the research, and section 5 the KPIs inferred from the maps and interviews with  
116 experts. Finally, section 6 analyses the results, and section 7 concludes the paper.

117

## 118 **2 GAPS IN EA PROCESS AND INFORMATION FLOW**

### 119 **2.1 BENEFITS AND CHALLENGES**

EA allows benchmarking different design options at the conceptual design stages leading to reduced LCC and optimised energy behaviour, requiring early input from the energy modeller to the architectural model. Abrishami et al. (2021) highlighted the importance of conceptual design stage automation approach for improved project outcomes. However, the energy modelling currently recommends frequent involvement and rework in the architect's software tool due to interoperability issues, complicating the iterative model improvement (Zhuang et al., 2021).

A BIM-enabled process adapted to the energy consultant's needs is still not fully developed (Chang and Hsieh, 2020), lacking the proper KPI analysis and a standard process to add consistency. Gong et al. (2019) indicate a discrepancy between simulation and real-life data and the challenge of decision-making processes relating to adaptation and optimization of energy behaviour in a building project. Ying and Lee (2019) described the outcome of curved walls exported in two different EA applications; both exported models needed to be adjusted. Constraints in the process included not considering element thickness and connections between curved walls. **Table 1** illustrates the different benefits, challenges, and competencies required for the various sub-processes involved in EA.

**Table 1:** EA with BIM requirements, maturity competencies, benefits, and challenges

ENERGY ANALYSIS WITH BIM			
PROCESS REQUIREMENTS	REQUIRED MATURITY COMPETENCIES	BENEFITS	CHALLENGES
Basic knowledge of building energy systems and modelling standards. Penn State (2012)	Standards	Improved accuracy of analysis outcome through auto extraction of building information and data blending through Symbiotic Data Platform ( <b>B1</b> ). Eastman et al. (2011);	Personal energy use is not simulated and predicted. Eastman et al. (2011); Reddy (2012);
Knowledge of building system design.	BIM Execution Plan (BEP0)	Building Energy code verification ( <b>B2</b> ). Eastman et al. (2011);	There is a gap between simulation results and real-live operation figures. Reddy (2012);
Navigation, handling and review capability of 3D models in energy tools.	Quality Assurance/ Quality Control (QA/ QC)	Time and cost-saving through automatic model information retrieval and multi-criteria decision analysis for energy management ( <b>B3</b> ). ; Gong et al. (2019)	Funding immediate cost of thermal building materials proposed for energy optimisation. Eastman et al. (2011);

Manage model LODs – received at different project stages.	Software	Optioneering and optimisation through scenario simulations (comparative analysis) <b>(B4)</b> . . Eastman et al. (2011);	Technology disconnect and ability to utilise the tools. Ramaji et al. (2020); Stumpf et al. (2011); Sattler et al. (2019);
Stakeholder collaboration.	Role and Responsibility	Assist in lifecycle cost analysis and reduction <b>(B5)</b> . . Eastman et al. (2011);	Lack of tool interoperability with other applications at defined project stages. Eastman et al. (2011); Ramaji et al. (2020); Sattler et al. (2019); Lin et al. (2010);
Certification requirements.	Software	Modelling documentation for building rating certification <b>(B6)</b> .	Lack of direct feedback loop between EA tools and design native tools. Eastman et al. (2011); Lin et al (2010);
EA Modelling .	Knowledge of EA input	Predictive analysis of outcome capability and blending BIM data with real-time Information <b>(B7)</b> . Birgonul (2021)	Input assumptions are variable. (Author)

137

138

## 2.2 INFORMATION SHARING AND LOSS

139

Laine and Karola (2007) consider that BIM methodologies enable re-using information across

140

the whole building lifecycle. This paper considers this information flow a set of rules, represented

141

as non-graphical or graphical data objects within process maps. Dawood and Vukovic

142

(2015) explain that lifecycle information flow needs the adoption of the "project DNA "and

143

advocate the four pillars of BIM as People, process, policy, and technology, highly

144

interdependent. Design practitioners who do not consider energy analysis may lose the

145

opportunity to make informed decisions on developed improved designs that can provide better

146

energy savings over the lifecycle of a building. However, one of the challenges of the EA

147

concerning architectural design models is the transfer of information from architectural design

148

models to energy modelling tools. For example, parametric properties embedded in design

149

authoring tools are often not readable in some EA tools. The different sets of information required

150

for the EA include general information such as building form, orientation, window size,

151

construction materials, weather data (location set), energy and thermal systems, set-points, and

152

use patterns (internal loads). Despite the efforts to make data available in a common data

153

environment, there is a need to produce information in formats that value the succeeding building

154

design and construction stages and other BIM Uses within the project lifecycle prone to

155 information loss (Figure 1 Dawood and Vukovic, 2015); this also occurs within a single stage due  
 156 to exchanging information from different software applications to others, as described in table 2.

157

158  
 159

**Table 2: Energy Modelling Details and LOD**

Design Phase	LOD (CIC, 2013)	AIA (2013)	DETAIL INCREASE	ENERGY MODELLING DETAILS	ME	ID
<b>Preparation and Brief</b>	Brief (1)	LOD 100		Site location, preliminary positioning, preliminary massing, layout (locate rooms & volumes), special requirements, performance standards (natural ventilation, temperature range), schedules, statutory requirements, user profiles. Gerrish et al. (2019); Osello, et al. (2011); Capper et al. (2012)		
<b>Concept Design</b>	Concept (2)	LOD 200	Building type e.g School	Geometry, dimensions, elevations, massing, size, form, volumes, orientation, master plan, preliminary material specification, target U-Values, glazing ratio for facades, shading depth & height, thermal mass, preliminary services specification. Lin et al. (2010); Gerrish et al. (2019); Osello, et al. (2011); Capper et al. (2012)	x	x
<b>Developed Design</b>	Developed Design (3)	LOD 300	Systems, e.g. External walling	Definite window size/shape/location, materials, accurate location on-site & orientation, correct building envelopes, compact surface areas, accurate building services, the numbering of elements, ceiling, voids, plant location & size, duct size. Capper et al. (2012); Gerrish et al. (2019),	x	x
<b>Developed Design</b>	Developed Design (3)	LOD 350		Detailed model. Gerrish et al. (2019),	x	x
<b>Technical Design</b>	Production (4)	LOD 400	Element, e.g. Cavity wall	Construction details, daylighting & artificial lighting strategies & controls, date, specification of products, definite contract, maintenance strategy. Gerrish et al. (2019)	x	x
<b>Construction Handover</b>	Installation/as constructed (5)	LOD 500	Materials, e.g., Brick	As-built validated model. Gerrish et al. (2019)	x	x
<b>ID: Information Drop; ME: Model Exchange</b>						

160  
 161

### 162 2.3 MODEL INFORMATION DEVELOPMENT

163 There are different file formats for data transfer and exchange within a BIM environment and EA  
 164 tools, as IFC, OSB, HTML, XHTML, bcXML, gbXML and ifcXML (Ramaji et al., 2020; Volk



165 et al., 2014; BuildingSmart, 2010). These include whole building, space/zone, and building  
166 elements and materials; data interoperability is fundamental to inform the design, and this  
167 exchange needs to continue along the building life span (Bort et al., 2013), and the simplification  
168 of the number of formats to be used allow a seamless process (Ramaji et al., 2020). Chang and  
169 Hsieh (2020) describe how interoperability within a BIM platform remains a substantiated  
170 limitation towards achieving an optimised BPA. Lewis, Valdes-Vasquez, and Clevenger (2019),  
171 in their e-survey, found no correlation between the green building stakeholders' perception of the  
172 value of Information from BIM into energy simulation and their engagement level towards BIM  
173 and energy simulation, which shows a lack of stakeholders' involvement. Sattler et al. (2019)  
174 highlighted the importance of interoperability needs. These include accessing, re-using, checking,  
175 retrieving, linking, and combining data and data hubs. Maile et al. (2013) described some  
176 challenges while exporting data into the IFC data model. These include the missing space  
177 boundaries; missing spaces; incorrect space volume; duplicate objects; missing exterior walls;  
178 misalignment of space and building element; incorrect second level of space boundaries; column  
179 dislocation; incorrect normal vector direction; and so on, impacting the accuracy and reliability  
180 of the information that needs to be checked and fixed.

181 Process mapping and business process modelling are a range of techniques to study the as-is  
182 state of an industrial process and to analyse the improvements or adaptations needed to  
183 implement new technology (Van der Aalst, 2013). Business Process Model and Notation  
184 (BPMN) is a widely adopted mapping process used to define and conceptualise the construction  
185 industry's processes and reflect on the technology and methodology changes required by the  
186 BIM adoption (Penn State, 2012).

187  
188 Missing data from BIM when dealing with EA includes weather conditions and characteristics,  
189 occupancy and activity schedule, specific material properties for energy and simulation, etc  
190 (Katranchukov et al., 2014). **Error! Reference source not found.** provides some existing details

191 for energy modelling with BIM. However, these are rarely available in one document, and  
192 correlation among energy modelling detail and LOD or LOI is seldom found.

193

194

## 195 **2.4 REQUIREMENTS FOR EA INFORMATION EXCHANGE**

196 interoperability issues in the process of information exchange lead to information loss and  
197 inconsistencies (Kamel and Memari, 2019). Lin et al. (2010) noted four solutions towards the  
198 challenge of information exchange during EA within a BIM-enabled project. These are: 1) the  
199 use of Industry Foundation Class (IFC) format files that allows information exchange between  
200 different applications, but there are limitations related to the maturity of the information  
201 exchanged for EA; 2) The application of standalone EA tools. These require more man-hours time  
202 towards modelling becoming more expensive; 3) embedded EA tools require native file  
203 applications to have EA capability or ability to exchange information to other applications they  
204 own. This solution could remove interoperability challenges, but there is a need for the  
205 applications to provide more detailed EA; 4) Green Building XML schema (gbXML) allows  
206 information transfer across building models. It also contains heating and cooling data within the  
207 gbXML file structure, which is important for Heating Ventilation, and Air Conditioning (HVAC).  
208 Some limitations are present as, after the information exchange through gbXML, some  
209 information is lost or modified. For example, a wall assembly information set in the defined BIM  
210 model is exchanged with default data adjusted manually when required. After simulation through  
211 gbXML, any parameters edited cannot be exported back into the native BIM model. Zanni et al.  
212 (2014) identified three important EA lifecycle drivers to consider for effective model sharing.  
213 These are 1) Level of Detail required for sharing information; 2) interaction with the client at each  
214 stage, and; 3) format of input and output. Table 3 show various requirements from various sources  
215 that call for the need for standardised requirements readily available.

216

217  
218  
219  
220

**Table 3: Modelling Requirements for EA**

<b>BIM USE CASE</b>	<b>FOCUS</b>	<b>SOURCE</b>	<b>CONSIDERATIONS DURING DESIGN AUTHORIZING FOR EA PURPOSES</b>
<b>Energy Analysis Modelling</b>	Coordination View	CoBIM (2012)	Remodelling is required if the requirements of the energy analysis modelling are not met. Requirements include: The IFC exchanged files should have the coordination view (between the architect, structural, and MEP designer).
	Surface and Opening Definition	BuildingSmart (2010) Yin and Lee (2019)	SB add-on view (defines space surfaces and their connection to structures, openings, etc.). Challenge of exporting curved walls and lacking wall thickness.
	Energy Flow Estimation	Statsbygg (2013)	SB is used to estimate energy flow between spaces
	Coordination	Berlo and Papadonikolaki (2016)	There should be only one IfcProject object per file (no more, no less); There should be only one IfcSite object per file; All objects should be linked to an IfcBuildingStorey object; There should be at least one IfcBuildingStorey in the dataset; The naming of the building storeys should be consistent and in order, i.e. floor-numbers; and so on
	Linking Light to Spaces	BuildingSmart (2010)	Space Boundary Levels (SBL) are required to be defined, there are different SBL for different BIM Use case
	Linking Services to Spaces	Statsbygg (2013)	Structured modelling with the alignment of space and its services
	Generic Recommendation	Maile et al. (2013).	Building elements with proper geometry, Model-checking for quality purposes, Building elements need proper material definitions Adaption of IFC2x4 Spaces must be completed enclosed Avoid spatial overlapping, duplication of building elements.
	Object Library	Choi and Kim (2015)	The use of object library to increase accuracy
	Multi level LOD	Singh and Geyer (2020)	Parametric uncertainty in a multi-LOD approach. Define LOD should be adopted.

221 Soust-Verdaguer et al. (2017) described the challenge of material properties and data exchange.  
222 There is insufficient data on material properties that the energy modeller might have to conduct  
223 manually at the initial project stages. Gerrish et al. (2017) described storage of (HVAC) systems  
224 details or spatial geometries in both EA and BIM tools as possible; however, the method of

225 information storage is not standardised, causing incompatible transfer of data. They found  
226 explored the application of LOD's during EA. Andriamamonjy et al. (2019) stated that  
227 assumptions during EA are not communicated or documented.

228 GSA (2015) stated that consistent creation or editing of models is difficult; it needs to be  
229 simplified to accommodate the modeller's understanding, knowledge, and resources; this brings  
230 subjectivity to the process. However, several literature sources and organisations such as  
231 BuildingSmart provide modelling requirements for EA to enable better lifecycle information  
232 flow. For example, some considerations and recommendations are illustrated in Table 3, such as  
233 using IFC exchange files that could facilitate information re-use throughout the building lifecycle.  
234 In addition, the literature suggests that a technology change requires a change in methodologies  
235 and processes. The BIM use related to Energy modelling involves a set of particular problems  
236 that have been enunciated. These make necessary the development of standard process maps  
237 adapted to the topic (BuildingSmart, 2010). In this paper, the new process maps for Energy  
238 modelling BIM use are developed to sort the disruptions and information loss that happens within  
239 and with other BIM uses across the building lifecycle information flow.

## 240 **2.5 GAPS WITHIN EA PROCESS MAPS**

241 Over the years, several process maps have been developed. However, Table 4 illustrates some  
242 limitations in existing process maps, such as linking EA requirements to EIR. These will allow  
243 the energy modeller and the architectural design team to make informed decisions before  
244 developing the models and perhaps reduce the need for model rework during the EA process.  
245 Various research (Penn State (2010); Zanni et al. (2014); Asmi et al. (2015); Laine and Karola  
246 (2007)) which developed EA Process maps required the model to be modified before EA, due to  
247 the interoperability challenges. Furthermore, the required level of LOD can be clearly stated.  
248 However, a lower level of LOD is required for EA. Ramaji et al. (2020) described imported IFC

249 models as planar query elements, aggregation of spaces and voids (possible openings) in  
 250 applications such as open studios.


251 **Table 4:** Gaps in existing EA process maps

Reference	Model Adjustment Required	LOD during Model Exchange	Linking EA Requirements to EIR	Client Team Review
Penn State (2010)	X	NA	X	NA
Liebich, et al. (2011)	X	NA	NA	NA
2011	X	NA	X	X
Zanni et al. (2014)	X	X	X	NA
Asmi et al. (2015)	X	NA	NA	X
Laine and Karola (2007)	NA	NA	NA	NA
Jalaei and Jrade (2014)	X	NA	NA	NA
Gerrish et al. (2017)	X	X	NA	X
Pinheiro et al. (2018)	X	NA	NA	NA
Ying and Lee (2019)	X	NA	NA	NA
Ramaji et al. (2020)	NA	NA	NA	NA
Authors developed EA Process map	X	X	X	X
Note: It is noteworthy to highlight that the existing EA process maps above do not focus on the entire stages. However, they are limited to a defined context study focus.				

252

253 **3. METHODOLOGY**

254 This research grounds on existing processes for EA and BIM in the AEC industry. The paper aims  
 255 to identify drivers that facilitate information flow within the developed EA process maps. This  
 256 methodology is described in Figure 1 and focuses on developing an EA process map through the  
 257 workshop involving multiple tasks (literature review, brainstorming exercise, and input from  
 258 industry expert review). The same experts participated in the workshop activities. The existing  
 259 EA Process maps, such as Penn State maps, were explored during the study. In addition, the  
 260 Business Process Model Notation (BPMN) method was adopted. Several process models for the  
 261 building construction industry were developed using the BPMN, which captures the exchange of  
 262 information between actors in a business process (Underwood & Isikdag, 2010).

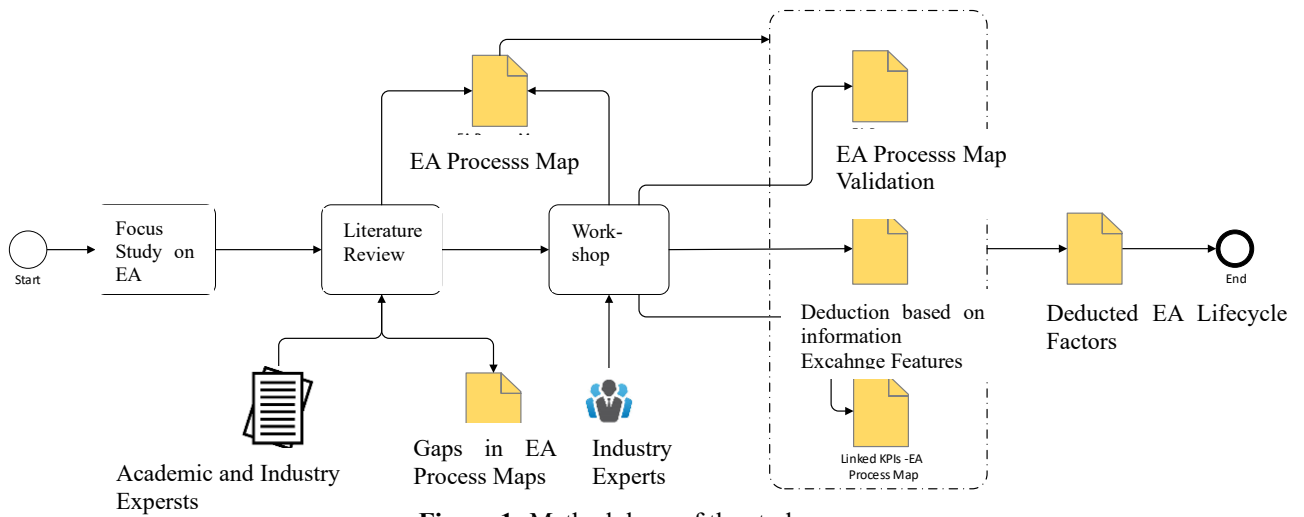

**Figure 1:** Methodology of the study

263  
264  
265

266 2- A workshop with six industry experts was conducted (see table 5). The workshop included the  
267 EA Process map validation process, the deduction of KPIs, and the linking of KPIs to develop  
268 the process maps. The workshop participants included a sustainability consulting organisation; a  
269 leading virtual construction organisation, and an energy software vendor. There were two  
270 participants from each organisation, with a minimum of ten years of BIM working experience.  
271 Each review lasted for about 45-60 minutes in each of the three sessions. The process consisted  
272 of collecting primary data (qualitative analysis); presenting and reviewing the process maps, and  
273 final reviewing the process maps.

274

**Table 5:** Workshop participants

ORGANISATION TYPE	JOB TILE	YEARS OF EXPERIENCE	WORKSHOP
Energy Software Vendor-	Regional Manager	10	3 sessions
Energy Software Vendor-	Project Manager	10	3 sessions
Sustainability Council	Head of Sustainability	30	3 sessions
Sustainability Council	Research Assistant	20	3 sessions
Design Consultancy	Head of Operations	20	3 sessions
Design Consultancy	BIM Manager	10	3 sessions

275

276 The chosen validation method for the EA process map adopted a collaborative process mapping  
277 and modelling through the workshop. For example, the Kit process was adopted with three steps  
278 and allowed a feedback loop between industry experts and researchers, as described in Figure 2.  
279 First, the research collects information from the industry experts and processes it. Later, the


280 researchers provided the industry expert with the inference from the previous meeting, and further  
 281 adjustments were made in a feedback loop until the adequate output was achieved. Three KPIs  
 282 were deduced from the identified from the literature review and the industry experts. 4- A Focus  
 283 review with industry experts was conducted to align the KPIs with relevant benefits that could  
 284 lead to relevant lifecycle information. Kerzner (2015) defined the KPIs characteristics as Specific,  
 285 Measurable, Attainable, Realistic, and Time-based (SMART) were adopted. 5- The KPIs were  
 286 aligned with information flow features; Demian and Walters (2013) described five KPI's features  
 287 for information flow studied by Tribelsky and Sacks (2010). These are:

288 **Information Object**- components of a building such as walls; information attribute-technical and  
 289 management features such as colour, dimensions, and materials;

290 **Information Package**- a document used for the communication and transfer of information such  
 291 as 2D drawings, spreadsheet, and email exchanges.

292 **Information batch** - A collection of information packages transferred by a project participant  
 293 simultaneously.

294 **Project Action** – a project participant acts to share information with one or more stakeholders.

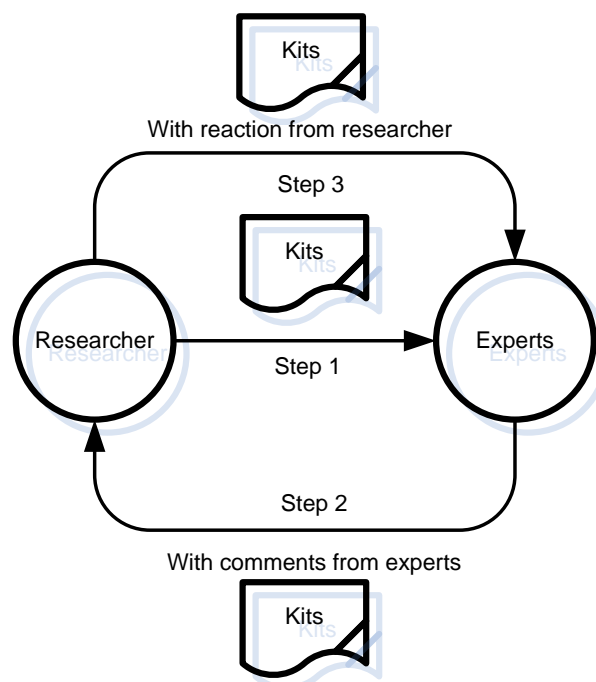

312 **Figure 2:** KITS Process for developing EA process map

313 The validations of the EA process map are achieved using three-floor institutional buildings  
314 using VE IES software application (IES); afterwards, the KPI'S and determinants were deducted  
315 from the generated maps. The KPIs with lifecycle information flow capability is considered as  
316 lifecycle drivers for this study. These were identified through industry expert reviews. The  
317 workshop in this study allows the achievement of 1- EA process map; 2- EA process map  
318 validation; 3- deducted KPI's based on information exchange features; 4- Linked KPI's to EA  
319 process map; and 5- Deduction of EA lifecycle factors.

320

#### 321 **4. THE DEVELOPED PROCESS MAPS**


322 The development of the EA process map was based on existing process maps developed by  
323 Penn State (2012). In addition, the study conducted reviews and revisions based on the industry  
324 experts' input. The developed EA process map has 22 tasks, as illustrated in Figure 3; it was  
325 designed to identify relevant KPIs that would facilitate lifecycle information flow to allow other  
326 BIM Uses to be conducted without Information and model rework while promoting EA. The  
327 map is focused on Schematic Design Stage but would accommodate slight changes as the  
328 project stages progress for a range of construction and infrastructure projects after adaptation.  
329 In addition, the tasks within the EA process map in Figure 3 would slightly vary at the different  
330 project stages as building Information and LOD increase. **Error! Reference source not found.**  
331 shows how information detail used for EA increases as the project stages evolve from the  
332 schematic to the construction stage; this indicates that the process map could vary in different  
333 projects and between different phases. EA is conducted after the Concept Design (CD) stage,  
334 at the Schematic Design (SD) stage, and later project stages. The main differences between  
335 stages relate to the LOD, i.e., LOD 200 is adopted for the SD stage, while LOD 300 is adopted  
336 for the Detailed Design (DD) stage. Therefore, a lower LOD is preferable for EA. An energy  
337 consultant from the design team can conduct the EA. However, when required, the energy



338 consultant from the client side can achieve a further review of the EA. The map allows the  
339 client energy consultant to review and audit the project energy consultant input and results. The  
340 BIM coordinator acts as merely as an administrator in this case. However, the client energy  
341 target set in the EIR and BEP can be reviewed against the energy consultant results.

342 Two steps are elaborated in the high-level EA process map, as shown in Figure 3. First, prepare  
343 for energy analysis (Energy Consultant); and conduct energy simulation analysis (Energy  
344 Consultant). This process starts with adjusting the energy consultant's energy analysis model  
345 and is reviewed by the BIM coordinator to document what was done. Then, the BIM model is  
346 adjusted and exported. *Exchange Requirement (ER) Energy Analysis Input 1* is added when  
347 preparing for energy analysis. While *ER Energy Analysis Input 2* is achieved when adjustments  
348 are made after *ER Energy Analysis Input 1*. The energy simulation is conducted using Energy  
349 Tariff, Weather Data, and Analysis Method. The *ER Energy Analysis Results* are produced and  
350 reviewed against the *EA Project Requirement*. If results are acceptable, the energy consultant  
351 prepares to submit Energy BIM Model that contains performance and modification for  
352 improvements are suggested in the *Energy Analysis Report*. The BIM coordinator discusses the  
353 energy consultant's *ER Energy Analysis Result* with the client's energy consultant to decide if  
354 the client's energy analysis is required. If no, then *ER Energy Analysis Result* and Report are  
355 provided to the cost consultant. If yes, the BIM coordinator forwards the *ER Energy input 2* and  
356 *ER Energy Analysis Result* to the client's energy consultant, who conducts an audit and  
357 compares their results with the energy consultant's findings. The client's energy consultant  
358 provides a report to the cost consultant, who provides feedback to approve or disapprove  
359 analysis of the energy consultant based on cost implications. Figure 4 has 15 tasks; it starts with  
360 adjusting the model for energy analysis by aligning work structure to Client energy aspiration  
361 defined in the EIR.

362 The architect obtains building spaces, and a Project Space Type Library is created using the  
363 Industry Space Type Library. In the meantime, the MEP consultant/ contractor creates the  
364 Project Construction Type Library using the Industry Construction Type Library. These  
365 combined define the ER Energy Analysis Input 1. Next, the energy consultant customises the  
366 Construction Type Library and the Space Type Data. Further inputs before achieving ER Energy  
367 Analysis Input 2 include assigning energy targets, window glazing and opening, space use  
368 intensity, and coordinating spaces and systems. The process described in Figure 5 has 20 tasks;  
369 it starts with loading design with Weather Data and Energy supply and demand features. Then,  
370 optimisation between supply and demand is conducted to achieve optimum performance.  
371 Before working, the Simulation Analysis Method, as described in the BIM Execution Plan, is  
372 adopted. The Energy Tariff is added, and simulation output is recorded as ER Energy Analysis  
373 Results.

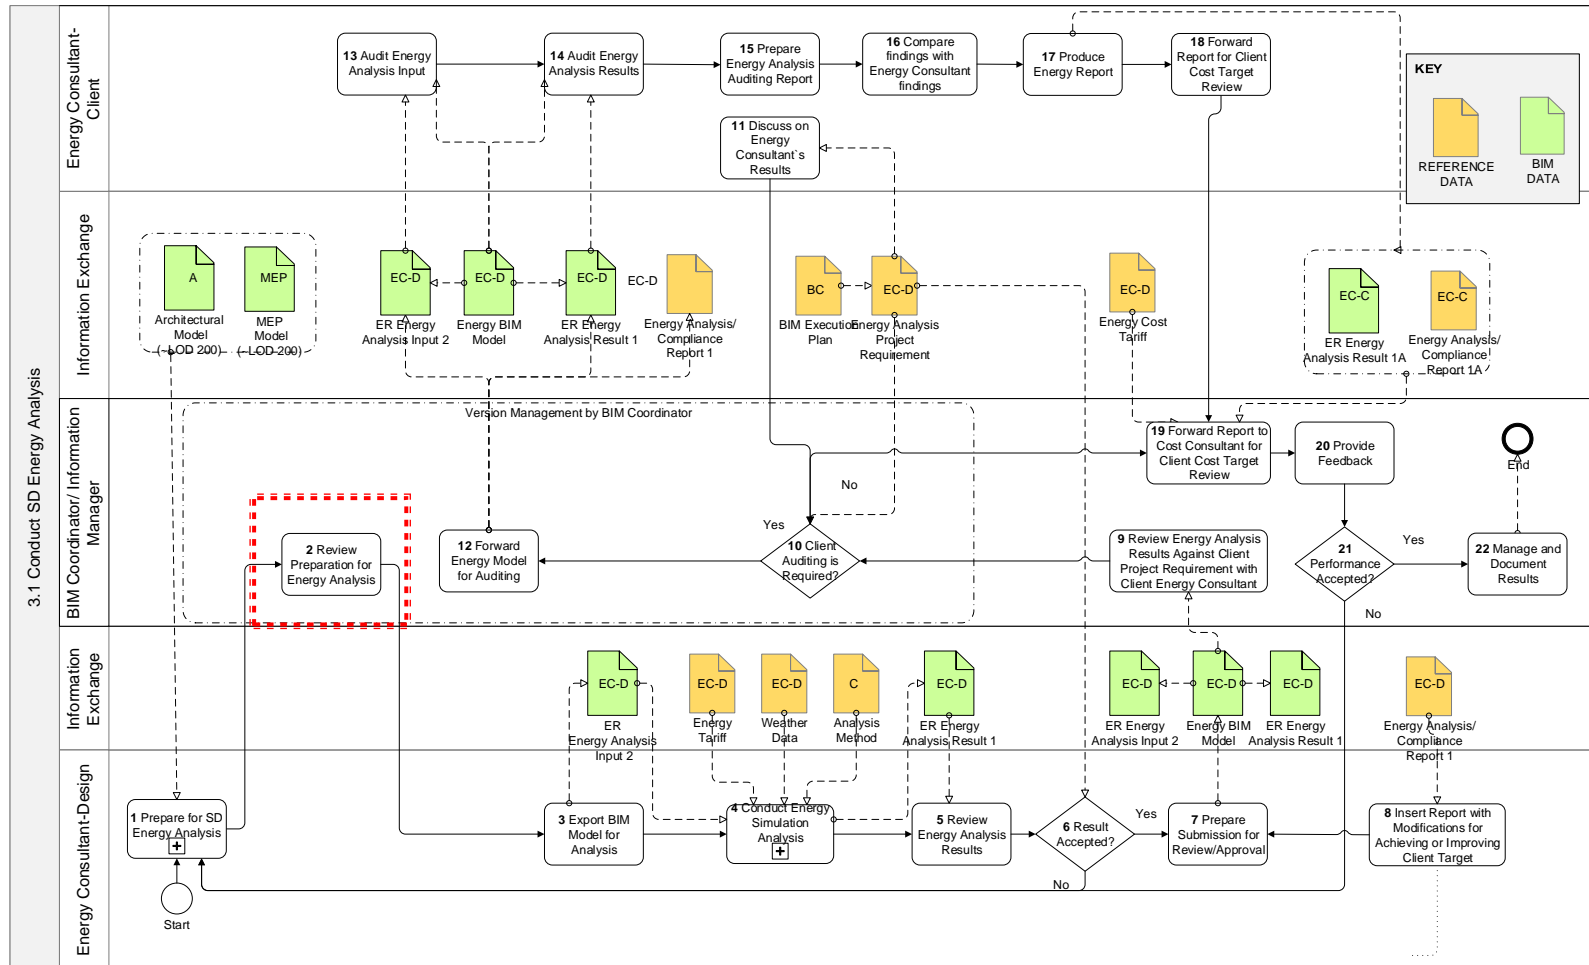


**LEGEND:**  
 A: Architect; MEP: Mechanical, Electrical and Plumbing; O: Others; BC: BIM Coordinator; EC-D: Energy Consultant Design; EC-C: Energy Consultant Client; C: Client

**ENERGY REPORT**  
 Energy Report has Two Documents:  
 1. Performance reached and  
 2. Modification for improvements

374

375


**Figure 3: EA Process at Schematic Design Stage**

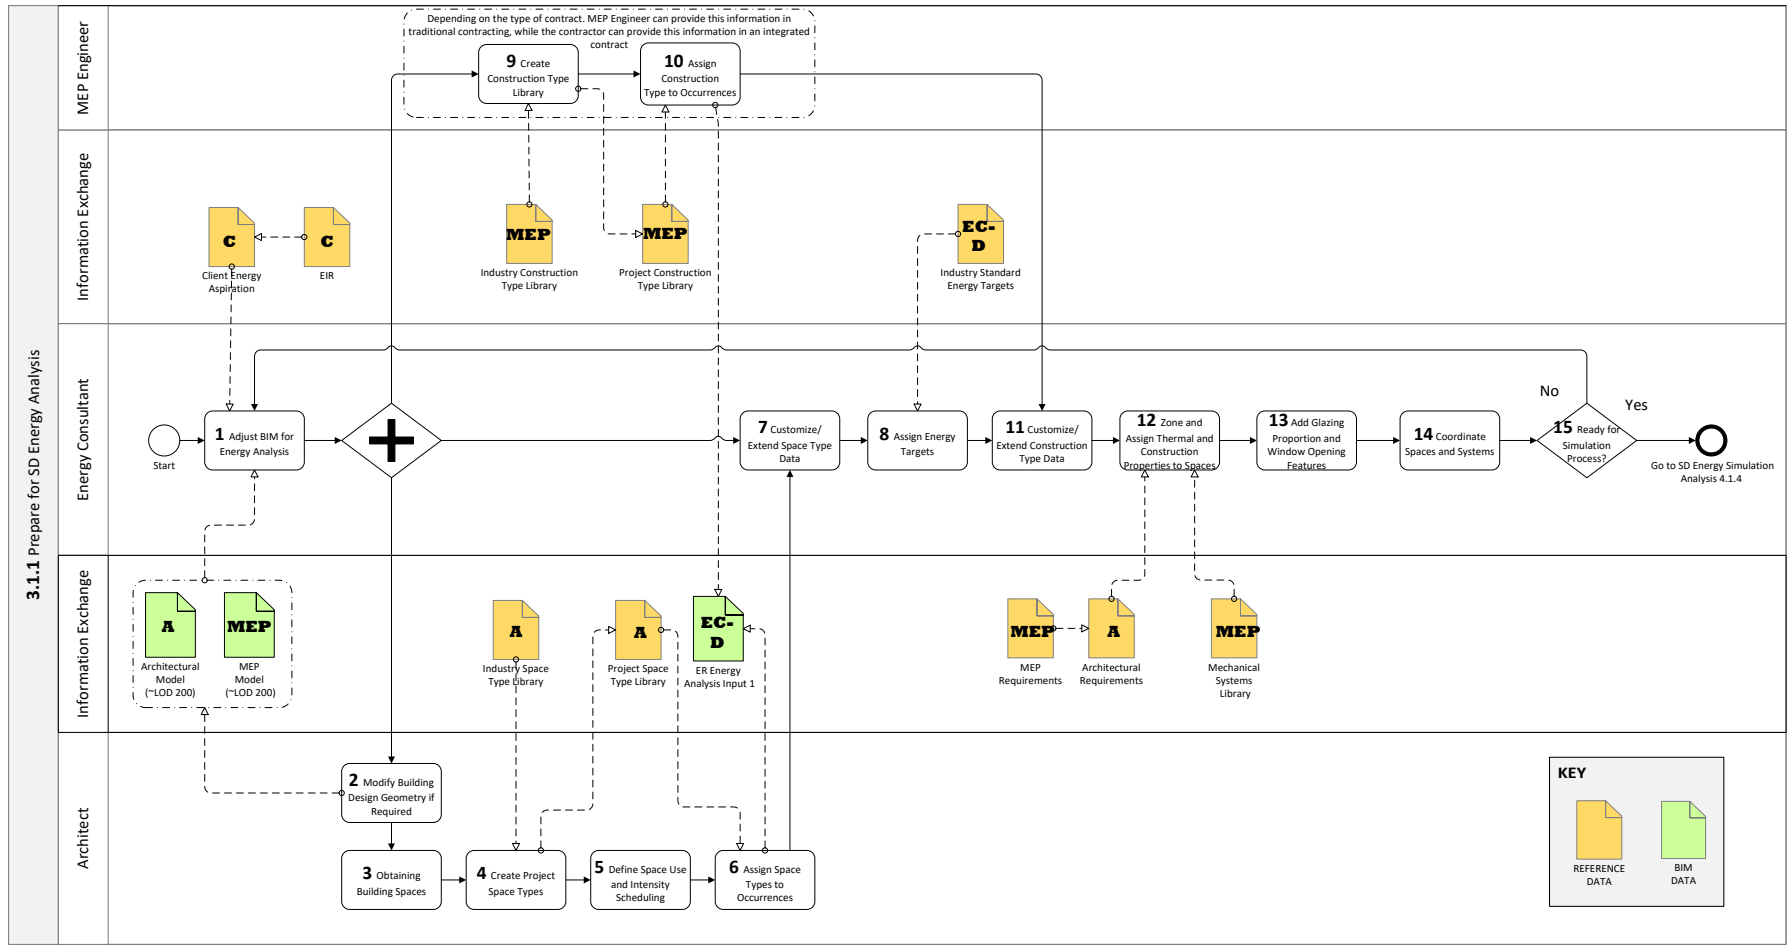

**LEGEND:**  
 A: Architect; MEP: Mechanical, Electrical and Plumbing; BC: BIM Coordinator; EC-D: Energy Consultant Design; C: Client

**Figure 4: Preparing for Schematic Design EA process**

376  
 377  
 378  
 379  
 380

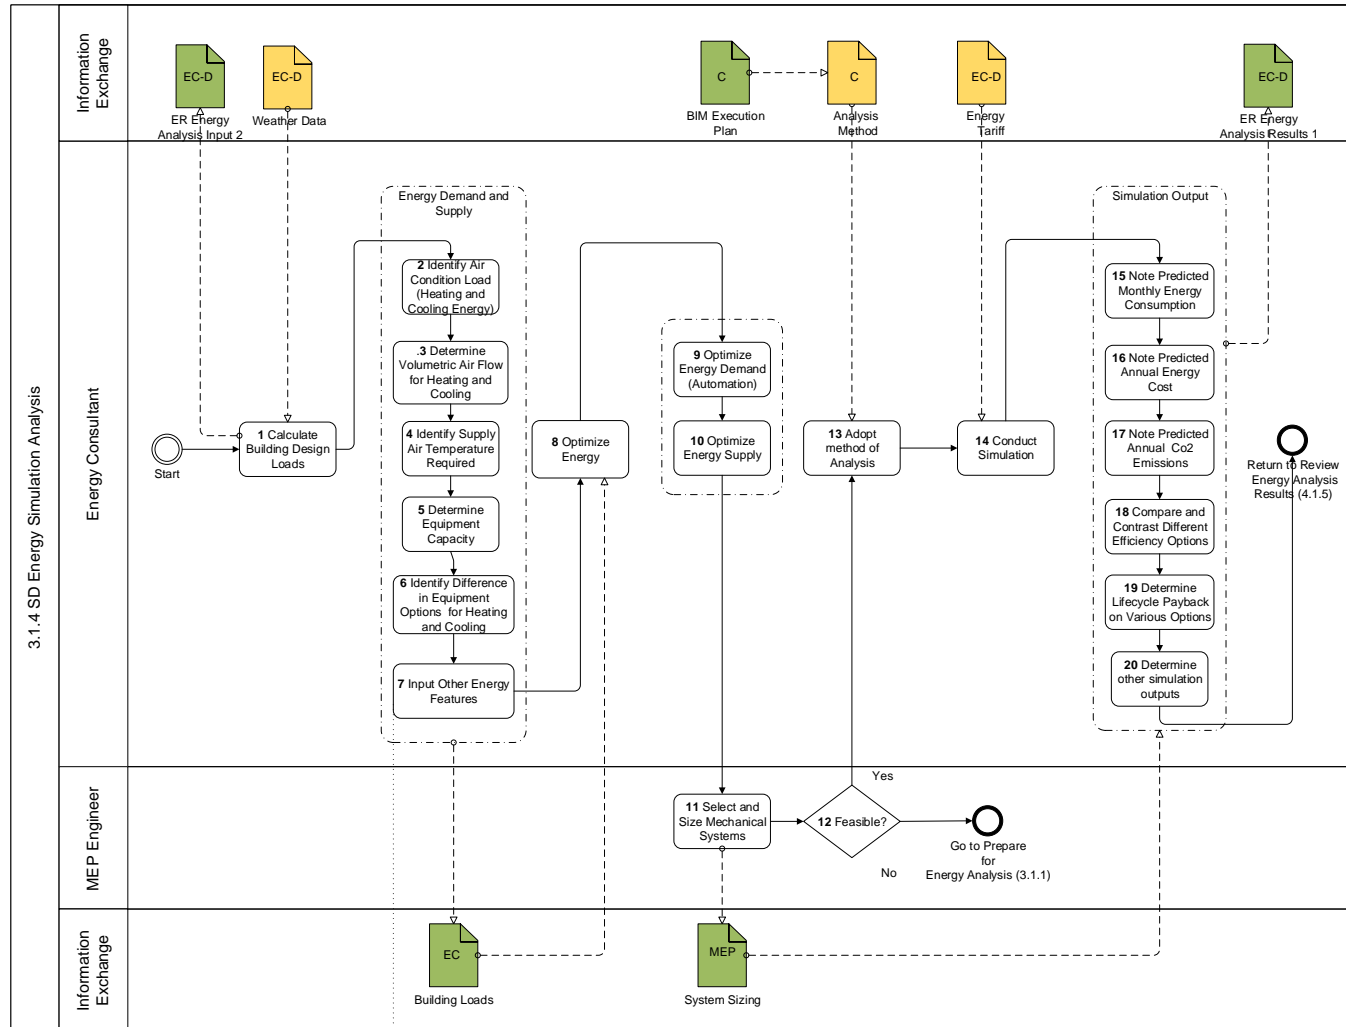

**LEGEND:**  
 MEP: Mechanical, Electrical and Plumbing; BC: BIM Coordinator; EC-D: Energy Consultant Design; C: Client

**OTHER ENERGY FEATURES INPUT**  
 These may include indoor air quality, humidity, noise filtering, material emissions, pollutant concentrations and so on

381  
382

**Figure 5: Schematic Design Energy Simulation Analysis**

#### 383 **4.1 EA Process map Validation**

384 The process maps were developed based on a reference template (Penn State, 2012) with additional  
385 complexity and definition. It was validated based on a case study project (two storeys institutional  
386 building); different software vendors validated the maps. However, IES software was used for the  
387 validation process due to availability.

#### 388 ***Description of Task: Map 3.1.1; Task 1***

390 Task 1: Adjust BIM model for Energy Analysis

391 Model requirements of the EA are considered during the Design Authoring stage; the EA modeller  
392 adds all requirements that cannot be met. The BIM model is adjusted to suit the Energy Analysis  
393 software solutions selected for the project. IES was chosen for the energy analysis. Figure 6 illustrates  
394 Task 1- the BIM model adjusted in Revit before exporting it to IES. The architect can configure the  
395 features, such as location, weather, and site for daylight and other analysis in Revit. However, weather  
396 information is added when the model is exported. Architectural building spaces are categorised as  
397 *Rooms* in Revit; they are analysed for clashes through *analytical surfaces*. Rooms that need to be  
398 revised are identified; this shows that the architect can adjust the model in a design authoring tool  
399 (Revit) before forwarding the model to the energy consultant. BIM use and requirements should be  
400 stated in the EIR for early decision-making towards reduced model rework.

#### 401 ***Description of Task: Map 3.3.4; Task 14***

402 Task 14: Note predicted monthly energy consumption

403 There are several factors to consider towards forecasting the energy consumption of a building. These  
404 include weather information. Figure 7 describes Task 14. Weather data information within the gulf  
405 region shows cooling is required almost throughout the year. As the weather readings show, May,  
406 June, July, and August are the hottest periods, which require a large amount of energy for cooling. In  
407 addition, the readings show no energy use between 01.30 to 07:30; and 17:30 to 23:30 as the building  
408 is out of service.

409 ***Description of Task: Map 3.3.1; Task 11***


410 Task 11: Customise/extend construction type data

411 The EIR can provide the necessary construction type data to be adopted at the early stages. However,  
412 individual constructions that are not fully defined within the project construction type library may be  
413 updated. These could be created by editing/updating/ customising existing elements in the library.  
414 Elements created are then saved in the project construction type library. Figure 8 describes Task 11.  
415 Construction type data can be edited using the *edit construction* option as shown. In addition, the  
416 construction type for each room can be edited for each building element.


417

418

# Map 3.1.1

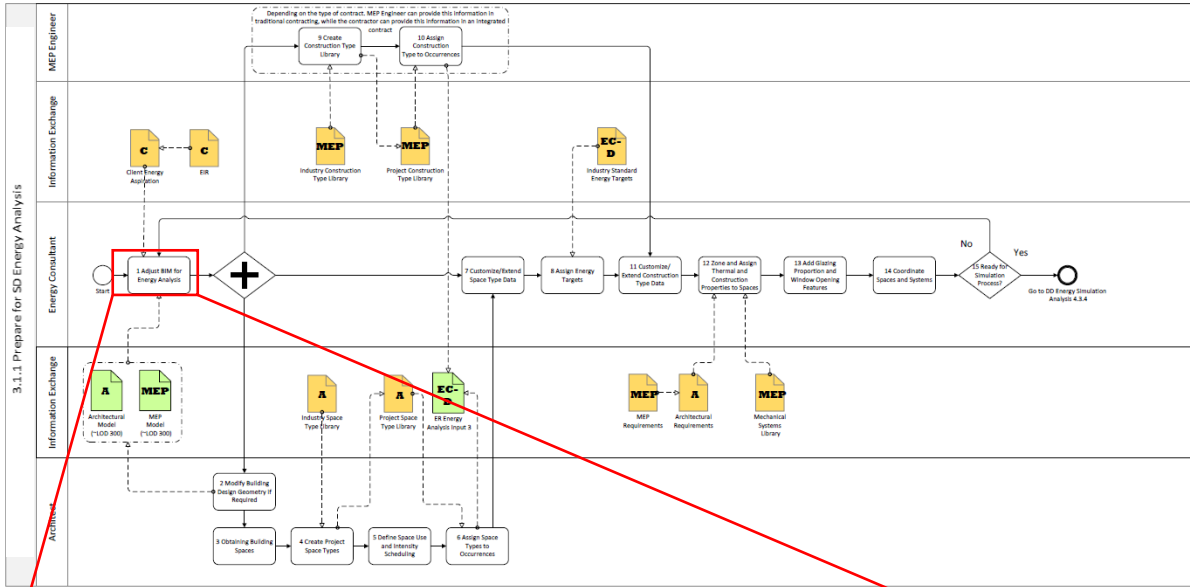

## Task 1

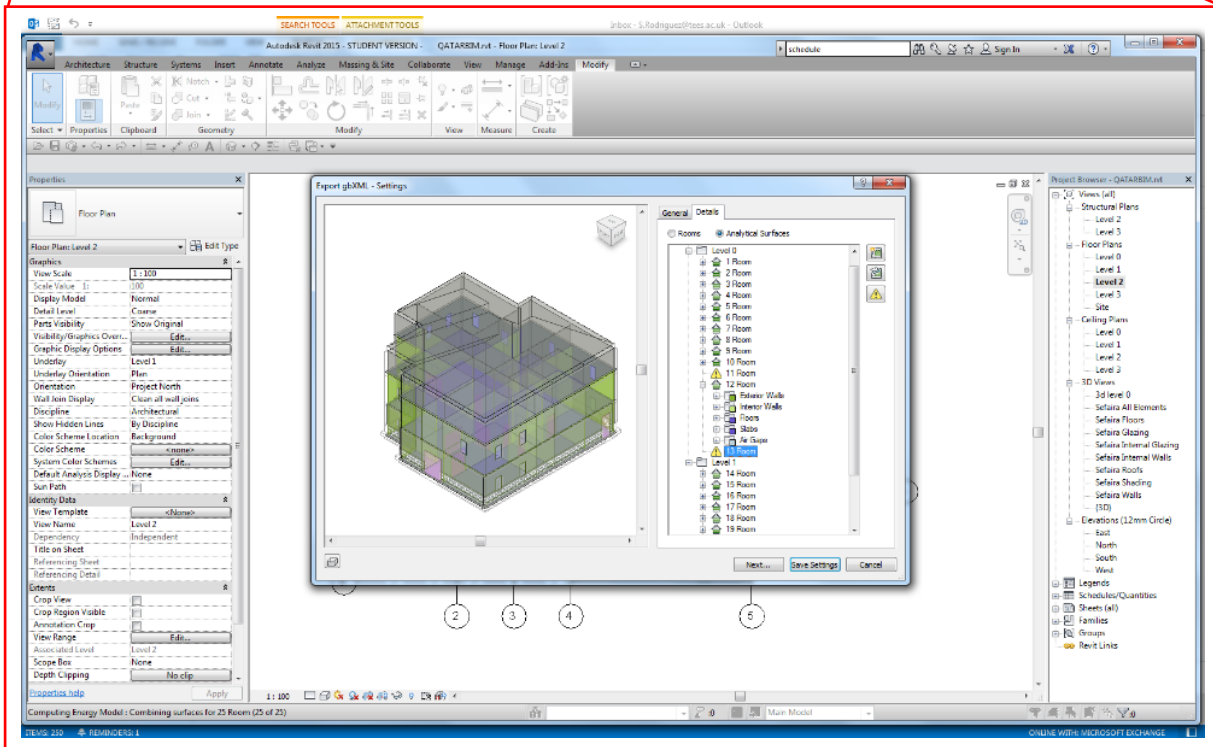

419


420

Figure 6: Validation adjusting of the BIM models during preparation

421



# Map 3.1.1

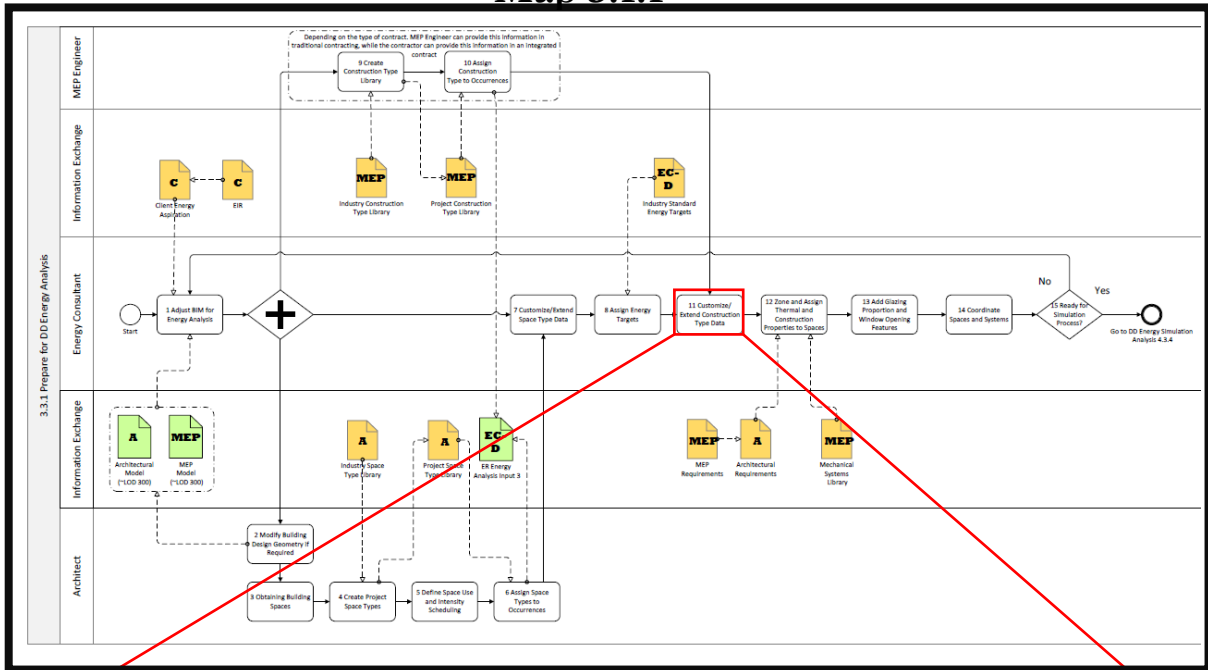

## Task 11


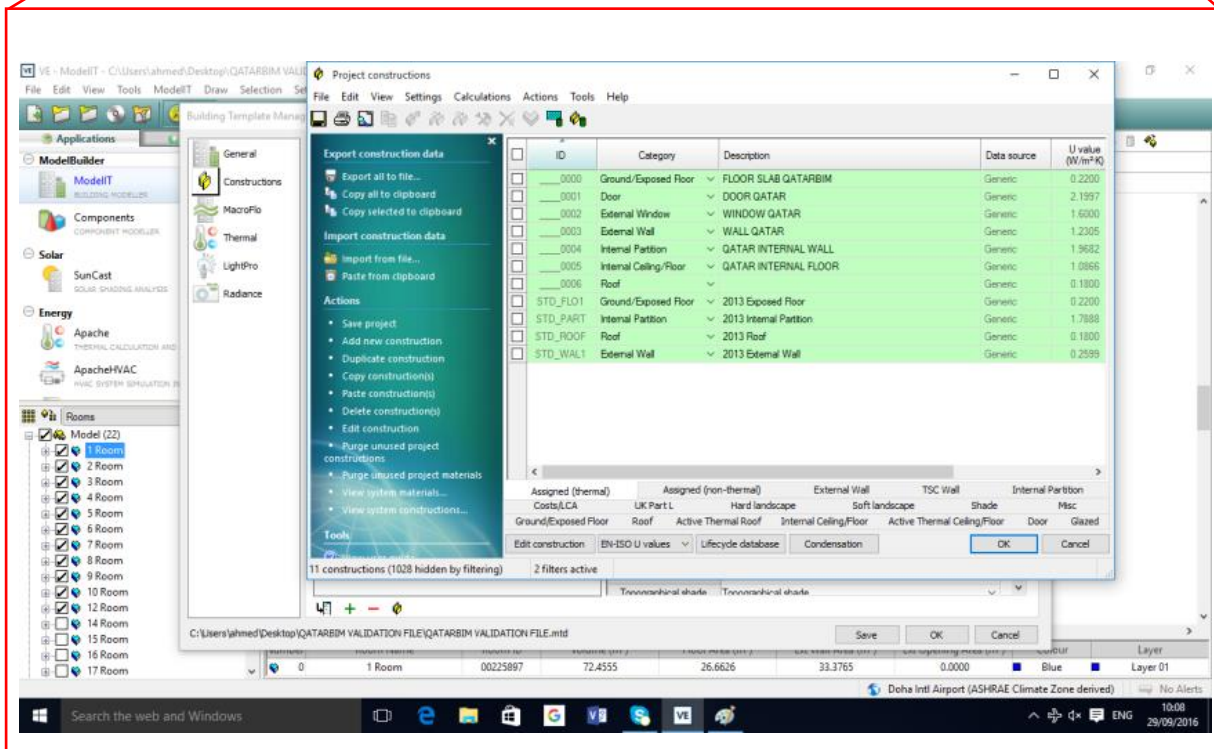


Figure 7: Validation- Construction type data

422  
423  
424  
425

### Map 3.1.4

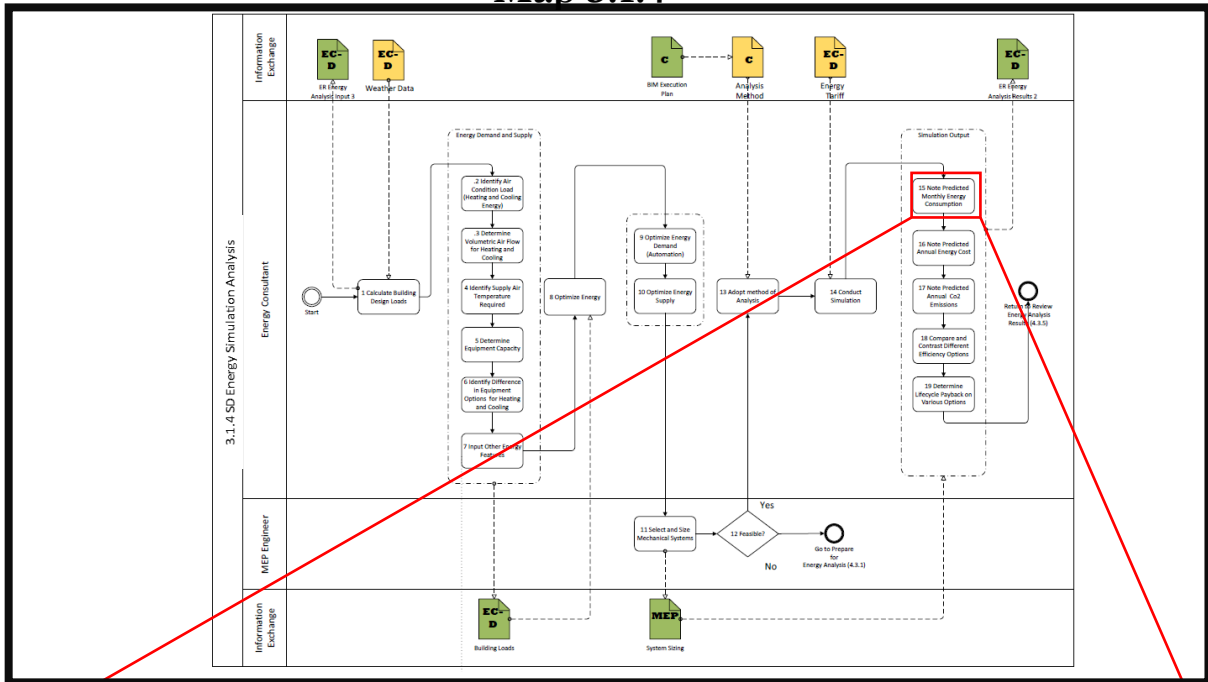

### Task 14

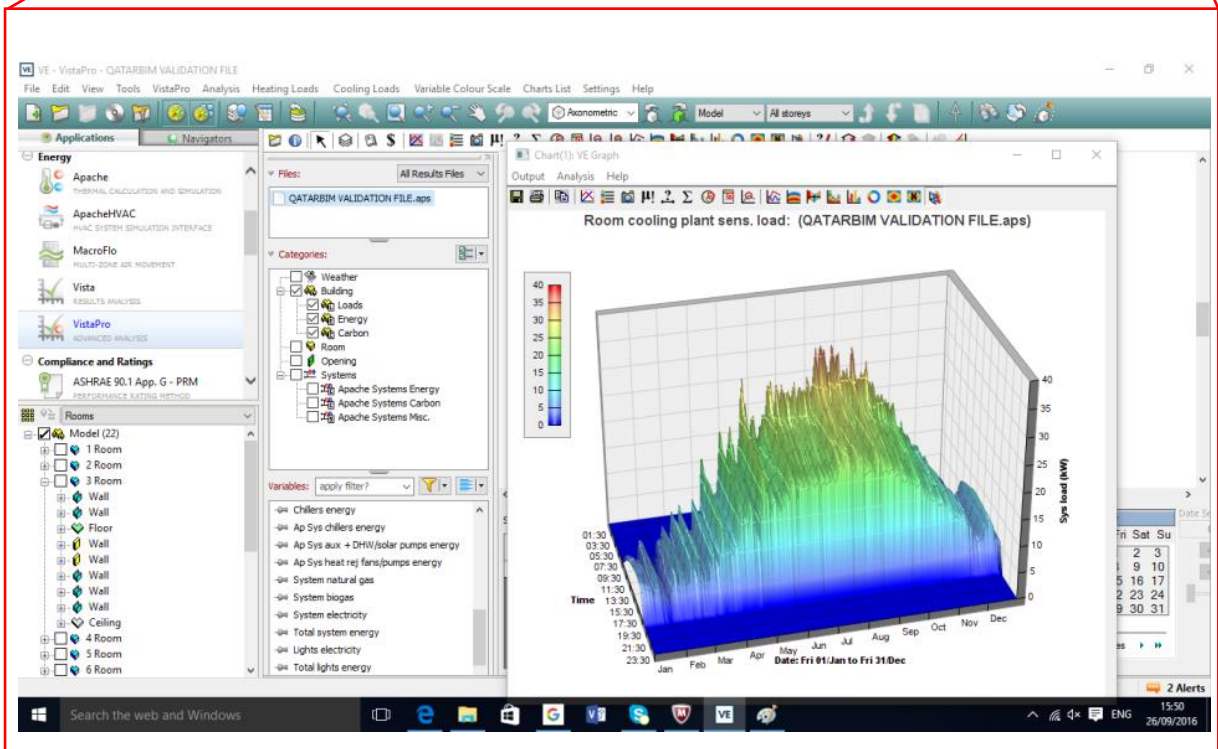


Figure 8: Validation- Predict Monthly Energy Consumption

426  
427  
428  
429  
430

## 431 **4.2 CONSIDERATION FOR THE EA PROCESS MAPS**

432 The introduction of the client's energy consultant allows the work of the design energy consultant to  
433 be reviewed. A cost consultant is introduced for client target review. The BIM coordinator manages  
434 the versioning of information within the process. The Energy Report has two documents: Performance  
435 reached and modification for improvement. When loading the design before conducting energy  
436 simulations, it is noteworthy to note that there are other inputs (energy features) apart from energy  
437 and supply. These include indoor air quality, humidity, noise filtering, material emissions, pollutant  
438 concentrations, etc. Energy consultants should be introduced early in the building stages; otherwise,  
439 valuable input would be lost to save costs and improve facility performance during facility  
440 management and operation. Findings show that adjusting the model for EA is the most challenging  
441 feature of the EA process. Assumptions and frequent design changes updated centrally are  
442 automatically updated and can be shared, thus reducing rework.

443 The items added to the developed EA process map include:

- 444 • The cost of EA proposals is reviewed against the client requirement, as shown in Figure 3  
445 step 19.
- 446 • The appropriate steps within the process maps that would allow performance management  
447 and assessment of EA.
- 448 • The EIR should contain all the EA requirements that allow lifecycle information flow, as  
449 shown in Figure 4, step 1.
- 450 • The Client Team is introduced to cross-check to ensure that EA requirements are adopted in  
451 Figure 3 (map 3.1, step 2).
- 452 • Depending on the type of contract (traditional/ integrated), the MEP engineer provides  
453 information on construction type library, as shown in Figure 4 step- eleven
- 454 • The identified activities are organised and managed by the information manager.

455 **5 DEDUCTION OF KPI's BASED ON INFORMATION FLOW**

456 The relevance of the identified KPI's was indicated through the application of information flow  
 457 features. **Table 6** proposes the alignment of information flow features described by Demian and  
 458 Walters (2013) with proposed EA KPIs. The frequency of occurrences of the different KPIs would  
 459 vary from project to project. These could be tabulated within a defined time scale or project stage.  
 460 The KPIs can facilitate the outcomes that would enable effective and efficient EA. The benefits of  
 461 Energy Analysis are described in Table 1. The KPIs have been categorised as local and determinates.  
 462 The *local KPIs* are considered factors directly linked to the process maps, while determinates are  
 463 considered factors that can indirectly enhance the data flow from the process maps. For example, the  
 464 KPI: *Time required to adjust the imported model for Energy Analysis* is not directly lifted from the  
 465 process map. However, the task is stated as an adjusted Model for EA. If it takes a long time to adjust,  
 466 the model is problematic in its native file. As a result, adjusting time is considered a measure of  
 467 adequate information sharing between the Design Authoring team and the EA modeller. **Table 6** show  
 468 KPIs and their relevant output nature and information flow feature to better understand the KPIs.

469 **Table 6:** EA Process Map KPIs and Information Flow features

INFORMATION FLOW FEATURES	INPUT/ OUTPUT	ENERGY ANALYSIS (EA) PROCESS MAP KPIs	KPI OUTCOME
Information Object	Input	No. LOD model adjustment required per model exchange (Reducing unnecessary detailing) (Expert review)	Model Adjustment
Information Attributes	Input	Raised Revisions Rate during EA	Information Iterations
	Output	Revision Rate during EA	
Information Packages	Input	No. Available but unused information files	Information Redundancy
	Output	% Information shared on a Centralised platform	Stakeholder collaboration
	Output	% Annual Energy Emission Reduction towards Client Target	Simulation Projections
	Output	% Annual Energy Cost Savings towards Client Target	Simulation Projections
Information Batch	Output	No. Prepared Energy Reports (performance and modification report)	Energy Reporting
Project Action	Input	The time required to adjust the imported model for Energy Analysis	Model Adjustment
	Output	% Stakeholders using compatible applications	Information Exchange

471

472 **5.1 LINKED KPI's WITH EA PROCESS MAPS**

473 The identified KPI's were filtered based on information flow features; however, there is a need to sift  
 474 through other criteria further. **Table 7** shows a possible alignment of identified KPIs with proposed  
 475 EA process maps. All the KPIs identified met the KPI SMART criteria based on the workshop  
 476 participants.

477 **Table 7: Linking Energy Analysis Process Map with identified\ KPIs. ( (**

ENERGY ANALYSIS MAP ALIGNED WITH KPIs								478	
Energy Analysis Process Map	MAP REFERENCE	TASKS	LOCAL KPIS/ DETERMINANTS	S	M	A	R	T	
	3.1	4	% Stakeholders using compatible applications Adapted from Won et al. (2013)	x	x	x	x	x	
	3.1	3	% EA information shared on a centralised platform (CIC, 2012)	x	x	x	x	x	
	3.1.1	1	Time required to adjust the imported model for Energy Analysis (CIC, 2012)	x	x	x	x	x	
	3.1.1	1	No. LOD model adjustment required per model exchange (Reducing unnecessary detailing) (Expert review)	x	x	x	x	x	
	3.1.4	17	% Annual energy emission against client target (Expert review)	x	x	x	x	x	
	3.1.4	16	% Annual energy cost saving against client target (Expert review)	x	x	x	x	x	
	3.1	20	Raised Revisions Rate during EA. Adopted from Demian and Walters (2013)	x	x	x	x	x	
	3.1	20	Revision Rate during EA. Adopted from Demian and Walters (2013)	x	x	x	x	x	
	3.1	22	No. Available but unused information files. Adopted from Demian and Walters (2013)	x	x	x	x	x	
	3.1	22	No. Prepared Energy Reports (performance and modification report). Adopted from Demian and Walters (2013)	x	x	x	x	x	
S: Specific M: Measurable A: Attainable R: Realistic/ Relevant T: Time-based								490	

**5.2**

491 **OBSTACLES CONCERNING INFORMATION FLOW**

492 **Table 8** shows possible obstacles related to the adoption of the process maps. These could be  
 493 considered by EA consultants to make better and informed decisions during the process. The five  
 494 obstacles have been identified from the EA process maps through the expert review. The primary

495 industry challenge highlighted is exchanging information from design teams to EA teams without  
 496 modelling further rework modeling. Lin et al. (2010) observed two possible options towards model  
 497 management. These are traditional and BIM-enabled. Traditionally the design and energy team have  
 498 separate models that are expected to be identical. However, the energy model was developed after the  
 499 design team had exchanged their model with the energy team (non-synchronised model). EA in a  
 500 BIM-enabled project allows developing a synchronised model that can be exchanged between the  
 501 design and energy team. However, it may require certain model adjustments to be compatible with  
 502 EA. Model changes proposed by the energy modeller are provided to the design team as feedback.  
 503 These have to be manually adjusted to the design models in their native file formats. Some  
 504 development is taking place within commercial vendors where native files are integrated with EA  
 505 capability. For example, AutoDesk Revit and Nemetschek ArchiCad can be used for both Design  
 506 Authoring and EA simulation.

507 **Table 8:** EA Process Map with Information Flow Obstacles  
 508

THEME	Input/ Output	DESCRIPTION OF EA PROCESS MAP INFORMATION FLOW OBSTACLES
<b>MODEL GUIDELINES</b>	Input	Non-availability of widely accessible energy modelling guidelines during Design Authoring
<b>MODEL ADJUSTMENT</b>	Input	The energy modeller would waste critical time on adjusting the model
<b>MODEL BI-EXCHANGE</b>	Output	The model used for EA is challenging to export back to the native files to communicate (feedback) directly with the design team. Manual updating required
<b>MODEL LOD</b>	Input	Higher LODs are not recommended for EA
<b>MODEL COORDINATION</b>	Output	The stakeholders involved need to coordinate their models to reduce rework

509

### 510 **5.3 EA LIFECYCLE DRIVERS**

511 The lifecycle drivers are deducted from the KPI/ Determinants relevant to the developed process map.  
 512 The six industry experts in the workshop facilitated the deduction of the KPIs with aligned EA benefits  
 513 and possible lifecycle information flow capability. The relevant KPIs identified in **Table 9** to facilitate  
 514 lifecycle information flow are managing large model file handling (scalability). The percentage of  
 515 information shared on a centralised platform could indirectly facilitate lifecycle information flow.

516 The percentage of stakeholders using compatible applications can simplify lifecycle information flow  
 517 directly. Other factors are related to the interoperability of software adopted. XML allows for  
 518 interoperability, but there are limitations due to its *flat-file* format that cannot account for data  
 519 generated during operational building management (Gerrish et al., 2015). Another challenge is the  
 520 one-way information exchange between the design authoring team and Energy consultant due to  
 521 interoperability. There is a need for IFC BIM models ready for energy simulations.

522 **Table 9:** Relationship between KPIs, EA benefits and LC

BIM Use	Local KPI/ Determinant	B1	B2	B3	B4	B5	B6	B7	LC
<b>Energy Analysis</b>	% EA models files shared within the defined file size (scalability)	x	x	x	x	x	xx	x	x
	% Stakeholders using compatible applications	xx		x	x	x	x		xx
	% Information shared on a centralised platform				xx	xx	x		x
	The time required to adjust the imported model for Energy Analysis			xx	x	x			
	No. LOD model adjustment required per model exchange (unnecessary detailing)	x	x	xx	x	x			
	% Annual energy emission against client target				x	xx	xx	xx	
	% Annual energy cost saving against client target				x	xx	xx	xx	
	No. Prepared Energy Reports (performance and modification report)				xx	xx	xx	x	
	No. Available but unused information files								
	Raised Revisions Rate during EA	x		x	x				
	Revision Rate during EA	x		x	xx				
Indirect Benefits: X; Direct Benefits: XX; Benefits (Design Authoring): B; KPIs towards Life Cycle information flow drivers: LC									

523

524 **6. FINDINGS AND DISCUSSION**

525 The study focuses on analysing EA tools for lifecycle information flow used for facility management  
 526 and facility operation. Six industry experts participated in the study, including two participants from a  
 527 defined energy software Vendor, a digital construction management consultant, and a sustainability  
 528 organisation. They participated in developing and validating the generated process maps. Furthermore,  
 529 supported the process of deduction of the KPIs from the process maps and alignment with possible  
 530 lifecycle features was achieved in the workshop. However, due to the gaps identified in Table 4, existing  
 531 process maps could not be adopted without adjustments. These include the need for client review, LOD  
 532 adjustment, and linking EA requirements to the EIR.

533 However, it is essential to highlight that the developed process maps do not fit all but can be adjusted  
534 to meet individual organisation setups. Furthermore, the quality of information input into the process  
535 will yield a similar output. Designers with limited EA understanding can benefit from the project's  
536 outcome. The developed KPIs used to assess its applicability towards information exchange would  
537 facilitate performance design and operation tasks for energy and cost savings.

538 The EA process map was developed to indicate KPIs that could facilitate lifecycle information flow  
539 within the tasks of the developed process maps. The KPIs meet the SMART criteria (Kerzner, 2015)  
540 and are linked to the developed process maps. The nature of the KPIs is described in terms of  
541 information flow, as illustrated by Demain and Walters (2013). At the same time, the KPI outcome  
542 shows related feature categories such as model adjustment, simulation, information exchange, etc. This  
543 information would enable a better understanding of EA and help improve information flow to reduce  
544 the possible loss of information during information exchange between architectural designers and  
545 energy modellers.

546 Within the eleven KPIs identified, only three had lifecycle information flow capability. The percentage  
547 of EA models files shared within the defined file size (scalability) - *indirect benefit*; the percentage of  
548 stakeholders using compatible applications- *direct benefit*; and the percentage of information shared on  
549 a centralised platform – *indirect benefit*.

550 In addition, some obstacles to the EA process have been identified; they are categorised under Model  
551 Guidelines- lack of universal standards; Model Adjustment- EA model conduct model rework before  
552 model use; Model Bi-Exchange- EA modeller changes have to be manually applied to architectural  
553 design models; Model Lod- high level of LoD makes the model more complex for EA; Model  
554 Coordination- stakeholders need to coordinate and manage their models to reduce rework. Hitchcock  
555 and Wong (2011) indicated that dominant vendors perceive better business cases for developing  
556 embedded energy analysis tools within their native products format rather than participating towards



557 the adoption of robust data exchange with third-party tools and stakeholders. In addition, the main  
558 challenge is the robust transformation of thermal view space boundary geometry.

559 Assumptions are made to improve the lifecycle information flow; they should be automatically updated  
560 and shared centrally. Furthermore, frequent design changes should be updated centrally to reduce  
561 rework. Model changes proposed by the energy modeller are provided to the architectural design team  
562 as feedback. These must be manually adjusted to the architectural design models in their native file  
563 formats, as EA tools are incompatible with native authoring tools.

## 564 **7. CONCLUSION**

565 EA is vital for facility management and operations (lifecycle) cost and emission management.  
566 Information is essential for effective stakeholder decision-making, adhering to project cost, time,  
567 quality, and client satisfaction. The EA process map developed has taken into account the practical  
568 implications of industry best practices. The proposed EA maps are founded on existing EA processes  
569 available in the literature. The maps indicate the introduction of the information manager/ BIM  
570 coordinator to manage information shared within the process; when input and output formats are  
571 standardised and managed, information can be shared with other BIM Use consultants within a  
572 construction project. The study proposed eleven KPIs for assessing the quality of the EA process maps.  
573 The KPIs have met the SMART criteria and are aligned to the developed EA maps, as shown in **Table**  
574 **7**. The proposed KPIs are categorised under defined information flow categories, as shown in **Table 6**.  
575 The proposed KPIs are also expected to help achieve the defined benefits of EA and lifecycle  
576 information flow. As illustrated in Table 9, three are expected to simplify lifecycle information flow  
577 within the eleven KPIs identified. These are handling large-size models (scalability), centralizing shared  
578 information, and using compatible applications to enable users to access or re-use information without  
579 recreating existing data, which could lead to loss of information. Furthermore, the use of standardised  
580 object and material libraries can further simplify information exchange during EA.

## 581 **8. REFERENCES**

582 Abrishami, S., Goulding, J. and Rahimian, F. (2021), "Generative BIM workspace for AEC conceptual  
583 design automation: prototype development", *Engineering, Construction and Architectural  
584 Management*, Vol. 28 No. 2, pp. 482-509. Available at: <https://doi.org/10.1108/ECAM-04-2020-0256>  
585 (accessed 20 November 2021).

586 Ahmad, A. M., Hafeez, M. A., Rodriguez, S., Vukovic, V., Naji, K., Dawood, N. N. (2016).  
587 Investigating the use of BIM models for BIM work streams in traditional construction contracting in  
588 Qatar in Cheng, Dawood and Kuang (eds) *Proceedings of the 16th International Conference on  
589 Construction Applications of Virtual Reality*. Hong Kong University of Science and Technology.  
590 Kowloon, Hong Kong. 11-13 December 2016. Available at: <https://doi.org/10.13140/RG.2.2.31311.59049>  
591 (accessed 20 November 2021).

592 Ala-Juusela, M., Crosbie, T., & Hukkalainen, M. (2016). Defining and operationalising the concept of  
593 an energy positive neighbourhood. *Energy Conversion and Management*, 125, 133–140. Available  
594 from: <https://doi.org/10.1016/j.enconman.2016.05.052> (accessed 20 November 2021).

595 Andriamamonjy, A., Saelens, D., Klein, R. (2019). A combined scientometric and conventional  
596 literature review to grasp the entire BIM knowledge and its integration with energy simulation, *Journal  
597 of Building Engineering*, Volume 22, pp. 513-527, ISSN 2352-7102. Available from:  
598 <https://doi.org/10.1016/j.jobe.2018.12.021>. (accessed 20 November 2021).

599 Asmi, E., Robert, S., Haas B. and Zreik, K. (2015). A standardised approach to BIM and energy  
600 simulation connection, *International Journal of Design Sciences and Technology*, 21:1 pp. 59-82.  
601 Available from: [https://www.researchgate.net/profile/Sylvain\\_Robert2](https://www.researchgate.net/profile/Sylvain_Robert2) (accessed 20 November 2021).

602 Azhar, S, Brown, J and Farooqui, R. (2009). BIM-based Sustainability Analysis: An Evaluation of  
603 Building Performance Analysis Software, 45th ASC Annual Conference. Available from:

604 [https://www.researchgate.net/publication/237835268\\_BIM-](https://www.researchgate.net/publication/237835268_BIM-)  
605 [based\\_Sustainability\\_Analysis\\_An\\_Evaluation\\_of\\_Building\\_Performance\\_Analysis\\_Software.](#)  
606 (accessed 20 November 2021).

607 Baldwin, A.N. Austin, S.A. Hassan, T.M. and Thorpe, A (1999) Modelling information flow during the  
608 conceptual and schematic stages of building design, *Construction Management & Economics*, 17:2,  
609 155-167. Available from: <https://doi.org/doi:10.1080/014461999371655> (accessed 20 November 2021).

610 Barlish, K. and Sullivan, K. (2012) 'How to measure the benefits of BIM — A case study approach',  
611 *Automation in Construction*, 24, pp. 149–159. Available from: <https://doi.org/10.1016/j.autcon.2012.02.008>  
612 (accessed 20 November 2021).

613 Liebich, T., Stuhlmacher, K., Katranuschkov, P., Guruz, R., Nisbet, N., Kaiser, J., Hensel, B., Zellner,  
614 R., Laine, T., Geißler, M. -C. (2011). HESMOS Deliverable D2.1: BIM Enhancement Specification,  
615 ©HESMOS Consortium, Brussels. Available from:  
616 [http://www.ectp.org/fileadmin/user\\_upload/documents/E2B/HESMOS/HESMOS\\_WP02\\_D02\\_1\\_Final.pdf](http://www.ectp.org/fileadmin/user_upload/documents/E2B/HESMOS/HESMOS_WP02_D02_1_Final.pdf) (accessed  
617 20 November 2021)

618 Bort, B., Geißler M.-C., Guruz R., Jonas F., Woudenberg, W. (2013). HESMOS Deliverable D9.2.2:  
619 Recording evidence on benefits and costs [final specification], © HESMOS Consortium, Brussels.  
620 Available from:  
621 [http://e2b.ectp.org/fileadmin/user\\_upload/documents/E2B/HESMOS/HESMOS\\_WP09\\_D09\\_2\\_2\\_Final.pdf](http://e2b.ectp.org/fileadmin/user_upload/documents/E2B/HESMOS/HESMOS_WP09_D09_2_2_Final.pdf) (accessed  
622 20 November 2021).

623 BuildingSmart (2010). IFC Implementation Agreement Space Boundary; Overview on common  
624 agreements for implementing Space Boundaries. Available from:  
625 [https://standards.buildingsmart.org/MVD/RELEASE/IFC2x3/TC1/SB1\\_1/IFC%20Space%20Boundary%20Implementa](https://standards.buildingsmart.org/MVD/RELEASE/IFC2x3/TC1/SB1_1/IFC%20Space%20Boundary%20Implementa)  
626 [tion%20Agreement%20Addendum%202010-03-22.pdf](#) (accessed 20 November, 2021).

627 Birgonul, Z. (2021), "A receptive-responsive tool for customizing occupant's thermal comfort and  
628 maximizing energy efficiency by blending BIM data with real-time information", *Smart and Sustainable*  
629 *Built Environment*, Vol. ahead-of-print No. ahead-of-print. Available from: [https://doi.org/10.1108/SASBE-](https://doi.org/10.1108/SASBE-11-2020-0175)  
630 [11-2020-0175](https://doi.org/10.1108/SASBE-11-2020-0175) (accessed 20 November 2021)

631 Capper, G, Matthews, J. and Lockley, S. (2012). Incorporating embodied energy in the BIM process.  
632 In: CIBSE ASHRAE Technical Symposium, 18 – 19 April 2012, Imperial College, London, UK.  
633 Available from: <https://www.cibse.org/knowledge/knowledge-items/detail?id=a0q20000008I703AAC> (accessed 20  
634 November 2021).

635 Chang Y.-T., Hsieh S.-H. (2020). A review of building information modelling research for green  
636 building design through building performance analysis *Journal of Information Technology in*  
637 *Construction*, 25, 1, 40. Available from: <https://doi.org/doi:10.36680/j.itcon.2020.001> (accessed 20 November  
638 2021).

639 Chahrour, R., Hafeez, M.A., Ahmad, A.M., Sulieman, H.I., Dawood, H., Rodriguez-Trejo, S., Kassem,  
640 M., Naji, K.K., Dawood, N.(2021). Cost-benefit analysis of BIM-enabled design clash detection and  
641 resolution. *Construction Management and Economics*, 39 (1), pp. 55-72. Available from:  
642 <https://doi.org/10.1080/01446193.2020.1802768> (accessed 26 November 2021)

643 Choi, J. and Kim, I. (2015). Development of an open BIM-based legality system for building  
644 administration permission services. *J. Asian Archit. Build. Eng.*, 14 (3) pp. 577-584 Available from:  
645 <https://doi.org/doi:10.3130/jaabe.14.577> (accessed 20 November 2021).

646 Choi, J., Lee, J., & Cho, J. (2018). Suggestion of the core element technology to improve BIM data  
647 interoperability based on the energy performance analysis. *International Journal of Grid and Distributed*

648 Computing, 11(4), 157–168. Available from: <https://doi.org/10.14257/IJGDC.2018.11.4.14> (accessed 20  
649 November 2021)

650 Choi, J., Shin, J., Kim, M., & Kim, I. (2016). Development of openBIM-based energy analysis software  
651 to improve the interoperability of energy performance assessment. *Automation in Construction*, 72, 52–  
652 64. Available from: <https://doi.org/10.1016/j.autcon.2016.07.004> (accessed 20 November 2021)

653 Crosbie, T., Dawood, N., & Dean, J. (2010). Energy profiling in the lifecycle assessment of buildings.  
654 *Management of Environmental Quality: An International Journal*, 21(1), 20–31. Available from:  
655 <https://doi.org/10.1108/14777831011010838> (accessed 20 November 2021).

656 Dakhil, A. and Al-Shawi, M. (2014). Building Information Modelling Benefits-Maturity Relationship  
657 from Client Perspective. *Information and Knowledge Management*, V. 4 (N0.9), pp 8- 16. ISSN 2224-  
658 5758 (Paper) ISSN 2224-896X (Online)

659 Dakhil, A., Underwood, J. and Al-Shawi, M. (2016). BIM Benefits-Maturity Relationship Awareness  
660 among UK Construction Clients. *Proceedings of the First International Conference of the BIM*  
661 *Academic Forum Held at Glasgow Caledonian University, Glasgow, September 13-15.* (ISBN –  
662 9781905866816

663 Dawood, N. and Vukovic, V. (2015). Whole Lifecycle Information Flow Underpinned by BIM:  
664 Technology, Processes, Policy and People. *International Conference on Civil and Building Engineering*  
665 *Informatics, Tokyo, Japan.* Available from: [https://www.semanticscholar.org/paper/Whole-Lifecycle-Information-  
666 Flow-Underpinned-by-and-Dawood- Vukovic/75cc7cf83865fd2130f8eba3e4002da6d69b719f](https://www.semanticscholar.org/paper/Whole-Lifecycle-Information-Flow-Underpinned-by-and-Dawood-Vukovic/75cc7cf83865fd2130f8eba3e4002da6d69b719f) (accessed 20  
667 November 2021).

668 Demian, P. and Walters, D. (2013): "The advantages of information management through Building  
669 Information Modelling ", Journal of Construction Management and Economics, 32, 12, pp. 1153-1165.  
670 Available from: <https://doi.org/doi: 10.1080/01446193.2013.777754> (accessed 20 November 2021).

671 Eastman, C. M., Teicholz, P., Sacks, R. and Liston, K. (2011). BIM Handbook: A Guide to Building  
672 Information Modelling for Owners, Managers, Designers, Engineers and Contractors (2nd ed.).  
673 Hoboken, NJ: Wiley. ISBN-13: 978-0470541371; ISBN-10: 9780470541371

674 Farzaneh, A., Monfet, D. and Forgues, AD. (2019). Review of Using Building Information Modelling  
675 for Building Energy Modelling during the Design Process. Journal of Building Engineering. 23, pp 127-  
676 135. Available from: <https://doi.org/doi: 10.1016/j.apenergy.2019.01.032> (accessed 20 November 2021).

677 Gao, H., Zhang, L., Koch, C., & Wu, Y. (2019). BIM-based real time building energy simulation and  
678 optimization in early design stage. IOP Conference Series: Materials Science and Engineering, 556(1).  
679 Available from: <https://doi.org/10.1088/1757-899X/556/1/012064> (accessed 20 November 2021).

680 Gong, X., Michel, P. & Cantin, R. (2019). Multiple-criteria decision analysis of BIM influences in  
681 building energy management. Build. Simul. 12, 641–652. Available from: [https://doi.org/10.1007/s12273-  
682 019-0534-4](https://doi.org/10.1007/s12273-019-0534-4) (accessed 20 November 2021).

683 GSA (2015). Building Information Modelling (BIM) Guide 05 – Energy Performance. Accessed on  
684 09/09/2021; Available from: [https://www.gsa.gov/cdnstatic/GSA\\_BIM\\_Guide\\_05\\_Version\\_2.1.pdf](https://www.gsa.gov/cdnstatic/GSA_BIM_Guide_05_Version_2.1.pdf) (accessed 20  
685 November 2021).

686 Gerrish, T., Ruikar, K., Cook, M., Johnson, M. and Phillip, M. (2017), "Using BIM capabilities to  
687 improve existing building energy modelling practices", Engineering, Construction and Architectural  
688 Management, Vol. 24 No. 2, pp. 190-208. Available from: <https://doi.org/10.1108/ECAM-11-2015-0181>  
689 (accessed 20 November 2021).

690 Gustav Jansson., Jutta, Schade, and Thomas Olofsson. (2013). Requirements management for the  
691 design of energy efficient buildings, *Journal of Information Technology in Construction (ITcon)*, Vol.  
692 18, pg. 321-337. Available from: <http://www.itcon.org/2013/16> (accessed 20 November 2021).

693 Hafeez, M. A., Ahmad, A. M., Chahrour, R., Vukovic, V., Dawood, N., & Kassem, M. (2016). Principles  
694 and recommendations for client information requirements for BIM enabled construction projects in  
695 Qatar. *International Journal of Product Lifecycle Management*, 9 (3), pp. 198–218. Available from:  
696 <https://doi.org/doi:10.1504/IJPLM.2016.080503> (accessed 20 November 2021).

697 (Hitchcock, R.J and Wong, J. (2011). Transforming IFC Architectural View BIMs for Energy  
698 Simulation. *Proceedings of Building Simulation 2011: 12th Conference of International Building*  
699 *Performance Simulation Association*, Sydney, Australia, 14-16 November. Accessed 09/09/2021;  
700 Available from [http://www.ibpsa.org/proceedings/BS2011/P\\_1391.pdf](http://www.ibpsa.org/proceedings/BS2011/P_1391.pdf) (accessed 20 November 2021).

701 Jalaei F, Jade A (2014). Integrating Building Information Modelling (BIM) and Energy Analysis Tools  
702 with Green Building Certification System to Conceptually Design Sustainable Buildings, *Journal of*  
703 *Information Technology in Construction (ITcon)*, Vol. 19, pg. 494-519. Available from:  
704 <http://www.itcon.org/2014/29> (accessed 20 November 2021).

705 Jin, R., Zhong, B., Ma, L., Hashemi, A., & Ding, L. (2019). Integrating BIM with building performance  
706 analysis in project lifecycle. *Automation in Construction*, 106, 102861. Available from:  
707 <https://doi.org/10.1016/J.AUTCON.2019.102861> (accessed 20 November 2021).

708 Kamel, E., & Memari, A. (2019). Review of BIM's application in energy simulation: Tools, issues, and  
709 solutions. *Automation in Construction*, 97, 164-180 Available from:  
710 <https://doi.org/doi:10.1016/J.AUTCON.2018.11.008> (accessed 20 November 2021).

711 Katranuschkov, P., Scherer, R. J. Weise, M. and Liebich, T. (2014). Extending BIM for Energy  
712 Simulation and Design Tasks. Computing in Civil and Building Engineering, ASCE, 2014, pp. 625-  
713 632. Available from: <https://itc.scix.net/pdfs/w78-2014-paper-078.pdf> (accessed on 20 November 2021).

714 Kerzner, H. (2015). Project Management 2.0: Leveraging Tools, Distributed Collaboration, and Metrics  
715 for Project Success. Hoboken, New Jersey: John Wiley. ISBN: 978-1-118-99125-1

716 Kreider R., Messner J. (2013) The Uses of BIM: Classifying and Selecting BIM Uses, The Pennsylvania  
717 State University, Pennsylvania, United States. Available from:  
718 [http://home.fa.utl.pt/~franc/2020/the\\_uses\\_of\\_bim.pdf](http://home.fa.utl.pt/~franc/2020/the_uses_of_bim.pdf) (accessed 20 November 2021).

719 Laine, T., Hänninen, R., Karola, A. (2007) Benefits of BIM in the Thermal Performance Management.  
720 IBPSA 2007 - International Building Performance Simulation Association 2007, pp. 1455-1461.  
721 Available from: [https://www.aivc.org/sites/default/files/p785\\_final.pdf](https://www.aivc.org/sites/default/files/p785_final.pdf) (accessed 20 November 2021).

722 Lin E.S., Kensek, K. and Haymond, L. (2010). Analytical Building Information Modelling : What is  
723 the gap between BIM and Energy Simulation Tools' Performance Feedback Loops' Ecobuild  
724 Conference, 2021. Available from:  
725 [https://www.academia.edu/23748425/Analytical\\_building\\_information\\_modeling\\_What\\_is\\_the\\_gap\\_](https://www.academia.edu/23748425/Analytical_building_information_modeling_What_is_the_gap_between_BIM_and_energy_simulation_tools_performance_feedback_loops)  
726 [between\\_BIM\\_and\\_energy\\_simulation\\_tools\\_performance\\_feedback\\_loops](https://www.academia.edu/23748425/Analytical_building_information_modeling_What_is_the_gap_between_BIM_and_energy_simulation_tools_performance_feedback_loops) (accessed 20 November  
727 2021).

728 Osello, A., Cangiallosi, G., Dalmasso, D., Paolo, A. D., Lo Turco, M. and Piumatti, P. (2011).  
729 Architecture data and energy efficiency simulations: BIM and Interoperability Standards. Proceedings  
730 of the 12th Conference of the International Building Performance Simulation Association, Sydney,  
731 Australia, November 14-16. Available from: [http://ibpsa.org/proceedings/BS2011/P\\_1702.pdf](http://ibpsa.org/proceedings/BS2011/P_1702.pdf) (accessed 20  
732 November 2021).



733 Maile, T., O'Donnell, J., Bazjanac, V. and Rose, C. (2013). BIM- Geometry Modelling Guidelines for  
734 Building Energy Performance Simulation. Proceedings of BS2013: 13th Conference of International  
735 Building Performance Simulation Association, Chambéry, France, August 26-28, pp. 3242-3249.  
736 Available from: [http://www.ibpsa.org/proceedings/BS2013/p\\_1510.pdf](http://www.ibpsa.org/proceedings/BS2013/p_1510.pdf) (accessed 20 November 2021).

737 PennState. (2012). BIM Planning Guide for Facility Owners. USA. ISBN: 978-1-62307-001-4

738 Pérez-Lombard, L., Ortiz, J., and Pout, C. (2008). A review on buildings energy consumption  
739 information. Energy and Buildings, 40(3), 394–398. Available from:  
740 <https://doi.org/10.1016/J.ENBUILD.2007.03.007> (accessed 20 November 2021).

741 Ramaji, I. J., Messner, J. I., and Mostavi, E. (2020) IFC-Based BIM-to-BEM Model Transformation.  
742 Journal of Computing in Civil Engineering, vol 34 / 3. [https://doi.org/10.1061/\(ASCE\)CP.1943-5487.0000880](https://doi.org/10.1061/(ASCE)CP.1943-5487.0000880)

743 Reddy, K. P. (2012). BIM for Building Owners and Developers: Making a Business Case for Using  
744 BIM on Projects. Wiley. ISBN: 978-0-470-90598-2

745 Rodriguez-Trejo, S., Ahmad, A. M., Hafeez, M. A., Dawood, H., Vukovic, V., Kassem, M., Naji, K. K.,  
746 & Dawood, N. (2017). Hierarchy based information requirements for sustainable operations of  
747 buildings in Qatar. Sustainable Cities and Society, 32, 435–448. Available from:  
748 <https://doi.org/10.1016/j.scs.2017.03.005> (accessed 20 November 2021).

749 Rodriguez-Ubinas, E., Rodriguez, S., Voss, K., & Todorovic, M. S. (2014). Energy efficiency evaluation  
750 of zero energy houses. Energy and Buildings, 83. Available from: <https://doi.org/10.1016/j.enbuild.2014.06.019>  
751 (accessed 20 November 2021).

752 Sacks, R. et al. (2018) BIM Handbook: A Guide to Building Information Modelling for Owners,  
753 Designers, Engineers, Contractors, and Facility Managers. 3rd edition. Hoboken, New Jersey: John  
754 Wiley & Sons. ISBN: 978-1-119-28753-7

755 Saidur, R. (2009). Energy consumption, energy savings, and emission analysis in Malaysian office  
756 buildings. *Energy Policy*, 37(10), 4104–4113. Available from: <https://doi.org/10.1016/J.ENPOL.2009.04.052>  
757 (accessed 20 November 2021).

758 Sattler, L., Lamouri, S., Pellerin, R., & Maigne, T. (2019). Interoperability aims in building information  
759 modelling exchanges: A literature review. *IFAC-Papers OnLine*, 52(13), 271–276. Available from:  
760 <https://doi.org/10.1016/j.ifacol.2019.11.180> (accessed 20 November 2021).

761 Sawyer, K. (2014). *Windows and Building Envelope Research and Development: A Roadmap for*  
762 *Emerging Technologies*. United States. Dept. of Energy. Office of Energy Efficiency and Renewable  
763 Energy, Washington, DC. Available from:  
764 [https://www.energy.gov/sites/default/files/2014/02/f8/BTO\\_windows\\_and\\_envelope\\_report\\_3.pdf](https://www.energy.gov/sites/default/files/2014/02/f8/BTO_windows_and_envelope_report_3.pdf) (accessed 20  
765 November 2021).

766 Pinheiro, S., Wimmer S., O'Donnell, J., Serge, jMuhic, S., Bazjanac, V., Maile, T., Frisch, J., van  
767 Treeck, C. (2018). MVD based information exchange between BIM and building energy performance  
768 simulation. *Automation in Construction*, Volume 90, June 2018, Pages 91-103. Available from:  
769 <https://doi.org/doi: 10.1016/j.autcon.2018.02.009> (accessed 20 November 2021).

770 Sergio Pinheiro, Reinhard Wimmer, James O'Donnell, Sergej Muhic, Vladimir Bazjanac, Tobias Maile,  
771 Jérôme Frisch, Christoph van Treeck, Shi, X. (2011). Design optimization of insulation usage and space  
772 conditioning load using energy simulation and genetic algorithm. *Energy*, 36(3), 1659–1667. Available  
773 from: <https://doi.org/10.1016/j.energy.2010.12.064> (accessed 20 November 2021).

774 Shi, X., Tian, Z., Chen, W., Si, B., & Jin, X. (2016). A review on building energy efficient design  
775 optimization from the perspective of architects. In *Renewable and Sustainable Energy Reviews* (Vol. 65,

776 pp. 872–884). Elsevier Ltd. Available from: <https://doi.org/10.1016/j.rser.2016.07.050> (accessed 20  
777 November 2021).

778 Singh, M. A. and Geyer, P. (2020). Information requirements for multi-level-of-development BIM using  
779 sensitivity analysis for energy performance, *Advanced Engineering Informatics*, Volume 43, 101026,  
780 ISSN 1474-0346, Available from: <https://doi.org/10.1016/j.aei.2019.101026> (accessed 20 November 2021).

781 Soust-Verdaguer, B., Llatas, C. and García-Martínez, A. (2017). Critical review of BIM-based LCA  
782 method to buildings *Energy and Buildings*, Vol. 136, pp. 110-120. Available from: [https://doi.org/doi:  
783 10.1016/j.enbuild.2016.12.009](https://doi.org/doi:10.1016/j.enbuild.2016.12.009) (accessed 20 November 2021).

784 Stumpf, A. L., Kim, H., & Jenicek, E. M. (2011). Early Design Energy Analysis Using Building  
785 Information Modelling Technology: Engineer Research and Development Center Champaign II  
786 Construction Engineering Research Lab. Available from: [https://erdc-  
787 library.erdcdren.mil/jspui/bitstream/11681/19971/1/ERDC-CERL-TR-11-41.pdf](https://erdc-library.erdcdren.mil/jspui/bitstream/11681/19971/1/ERDC-CERL-TR-11-41.pdf) (accessed 20 November 2021).

788 Tribelsky, E., and Sacks, R. (2010). Measuring information flow in the detailed design of construction  
789 projects. *Res Eng Design* 21:189–206. Available from: <https://doi.org/10.1007/s00163-009-0084-3> (accessed  
790 20 November 2021).

791 Underwood, J., and Isikdag, U. (2010). Handbook of research on building information modelling and  
792 construction informatics: concepts and technologies. IGI Global. Available from: [https://doi: 10.4018/978-  
793 1-60566-928-1](https://doi:10.4018/978-1-60566-928-1) (accessed 20 November 2021).

794 Van der Aalst, Wil M. P. (2013). "Business Process Management: A Comprehensive Survey," *ISRN*  
795 *Software Engineering*, vol. 2013, Article ID 507984, 37 pages, 2013. Available from:  
796 <https://doi.org/10.1155/2013/507984> (accessed 20 November 2021).

797 Volk, R., Stengel, J. and Schultmann, F., (2014). Building Information Modelling (BIM)  
798 for existing buildings—Literature review and future needs. *Automation in construction*,  
799 38, pp.109-127. Available from: <https://doi.org/10.1016/j.autcon.2013.10.023> (accessed 20 November 2021).

800 William, S., Van-Aerschot, C., Kornevall, C., Cowe, R., Bridoux, D., Bonnaire, T.B. and Fritz, J. (2009).  
801 Energy efficiency in buildings: Transforming the market, Switzerland: World Business Council for  
802 Sustainable Development (WBCSD). Available from: [https://docs.wbcsd.org/2009/08/EEB-  
803 TransformingTheMarket.pdf](https://docs.wbcsd.org/2009/08/EEB-TransformingTheMarket.pdf) (accessed 20 November 2021).

804 Xu, X., Mumford, T., & Zou, P. X. W. (2021). Life-cycle building information modelling (BIM)  
805 engaged framework for improving building energy performance. *Energy and Buildings*, 231, 110496.  
806 Available from: <https://doi.org/10.1016/j.enbuild.2020.110496> (accessed 20 November 2021).

807 Ying, H. and Lee, S. (2019). An algorithm to facet curved walls in IFC BIM for building energy analysis,  
808 *Automation in Construction*, Volume 103, pp. 80-103, ISSN 0926-5805, Available from:  
809 <https://doi.org/10.1016/j.autcon.2019.03.004> (accessed 20 November 2021).

810 Zanni, M. A., Soetanto, R. and Ruikar, K. (2014). Defining the Sustainable Building Design Process:  
811 Methods for BIM Execution Planning in the UK. *International Journal of Energy Sector Management*,  
812 8 (4), pp.562-587. Available from : <https://doi:10.1108/IJESM-04-2014-0005> (accessed 20 November 2021).

813 Zhang, X. et al. (2018) 'Using Building Information Modelling to achieve Lean principles by improving  
814 efficiency of work teams', *International Journal of Construction Management*, 18(4), pp. 293–300.  
815 <https://doi:10.1080/15623599.2017.1382083> (accessed 20 November 2021).

816 Zhuang, D., Zhang, X., Lu, Y., Wang, C., Jin, X., Zhou, X., & Shi, X. (2021). A performance data  
817 integrated BIM framework for building lifecycle energy efficiency and environmental optimization

818 design. Automation in Construction, 127, 103712. Available from:

819 <https://doi.org/10.1016/j.autcon.2021.103712> (accessed 20 November 2021).