

# Environmental Research Letters



## LETTER

### OPEN ACCESS

RECEIVED  
16 April 2020

REVISED  
9 September 2020

ACCEPTED FOR PUBLICATION  
30 September 2020

PUBLISHED  
25 November 2020

Original content from this work may be used under the terms of the [Creative Commons Attribution 4.0 licence](#).

Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.



## The CO<sub>2</sub> reduction potential for the European industry via direct electrification of heat supply (power-to-heat)

Silvia Madeddu<sup>1</sup>, Falko Ueckerdt<sup>1</sup>, Michaja Pehl<sup>1</sup>, Juergen Peterseim<sup>2</sup>, Michael Lord<sup>3</sup>, Karthik Ajith Kumar<sup>1</sup>, Christoph Krüger<sup>1</sup> and Gunnar Luderer<sup>1,4</sup>

<sup>1</sup> Potsdam Institute for Climate Impact Research, Potsdam 14473, Germany

<sup>2</sup> University of Technology Sydney, Institute for Sustainable Future, 235 Jones Street, Ultimo, NSW 2007, Australia

<sup>3</sup> The University of Melbourne, Climate and Energy College, University of Melbourne, 187 Grattan Street, Carlton, VIC 3053, Australia

<sup>4</sup> Fachgebiet Globale Energiesysteme, Technische Universität Berlin, Straße des 17. Juni 135, Berlin 10623, Germany

E-mail: [madeddu@pik-potsdam.de](mailto:madeddu@pik-potsdam.de)

**Keywords:** electrification, power-to-heat, decarbonisation, industry energy demand, industry energy transition

Supplementary material for this article is available [online](#)

### Abstract

The decarbonisation of industry is a bottleneck for the EU's 2050 target of climate neutrality. Replacing fossil fuels with low-carbon electricity is at the core of this challenge; however, the aggregate electrification potential and resulting system-wide CO<sub>2</sub> reductions for diverse industrial processes are unknown. Here, we present the results from a comprehensive bottom-up analysis of the energy use in 11 industrial sectors (accounting for 92% of Europe's industry CO<sub>2</sub> emissions), and estimate the technological potential for industry electrification in three stages. Seventy-eight per cent of the energy demand is electrifiable with technologies that are already established, while 99% electrification can be achieved with the addition of technologies currently under development. Such a deep electrification reduces CO<sub>2</sub> emissions already based on the carbon intensity of today's electricity ( $\sim 300 \text{ gCO}_2 \text{ kWh}_{\text{el}}^{-1}$ ). With an increasing decarbonisation of the power sector IEA: 12  $\text{gCO}_2 \text{ kWh}_{\text{el}}^{-1}$  in 2050), electrification could cut CO<sub>2</sub> emissions by 78%, and almost entirely abate the energy-related CO<sub>2</sub> emissions, reducing the industry bottleneck to only residual process emissions. Despite its decarbonisation potential, the extent to which direct electrification will be deployed in industry remains uncertain and depends on the relative cost of electric technologies compared to other low-carbon options.

### Acronyms and abbreviations

2DS	2 °C scenario	FE	Final energy
°C	Degree Celsius	g	Grams
CCS/U	Carbon capture and storage/utilisation	Gt	Gigatonne
CO <sub>2</sub>	Carbon dioxide	IEA	International Energy Agency
COP	Coefficient of performance	IPCC	Intergovernmental Panel on Climate Change
EAF	Electric arc furnace	kWh <sub>el</sub>	Kilowatt hour electricity
Efuels	Synthetic electricity-based fuels	MVR	Mechanical vapour recompression
EJ	Exajoule	MW	Megawatt
EPRI	Electric Power Research Institute	R&D	Research and development
ETP	Energy Technology Perspective	St1,2,3	Stage1,2,3 of electrification
ETS	Emissions Trading System	TWh	Terawatt hour
EU	European Union	UE	Useful energy
		UK	United Kingdom

## 1. Introduction

In 2015, industry<sup>5</sup> generated 15% ( $0.5 \text{ GtCO}_2 \text{ yr}^{-1}$ ) of the European CO<sub>2</sub> emissions from fuels combustion, and was responsible for circa 30% ( $1 \text{ GtCO}_2 \text{ yr}^{-1}$ ) of the end-sectors emissions, when process and indirect CO<sub>2</sub> emissions from electricity and central heat use were included [1, 2]. Fuels combustion provided 70% of the final energy consumed in industry (feedstocks excluded), mostly to supply heat [1, 2]. The remaining 30% was from electricity, which is primarily used for cooling and supplying mechanical power while it plays a minor role in delivering industrial heat [1–3].

Industry is characterised by long-lived capital stocks [4], thus a clear perspective on viable low-carbon options is crucial to avoid further lock-ins into emission intensive infrastructures [5]. In some European countries, coke ovens, blast furnaces, and steam crackers will reach the end of their lifetime or require new investments within the next 10–15 yr [6, 7].

Replacing fossil fuels with low-carbon electricity has become the core climate change mitigation strategy (referred to as electrification, sector coupling, power-to-X or power-to-heat), as supported by many climate change mitigation scenarios [8]. The carbon intensity of electricity has continuously declined in the past decades, at a much faster rate than any other energy carrier [9]. The global renewable energy generation capacity has steadily increased and tapping into this vast energy source would help avoiding the caveats and risks of other options such as carbon capture and storage/utilisation (CCS/U) [10, 11], or carbon dioxide removal [10]. Indirect electrification via synthetic electricity-based fuels (efuels) suffers from low electricity-to-fuel conversion efficiencies, and the requirements of sourcing carbon for the synthesis of hydrocarbons [3, 12]. Although, synthetic fuels are an important complementary low-carbon option when electricity cannot substitute fossil fuels (e.g. chemical feedstocks).

This paper focuses on direct electrification, which makes a more efficient use of electricity as a direct input in electrolytic processes or to supply heat based largely on already mature technologies (e.g. heat pumps, electric boilers and furnaces).

The IPCC [13] lists electrification among the key decarbonisation options for industry, and highlights the lack of robust literature to evaluate its economic, environmental and technological feasibility [13]. Previous studies conducted on the European industry [14–16] estimated the thermal energy demand at

different temperature levels and end-uses. While these investigations provide an accurate bottom-up analysis of the heat consumption in industry, they do not focus on electrification. Lechtenböhrmer *et al* [17] investigated the complete electrification of seven manufacturing processes. The study analyses the impact of such scenario on electricity demand, production cost, and emissions reduction in Europe, but it does not provide a complete overview on the viability of power-to-heat in industry. Other studies have discussed electrification of heat from a cross-sectoral perspective [18] or country level [19, 20]. Beyond the European context, Philibert [3] provided a detailed overview of electrification options for industry [3], while Lord [21] presented a series of electrification guides for different manufacturing processes. The EPR [22] used a top-down modelling approach to estimate the potential for industry electrification in the United States. By 2050, nearly 50% of industry's final energy could be electrified when a stringent carbon price is adopted [22]. Mai *et al* [23] obtained comparable results, i.e. circa 40% electrification by 2050. Khanna *et al* [24] estimated the CO<sub>2</sub>-abatement potential of electrification in China, but analysed only four industry sectors and provided results for the aggregated end-use sectors [24].

Thus far, a comprehensive bottom-up analysis of industry energy demand aimed at identifying the achievable level of electrification and its climate change mitigation potential is missing, as well as a clear assessment of the transformations needed at sectoral level. We aim to close these gaps with the present study.

We look at the industry sector in Europe, as here the greenhouse gas emissions regulation is at an advanced stage, and Europe aspires to be a global leader in low carbon technologies. We combine a bottom-up analysis of the energy demand from 11 industry sectors (covering 88% of Europe's industry final energy consumption and 92% of its CO<sub>2</sub> emissions) with the assessment of a portfolio of electric technologies implementable in industrial processes. We present three electrification stages, which outline the progressive penetration of electrification in industry, and provide the respective CO<sub>2</sub> emissions mitigation potential at different carbon intensities of electricity.

## 2. Mapping out today's industrial energy use

Figure 1 shows the distribution of the UE demand in the selected manufacturing industries examined in this study for 27 EU member states and the United Kingdom (EU27/UK) in 2015 [2] (see supplementary section A.1 Methods (available online at <https://stacks.iop.org/ERL/15/124004/mmedia>)). FE is the energy available to the end-users (e.g. electricity input for an electric boiler), while UE is the energy

<sup>5</sup> In the *Introduction*, industry includes manufacturing sectors, mining, construction, coke ovens and blast furnaces [2], while in the following sections, unless otherwise noted, industry refers to the selected sectors analysed in this study (see supplementary section A.1 Methods).

output available after the conversion of the FE input through an appliance (e.g. heat output of an electric boiler). While FE is directly measurable, UE is based on sometimes-arbitrary assumptions on efficiency and energy losses. In the present study, the FE-to-UE conversion accounts for all the energy losses occurred within the plant, e.g. steam distribution losses, unrecovered waste heat from processes [25].

The electricity demand was divided into (1) electricity to supply heating or cooling, i.e. *electricity thermal*, and (2) electricity used in mechanical power and lighting, i.e. *electricity other*. Mechanical power was assumed 100% electric. The energy from combustible fuels was divided into non-process energy (e.g. space heating), steam, and thermal energy; the latter was distributed across the temperature spectrum (<100 °C, 100 °C–400 °C, 400 °C–1000 °C, >1000 °C). The non-electric thermal cooling was allocated below 100 °C.

The total UE was 8.7 EJ, which compared to the FE consumption of 13.2 EJ indicates that about one third of the energy input is lost due to inefficiencies and energy losses within the plant. The highest energy consumption is observed in chemicals, primary steel and paper industries, which combined account for 70% of the total UE demand (6.1 EJ). Chemical feedstocks, i.e. fossil fuels used as raw materials, amount to 36% of the total UE (according to their energy content, 3.2 EJ). Nineteen per cent of UE is consumed as electricity (1.6 EJ) and 45% (3.9 EJ) as heat (6% at temperatures below 100 °C, 17% between 100 °C–400 °C, 4% between 400 °C–1000 °C, and 18% above 1000 °C), which leaves great potential for the electrification of industrial processes (see supplementary section A.1 Methods and table A.2).

### 3. Portfolio of available electrification technologies

Table 1 presents a portfolio of technologies that can substitute the traditional fired-systems for electrifying industrial heat and cooling demand. These technologies lay the foundation for the three electrification stages discussed in the following section and are classified based on technological maturity, achievable temperatures, applications and efficiency [3, 18, 21, 26–28]. The supplementary section A.3 provides a technical description of these technologies and their applications.

Electrically powered technologies can cover the whole temperature spectrum relevant to industrial thermal processes (up to 20 000 °C [53]), and are already established in industry. The applications at low and medium temperature are not sector-specific, consequently electric boilers and heat pumps could be implemented transversally across industry to supply cooling and heat. On the other hand, high temperature processes are highly heterogeneous and require different heating systems, e.g. induction, resistance.

The substitution of fired systems with electrically powered technologies can lead to lower energy consumption as the latter operate with higher or comparable efficiencies [3, 18, 21]. For instance, compression heat pumps use less energy per unit of heat output than any type of boiler and can transfer energy from external heat sources or waste heat, reaching COP above 2 [18, 28].


Despite the many advantages, the extent to which direct electrification will be deployed in industry remains uncertain and depends on the relative cost of electric technologies compared to other low-carbon options [54]. To the best knowledge of the authors, a comprehensive cost analysis of industrial electrification technologies is not available in the open literature. Material Economics [6] analysed the CO<sub>2</sub> abatement cost for industry decarbonisation pathways, but aggregated the cost of direct electrification with that of other low-carbon measures, which makes it difficult to put a price tag on a specific technology [6]. An accurate estimate of the electrification costs for industry is particularly challenging due to the heterogeneity of the technologies and processes in use. In many cases, costs are not disclosed by manufacturers, or not available for technologies that are still under development. When investment and operation & maintenance costs are available, they are often applicable to a limited range of heating capacities lower than those used in industry. An exception to this trend is represented by boilers and heat pumps, for which detailed cost analyses have been performed, mostly in the context of residential heating electrification [55]. The overall cost of boilers and heat pumps is driven by the fuel/electricity price [55–59]. Since the price of electricity is three times higher than that of natural gas, the application of electrically powered technologies is often limited to small production volumes [3, 17, 23, 26].

### 4. Three stages for industry electrification

Here we present three electrification stages and aggregate the resulting electrification potential of the European industry. The three stages constitute the potential advancement of industry electrification from status-quo to full electrification, based on the level of complexity of the processes and maturity of the technologies involved. The results are shown in figure 2.

St1 includes thermal processes that are common to all industries and are therefore considered potential entry points for electrification, as the broad implementation of electric technologies will benefit from the transfer of experience and know-how across the sectors.

St2 corresponds to the more technologically advanced phase of electrification, in which a diverse range of processes and sector-specific technologies are involved. The technologies implemented in St2 vary

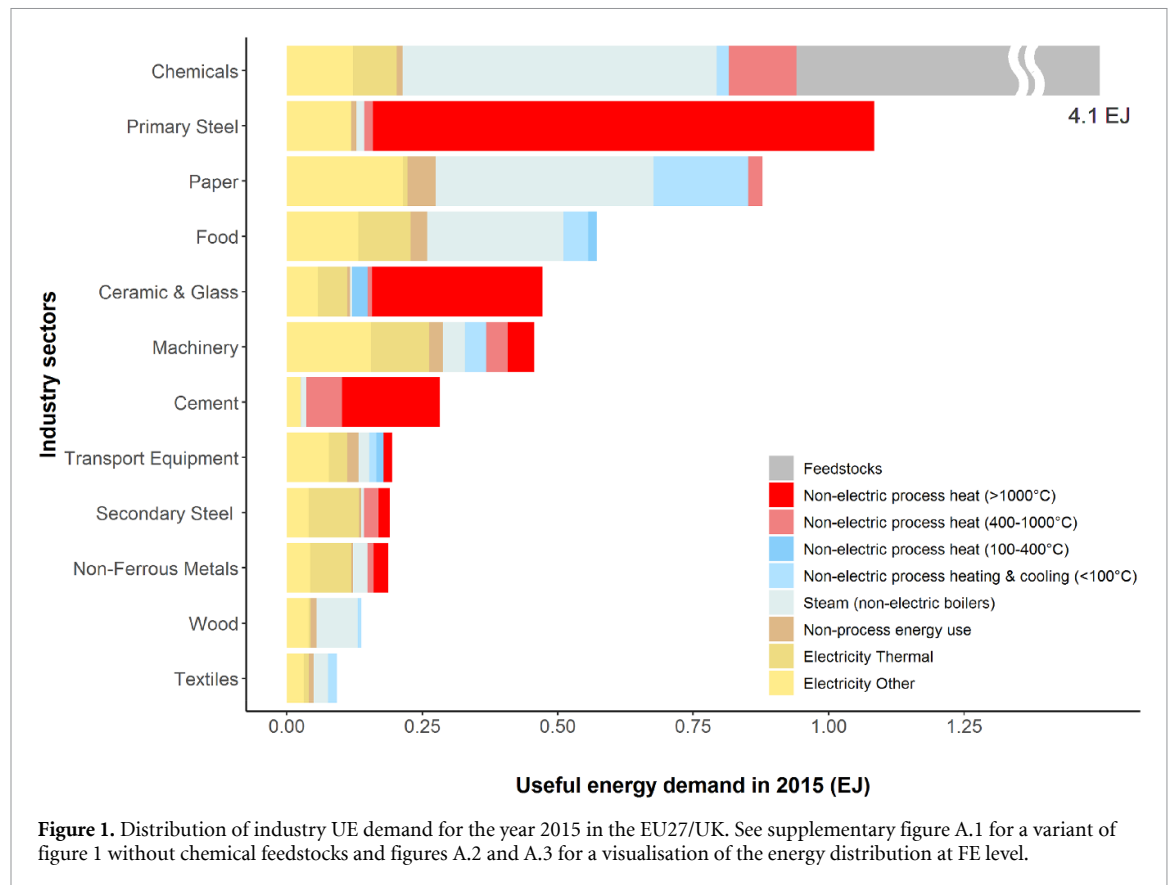

in heating systems and technical properties depending on products and applications. For this reason, it is expected that electrification will be slower and require a more substantial technological upgrade than in St1.

St1 and St2 involve technologies that are already fully developed and established in industry. On the other side, St3 explores the maximum achievable electrification potential if also technologies that have higher uncertainties and lower technological maturity are included.

In the interest of conceptual clarity, we assume scale and sectoral shares in industrial UE constant at 2015 levels.

#### 4.1. Stage 1—Entry points for industry electrification with mature technologies

The aggregated electrification potential of St1 (blue bars in figure 2) amounts to 42% of the industrial UE demand (3.6 EJ), and 66% if the energy content in chemical feedstocks is not accounted for. The electricity demand from industry doubles when low and medium temperature processes are fully electrified.

At this stage, the energy demand for cooling, space heating, steam generation, and drying, i.e. processes operated at low and medium temperature, is fully electrifiable with compression heat pumps, chillers, MVR, electric boilers, infrared, microwave, and radiofrequency heaters. Such technologies are fully developed and have sufficient capacities for

industrial applications (see supplementary section A.3).

Excluding chemicals, cement, and steel, the remaining sectors, which together account for 35% of the industry's UE demand and 40% of its CO<sub>2</sub> emissions, can be fully or extensively electrified in St1. Food, wood and textiles are 100% electrified as they mostly require heat below 400 °C [31, 40, 60, 61]. Similarly, paper requires 97% heat below 400 °C [33, 60], while the remaining 3% is consumed in limekilns for limestone calcination during the pulp-making process (see St2) [33, 60].

Chemicals, steel and cement, which are also the most CO<sub>2</sub>-intensive sectors, are not easily electrified in St1. Among these, the chemical sector has the largest electrification potential as it primarily consumes energy for cooling and steam. The latter in particular is largely used in steam cracking and reforming, which also require the combustion of fuels for heat supply (see St3) [32, 34].

#### 4.2. Stage 2—A more technologically advanced phase of industry electrification

Overall, the electrified energy in St2 (purple bars in figure 2) is estimated at 50% of the UE demand, i.e. 4.3 EJ (including the 42% from St1), and at 78% when feedstocks are excluded.

St2 involves technologies that are already established in industry and can supply heat above 400 °C. The electrification at this stage mostly relies on

**Table 1.** Electrically powered technologies for industry electrification. Efficiency is the ratio between UE output and FE input of an appliance. The COP measures the heat output (for heat pumps) or the heat absorbed (for chillers) per unit of work input [18–52].

<100°C	100 – 400°C	400 – 1000°C	>1000°C	TECHNOLOGICAL MATURITY	APPLICATIONS	EFFICIENCY /COP	ELECTRIFICATION STAGES	REFERENCE
				Established in industry (only <100 °C)	Space heating Hot water Low pressure steam Drying Cooling and refrigeration	COP 2 – 5	1	28-30
				Established in industry	Energy recovery (e.g. in distillation, evaporation) to provide steam and process heat	COP 3 – 10	1	19,21, 31-34
				Established in industry	Space heating Hot water Thermal oil Steam	0.95 – 0.99	1	18,19,21, 35,36
				Established in industry	Drying Paint curing Plastic treatments Food processing	0.60 – 0.90	1	29,31,33, 37-40
				Established in industry except cement and ceramic firing/sintering	Drying Ceramics firing and sintering Cement treatment Food processing	0.50 – 0.85	1	29,31,37, 40-47
				Established in industry	Metals melting, re-heating, annealing, welding	0.50 – 0.90	2, 3	26,27, 48,49
				Established in industry	Metals melting, smelting Heaters for the chemical industry Ceramic firing Glass melting Calcination	0.50 – 0.95	2, 3	26,27, 48,49
				Established in industry	Metals melting and partial refining	0.60 – 0.90	2, 3	26,48,50
				Established in industry only for metals and waste treatment	Waste treatment Metals treatments (e.g. welding) Sintering Cement production	0.50 – 0.90	2, 3	21,26,48, 49,51,52


electric furnaces with various heating systems and designs. Resistance heating is used for firing ceramics, glass melting, annealing and tempering [37, 62]. Induction, resistance, and arc furnaces are already used for melting, smelting, and refining various metals [26, 48]. Metals used for the production of machinery and transport equipment are also subject to thermal treatments that can be electrically powered [26, 38]. Electric kilns can also be used for calcination, although fired rotary calciners are normally used in industry [63] (see supplementary section A.3).

In St2, paper, ceramics & glass, machinery and transport equipment industries are 100% electrified. Non-ferrous metals and secondary steel have an electrification potential of 97% and 98% of the UE

demand, respectively. The remaining energy share represents the usage of carbon-bearing reducing agents used for metallurgical purposes, e.g. smelting and refining [48].

Similarly to what observed in St1, chemicals, primary steel, and cement cannot be extensively electrified with currently available technologies in St2. Chemicals maintain the same electrification of St1, while only re-heating and annealing are electrified in primary steel (see St3). Cement has an electrification potential of 36% of the UE demand that includes the calcination of limestone, whereas the energy for clinker burning is excluded (see St3). Electrolysis of limestone could substitute fired or electric furnaces for calcination, but it is not discussed here due its early stage of development [64].



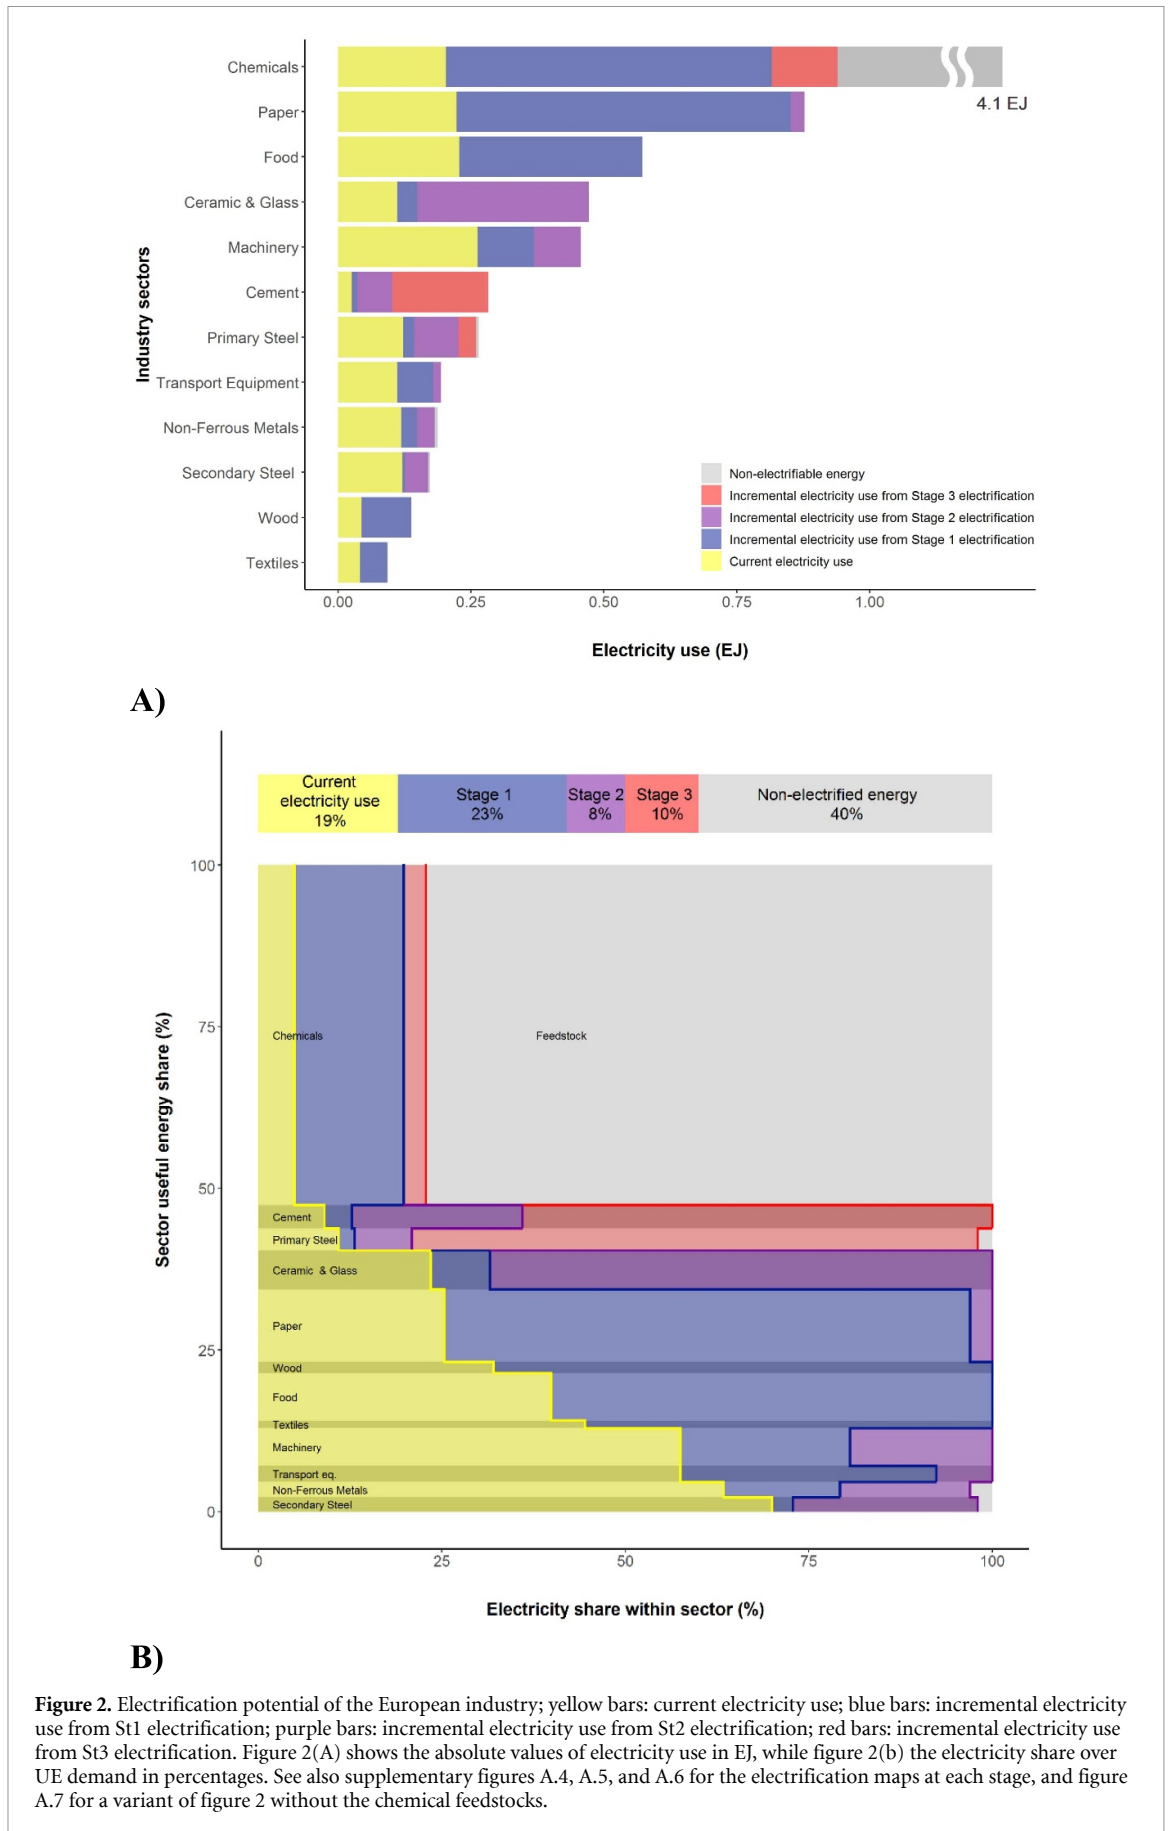

**Figure 2.** Electrification potential of the European industry; yellow bars: current electricity use; blue bars: incremental electricity use from St1 electrification; purple bars: incremental electricity use from St2 electrification; red bars: incremental electricity use from St3 electrification. Figure 2(A) shows the absolute values of electricity use in EJ, while figure 2(b) the electricity share over UE demand in percentages. See also supplementary figures A.4, A.5, and A.6 for the electrification maps at each stage, and figure A.7 for a variant of figure 2 without the chemical feedstocks.

St1 and St2 rely on technologies that are already used in industry, thus these stages could be implemented simultaneously, potentially accelerating industry electrification. For instance, it may

be possible to implement electric boilers for steam production (St1) in parallel with the electrification of metals melting (St2). While all the industry sectors consume steam and could benefit from the installation of electric boilers, metals melting is a more complex process that is operated in selected industries and requires different heating systems, operating conditions etc (see supplementary section A.3). The technical improvement, scaling-up, and integration of electric technologies in St2 is considered more technically challenging than in St1, yet St2 should not be considered a follow-up to St1, nor is the complete electrification in St1 a pre-requisite for electrification in St2.

#### 4.3. Stage 3—Maximum potential of industry electrification with high technological uncertainty

When including technologies with low technological maturity and high uncertainty in chemicals, cement, and steel, the maximum electrification potential increases to 60% of the UE demand (4.7 EJ) in St3 (red bars in figure 2). The remaining 40% cannot be supplied directly with electricity because fossil fuels are used for metallurgical purposes in non-ferrous metals and EAFs, and as chemical feedstocks. When feedstocks are excluded, 99% of the cooling and heat demand from industry can be electrified.

Around 3% of the UE demand from the chemical sector is required to supply heat during steam cracking and reforming. Electric steam crackers and reformers are not established in chemicals production and are considered to have a high uncertainty because they are still at the R&D stage [65, 66]. If these technologies were to be implemented, the total electrification potential of the chemical sector would correspond to 23% of the UE demand, i.e. 20% in St1 plus 3% in St3.

Clinker burning is responsible for 64% of the UE demand from the cement sector and is operated at 1450 °C in large rotary kilns with production volumes of 3000–10 000 tonnes day<sup>-1</sup> [63]. The CemZero project is investigating the electrification of cement via thermal plasma. Despite being still at R&D stage, the first results have shown that the process is technically feasible and the investors are looking at building a pilot plant [3, 67]. Existing plasma generators operate at low heating capacity (maximum 7 MW [6]), therefore their scalability to the levels required for cement production (up to 100 MW and above [63]) is highly uncertain.

There are currently three possible electrification routes for the steel industry. (1) Hydrogen can be used as reducing agent for iron, which—to the extent that hydrogen is produced via electrolysis (green hydrogen)—constitutes an indirect form of electrification [3]. This technology has been successfully proven but to date it counts on a single commercial application [21]. Since this study focuses on direct electrification, we exclude hydrogen reduction

from our analysis. (2) The electrolytic reduction of iron (electrowinning) could be an option for the electrification of primary steel although it has been demonstrated only at pilot scale [3]. (3) The manufacture of secondary steel via EAF is already well-established and accounts for 40% of the European steel production [68]. On top of the high technological maturity, secondary steel demands from a quarter to a fifth of the energy needed in blast furnaces coupled with basic oxygen furnaces [69]. For these reasons, in St3 we consider the entire substitution of primary steel with secondary steel (EAF + 100% scrap) [69]. This leads to a reduction of primary steel UE demand by 76% (i.e. from 1.1 to 0.3 EJ) compared to St1 and St2, and an electrification potential of 98%. The remaining UE is for coke or coal added for metallurgical purposes [49].


The electrification of primary steel via EAF + 100% scrap is included in St3 due to the high uncertainty of scaling-up the production to current consumption levels, which may be challenging since scrap has already high recycling rates (~85%) [6]. Higher scrap availability could be achieved with a better management of the accumulated in-use steel stocks, e.g. maximising the recycling rate, increasing the products lifetime or decreasing steel consumption in transport and construction sectors [6, 70]. Some studies have shown that under the saturation of per capita steel stocks in Europe, sufficient scrap would be accessible to meet the total steel demand by the 2050s [6].

Despite the great decarbonisation potential provided by a fully circular steel cycle, the transition from primary to secondary steel is likely to happen gradually. It is fundamental to identify viable low-carbon options for primary steel that can be implemented in the next 10–20 yr to complement the increasing production of secondary steel. The electrification of blast furnaces would provide only a partial reduction of CO<sub>2</sub> emissions, since large amounts of coke are required for smelting iron ores [49]. Thus, investments should foster the technical development and industrial application of iron reduction via electrowinning or green hydrogen.

## 5. The CO<sub>2</sub> reduction potential of industry electrification

Figure 3 shows the mitigation potential of the aggregated industry sector based on a low-carbon power sector transition within the next 10–20 yr. For each electrification stage, the CO<sub>2</sub> emissions from industry are shown for decreasing electricity carbon intensities: 300 gCO<sub>2</sub> kWh<sub>el</sub><sup>-1</sup> is the European electricity carbon intensity in 2015, while 108 and 12 gCO<sub>2</sub> kWh<sub>el</sub><sup>-1</sup> correspond to the IEA 2 °C scenario (2DS) in 2030 and 2050, respectively [1, 71].

The substitution of fired systems with electric technologies is associated with an efficiency gain,

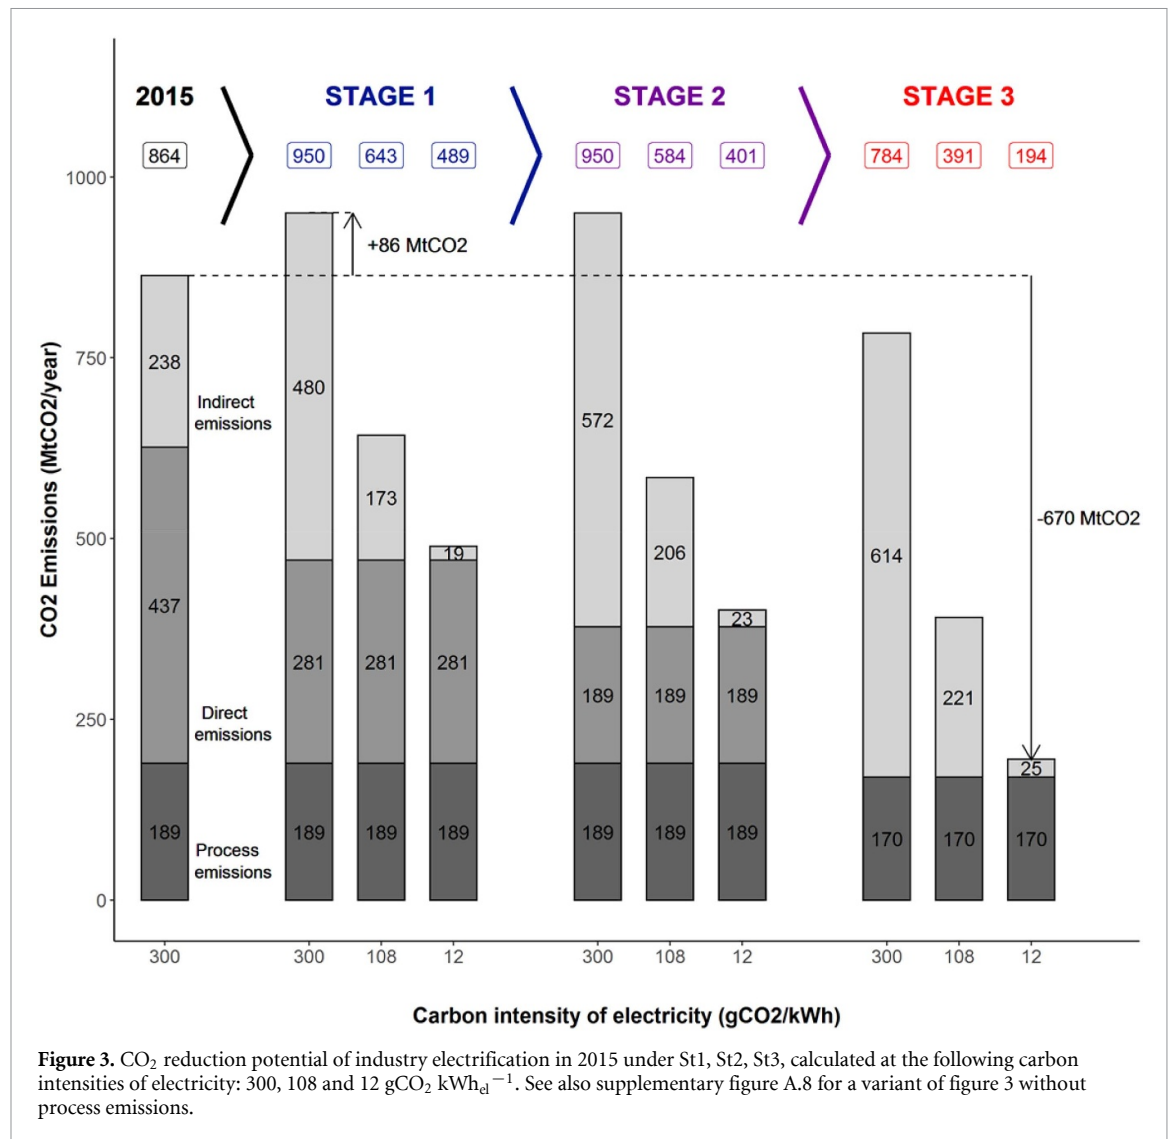

which corresponds to a decrease of the FE input by 20% in St3 (i.e. from 13.2 to 10.6 EJ). The major energy saving is observed in primary steel, where the FE input is reduced by 79% (i.e. from 2.0 to 0.4 EJ) (see A.1 Methods).


In 2015, the selected industry sectors accounted for 864 MtCO<sub>2</sub>, of which 50% are direct emissions from fuels combustion, 28% indirect emissions from electricity generation, and 22% process emissions generated by the chemical transformation of raw materials consumed for non-energy use (e.g. limestone calcination in cement manufacturing) [17]. These figures show that the reduction of direct emissions could be the real game changer for the decarbonisation of industry.

In absence of further decarbonisation of power supply, electrifying industry can lead to an increase of CO<sub>2</sub> emissions. In St1, the CO<sub>2</sub> emissions increase by 10% (950 MtCO<sub>2</sub>) with 2015 electricity carbon intensity, whereas a deep electrification in St3 would slightly reduce emissions by 9% (784 MtCO<sub>2</sub>). This is mostly due to the significant reduction of FE consumption from steel in St3, and shows

that substituting primary with secondary steel could lower the emissions from this sector already with an unchanged electricity mix. While our electrification stages are largely based on the maturity of electric technologies, these data suggest another approach to industry electrification, which prioritises technologies and sectors with large decarbonisation potential despite a higher uncertainty of viability.

In St1 and St2, which are partially electrified and characterised by a higher FE input than St3, CO<sub>2</sub> mitigation via electrification is achieved with breakeven carbon intensities of electricity of 246 and 255 gCO<sub>2</sub> kWh<sub>el</sub><sup>-1</sup>, respectively. Between 2000 and 2015, the carbon intensity of electricity in the EU27/UK has seen a steady decrease and if the rate remains constant, ~230 gCO<sub>2</sub> kWh<sub>el</sub><sup>-1</sup> electricity could be achieved by 2030 [72]. This is significantly less ambitious than the IEA 2DS (108 gCO<sub>2</sub> kWh<sub>el</sub><sup>-1</sup>), and suggests that in the next 10 yr a partially electrified industry could be decarbonised even without the implementation of stringent climate policies.



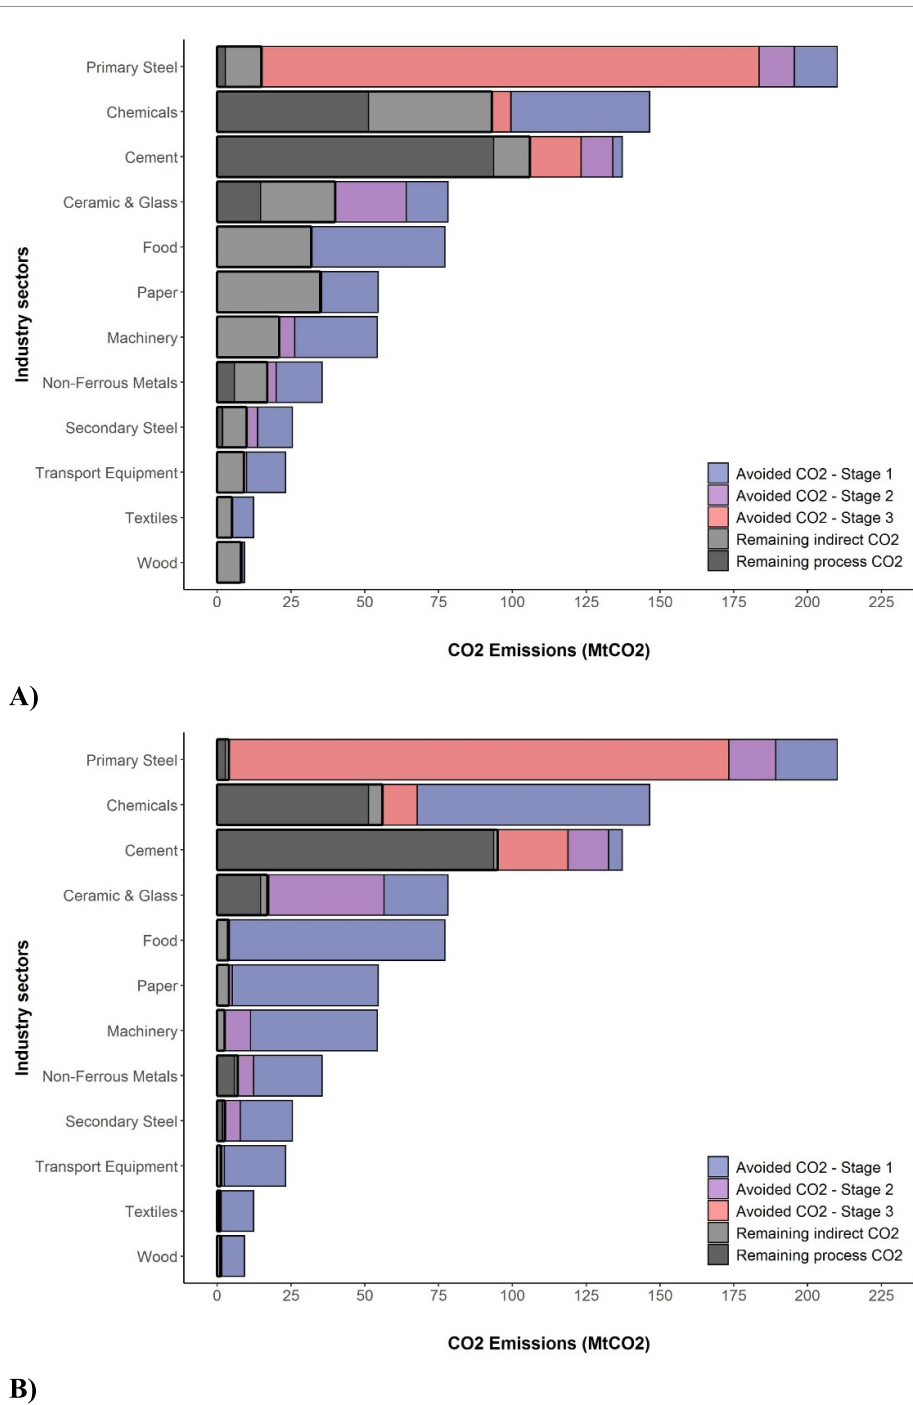

**Figure 4.** Residual and avoided CO<sub>2</sub> emissions of the disaggregated industry sector at 108 gCO<sub>2</sub> kWh<sub>el</sub><sup>-1</sup> (figure 4(a)) and 12 gCO<sub>2</sub> kWh<sub>el</sub><sup>-1</sup> (figure 4(b)). The blue, purple and red bars represent the CO<sub>2</sub> emissions avoided via electrification in St1, St2 and St3, respectively. The grey bars indicate the remaining process (dark grey) and indirect emissions (light grey). In St3, the only combustible fuels consumed in industry are for metallurgical purposes, thus their CO<sub>2</sub> is part of the process emissions. See also supplementary figure A.9 for a variant of figure 4 without process emissions.


If the power sector is transformed as well (IEA 2DS in 2050: 12 gCO<sub>2</sub> kWh<sub>el</sub><sup>-1</sup>), electrification along the three stages increasingly reduces CO<sub>2</sub> emissions by up to 78% in St3 (194 MtCO<sub>2</sub>).

Our analysis implicitly assumes the usage of grid electricity, although industry electrification could also stimulate the expansion of onsite renewable electricity generation. A decentralised renewable energy supply system would not only guarantee

greater energy autonomy for industrial plants, but it could also reduce indirect CO<sub>2</sub> emissions from electrification [73].

Figure 4 shows the residual and avoided CO<sub>2</sub> emissions at sectoral level under a transformed power sector.

At carbon intensity of 108 gCO<sub>2</sub> kWh<sub>el</sub><sup>-1</sup> (figure 4(a)), a partial electrification (St1) reduces emissions by 26% (643 MtCO<sub>2</sub>). The CO<sub>2</sub> emissions

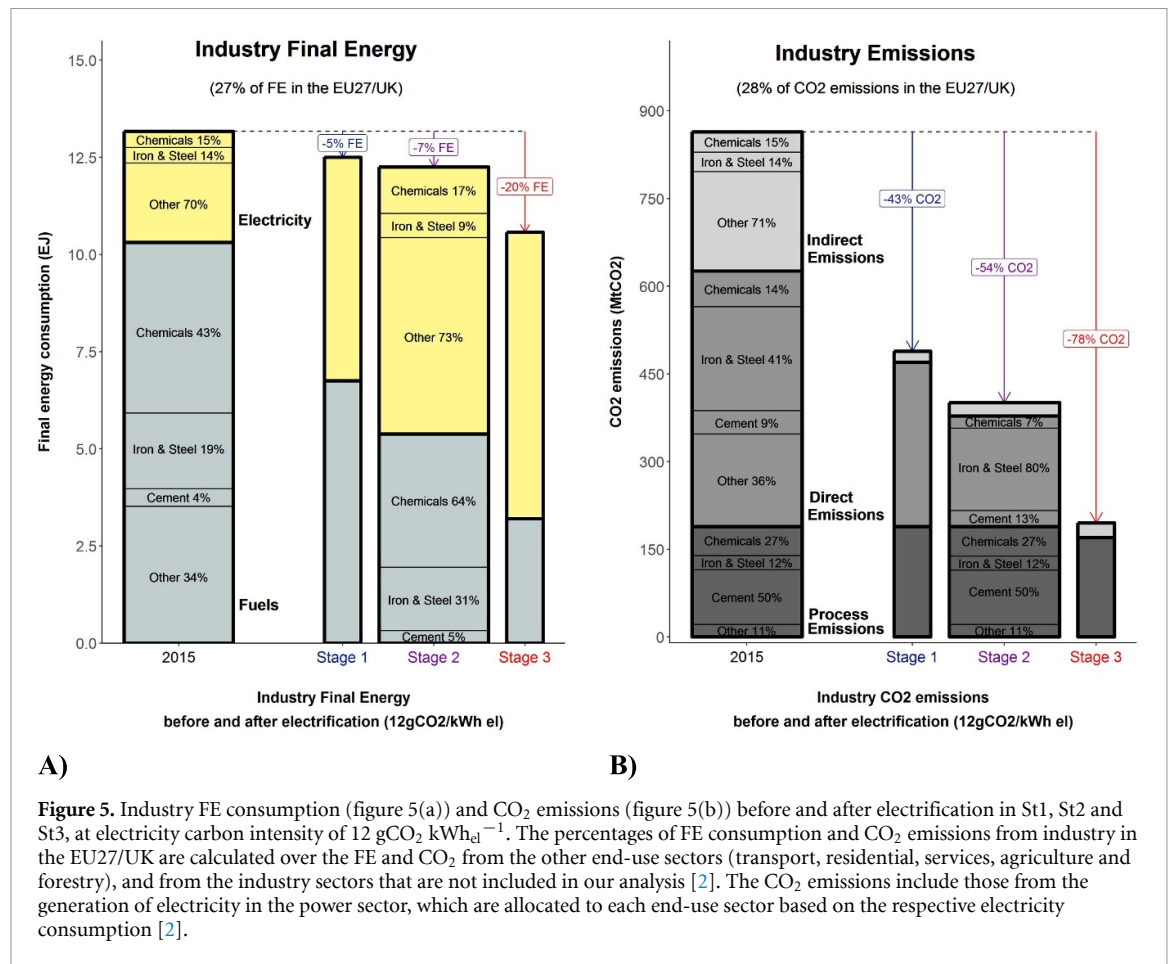

A)

B)

**Figure 5.** Industry FE consumption (figure 5(a)) and CO<sub>2</sub> emissions (figure 5(b)) before and after electrification in St1, St2 and St3, at electricity carbon intensity of 12 gCO<sub>2</sub> kWh<sub>el</sub><sup>-1</sup>. The percentages of FE consumption and CO<sub>2</sub> emissions from industry in the EU27/UK are calculated over the FE and CO<sub>2</sub> from the other end-use sectors (transport, residential, services, agriculture and forestry), and from the industry sectors that are not included in our analysis [2]. The CO<sub>2</sub> emissions include those from the generation of electricity in the power sector, which are allocated to each end-use sector based on the respective electricity consumption [2].

from less carbon intensive sectors like food, textiles, machinery, and transport equipment are halved or even more extensively reduced. Advancing electrification (St2) reduces emissions by an additional 7% (584 MtCO<sub>2</sub>).

The CO<sub>2</sub> mitigation in cement, steel and chemicals in St2 is limited by their reduced electrification potential and the large share of process CO<sub>2</sub>. A deep electrification in St3 significantly lowers the emissions from these sectors, particularly those from primary steel, and halves the overall industry emissions by 55% (391 MtCO<sub>2</sub>).

At 12 gCO<sub>2</sub> kWh<sub>el</sub><sup>-1</sup> (figure 4(b)), the avoided CO<sub>2</sub> emissions further increase from 43% in St1 (489 MtCO<sub>2</sub>), to 78% in St3 (194 MtCO<sub>2</sub>). Considering that 87% of the remaining emissions (170 MtCO<sub>2</sub>) are process related, mostly from cement (48%, 94 MtCO<sub>2</sub>) and chemicals (26%, 51 MtCO<sub>2</sub>), electrification alone could almost entirely abate the carbon emissions from cooling and heat demand in industry by 2050 (i.e. 63% of FE).

Power-to-heat cannot mitigate process emissions as they are non-energy related and require a different abatement strategy. This adds another layer of complexity in the development of a CO<sub>2</sub> mitigation plan for industry.

## 6. Industry electrification and the European Green Deal

Reaching carbon neutrality by 2050, as proposed by the European Commission [74] translates into deep CO<sub>2</sub> emissions reduction in industry. Re-investing in long-lived fossil-based technologies might lead to carbon lock-in with significant CO<sub>2</sub> costs (e.g. through the EU Emissions Trading System (EU-ETS)) or stranded assets, jeopardising the EU climate targets [5]. Industry stakeholders and policy makers should implement a transformation strategy where new investments are directed towards viable technologies with a CO<sub>2</sub> mitigation potential.

Based on a comprehensive bottom-up analysis of 11 industrial sectors, we analysed the technical potential for industry electrification and show that electrification could almost entirely abate the energy-related CO<sub>2</sub> emissions from industry. Seventy eight per cent of the energy demand is electrifiable with technologies that are already established (St2), while 99% electrification can be achieved with technologies currently under development (St3). Such a deep electrification reduces final energy consumption by 20% (figure 5(a)) and reduces CO<sub>2</sub> emissions by 9% already based on today's electricity mix (~300 gCO<sub>2</sub> kWh<sub>el</sub><sup>-1</sup>). With an increasing decarbonisation of power supply (IEA: 12 gCO<sub>2</sub> kWh<sub>el</sub><sup>-1</sup>

in 2050), 78% electrification could halve industrial CO<sub>2</sub> emissions (figure 5(b)), while a deeper electrification in St3 could cut emissions by 78%, reducing the industry bottleneck to residual process CO<sub>2</sub>, mostly from cement and chemicals. These findings are based on a technological assessment of electric technologies, however a detailed cost analysis is needed to prove the economic viability of industry electrification.

The less CO<sub>2</sub>-intensive sectors (e.g. paper, wood, textiles etc), which combined account for 40% of Europe's industrial emissions, can be nearly entirely electrified in St2 reducing by 36% industrial emissions. These sectors mostly use low and medium temperature processes, which constitute potential entry points for electrification with established technologies such as electric boilers and heat pumps. These technologies allow for a gradual transformation since existing machines can be retrofitted, or hybrid systems can be installed, e.g. gas/electric boiler [75]. In this way, operators can get used to new technologies maintaining a stable production. Moreover, hybrid systems could ensure a smooth phase-in of electricity benefitting from (1) low electricity price hours, and (2) reduced risks associated with fuels price fluctuations and increasing CO<sub>2</sub> prices [3]. These drivers are likely to eventually shift hybrid operations towards all-electric systems.

The analysis shows that the most CO<sub>2</sub>-intensive sectors, i.e. primary steel, chemicals and cement, are the most challenging to electrify.

The energy demand from the cement sector could be fully electrified via power-to-heat, nevertheless the scalability of new technologies remains a critical aspect. In this sector, the CO<sub>2</sub> abatement potential of electrification (31%) is limited due to the large share of process CO<sub>2</sub> (68%), which can be reduced via CCS, or with alternative raw materials [76].

The heat and cooling demand from the chemical industry can be 100% electrified, although when the energy contained in feedstocks is accounted for, the electrification potential reduces to 23%. This electrification level can cut 62% of the sector CO<sub>2</sub> emissions, however end-of-life emissions are not comprised in the calculation. Indirect electrification is likely to play a complementary role to direct electrification in the reduction of CO<sub>2</sub> emissions from the chemical industry. High production volume chemicals can be synthesised with green hydrogen from electrolysis [3]. However, the synthesis of hydrocarbons relies on the implementation of CO<sub>2</sub> capture or other methodologies to source non-fossil carbon (e.g. direct air capture or biomass) [3, 77]. Synthetic fuels like bio-naphtha can also be produced from biomass [6, 78, 79].

The electrification of steel via EAF + 100% scrap feed could reduce the energy consumption from this sector by 70% and the CO<sub>2</sub> emissions by 74%. Electrowinning and hydrogen-based reduction

of iron are the most advanced routes for electrifying primary steel, and could prevent the usage of coke and CCS/U [3].

The complete electrification of industry requires two to three times more electricity (1786–2313 TWh) than the sector currently uses. In 2017, the renewable energy production capacity in Europe was nearly 1000 TWh [54], i.e. circa half of that required to meet the demand from industry electrification in St3. The generation capacity will have to increase by 40 TWh per yr until 2050 to meet the electricity demand in St3 [54]. An ongoing expansion of carbon-free power is a prerequisite for reducing emissions via electrification. This includes overcoming the economic and technical challenges of integrating high shares of renewables with distribution and transmission grid enhancements and storage technologies. Many modelling studies show that 100% renewables based energy systems can be technically and economically viable [80–84], however the expansion rate and the large upfront capital expenditures required for such disruptive transformation constitute significant barriers [85, 86].

An extensive electrification of industry will intensify the electricity peak demand and affect the energy costs since electricity prices tend to be higher in peak hours. Industry will have to maximise its demand flexibility and develop new smart approaches to peak-load management. Load shifting can be achieved by implementing storage technologies (e.g. batteries and renewable-gas storage), or by installing hybrid technologies, which allow switching from electricity to gas depending on the prices, and integrating renewable electricity from wind and solar power when available [87]. Another option is to increase onsite electricity generation that would provide greater autonomy and lower risks due to price volatility [73]. Circa 40% of the electricity consumed in industry is self-generated, of which only one fourth is produced from renewables [73]. Electrification could stimulate the expansion of decentralised energy supply systems as well as the integration of larger shares of renewable power.

The electrification of industry implies significant changes in production processes and is often met by industry stakeholders with scepticism. In most European countries, powering industrial systems with electricity would lead to an increase of the production cost since electricity is on average three times more expensive than natural gas [88]. An evident case concerns electric furnaces or heat pumps that have been narrowly adopted despite their technological maturity. In turn, the limited number of demonstrative applications as well as the lack of proven systems at large scale, hinders the further development of electrically powered technologies and the progress via learning-by-doing. Industry investments in electrification, not only monetary but also for the acquisition of technical expertise will probably stall until a clear

scenario is presented where electricity is going to be cost-competitive.

Transformative investment decisions require economic incentives and appropriate policies; here we identified three pillars to support the electrification of industry. First, the reduction of electricity taxation and levies to create a level playing field across energy carriers and a competitive electricity price. The results of such action can be observed in Sweden, where the difference between electricity and gas price is almost half than the European average [88], and industry is leading very ambitious projects to electrify steel and cement [3]. Second, the reduction of investment uncertainties by creating a clear carbon price signal for industry possible by complementing the EU-ETS with a minimum price, while reducing the carbon leakage risk for those sectors that face non-EU competition [89]. Third, the establishment of complementing policies such as technology support schemes and market introduction programs where carbon price fails to incentivise investments [89]. Catalysed by an advancing policy environment, industry can make efficient use of low-carbon electricity. Technologies available today provide entry points towards a deep electrification and first moving companies can benefit from emerging markets for low-carbon products.

## Acknowledgments

The research leading to these results has received funding by the Australian Department of Foreign Affairs and Trade and the German Federal Ministry of Education and Research (BMBF) under the grant agreement No. 03EK3046A (START Project) and from the European Union's Horizon 2020 research and innovation programme under grant agreements No. 821124 (NAVIGATE) and No. 730403 (INNO-PATHS).

## Data availability statement

The data that support the findings of this study are available upon reasonable request from the authors.

## References

- [1] IEA 2016 *World Energy Balances* Paris: IEA
- [2] Mantzos L et al 2018 'JRC-IDEES: integrated Database of the European Energy System' (<https://ec.europa.eu/jrc/en/potencia/jrc-idees>)
- [3] Philibert C 2017 *Renewable Energy for Industry from green energy to green materials and fuels* IEA
- [4] Seto K C, Davis S J, Mitchell R B, Stokes E C, Unruh G and Ürge-Vorsatz D 2016 Carbon lock-in: types, causes, and policy implications *Annu. Rev. Environ. Resour.* **41** 425–52
- [5] IPCC 2013 Summary for Policymakers *IPCC Special Report on Renewable Energy Sources and Climate Change Mitigation*, ed O Edenhofer et al. (Cambridge: Cambridge University Press: Cambridge University Press) 3-29
- [6] Material Economics 2019 *Industrial Transformation 2050 Pathways to Net-Zero Emissions from EU Heavy Industry*
- [7] AGORA Energiewende 2019 *Klimaneutrale Industrie Schlüsseltechnologien und Politikoptionen für Stahl, Chemie und Zement*
- [8] Luderer G et al 2018 Residual fossil CO<sub>2</sub> emissions in 1.5–2 °C pathways *Nat. Clim. Change* **8** 626–33
- [9] IEA 2018 *World Energy Outlook 2018*
- [10] Hepburn C, Adlen E, Beddington J, Carter E A, Fuss S, Mac Dowell N, Minx J C, Smith P and Williams C K 2019 The technological and economic prospects for CO<sub>2</sub> utilization and removal *Nature* **575** 87–97
- [11] Sgouridis S, Carbajales-Dale M, Csala D, Chiesa M and Bardi U 2019 Comparative net energy analysis of renewable electricity and carbon capture and storage *Nat. Energy* **4** 456–65
- [12] Ruhnau O, Bannik S, Otten S, Praktijnjo A and Robinius M 2019 Direct or indirect electrification? A review of heat generation and road transport decarbonisation scenarios for Germany 2050 *Energy* **166** 989–99
- [13] Chapter 4: strengthening and Implementing the Global Response *Global Warming of 1.5 °C. An IPCC Special Report on the Impacts of Global Warming of 1.5 °C above Pre-industrial Levels and Related Global Greenhouse Gas Emission Pathways, in the Context of Strengthening the Global Response to the Threat of Climate Change, Sustainable Development, and Efforts to Eradicate Poverty*, ed et al deConinck Heleen 2018 pp 313–443 Masson-Delmotte V (Cambridge: Cambridge University Press)
- [14] Pardo N, Vatopoulos K, Riekkola A K and Perez A 2013 Methodology to estimate the energy flows of the European Union heating and cooling market *Energy* **52** 339–52
- [15] Naegler T, Simon S, Klein M and Gils H C 2015 Quantification of the European industrial heat demand by branch and temperature level *Int. J. Energy Res.* **39** 2019–30
- [16] Rehfeldt M, Fleiter T and Toro F 2018 A bottom-up estimation of the heating and cooling demand in European industry *Energy Effic.* **11** 1057–82
- [17] Lechtenböhmer S, Nilsson L J, Åhman M and Schneider C 2016 Decarbonising the energy intensive basic materials industry through electrification—implications for future EU electricity demand *Energy* **115** 1623–31
- [18] Yilmaz H Ü, Keles D, Chiodi A, Hartel R and Mikulić M 2018 Analysis of the power-to-heat potential in the European energy system *Energy Strategy Rev.* **20** 6–19
- [19] Berenschot, CE Delft, Industrial Energy Experts, Energy Matters 2017 *Electrification in the Dutch process industry, In-depth study of promising transition pathways and innovation opportunities for electrification in the Dutch process industry*
- [20] Sandberg E, Toffolo A and Krook-Riekkola A 2019 A bottom-up study of biomass and electricity use in a fossil free Swedish industry *Energy* **167** 1019–30
- [21] Lord M 2018 *Zero Carbon Industry Plan Electrifying Industry* (BZE)
- [22] EPRI 2018 *U.S. National Electrification Assessment*
- [23] Mai T et al 2018 *Electrification Futures Study: Scenarios of Electric Technology Adoption and Power Consumption for the United States* NREL
- [24] Khanna N, Fridley D, Zhou N, Karali N, Zhang J and Feng W 2019 Energy and CO<sub>2</sub> implications of decarbonization strategies for China beyond efficiency: modeling 2050 maximum renewable resources and accelerated electrification impacts *Appl. Energy* **242** 12–26
- [25] Pellegrino J L, Margolis N, Justiniano M, Miller M and Thedki A 2004 *Energy Use, Loss, and Opportunities Analysis for U.S. Manufacturing and Mining* p 1218707
- [26] European Commission 2005 *Integrated Pollution Prevention and Control Reference Document on Best Available Techniques in the Smitheries and Foundries Industry*
- [27] Lupi S 2017 *Fundamentals of Electroheat—Electrical Technologies for Process Heating* (Berlin: Springer AG)
- [28] Arpagaus C, Bless F, Uhlmann M, Schiffmann J and Bertsch S S 2018 High temperature heat pumps: market



- overview, state of the art, research status, refrigerants, and application potentials *Energy* **152** 985–1010
- [29] Ullmann F et al 1985 *Ullmann's Encyclopedia of Industrial Chemistry* (New York: VCH)
- [30] David A, Mathiesen B V, Averfalk H, Werner S and Lund H 2017 Heat roadmap Europe: large-scale electric heat pumps in district heating systems *Energies* **10** 578
- [31] European Commission 2003 *Integrated Pollution Prevention and Control (IPPC) Reference Document on Best Available Techniques for the Textiles Industry*
- [32] Joint Research Centre 2007 *Integrated Pollution Prevention and Control, Reference Document on Best Available Techniques for the Manufacture of Large Volume Inorganic Chemicals—Ammonia, Acids and Fertilisers*
- [33] Suhr M et al 2015 *Best Available Techniques (BAT) Reference Document for the Production of Pulp, Paper and Board. Industrial Emissions Directive 2010/75/EU (Integrated Pollution Prevention and Control)* Joint Research Centre
- [34] Boulamanti A and Moya J A 2017 *Energy efficiency and GHG emissions: Prospective scenarios for the Chemical and Petrochemical Industry* Joint Research Centre
- [35] European Commission 2016 *Mapping and analyses of the current and future (2020–2030) heating/cooling fuel deployment (fossil/renewables)*
- [36] Danish Energy Agency, Energinet 2016 *Technology Data for Energy Plants for Electricity and District heating generation*
- [37] European Commission 2007 *Reference Document on Best Available Techniques in the Ceramic Manufacturing Industry*
- [38] Galitsky C, Galitsky C and Worrell E 2008 *Energy Efficiency Improvement and Cost Saving Opportunities for the Vehicle Assembly Industry: An ENERGY STAR Guide for Energy and Plant Managers* LBNL-50939-Revision p 927881
- [39] Monforti-Ferrario F et al 2015 *Energy use in the EU food sector: State of play and opportunities for improvement* Joint Research Centre
- [40] Santonja G G, Karlis P, Stubdrup K R, Brinkmann T and Roudier S 2019 *Best Available Techniques (BAT) Reference Document for the Food, Drink and Milk Industries. Industrial Emissions Directive 2010/75/EU (Integrated Pollution Prevention and Control)* Joint Research Centre
- [41] European Commission 2007 *Integrated Pollution Prevention and Control Reference Document on Best Available Techniques for the Production of Speciality Inorganic Chemicals*
- [42] Oghbaei M and Mirzaee O 2010 Microwave versus conventional sintering: A review of fundamentals, advantages and applications *J. Alloys Compd.* **494** 175–89
- [43] Morschhäuser R et al 2012 Microwave-assisted continuous flow synthesis on industrial scale *Green Process. Synth.* **1** 281–90
- [44] Makul N, Rattanadecho P and Agrawal D K 2014 Applications of microwave energy in cement and concrete—a review *Renew. Sustainable Energy Rev.* **37** 715–33
- [45] Buttress A, Jones A and Kingman S 2015 Microwave processing of cement and concrete materials—towards an industrial reality? *Cem. Concr. Res.* **68** 112–23
- [46] Karayannis V G 2016 Microwave sintering of ceramic materials *IOP Conf. Ser. Mater. Sci. Eng.* **161** 012068
- [47] Dąbrowska S, Chudoba T, Wojnarowicz J and Łojkowski W 2018 Current trends in the development of microwave reactors for the synthesis of nanomaterials in laboratories and industries: a review *Crystals* **8** 379
- [48] Naranjo R D, Kwon J-Y, Majumdar R and Choate W T 2005 *Advanced Melting Technologies: energy Saving Concepts and Opportunities for the Metal Casting Industry* BCS, Incorporated
- [49] Cusano G et al 2017 *Best Available Techniques (BAT) Reference Document for the Non-Ferrous Metals Industries - Industrial Emissions Directive 2010/75/EU (Integrated Pollution Prevention and Control)* Joint Research Centre
- [50] Remus R, Aguado-Monsonet M A, Roudier S and Delgado Sancho L 2013 *Best Available Techniques (BAT) Reference Document for: Iron and Steel Production: Industrial Emissions Directive 2010/75/EU: (Integrated Pollution Prevention and Control)* Joint Research Centre
- [51] Bonizzoni G and Vassallo E 2002 Plasma physics and technology; industrial applications *Vacuum* **64** 327–36
- [52] Kessel H U, Hennicke J, Kirchner R and Kessel T 2010 *Rapid sintering of novel materials by FAST/SPS—Further development to the point of an industrial production process with high cost efficiency* FCT Systeme GmbH
- [53] Samal S 2017 Thermal plasma technology: the prospective future in material processing *J. Cleaner Prod.* **142** 3131–50
- [54] IRENA 2019 *Electrification with renewables: driving the transformation of energy services*
- [55] Element Energy Limited & AEA 2012 *2050 options for decarbonising heat in buildings*
- [56] Frontier Economics & Element Energy Limited 2013 *Pathways to high penetration of heat pumps*
- [57] Soysal E R, Sneum D M, Skytte K, Olsen O J and Sandberg E 2016 Electric boilers in district heating systems: a comparative study of the Scandinavian market conditions. *Swedish Association for Energy Economics Conf.* 2016
- [58] Vijay A and Hawkes A 2017 The techno-economics of small-scale residential heating in low carbon futures *Energies* **10** 1915
- [59] Popovski E, Fleiter T, Santos H, Leal V and Fernandes E O 2018 Technical and economic feasibility of sustainable heating and cooling supply options in southern European municipalities—a case study for Matosinhos, Portugal *Energy* **153** 311–23
- [60] Brown H L 1996 *Energy Analysis of 108 Industrial Processes* (Lilburn: Fairmont Press)
- [61] Stubdrup K R, Karlis P, Roudier S and Delgado Sancho L 2016 *Best Available Techniques (BAT) Reference Document for the Production of Wood-based Panels Industrial Emissions Directive 2010/75/EU (Integrated Pollution Prevention and Control)* Joint Research Centre
- [62] Scalet B M, Garcia M M, Sissa A Q, Roudier S and Delgado Sancho L 2013 *Best available techniques (BAT) reference document for the manufacture of glass: industrial emissions Directive 2010/75/EU: integrated pollution prevention and control* Joint Research Centre
- [63] Schorch F, Kourti I, Scalet B M, Roudier S and Delgado Sancho L 2013 *Best Available Techniques (BAT) Reference Document for the Production of Cement, Lime and Magnesium Oxide: industrial Emissions Directive 2010/75/EU: (Integrated Pollution Prevention and Control)* Joint Research Centre
- [64] Ellis L D, Badel A F, Chiang M L, Park R J-Y and Chiang Y-M 2019 Toward electrochemical synthesis of cement—an electrolyzer-based process for decarbonating CaCO<sub>3</sub> while producing useful gas streams *Proc. Natl Acad. Sci.* **117** 201821673
- [65] BASF 2019 'Innovations for a climate-friendly chemical production' ([www.basf.com/global/en/media/news-releases/2019/01/p-19-103.html](http://www.basf.com/global/en/media/news-releases/2019/01/p-19-103.html))
- [66] Wismann S T, Engbæk J S, Vendelbo S B, Bendixen F B, Eriksen W L, Aasberg-Petersen K, Frandsen C, Chorkendorff I and Mortensen P M 2019 Electrified methane reforming: a compact approach to greener industrial hydrogen production *Science* **364** 756–9
- [67] Vattenfall 2018 'Vattenfall and Cementa take the next step towards a climate neutral cement' (<https://group.vattenfall.com/press-and-media/news-press-releases/press-releases/2019/vattenfall-and-cementa-take-the-next-step-towards-a-climate-neutral-cement>)
- [68] World Steel Association 2018 *Steel Statistical Yearbook*
- [69] Worrell E, Price L, Neelis M, Galitsky C and Zhou N 2008 *World Best Practice Energy Intensity Values for Selected Industrial Sectors* LBNL
- [70] Pauliuk S, Milford R L, Müller D B and Allwood J M 2013 The steel scrap age *Environ. Sci. Technol.* **47** 130307142353004
- [71] IEA 2017 *Energy Technology Perspectives 2017*



- [72] EEA 2019 'Overview of electricity production and use in Europe' ([www.eea.europa.eu/data-and-maps/indicators/overview-of-the-electricity-production-2/assessment-4](http://www.eea.europa.eu/data-and-maps/indicators/overview-of-the-electricity-production-2/assessment-4))
- [73] Dossow P, von Room S, Kern T and Guminski A 2019 Relevance and potential for industrial on-site electricity generation on a European scale *16th IAEE European Conf. Ljubljana* 22
- [74] European Commission 2019 *Communication from the Commission to the European Parliament, the European Council, the Council, the European Economic and Social Committee and the Committee of the Regions. The European Green Deal* (COM(2019) 640 final)
- [75] Heinen S, Burke D and O'Malley M 2016 Electricity, gas, heat integration via residential hybrid heating technologies—an investment model assessment *Energy* **109** 906–19
- [76] Scrivener K L, John V M and Gartner E M 2018 Eco-efficient cements: potential economically viable solutions for a low-CO<sub>2</sub> cement-based materials industry *Cem. Concr. Res.* **114** 2–26
- [77] Chen C, Lu Y and Banares-Alcantara R 2019 Direct and indirect electrification of chemical industry using methanol production as a case study *Appl. Energy* **243** 71–90
- [78] Alonso D M, Bond J Q and Dumesic J A 2010 Catalytic conversion of biomass to biofuels *Green Chem.* **12** 1493–513
- [79] Zacharopoulou V and Lemonidou A A 2018 Olefins from biomass intermediates: a review *Catalysts* **8** 2
- [80] Schellekens G, Battaglini A, Lilliestam J, McDonnell J and Patt A 2010 100% renewable electricity: a roadmap to 2050 for Europe and North Africa ([www.pwc.co.uk/eng/publications/100\\_percent\\_renewable\\_electricity.html](http://www.pwc.co.uk/eng/publications/100_percent_renewable_electricity.html))
- [81] Connolly D and Mathiesen B V 2014 A technical and economic analysis of one potential pathway to a 100% renewable energy system *Int. J. Sustainable Energy Plan. Manage.* **1** 7–28
- [82] Jacobson M Z, Delucchi M A, Cameron M A and Frew B A 2015 Low-cost solution to the grid reliability problem with 100% penetration of intermittent wind, water, and solar for all purposes *Proc. Natl Acad. Sci.* **112** 15060–5
- [83] Brown T W, Bischof-Niemz T, Blok K, Breyer C, Lund H and Mathiesen B V 2018 Response to 'Burden of proof: a comprehensive review of the feasibility of 100% renewable-electricity systems' *Renew. Sustainable Energy Rev.* **92** 834–47
- [84] Bogdanov D, Farfan J, Sadovskaia K, Aghahosseini A, Child M, Gulagi A, Oyewo A S, de Souza Noel Simas Barbosa L and Breyer C 2019 Radical transformation pathway towards sustainable electricity via evolutionary steps *Nat. Commun.* **10** 1077
- [85] World Wildlife Fund 2011 *The energy report: 100% renewables by 2050* World Wildlife Fund
- [86] Creutzig F, Agoston P, Goldschmidt J C, Luderer G, Nemet G and Pietzcker R C 2017 The underestimated potential of solar energy to mitigate climate change *Nat. Energy* **2** 2017140
- [87] Luderer G, Pietzcker R C, Carrara S, de Boer H S, Fujimori S, Johnson N, Mima S and Arent D 2017 Assessment of wind and solar power in global low-carbon energy scenarios: an introduction *Energy Econ.* **64** 542–51
- [88] Department for Business, Energy & Industrial Strategy 2017 'International domestic energy prices' (London: UK Government) (available at: [www.gov.uk/government/statistical-data-sets/international-domestic-energy-prices](http://www.gov.uk/government/statistical-data-sets/international-domestic-energy-prices))
- [89] Neuhoff K et al 2019 Building Blocks for a Climate Neutral-European Industrial Sector DWI