



Solution regions in the parameter space of a 3-RRR decoupled robot for a prescribed workspace

Damien Chablat, Guillaume Moroz, Vigen Arakelian, Sébastien Briot,
Philippe Wenger

► To cite this version:

Damien Chablat, Guillaume Moroz, Vigen Arakelian, Sébastien Briot, Philippe Wenger. Solution regions in the parameter space of a 3-RRR decoupled robot for a prescribed workspace. Lenarcic J., Husty M. Latest Advances in Robot Kinematics, Springer, Dordrecht, pp.357-364, 2012, 978-94-007-4619-0. hal-00687005

HAL Id: hal-00687005

<https://hal.archives-ouvertes.fr/hal-00687005>

Submitted on 11 Apr 2012

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Solution regions in the parameter space of a 3-RRR decoupled robot for a prescribed workspace

D. Chablat, G. Moroz, V. Arakelian, S. Briot, and P. Wenger

Abstract This paper proposes a new design method to determine the feasible set of parameters of translational or position/orientation decoupled parallel robots for a prescribed singularity-free workspace of regular shape. The suggested method uses Groebner bases to define the singularities and the cylindrical algebraic decomposition to characterize the set of parameters. It makes it possible to generate all the robot designs. A 3-RRR decoupled robot is used to validate the proposed design method.

Key words: Parallel robot, Design, Singularities, Groebner basis, Discriminant varieties, Cylindrical algebraic decomposition.

1 Introduction

Parallel robots are attractive for various reasons but one has to cope with their singularities. There exists three main ways of coping with singularities, which have their own merits. A first approach consists in eliminating the singularities at the design stage by properly determining the kinematic architecture, the geometric parameters and the joint limits [1, 8]. This approach is difficult to apply in general and restricts the design possibilities but it is safe. A second approach is the determination of the singularity-free regions in the workspace [2, 3]. This solution does not involve a priori design restrictions but it may be difficult to determine safe regions that are sufficiently large. Finally, a third way consists in planning singularity-free trajectories in the manipulator workspace [4]. In this paper, the first approach is used. Designing a parallel robot that will operate in a singularity-free workspace is a first requirement but the designer often needs to optimize the robot as function

D. Chablat
Institut de Recherche en Communications et Cyberntique de Nantes,
e-mail: damien.chablat@ircyn.ec-nantes.fr

of various criteria [5]. Our goal is to generate the set of geometric parameters for a given singularity-free workspace. The resulting solution regions in the parameter space are of primary interest for the designer. Accordingly, this paper proposes a new design method to determine these solution regions. This method holds for parallel translational robots and for parallel robots with position/orientation decoupled architecture. Groebner bases are used to define the singularities and Cylindrical algebraic decomposition is applied to characterize the set of design parameters. The paper is organized as follows. Section 2 introduces the design method to generate the solution regions in the parameter space for a prescribed workspace of regular shape. Then, Section 3 applies this method to a 3-RRR planar parallel robot with position/orientation decoupled architecture.

2 Design method

2.1 Definition of the prescribed regular workspace

A robot should have sufficiently large, regular workspace with no singularity inside [9]. For planar (resp. spatial) translational robots, a regular workspace can be defined by a circle, a square or a rectangle (resp. a cylinder, a cube or parallelepiped). A circle, a cylinder or a sphere can be modeled with one single algebraic equation. A rectangle or a parallelepiped can be defined with a set of linear equations. It can be approximated using a Lamé curve (resp. surface). This approximation makes it possible to handle only one equation, thus simplifying the problem resolution as will be shown further. In the rest of the paper, the problem is formulated in the plane for practical reasons. A Lamé curve based workspace \mathcal{W}_L can be defined by the following boundary algebraic equation:

$$\mathcal{W}_L : \left(\frac{x-x_c}{l_x/2}\right)^n + \left(\frac{y-y_c}{l_y/2}\right)^n = 1 \quad (1)$$

l_x and l_y being the edge lengths of the desired rectangle, n being a strictly positive integer. For the purpose of this paper, $n = 4$ and $l_x = l_y = 4$. A rectangle based workspace can be modeled by four parametric lines, noted $\overline{\mathcal{W}}_{Ci}$

$$\overline{\mathcal{W}}_{Ci} : \begin{cases} x = P_{(i)x}t + P_{(i+1)x}(1-t) \\ y = P_{(i)y}t + P_{(i+1)y}(1-t) \end{cases} \text{ with } t \in [0, 1], i = 1, 2, 3, 4 \quad (2)$$

$P_{(i)x} = x_c \pm l_x/2$ $P_{(i)y} = y_c \pm l_y/2$ where P_i denote the rectangle vertices. For position/orientation decoupled robot architectures, the regular workspace is defined using the same approach for the translational module and the orientation module is considered separately, as it will be shown in the next section.

2.2 Method to generate the solution regions in the parameter space

The problem can be stated as follows: find the regions in the parameter space where the boundaries $\overline{\mathcal{W}}$ of the workspace \mathcal{W} have no intersection with the serial and parallel singularities loci δ_i , namely:

$$\mathcal{P} : [a_1 \dots a_n] / \delta_i \cap \overline{\mathcal{W}} = \emptyset, a_j > 0, j = 1, \dots, n \quad (3)$$

where $[a_1 \dots a_n]$ are the set of design parameters. This approach stands if and only if the singularity curves or points are never fully included in the prescribed region. In order to find the design parameters for which the intersection is empty, the design parameters will be sorted according to the number of intersections between the singularities and $\overline{\mathcal{W}}$. It is then necessary to decompose the design parameter space into cells C_1, \dots, C_k , such that: (a) C_i is an open connected subset of the design parameter space; (b) for all design parameter values in C_i , the design parameter space has a constant number of solutions. This analysis is done in 3 steps [6]:

- computation of a subset of the joint space (workspace, resp.) where the number of solutions changes: the *Discriminant Variety*;
- description of the complementary of the discriminant variety in connected cells: the *Generic Cylindrical Algebraic Decomposition*;
- connecting the cells that belong to the same connected component of the complementary of the discriminant variety: *interval comparisons*.

The results are sets of regions with the same number of intersections between δ_i and $\overline{\mathcal{W}}$. These three steps were integrated in a single function in the Siropa Library implemented in Maple (Moroz, 2010). For the purpose of this study, only the solutions with zero intersections are considered. When a decoupled robot is analyzed, problem \mathcal{P} is first treated for a prescribed workspace and a slightly modified problem \mathcal{P}' is then treated, in which the set of design parameters include the orientation parameters. This approach is illustrated in the next section.




Fig. 1 The 3-RRR decoupled parallel robot under study

3 Application to a 3-RRR decoupled parallel robot

The robot under study is a planar 3-RRR robot with a modified mobile platform design [10] (Fig. 1), thus decoupling the position and the orientation of the platform [11]. It is assumed to have three identical legs. The loop (A_1, B_1, P, B_2, A_2) corresponds to a five-bar robot that defines the position of point P and the leg (A_3, B_3, C_3) adjusts the orientation according to the position. If position of point P is given, this third leg is equivalent to a four-bar linkage. For this 3-RRR robot, thus, the problem

can be split into two parts: (i) design of the five-bar robot (the translational module) so that the end-effector can move in a prescribed singularity-free workspace and (ii) design of the third leg (the four-bar linkages (A_3, B_3, C_3, P)) so that the platform can be oriented within desired bounds throughout the prescribed workspace.

3.1 Translational module: five-bar robot

The constraint equations of the five-bar robot are defined as:

$$\mathcal{C}_i : \begin{cases} x - l \cos(\theta_1) - l \cos(\theta_2) + e/2 = 0 & y - l \sin(\theta_1) - l \sin(\theta_2) = 0 \\ x - l \cos(\theta_3) - l \cos(\theta_4) - e/2 = 0 & y - l \sin(\theta_3) - l \sin(\theta_4) = 0 \end{cases} \quad (4)$$

where $\|\mathbf{A}_1 \mathbf{B}_1\| = \|\mathbf{A}_2 \mathbf{B}_2\| = \|\mathbf{B}_1 \mathbf{P}\| = \|\mathbf{B}_2 \mathbf{P}\| = e$ and $\|\mathbf{A}_1 \mathbf{A}_2\| = e$. The differentiation of the relation between the input variables \mathbf{q} and the output variables \mathbf{X} with respect to time leads to the velocity model $\mathbf{A} \mathbf{t} + \mathbf{B} \dot{\mathbf{q}} = 0$ where \mathbf{A} and \mathbf{B} are $n \times n$ Jacobian matrices, \mathbf{t} is the platform twist and $\dot{\mathbf{q}}$ is the vector of joint rates. The roots of the determinant of \mathbf{A} and \mathbf{B} define the parallel and serial singularities, respectively. The first ones are directly characterized in the workspace and the second ones have to be projected from the joint space onto the workspace. The singularities are calculated using Groebner bases [6] as in [7].

The parallel singularities can be factored into a sextic, denoted δ_{p1} , and two quadratic polynomial equations, denoted δ_{p2} and δ_{p3}

$$\begin{aligned} \delta_{p1} : & 16(y^6 + x^6) + 8(e^2 y^4 - e^2 x^4) + 48(y^4 x^2 + y^2 x^4) + e^4 y^2 + e^4 x^2 - 16l^2 e^2 y^2 = 0 \\ \delta_{p2} : & x^2 + \left(y - \frac{1}{2} \sqrt{4l^2 - e^2} \right)^2 - l^2 = 0 \quad \delta_{p3} : x^2 + \left(y + \frac{1}{2} \sqrt{4l^2 - e^2} \right)^2 - l^2 = 0 \end{aligned}$$

The serial singularities are two quadratic equations

$$\delta_{s1} : (2x + e)^2 + 4y^2 - 16l^2 = 0 \quad \delta_{s2} : (2x - e)^2 + 4y^2 - 16l^2 = 0$$

Due to the symmetry of the robot with respect to y-axis, the design parameters are restricted to (l, f) i.e. the size of the legs and the distance from axis x to the geometric center of the robot's workspace \mathcal{W} , respectively. Parameter e is set to 1 to have a two dimensional representation of the solution regions. For robots with two degrees of freedom, the intersection of the boundaries of \mathcal{W} and the singularities is generically a finite set of points. Thus, as mentioned in 2.2, the singularity curves or points are never fully included in the prescribed region.

Lam curve based workspace: the problem to be solved is:

$$\mathcal{P}_L : [f, l] / \mathcal{S}_{p1} \cap \mathcal{S}_{p2} \cap \mathcal{S}_{p3} \cap \mathcal{S}_{s1} \cap \mathcal{S}_{s2} \cap \overline{\mathcal{W}} = \emptyset, f > 0, l > 0$$

Only the solutions with zero intersections are kept. Fig. 2 depicts the three solution regions obtained \mathcal{R}_{L1} , \mathcal{R}_{L2} and \mathcal{R}_{L3} , i.e. the parameter sets for which the prescribed workspace is singularity-free.

It turns out that in \mathcal{R}_{L1} , \mathcal{W}_L is inside the workspace (Fig. 2b). Conversely, in \mathcal{R}_{L2} and \mathcal{R}_{L3} , \mathcal{W}_L is outside the workspace (Fig. 2c). Thus the only feasible region is \mathcal{R}_{L1} . A feasible solution should not be taken on the boundary of \mathcal{R}_{L1} since any solution on the boundary could touch a singularity curve. Fig. 2b shows a solution near the boundary of \mathcal{R}_{L1} .

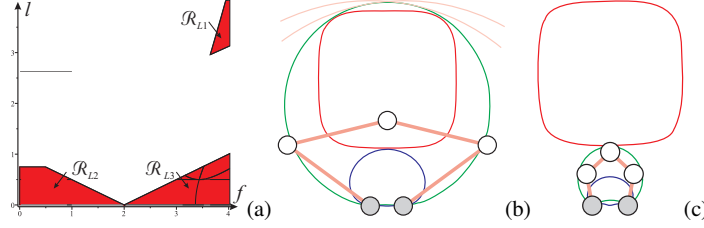


Fig. 2 (a) Solution regions \mathcal{R}_{L1} , \mathcal{R}_{L2} and \mathcal{R}_{L3} of problem \mathcal{P}_L and five-bar robot design when (b) $f = 3.7$, $l = 3$ (c) $f = 3.7$, $l = 0.9$

Square based workspace: in this case, four separate problems need to be solved:

$$\mathcal{P}_{Ci} : [f \ l] / \mathcal{S}_{p1} \cap \mathcal{S}_{p2} \cap \mathcal{S}_{p3} \cap \mathcal{S}_{s1} \cap \mathcal{S}_{s2} \cap \overline{\mathcal{W}_{Ci}} = \emptyset, f > 0, l > 0, t \in [0, 1], i = 1, \dots, 4$$

where are the parametric equations defining the boundaries of the square. Only the solutions with zero intersections are kept. Due to the symmetry of the square with respect to the y-axis, \mathcal{P}_{C3} and \mathcal{P}_{C4} yield the same regions in the design parameters space. Fig. 3 depicts (a) four connected solution regions for problem \mathcal{P}_{C1} , (b) two solution regions for \mathcal{P}_{C2} and (c) three solution regions for \mathcal{P}_{C3} . As compared to the Lamé curve based workspace, there is an additional step here: the final regions must be obtained by intersecting all these regions, thus yielding the three regions \mathcal{R}_{Cf13} , \mathcal{R}_{Cf2} and \mathcal{R}_{Cf3} as shown in Fig. 4. As expected, the solution regions obtained are similar to those associated with a Lamé curve (Fig.2) and only \mathcal{R}_{Cf1} is solution to the problem for the same reasons. Fig. 5a shows a solution near the boundary of \mathcal{R}_{Cf3} .

3.2 Orientation module: four-bar linkages

One of the two base points of the four-bar linkages is the reference point $P(x,y)$ of the moving platform. Accordingly, the constraint equation of the four-bar linkage is:

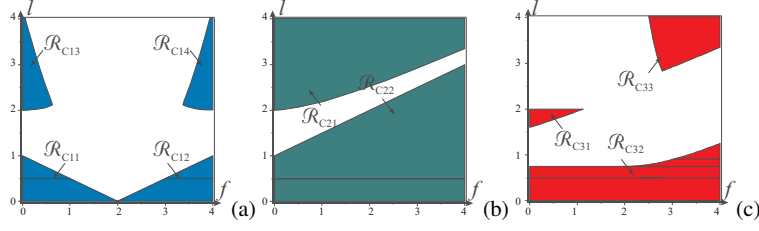


Fig. 3 Solution regions for problems (a) \mathcal{P}_{C1} , (b) \mathcal{P}_{C2} , (c) \mathcal{P}_{C3} and (d) intersection regions \mathcal{R}_{Cf1} , \mathcal{R}_{Cf2} and \mathcal{R}_{Cf3}

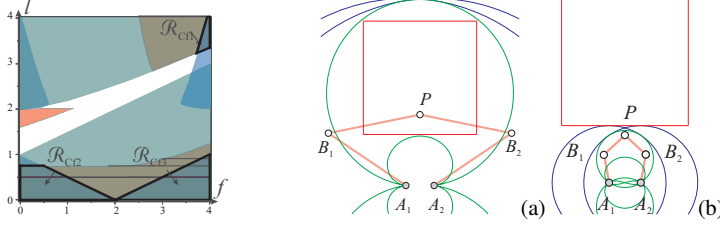


Fig. 4 Intersection regions \mathcal{R}_{Cf1} , \mathcal{R}_{Cf2} and \mathcal{R}_{Cf3} **Fig. 5** A five-bar solution robot when $f = 3.8$, $l = 3.3$ from \mathcal{R}_{Cf1} (a) and when $f = 3.8$, $l = 0.9$ from \mathcal{R}_{Cf2} (b)

$$\mathcal{E}_2 : (x + d \cos(\alpha) - l \cos(\theta_5))^2 + (y + d \sin(\alpha) - g - l \sin(\theta_5))^2 = l^2 \quad (5)$$

where θ_5 and α are the input and output angles, respectively, $\|\mathbf{A}_3\mathbf{B}_3\| = \|\mathbf{B}_3\mathbf{P}\| = l$, $\|\mathbf{C}_3\mathbf{P}\| = d$ and $\|\mathbf{A}_3\mathbf{O}\| = g$. A serial (resp. parallel) singularity is reached whenever $(\mathbf{A}_3\mathbf{B}_3)$ is aligned with $(\mathbf{B}_3\mathbf{C}_3)$ (resp. when $(\mathbf{B}_3\mathbf{C}_3)$ is aligned with $(\mathbf{C}_3\mathbf{P})$). These singularities are defined as follows:

$$\begin{aligned} \delta_{s3} : (2g \sin(\alpha) - 2x \cos(\alpha) - 2y \sin(\alpha))d - d^2 - x^2 - g^2 - y^2 + 4l^2 + 2yg &= 0 \\ \delta_{p4} : g^2 + 2(l \sin(\alpha) - d \sin(\alpha) - y)g + x^2 \\ (d \cos(\alpha) - 2l \cos(\alpha))x + y^2 + (2d \sin(\alpha) - 2l \sin(\alpha))y + d^2 - 2ld &= 0 \\ \delta_{p5} : g^2 - 2(l \sin(\alpha) + d \sin(\alpha) + y)g + x^2 + \\ (d \cos(\alpha) + 2l \cos(\alpha))x + y^2 + (2d \sin(\alpha) + 2l \sin(\alpha))y + d^2 + 2ld &= 0 \end{aligned}$$

It is proposed to find those designs for which the platform can be oriented within desired bounds throughout the prescribed workspace. Accordingly, the parameters considered here are the orientation angle α of the moving platform plus only one geometric parameter to handle a two-dimensional parameter space. For the purpose of this study, we choose the distance between the fixed base point C_3 and the geometric center of the prescribed workspace: $h = g - f$ and parameter d is set to 1 to have a two dimensional representation of the solution regions.

Lamé curve prescribed workspace: From Fig. 2, the smallest value of parameter l is equal to 3. This value is chosen for the four-bar linkage design. The following problem has then to be solved:

$$\mathcal{P}_L : [h \ \alpha] / \delta_{p4} \cap \delta_{p5} \cap \delta_{s3} \cap \overline{\mathcal{W}}_L = \emptyset, h > 0 \quad (6)$$

There exist two solution regions, \mathcal{R}_{L1} and \mathcal{R}_{L2} (Fig. 6), each one being associated with a single working mode and a single assembly mode. These regions describe the orientation ranges as function of parameter h , for which the robot can reach the full prescribed workspace without crossing singularities. It is then possible to choose h such that the range of the angular displacement α is greater than a prescribed value.

Square prescribed workspace: From Fig. 3, the smallest value of parameter l is equal to 3.3. This value is chosen for the 4-bar linkage design. The following problems have to be solved:

$$\mathcal{P}_{C_i} : [h \ \alpha] / \delta_{p4} \cap \delta_{p5} \cap \delta_{s3} \cap \overline{\mathcal{W}}_i = \emptyset, h > 0, t \in [0 \ 1], i = 1, \dots, 4 \quad (7)$$

The solutions regions of these problems and the intersection regions are shown in Fig. 7 and Fig. 8, respectively. Figure 9 depicts two 3-RRR parallel robots obtained for a square regular workspace. The solution obtained in Fig. 9b is more compact than in Fig. 9a and its angular range interval is greater but the design should take into account the self collisions.




Fig. 6 Solution regions of problem \mathcal{P}_L for a four-bar linkage when $l = 3$

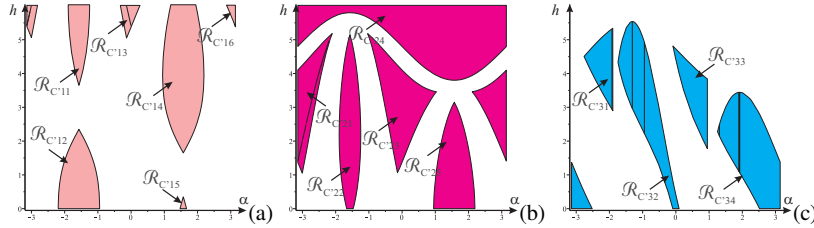


Fig. 7 Solution regions for problems (a) \mathcal{P}_{C1} , (b) \mathcal{P}_{C2} , (c) \mathcal{P}_{C3}




Fig. 8 Intersection regions when $l = 3.3$

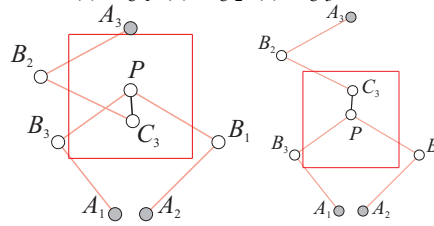


Fig. 9 Two examples from the regions \mathcal{P}_{C5} and \mathcal{P}_{C6} for (a) $h = 4.25, \alpha = [-1.717 \ -1.424]$ and (b) $h = 2.2, \alpha = [1.306 \ 1.835]$.

4 Conclusions

This paper presented a new design method to determine the feasible set of parameters of parallel manipulators for a prescribed singularity-free regular workspace. Rather than giving a single feasible or optimal solution, this method provides the solution regions in the parameter space. Groebner bases, discriminant varieties and cylindrical algebraic decomposition were used to generate the solution regions. As a result, their boundaries have an exact formulation. Solutions close to the boundaries of these regions correspond to robots for which the prescribed workspace is close to a singularity curve. The prescribed workspace can be defined in a more restrictive way to ensure that the robot will remain far enough from singularities. A solution would be to add a condition relying on some kinetostatic index [9]. The method was applied to a 3-RRR parallel planar robot with position/orientation decoupled architecture. It can handle other types of translational or decoupled robots but there are some limits that are due to the algebraic tools used. In particular, the number of parameters involved in the elimination process should not be too high.

References

1. Arsenault M., Boudreau R.: "The Synthesis of Three-Degree-of-Freedom Planar Parallel Robots with Revolute Joints (3-RRR) for an Optimal Singularity-Free Workspace," *Journal of Robotic Systems*, 21(5), pp. 259-274 (2004).
2. Merlet, J.P.: "Determination of the presence of singularities in 6D workspace of a Gough parallel manipulator," *Int. Symposium on Advances in Robot Kinematics*, pp.39-48 (1998).
3. Li H. and C.M. Gosselin: "Determination of maximal singularity-free zones in the workspace of planar three-degree-of-freedom parallel mechanisms," *Mechanism and Machine Theory*, Vol.41(10), pp 1157-1167 (2006).
4. Sen S., Dasgupta B., Mallik A.K.: "Variational approach for singularity-free-path-planning of parallel manipulators," *Mechanism and Machine Theory*, 38 (11), pp. 1165-1183 (2003).
5. McCarthy J.M., Soh G.S.: "Geometric Design of Linkages", 2nd Edition, Springer (2010).
6. Lazard D., Rouillier F.: "Solving parametric polynomial systems," *J. Symb. Comput.*, 42(6), pp. 636-667 (2007).
7. Moroz G., Chablat D., Wenger P., Rouillier F.: "Cusp points in the parameter space of RPR-2PRR parallel manipulator," 3-rd European Conference on Robot Science, Cluj-Napoca, Romania, pp. 29-38 (2010).
8. Wenger P., Gosselin C., Maill B.: "A comparative study of serial and parallel robot topologies for machine tools," *Int. Workshop on Parallel Kinematic Machines 1999*, Milan, Italie, pp. 23-35 (1999).
9. Chablat D., Wenger P., Majou F., Merlet J.P.: "An Interval Analysis Based Study for the Design and the Comparison of 3-DOF Parallel Kinematic Machines," *International Journal of Robotics Research*, 23(6), pp. 615-624 (2004).
10. Arakelian V., Briot S., Yatsun S., Yatsun A.: "A New 3-DoF Planar Parallel Manipulator with Unlimited Rotation Capability," 13th World Congress in Robot and Machine Science, Guanajuato, Mexico (2011).
11. Gogu G.: "Structural Synthesis of Parallel Robots," Springer Netherlands (2009).