



LEEDS  
BECKETT  
UNIVERSITY

---

Citation:

Zhang, X and Hu, Y and Deng, J and Xu, H and Wen, H (2022) Feature Engineering and Artificial Intelligence-Supported Approaches Used for Electric Powertrain Fault Diagnosis: A Review. IEEE Access, 10. pp. 29069-29088. ISSN 2169-3536 DOI: <https://doi.org/10.1109/access.2022.3157820>

Link to Leeds Beckett Repository record:

<https://eprints.leedsbeckett.ac.uk/id/eprint/8544/>

Document Version:

Article (Published Version)

---

Creative Commons: Attribution 4.0

The aim of the Leeds Beckett Repository is to provide open access to our research, as required by funder policies and permitted by publishers and copyright law.

The Leeds Beckett repository holds a wide range of publications, each of which has been checked for copyright and the relevant embargo period has been applied by the Research Services team.

We operate on a standard take-down policy. If you are the author or publisher of an output and you would like it removed from the repository, please [contact us](#) and we will investigate on a case-by-case basis.

Each thesis in the repository has been cleared where necessary by the author for third party copyright. If you would like a thesis to be removed from the repository or believe there is an issue with copyright, please contact us on [openaccess@leedsbeckett.ac.uk](mailto:openaccess@leedsbeckett.ac.uk) and we will investigate on a case-by-case basis.

Received January 17, 2022, accepted March 4, 2022, date of publication March 8, 2022, date of current version March 21, 2022.

Digital Object Identifier 10.1109/ACCESS.2022.3157820

# Feature Engineering and Artificial Intelligence-Supported Approaches Used for Electric Powertrain Fault Diagnosis: A Review

XIAOTIAN ZHANG<sup>1</sup>, (Student Member, IEEE), YIHUA HU<sup>1</sup>, (Senior Member, IEEE),  
JIAMEI DENG<sup>2</sup>, (Senior Member, IEEE), HUI XU<sup>2</sup>, AND  
HUIQING WEN<sup>3</sup>, (Senior Member, IEEE)

<sup>1</sup>Department of Electronic Engineering, University of York, York YO10 5DD, U.K.

<sup>2</sup>School of Built Environment, Engineering, and Computing, Leeds Beckett University, Leeds LS1 3HE, U.K.

<sup>3</sup>Department of Electrical and Electronic Engineering, Xi'an Jiaotong-Liverpool University, Suzhou 215000, China

Corresponding author: Jiamei Deng (j.deng@leedsbeckett.ac.uk)

This work was supported by the Royal Society Newton Advanced Fellowship.

**ABSTRACT** Electric powertrain is constituted by electric machine transmission unit, inverter and battery packs, etc., is a highly-integrated system. Its reliability and safety are not only related to industrial costs, but more importantly to the safety of human life. This review is the first contribution to comprehensively summarize both the feature engineering methods and artificial intelligence (AI) algorithms (including machine learning, neural networks and deep learning) in electric powertrain condition monitoring and fault diagnosis approaches. Specifically, this paper systematically divides the AI-supported method into two main steps: feature engineering and AI approach. On the one hand, it introduces the data and feature processing in AI-supported methods, and on the other hand it summarizes input signals, feature methods and AI algorithms included in the AI method in cases. Therefore, firstly this review is to guide how to choose the appropriate feature engineering method in further research. Secondly, the up-to-date AI algorithms adopted for powertrain health monitoring are presented in detail. Finally, such current approaches are discussed and future trends are proposed.

**INDEX TERMS** Artificial intelligence, feature extraction, fault diagnosis, neural networks, machine learning algorithms.

## I. INTRODUCTION

Electric powertrain system is playing an extremely important role in both human life and industry, thus increasingly attracting attention and researches. Especially in electric vehicles (EVs), which account for an increasing proportion of vehicles, the reliability and safety of powertrain components bear the responsibility of human life. The reliability issues of the powertrain system may appear on any component from historical data perspective. For example, in a permanent magnet synchronous motor (PMSM) which widely used in industries and EVs, the permanent magnet of the rotor will be demagnetized due to the high temperature during operation; the gearbox and bearing closely connected to the motor will cause safety hazards due to wear or damage; in the field of

power electronic, DC-bus capacitors or switch faults in the inverter may also occur due to various reasons such as ageing, over-stress, etc. Various faults of mechanical or electronic components will threaten the life security of drivers and passengers. Therefore, real-time condition monitoring and fault detection of EV powertrain (Fig. 1) have increasing importance and are high-priority tasks as well [1].

To date, various technologies have been applied to monitor the health condition of the electric powertrains. The commonly used methods are vibration analysis (VA) [2], [3], electromagnetic monitoring [4]–[6], motor current signature analysis (MCSA) [7], [8], thermal monitoring [9], [10], infrared monitoring [11], [12], sound signal analysis [13], [14], etc. In [15], a combinational-logic-based method is proposed to identify possible faults in EV powertrains. However, such methods are not sensitive to fault time and cannot predict faults in advance. AI as an excellent tool is

The associate editor coordinating the review of this manuscript and approving it for publication was Moussa Boukhnifer<sup>1</sup>.

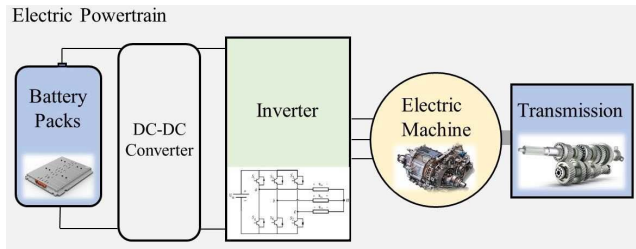


FIGURE 1. Diagram of regular EV powertrain system.

frequently employed to improve the performance of MCSA, VA [2], [3], thermal monitoring [16], etc. In recent years, the MCSA is getting faster increasing popularity among the motor monitoring technologies and the transient motor current signature analysis (TMCSA) which relies on the starting current of the motor provides more accurate fault information than MCSA, especially in non-ideal situations such as the application of multiple actuators, unstable power supply voltage, and load motor torque oscillations [17]. They are widely used to detect various faults of various motors and even gearboxes [7], [8]. Nevertheless, VA is also the mainstream of AI-supported motor bearing fault detection and gearbox fault detection.

AI-supported approaches have received strong attention from both industry and academia due to their low cost, model independence and superior performance, etc. In the field of industry, electric powertrain system requires the intervention of condition monitoring systems to prevent catastrophic faults and damages of major industrial machines, as well as predictive maintenance. For example, in the automotive industry, AI will help the electric powertrain of vehicles to be more transparent and visual to predict the possible faults in advance. Therefore, it has played an important role in solving many types of problems in powertrain systems, which emerged from the high development of machine learning and deep learning. A variety of AI algorithms was applied by scholars to electric powertrain in the past few decades, such as expert systems [18], fuzzy logic algorithm [19] and artificial neural networks (ANN). In recent years, more algorithms have been applied in the field of powertrain health monitoring. Improved algorithms based on classic ML algorithms such as K-nearest neighbor (K-NN), decision tree (DT), support vector machine (SVM) and even ensemble algorithms (Fig. 2) (such as adaptive boost (Adaboost), random forest (RF), etc.) are often employed.

These methods will classify the time-domain, frequency-domain or time-frequency domain features extracted from the feature extraction methods in the measurement signal (such as current, vibration, etc.). The feature extraction methods required by these methods are introduced in Section II. Meanwhile, neural networks and deep learning methods can avoid the feature extraction step to a certain extent and are becoming more and more popular among researchers. The neural network based models roughly include multilayer perceptron (MLP), convolutional neural network (CNN), deep belief

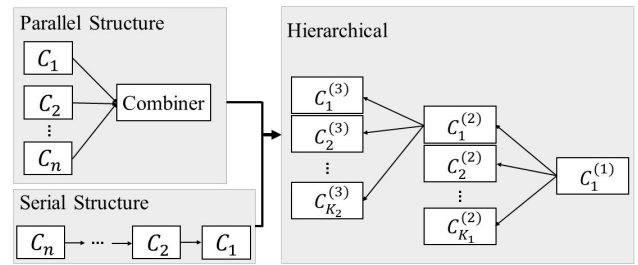


FIGURE 2. Structure of ensemble classifiers.

network (DBN), recurrent neural network (RNN) (including long and short-term memory network (LSTM) and gated recurrent unit (GRU)), autoencoder (AE), etc. Several papers have reviewed the AI-supported condition monitoring and fault diagnosis techniques. In [20], the author only summarizes the fault diagnosis of IM, not for the complete EV powertrain, and the review has outdated. In the review [21], the fields described are over-broad result in that each field cannot be introduced in detail. [22] is to review the AI fault diagnosis method from the perspective of rotating machinery. However, the AI algorithms involved are extremely limited.

This paper proposes the target at presenting a comprehensive review on the recent research about the whole process of AI applied condition monitoring and fault detection in EV powertrain system. Firstly, this paper systematically divides AI-supported condition monitoring and fault diagnosis into two main steps from feature engineering and AI algorithms points of view. Particularly, this review analyses literatures from feature engineering perspective, not just from AI algorithm point of view. In feature engineering, the raw signal will be processed for feature extraction and dimensionality reduction, which result will be used as the input of the AI algorithm. The application cases of methods are reviewed, and the advantages and shortcomings of these methods are pointed out. Then, the EV powertrain is divided into four components and applications of the up-to-date AI algorithms are analysed in detail with their inputted signal and feature engineering methods. In recent years, there is almost no review focus on the field of AI-supported EV powertrain condition monitoring and fault diagnosis. This review aims to guide further research in this field. The framework diagram of the review is demonstrated in Fig. 3.

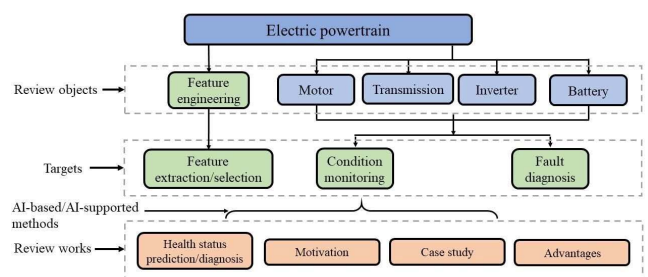


FIGURE 3. Framework diagram of the paper.

The organization of the rest paragraphs is introduced briefly as follows. Section II introduces the feature engineering methods from feature extraction and feature selection points of view. Section III summarizes the application of AI algorithms in the four components of EV. Section IV presents my discussion about current AI algorithms adopted in the EV powertrain health monitoring and the future trends of algorithm application and the improvement of neural networks in the future. A general conclusion is placed in section V.

## II. FEATURE ENGINEERING

Feature extraction is usually used to analyse the waveform signal such as current signal and vibration signal [23], [24], but if the extracted feature information is not completely contributed to the fault classification, it is necessary to use feature selection technology to find representative features to achieve the purpose of reducing the feature size and enhancing fault diagnosing efficiency [23].

### A. FEATURE EXTRACTION

The step after data preprocessing is often to extract features of the vibration signal, current signal, etc., which extract the fault information contained in the signal. The most famous and important method in signal processing is the Fourier transform (FT), which is widely used signal processing because it has the function of transforming the signal back and forth from the time domain to the frequency domain and helping analyze the components of the signal. For the signal that is discretized into discrete sampling points, the FT becomes the discrete Fourier transform (DFT). However, due to a large amount of DFT calculation and the high computational complexity, the earliest version of fast Fourier transform (FFT) was proposed by J. Cooley and T. Tukey in 1965 [25], which reduced the amount of calculation by several orders of magnitude. This allows computers to process signals more quickly, thereby promoting the rapid development of communications and signal processing. FFT has made great progress in fault diagnosis methods based on Fourier analysis [26]. Yang *et al.* [27] applies FFT in MCSA to analyze the stator current data of IMs and calls the obtained feature the FFT-ICA feature of stator current. Romero-Troncoso *et al.* [28] uses the improved FFT after fractional resampling for IM periodic monitoring tasks. In the paper [29], FFT banded RMS value input CNN for gearbox fault identification. FFT is also used to extract the fault spectrum characteristics of the three-phase current when diagnosing the multiple insulated gate bipolar transistors (IGBTs) open-circuit faults and current sensor faults in the three-phase pulse width modulation inverter [30]. Under necessary circumstances, quantum Fourier transform (QFT) can accelerate the FFT exponentially [31]. Short-time Fourier transform (STFT) contribute to deal with the problem of FT about losing all time-domain information. E. H. E. Bouchikhi [32] applies STFT to analyse IM stator current to diagnose bearing faults.

Continuous wavelet transform (CWT) introduces the wavelet mother function to achieve dynamic resolution in the time domain and frequency domain. Using CWT can get the complete time-frequency domain information of signals, avoiding the loss of information of the original signal to the utmost extent [33]. Discrete wavelet transform (DWT) is a new type of spectrum analysis tool that discretizes the scale and translation of basic wavelets. It can not only observe the frequency domain characteristics of local time-domain processes but also observe the time domain characteristics of local frequency domain processes, so even those non-stationary processes can be transformed and processed well. The type and number of features used in fault diagnosis methods could be extracted by DWT, but when extracting fault characteristics of motor bearings, key information may be lost near the fault characteristic frequency. Some research on IM proves that DWT can make fault identification more accurate than traditional FFT [34]. Therefore, it is also one of the time-frequency domain techniques preferred by researchers. In [35], the author uses DWT to diagnose faults in motor transient operation. Frequency domain methods often fail to detect faults from nonstationary signals, such as bearing vibration signals [36].

In addition to STFT and wavelet transform (WT), other signal time-frequency domain analysis techniques, such as wavelet packet transform (WPT), Wigner-Ville distribution (WVD) [37], empirical mode decomposition (EMD) [38], empirical wavelet transform (EWT) and spectral kurtosis (SK) analysis, etc. are also widely employed.

WT is a very successful method in time-frequency domain EV powertrain health monitoring, which can also reduce noise in the noisy working environment. However, the high-frequency band is not split where the modulation information of machine fault exists. WPT can extract key components through a band-pass filter to decompose the signal into different levels, which is helpful for the correct extraction of fault feature information. In paper [39], the CAA algorithm was used to improve the feature correlation according to the weight of the feature after the author extracted the fault features used by this method from the time domain, statistical feature, and frequency domain through wavelet packet transform (WPT). Then it reduces the dimensionality of fusion features through principal component analysis (PCA) and the support vector machine (SVM) is a diagnostic classifier. This is the basic process of a fault diagnosis method based on fault characteristics. WPT obtains a variety of the wavelet packet feature quantities through its multi-scale time-frequency analysis: energy, fluctuation coefficient, skewness, and margin factor. To pursue higher diagnostic accuracy, T. Gao [40] uses generalized discriminant analysis (GDA) to fuse wavelet packet features to eliminate redundant information. However, the feature extraction of WPT will not be able to extract effective fault information due to lack of adaptability [41], [42]. The WFM method combines WPT with manifold learning, which can suppress background noise in the time-frequency domain and enhance the signal [43].

The small-amplitude transient pulse at the beginning of the bearing failure can be extracted by the WFM method [44].

Methods such as FFT, STFT and WVD are more suitable for processing linear signals with high stability. WT has great advantages in analyzing non-stationary and non-linear signals, but it also has its shortcomings such as the certain bands of the defect information and the selection of the base function [45]. In addition, there are EMD, local mean decomposition (LMD) [46] and other adaptive methods are applied to the time-frequency domain analysis of powertrain fault signals. EMD is a signal decomposition method that can adaptively decompose any signal into a set of intrinsic mode functions (IMF) with different frequency characteristics. This is a major advancement in analysing non-stationary signals. Ge *et al.* proposed a rolling bearing fault diagnosis method based on ensemble EMD (EEMD) [47], wavelet semi-soft threshold (WSST) signal reconstruction and multi-scale entropy (MSE). First, use EEMD to decompose the bearing vibration signal into IMF, and then use the Pearson correlation coefficient to filter the high-frequency IMFs that contain more noise information. The WSST method denoises the high-frequency IMFs for signal reconstruction. The feature vector is constructed by using the MSE method to calculate the MSE value of the reconstructed signal. In paper [48], the author uses the EMD-SVM method to diagnose the neutral point clamped three-level inverters (NPC). The EMD-based feature extraction method is widely used in the intelligent diagnosis of bearings and rotating machinery [49], [50] in EV, and the stator as well [51]. However, EMD methods decompose the signal according to its time-scale characteristics. If the signals collected from different sensors are processed under the condition of without a pre-set basis function, the position of the fault feature in the EMD will be uncertain. Therefore, the best choice is to use WT related methods with a fixed wavelet basis function to decompose all signals when using deep learning diagnosis methods.

Empirical wavelet transform (EWT) combines the adaptability of EMD decomposition and the advantages of WT, which is a useful adaptive tool for vibration signal processing and can also decompose the original signal into different modes [52]. In the paper [53], there is a hybrid automatic bearing fault detection method that combines EWT and fuzzy logic system (FLS) to locate the early degradation of the bearing state under different working conditions. Paper [54] proved that EWT is more effective than EMD in the diagnosis of rolling bearings. However, the EWT method still has some problems. On the one hand, it is difficult to determine adaptive and robust boundaries of the EWT segments; on the other hand, the filtered signal still has noise and redundant vibrations, which will mask weaker fault features, which is not conducive to detecting early-stage faults [55]. There is also spectral kurtosis (SK) analysis in time-frequency domain technology that can handle both stationary and nonstationary signals [56].

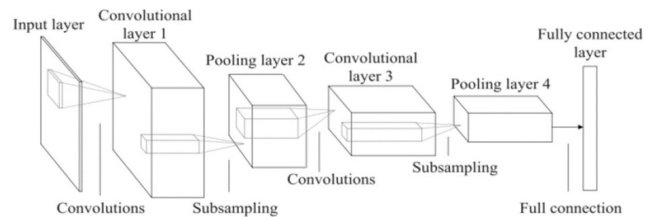


FIGURE 4. Schematic diagram of the classical CNN.

To take advantage of the powerful ability of convolutional neural network (CNN) (Fig. 4) to automatically extract features, time-domain vibration signals which include adequate once or more types of faults information are transformed to two-dimensional (2D) grey-scale images through continuous wavelet transform (CWT) [57]. In addition, CNN is good at processing continuous wavelet transform scalogram (CWTS) generated by CWT. S. Guo [58] adds the Pythagorean spatial pyramid pooling (PSPP) layer to the top layer of CNN, so that the fault features obtained by the PSPP layer from CWTS (Fig. 5) can be passed to the convolutional layer below for secondary extraction. Feature extraction methods related to neural networks include AE, but traditional AEs cannot stably obtain various meaningful signals from vibrations. Sparse autoencoder (SAE) is another neural network-based method for failure features extraction. The author of the paper [59] proposed to use normalized sparse autoencoder (NSAE) constructs local connection network (LCN), namely NSAE-LCN. NSAE-LCN overcomes two shortcomings of traditional autoencoders: machine feature extraction may learn similar features and shift variant properties may lead to machine health misclassification.

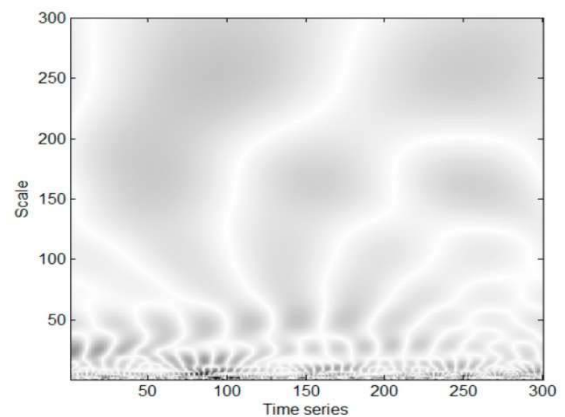


FIGURE 5. Continuous Wavelet Transform Scalogram (CWTS) (The darker pixels correspond to larger wavelet coefficients) of a ball fault bearing signal [58].

Entropy-related methods are also an important tool for feature extraction in fault diagnosis, and there are now many derivative methods. A diversity entropy (DE) based novel method called multiscale diversity entropy (MDE) is

**TABLE 1.** Summary of pros and cons of Feature extraction methods.

Method	Related Papers	Advantages	Shortcomings
FT/DFT/FFT	[26-28], [30], [31]	<ul style="list-style-type: none"> <li>To be suitable for signal with characteristics of discreteness and finiteness</li> <li>Computer calculation convenient</li> <li>Good frequency domain resolution</li> </ul>	<ul style="list-style-type: none"> <li>Time domain information completely lost</li> <li>The transient signal of the fault characteristic cannot be displayed</li> <li>Low noise resistance</li> <li>Sensitive to low signal-to-noise ratio</li> <li>Overlapping of closely-located spectral components, nonstationary signals and spectral leakage</li> </ul>
STFT	[32]	<ul style="list-style-type: none"> <li>Time domain information is retained after transform</li> </ul>	<ul style="list-style-type: none"> <li>Fixed time and frequency resolution</li> <li>Choice difficulty of window width</li> </ul>
CWT	[33]	<ul style="list-style-type: none"> <li>Dynamic time and frequency resolution</li> </ul>	<ul style="list-style-type: none"> <li>Computer cannot perform CWT on the continuous signal</li> </ul>
DWT	[34-36]	<ul style="list-style-type: none"> <li>Computer processing acceptable</li> <li>Controllable wavelet decomposition scale</li> </ul>	<ul style="list-style-type: none"> <li>Less retained information than CWT</li> <li>The loss of the invariant translation property</li> </ul>
WPT	[39-42]	<ul style="list-style-type: none"> <li>Decomposition of high frequency components more detailed than CWT</li> </ul>	<ul style="list-style-type: none"> <li>Usually more computational time than CWT</li> </ul>
WVD	[37]	<ul style="list-style-type: none"> <li>High resolution in time and frequency domain</li> <li>To combine with EMD and EEMD to analyze signal IMFs</li> </ul>	<ul style="list-style-type: none"> <li>Cross-terms generating frequently</li> </ul>
EMD	[38], [47-51]	<ul style="list-style-type: none"> <li>Signal decomposition based on its time scale characteristics</li> </ul>	<ul style="list-style-type: none"> <li>Uncertain location of the fault features</li> <li>To consume a lot of computing resources to decompose the calculation steps</li> <li>To be suffered from the mode mixing, distorted components and the end effects</li> </ul>
VMD	[71], [72]	<ul style="list-style-type: none"> <li>To avoid effectively the mode mixing problem of EMD and LMD</li> <li>Higher computational efficiency and good noise robustness</li> </ul>	<ul style="list-style-type: none"> <li>To setting the number of decomposition modes and the penalty factor difficulty</li> <li>Loss of information or excessive decomposition probably occur</li> </ul>
LMD	[46], [73]	<ul style="list-style-type: none"> <li>To get the calculation of instantaneous frequency (IF) and instantaneous amplitude without Hilbert transform</li> </ul>	<ul style="list-style-type: none"> <li>Difficult data processing from multiple channels in health monitoring</li> </ul>
Hilbert–Huang transform (HHT) [74]	[75], [76]	<ul style="list-style-type: none"> <li>To calculate the instantaneous amplitude and instantaneous frequency of intrinsic mode functions (IMFs)</li> <li>To highlight the IMF time-frequency representation and visualize the modulation of each component</li> </ul>	<ul style="list-style-type: none"> <li>To be suffered from end effects and mode mixing</li> </ul>
Singular value decomposition (SVD) [77]	[78], [79]	<ul style="list-style-type: none"> <li>Non-linear filtering to effectively eliminating random noise components</li> </ul>	<ul style="list-style-type: none"> <li>The quality of the noise reduction signal affected by different reconstruction orders</li> <li>Information loss when weak faults</li> <li>To determine difficulty adaptive and robust boundaries of the EWT segments</li> </ul>
EWT	[52-55]	<ul style="list-style-type: none"> <li>High efficiency, accuracy and reliability.</li> <li>To reduce signal noise</li> </ul>	<ul style="list-style-type: none"> <li>Noises and redundant vibrations exist after filtering</li> </ul>
CNN	[57], [58], [80]	<ul style="list-style-type: none"> <li>To extract features automatically</li> <li>Adjustable extraction level</li> </ul>	<ul style="list-style-type: none"> <li>To find the most suitable network structure difficulty</li> <li>To be more suitable for image signals</li> </ul>

extended to deal with multiscale analysis for a comprehensive feature description by combining with the coarse graining process [60]. This entropy method is designed for fault diagnosis of rotating machinery such as rotor and gearbox [61]. In the paper [62], the frequency band entropy (FBE) based on information entropy (IE) and STFT are introduced to extract the fault feature frequency of rolling element bearings. This method in the paper [63] is improved by WPT based on the Daubechies wavelet. Some entropy methods can play an auxiliary role in the construction of feature vectors. Permutation entropy (IPE), multi-scale entropy (MSE), multi-scale permutation entropy (MPE), weighted permutation entropy (WPE), and fine-sorted dispersion entropy (FSDE) calculate the entropy values of signal reconstructed by EMD and variational mode decomposition (VMD) [64], [65] to construct the feature vectors which will be used as the input data and classification basis for subsequent AI fault classification

methods such as types of support vector machine (SVM) [66]–[70].

Summary of pros and cons from all literatures mentioned before are shown in TABLE 1.

## B. DIMENSIONALITY REDUCTION AND FEATURE SELECTION


Principal Component Analysis (PCA) prepares for fault diagnosis before entering the dataset and convert existing features to low-dimensionality, reduce feature space, and avoid high-dimensional data redundancy [81], [82]. PCA use a group of fundamental function to reasonably optimize the minimum error of data model. The author introduces the algorithm of combining independent component analysis (ICA) in the kernel technique to improve the feature extraction of condition monitoring and fault diagnosis in IMs. ICA is formulated in the kernel-inducing feature space and developed through

two-phase kernel ICA algorithm: whitened using kernel principal component analysis (kernel PCA) plus ICA. Kernel PCA spheres data and makes the data structure become as linearly separable as possible by virtue of an implicit nonlinear mapping determined by kernel. ICA seeks the projection direction in the kernel PCA whitened space, making the distribution of the projected data as non-Gaussian as possible. In [82], the performance of the classification process due to the choice of kernel function is presented to show the excellent characteristic of the kernel function. And this research demonstrates the clustering feature using ICA is better than PCA does. In the article [83], a machine learning-based fault diagnosis method for single VFD-fed IMs have been developed. Gharavian *et al.* [84] compared the FDA-based and PCA-based feature selection results in the fault diagnosis of EV gearboxes. PCA may not be the optimal feature reduction method in a specific problem.

PCA and ICA are the most popular unsupervised learning feature dimensionality reduction techniques. For feature selection through supervised learning methods, Linear Discriminant Analysis (LDA) and Random forest Decision tree (RFDT) can be used [85]. What the difference is PCA follows the direction of maximum variance for optimal reconstruction, whereas LDA is to obtain the optimal low-dimensional representation result of the original data set by maximizing the between-class scatter matrix meanwhile minimizing the within-class scatter matrix. Since LDA operates based on labelled information, it can obtain better results than PCA when there are sufficient labelled samples [86]. LDA has been used in lots of fault detection works. Many works of literature explore the application of the combination of LDA and MCSA methods to various parts, online monitoring of operating conditions through voltage and current analysis, and estimation of the severity of the fault through the magnitude of the sub-harmonic amplitude. Paper [87] solved the problem of difficulty in detecting faults with sub-harmonics in the MCSA-LDA method, using harmonic amplitude instead of sub-harmonics as fault detection and classification function. Jin *et al.* [86] proposed a combination of trace ratio linear discriminant analysis (TR-LDA) and VA, which was applied to the bearing fault analysis of IM and brushless DC motors. TR-LDA is a variant of LDA based on the TR criterion. It is an excellent solution to the TR problem and can be extended to deal with non-Gaussian data sets encountered in many real-world fault diagnosis problems. LDA can also be used in the global spectrum analysis of vibration signals to improve the effect of fault diagnosis of ball bearings [88].

In addition, AI-based optimization algorithms have outstanding performance in feature selection, such as particle swarm optimization (PSO) and differential evolution (WBDE) [89]. Lee *et al.* [90] pointed out through experiments that PSO is the key technology to find the optimal weight of damage-sensitive feature vectors in the bearing system. In [91], the GA is utilized to reduce the number of features and select the most important ones from the feature

database to reduce power consumption and reduce model computational complexity. In the paper [92], GA combined with random forest (RF) algorithm to produce a new method RFOGA for machine fault detection, which is more accurate than only RF.

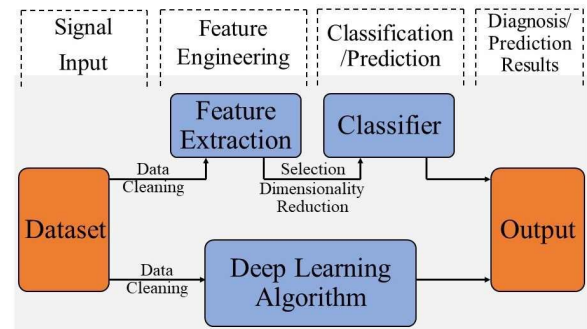

**FIGURE 6. Flowchart of AI approaches for condition monitoring and fault detection of electric powertrain.**

### III. AI ALGORITHMS FOR CONDITION MONITORING AND FAULT DETECTION OF ELECTRIC POWERTRAIN SYSTEM

Commonly used AI algorithms include three levels: machine learning, neural networks and deep learning. This section introduces their applications in EV powertrains. Fig. 6 demonstrates the complete flowchart from the original signal to the failure or prediction result (All variants of feature methods and AI algorithms are not listed in detail in the figure). Table 2, 3, 4 and 5 shows the main contributions and applied AI algorithm of each literature with used signals and feature methods.

#### A. AI APPROACHES FOR DETECTING FAULTS OF ELECTRIC MACHINE

The electric machine is an important part of the electric powertrain system. For instance, permanent magnet synchronous motor (PMSM) [93] plays an important role in many industrial applications such as EV traction steering, robotics and wind power due to its high efficiency, reliability, wide working range and high torque density [87]. Induction machine popularizes in EV powertrains as well [94]. Therefore, ensuring their correct operation is the key task of the motors fault diagnosis.

The subsequent description of motor faults will be in the following order: Bearing faults; Rotor faults; Stator faults.

##### 1) BEARING FAULTS

Almost most of the AI-supported diagnosis of bearing faults (Fig. 7) relies on bearing vibration signal, and a few use motor current signals [7], rotor speed [107] and acoustic emission (AE) [108], [109], etc. For bearing diagnosis based on VA, MCSA, etc., signal processing and feature extraction of vibration or stator current should be applied. The most used feature extraction and selection techniques have been mentioned in Section II.

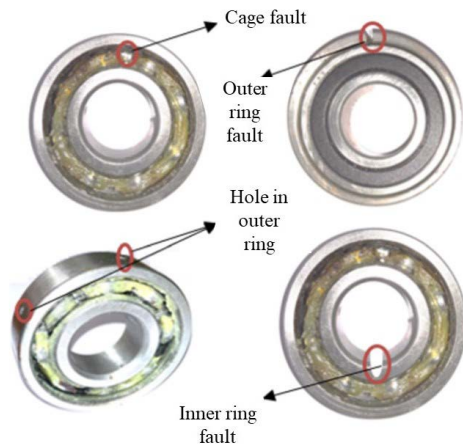


FIGURE 7. Some faults demonstration of ball element bearings.

Some AI-based new feature extraction methods are being proposed more and more and applied in bearing fault identification. Among them, H. Shi [95] proposed the SDLSTM algorithm combining stacked denoising auto-encoder (SDAE) and long short-term memory (LSTM) model to detect abnormal phenomena from the vibration signal of the bearing. According to the paper [96], the author suggests a deep wavelet auto-encoder (DWAE) based on extreme learning machine (ELM). Due to transferring the nonlinear activation function to wavelet function, DWAE has unsupervised feature learning function to capture characteristics of the signal. What researchers are interested in CNN is that it combines powerful automatic feature extraction capabilities and classification capabilities, in which a certain number of convolutional and pooling layers are used to extract fault features, and the following fully connected layers are used for fault classification. In the paper [57], CNN based LeNet-5 is used to extract the fault feature information of the time-domain vibration signal and use the RF classifier to classify multiple extracted local and global information multi-level features. It does not directly use CNN for classification but is followed by a machine learning classifier for classification. This article uses the feature maps of different layers in CNN to train independent RF classifiers and uses the winner-take-all strategy to obtain the best classification results. Similarly in paper [58], the author proposes a new fault diagnosis method based on continuous wavelet transform scalogram (CWTS) and Pythagorean spatial pyramid pooling convolutional neural network (PSP-PCNN). Its novelty is to solve the problem of low accuracy in the existing method for dealing with variable-speed bearing fault diagnosis and diagnose bearing faults at full speed. Fig. 8 illustrates an advanced fault diagnosis process based on CNN. It does not directly use 2-D CNN for classification from image data inputs but is followed by a machine learning classifier for classification.

To solve the drawback that the pooling operation of CNN will lose a lot of useful fault feature information, H. Li [80] proposed a new type bearing fault diagnosis model CNNEPDNN based on ensemble DNN and CNN, which

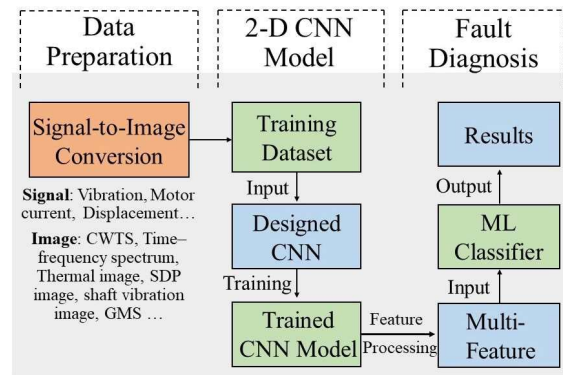


FIGURE 8. Diagram of the fault diagnosis structure combining 2-D CNN and ML classifier.

combines features with different discriminative powers to identify faults and uses the bearing data from bearing data center of case western reserve university (CWRU) verified the validity of the method. CNN applied papers for bearing fault diagnosis in recent years also have [103]–[106]. Among them, 1-D CNN is used to extract signal features and classification in paper [103] and [105]. CNN is only used as a classifier in paper [104], while CNN in literature [106] and [80] is used for feature extraction, and the SVM classifier is used to identify the type of fault. While CNN is superior in function, it is also accompanied by the problem of gradient disappearance as the number of layers deepens. According to paper [101] and [100], the residual network can solve the problem of CNN gradient disappearance.

Commonly used machine learning classifiers such as SVM and RF are not good at extracting fault features and are usually only used for fault classification. However, they can be connected to the CNN structure for direct fault classification [57], [106]. On the other hand, the feature extraction method can also be used to manually extract the fault features from the initial signal, and then machine learning classifiers perform classification work [2], [7], [98], [108]. There are also many excellent designs for bearing fault diagnosis. For example, in the paper [107], k-NN defines the fault type according to the specific graph distance metric in the graph-mapped spectrum (GMS). M. Kuncan [99] diagnose bearing faults by training the grey relational analysis (GRA) model. M. Kang [109] uses GA algorithm to optimize the classification accuracy of discriminative feature analysis (DFA) and applies time-varying and multiresolution envelope analysis (TVMREA). According to paper [107], rotor speed can also be used as a signal source for fault diagnosis, and even the accuracy of the absolute value-based PCA (AVPCA) based on rotor speed in a variable speed environment is significantly higher than that of vibration-based AVPCA.

## 2) ROTOR FAULTS

There has been a large number of studies on rotor fault diagnosis, and the methods are also diverse, such as data-driven methods, magnetic flux based methods [4], [5], and



model-based methods. Broken rotor bar (BRB) is a common fault in IM. At the level of machine learning algorithms, SVM are an advanced technology for rotor conditions classification. Paper [110] innovatively combine directed acyclic graph SVMs (DAGSVMs) and recursive undecimated wavelet packet transform (RUWPT) for classification problem of detecting BRB fault in IM. In multi-class classification problems, MSVM constructs an optimal hyperplane to decide multi-class problems, in which sufficient outliers are needed to improve the performance of MSVM. After the participation of Support Vector Data Description (SVDD), the accuracy tested on rotor bar fault detection is higher than that of the traditional MSVM method [111]. NN-based algorithm is widely used in BRB problem detection [112]. In addition, DNN can also complete the feature extraction and fault classification of the rotor system under unsupervised conditions [113]. In this paper, the author converts raw vibration signals into vibration images as well as paper [114]. The difference is that the former designs a DBN based model, and the latter designs a CNN based direct connection based CNN (DC-CNN). To be supported by CNN, the vibration signal can also be converted into a symmetrized dot pattern (SDP) image [115]. Researchers in the field of bearing fault have also got an increasing interest in the image feature extraction function of CNN in recent years. In addition to vibration image, displacement-based shaft vibration image (SVI) and even thermal image can also be used to diagnose bearing faults by inputting CNN based model [16], [116].

Particularly in PMSM, the rotor permanent magnet (PM) will demagnetize to varying degrees as the temperature rises. Traditionally, Ding *et al.* proposes a temperature estimation method using model reference fuzzy adaptive control to estimate the PM temperature [4]. In this method, a model reference adaptive system (MRAS) is established to estimate the PM flux linkage, and a fuzzy control method is introduced to improve the accuracy of the parameters estimated by the MRAS and the applicable speed range, and finally it derives the flux linkage and PM temperature based on the electromotive force (BEMF). And paper [5] predicts the rotor temperature by estimating PM flux linkage as well. The current research on rotor temperature prediction through neural networks and other algorithms is very limited because AI-related methods are driven by a large amount of data. However, it is very difficult to accurately measure the rotor temperature in the experiment, and it is unable to provide a large and highly reliable data set for the AI algorithm.

### 3) STATOR FAULTS

The types of stator fault are briefly including inter-turn fault, dynamic eccentricity fault, current sensor fault, insulation fault, open-circuit fault, short-circuit fault, turn fault, etc. Traditional stator detection methods are mature, such as magnetic flux [6] and infrared thermography (IRT) based diagnostic technology, which can effectively detect stator winding faults, turn-to-turn faults, and cooling system faults. PCM *et al.* [6] suggests the magnetic flux and vibration

signals as the basis for distinguishing the main electrical faults of the stator winding (turn-to-turn short circuit and unbalanced power supply). According to papers [11], [117], IRT images are analyzed thermally to monitor inter-turn fault and failure of the cooling system in IM. Then turn to AI approaches.

According to surveys [6], the inter-turn short-circuit (ITSC) of the stator winding accounts for one-third of all IM faults, second only to two-fifths of bearing faults. Paper [118] applies the orthogonal least squares regression (OLSR) algorithm to reduce the size and calculation of the neural network, in which the least squares regression algorithm is used to find the best size of the probabilistic neural network (PNN), and the dual tree complex wavelet transform (DTCWT) is used to extract the characteristics of the vibration signal. There is a stator current based method also for ITSC fault. This paper [119] uses discrete wavelet energy ratio (DWER) as the classification basis to input an improved Elman Neural Network (ENN), which can effectively detect ITSC faults. For stator faults, the most signal source is stator current [119]–[124]. In the early years, AI-based stator failure research mainly relied on improved ANN models [118], [120], [121], [124]. In recent years, CNN related articles appeared [122]. On the other hand, fewer people have used classic machine learning classifiers to diagnose stator failures in recent years. Particularly, literature [123] designs a novel SVM structure to detect the ground fault and inter-turn fault of the stator winding. The author extracts the characteristics of two different faults by setting different frequency bands of Stockwell transform (ST) and inputs two different SVM models.

From the perspective of the motor as a whole, the AI algorithms can achieve more functions. For example, the RNN-based LSTM network can estimate the remaining useful life (RUL) of the motor [125]. B. Wang [126] proposes multiscale convolutional attention network (MSCAN) can also achieve accurate RUL prediction. In addition, the method of multi-sensor signal fusion is a possible way to detect faults in different parts of the motor at the same time [127].

### B. AI APPROACHES FOR DETECTING FAULTS OF TRANSMISSION


Generally, in the electric powertrain system of a machine, transmission simply refers to the gearbox which uses gears and gear trains to provide speed and torque conversion from a rotating power source to another device. The gearbox is widely used in various rotating machinery, such as wind turbines, power generation devices, particularly EV. Gearbox failures account for a large proportion of the total failure time of all the statistics [128] and the initial fault features of the gearbox are weak and hidden in a set of time-varying vibration signals, which are difficult to effectively extract under strong noise. Most transmission system gearbox fault diagnosis methods are based on vibration and current methods (VA and MCSA). Among them, VA needs to install a sensor in the gearbox, while MCSA is more stable and saves costs.

**TABLE 2. Summary of contribution and AI algorithms of each paper with signals and feature methods.**

Parts	Paper	Signals	Feature Method	AI Algorithm	Contributions
Bearing	[57]	Vibration	CWT-CNN	CNN-RF	<ul style="list-style-type: none"> <li>To converted into 2D gray-scale images by CWT</li> <li>the ensemble of multiple RF classifiers used</li> </ul>
	[58]	Vibration	CWTS-CNN	PSPP-CNN	<ul style="list-style-type: none"> <li>To suggest adding PSPP layer on the top of CNN</li> </ul>
	[95]	Vibration	SDAE	SDAE-LSTM	<ul style="list-style-type: none"> <li>To discover the initial anomaly in advance</li> <li>Sliding window algorithm used in SDAE</li> <li>To use LSTM for predict the behavior of data in advance</li> </ul>
	[96]	Vibration	DWAE	DWAE-ELM	<ul style="list-style-type: none"> <li>To enhance unsupervised learning ability by constructing DWAE</li> </ul>
	[80]	Vibration	CNN	CNNEPDNN	<ul style="list-style-type: none"> <li>To diagnose multiple types and levels of rolling bearing faults</li> <li>To propose new bearing fault detection model CNNEPDNN</li> <li>Features with different discriminative abilities fused by CNNEPDNN</li> </ul>
	[7]	Stator current	WPT	SVM	<ul style="list-style-type: none"> <li>To propose a hybrid method based on optimized stationary WPT</li> <li>SVM combining with artificial immune system</li> </ul>
	[108]	AE	DWPT	MCSVM	<ul style="list-style-type: none"> <li>To take the relative wavelet packet energy (RWPE) and wavelet packet node kurtosis (WPNK) as fault characteristics</li> <li>To adopt OAA MCSVM classifier</li> </ul>
	[98]	Vibration	-	RF	<ul style="list-style-type: none"> <li>To solve the problem of slow diagnosis and repeated voting in traditional RF</li> <li>RF algorithm processed on SPARK platform</li> </ul>
	[2]	Vibration	WPT	RF	<ul style="list-style-type: none"> <li>To propose a novel hybrid RF approach</li> </ul>
	[99]	Vibration	1D-LBP	GRA	<ul style="list-style-type: none"> <li>To enhance the anti-noise ability of the RF algorithm</li> <li>To suggest a new method of bearing fault diagnosis combining 1D-LBP and GRA</li> </ul>
	[109]	AE	TVMREA	GA-DFA	<ul style="list-style-type: none"> <li>To use GA to select the most discriminative features</li> <li>GADFA improves the classification accuracy rate by 7.3%-46.6%</li> </ul>
	[107]	Rotor speed	-	AVPCA	<ul style="list-style-type: none"> <li>To propose a concise diagnosis method based only on rotor speed</li> <li>To suggest a modified AVPCA algorithm</li> </ul>
	[100]	Vibration	Deep residual network	DNN	<ul style="list-style-type: none"> <li>Simultaneous fault location detection and severity identification</li> <li>To visualize DNN</li> </ul>
	[101]	Vibration	ResNet	DeepResNet	<ul style="list-style-type: none"> <li>To propose IFMs transfer method</li> <li>To use ResNet to solve the problem of CNN gradient disappearance</li> </ul>
	[102]	Vibration	Short-time periodogram	k-NN	<ul style="list-style-type: none"> <li>To detect faults based on GMS</li> <li>Diagnosis is based on the same distribution of training data and test data</li> </ul>
	[103]	Vibration	1-D CNN	DCTLN	<ul style="list-style-type: none"> <li>Transfer learning based</li> <li>To learn and recognize features automatically by 1-D CNN</li> </ul>
	[104]	Vibration	SK based, MFCCs	CNN	<ul style="list-style-type: none"> <li>To use MFCCs and delta cepstrum to feature extraction</li> <li>Filter method based on SK to suppress noise</li> </ul>
	[105]	Vibration	VCN	VCN	<ul style="list-style-type: none"> <li>To design 1-D vision ConvNet (VCN)</li> <li>Different working conditions adaptable</li> </ul>
	[106]	Vibration	CNN	CNN-SVM	<ul style="list-style-type: none"> <li>To construct CNN-SVM diagnostic model</li> <li>To apply residual learning to prevent CNN gradients from disappearing</li> <li>To use transfer learning to solve the problem of insufficient data</li> </ul>
	Rotor	[111]	Motor current	SWPT	SVDD-SVM
[110]		Stator current	RUWPT	DAGSVM	<ul style="list-style-type: none"> <li>To combine RUWPT and DAGSVM</li> <li>To extract one new parameter by RUWPT</li> </ul>
[112]		Stator current	Hilbert transform (HT)	MLP	<ul style="list-style-type: none"> <li>To replace DFT by HT</li> <li>the amplitude and frequency of the harmonic from stator current envelope (SCE) spectrum as NN inputs</li> </ul>
[113]		Vibration	DBN	DBN	<ul style="list-style-type: none"> <li>Vibration imaging as feature source</li> <li>DBN applied to feature extraction and classification</li> </ul>
[114]		Vibration	DC-CNN	DC-CNN	<ul style="list-style-type: none"> <li>Vibration imaging as feature source</li> <li>DC-CNN applied to feature extraction and classification</li> </ul>
[16]		Thermal images	CNN	CNN	<ul style="list-style-type: none"> <li>Thermal Image as input of CNN</li> </ul>
[115]		Vibration	SDP-CNN	SDP-CNN	<ul style="list-style-type: none"> <li>To apply parameter transfer for limited training data</li> </ul>
[116]		Displacement	SVI-MCNN	SVI-MCNN	<ul style="list-style-type: none"> <li>Vibration signal transfer to SDP image</li> <li>To construct shaft vibration image (SVI) through displacement signal</li> </ul>
[118]		Vibration	DTCWT	PNN	<ul style="list-style-type: none"> <li>Orthogonal Least Squares Regression (OLSR) applied to optimize the size of the PNN</li> <li>DTCWT applied</li> </ul>
[120]		Stator current	-	ANN	<ul style="list-style-type: none"> <li>To binary code input signal</li> <li>To design new process addition and mean of the set of same rank</li> </ul>
Stator	[121]	Stator current	-	PSO-ANN	<ul style="list-style-type: none"> <li>PSO optimized ANN</li> <li>Simulation in SIMULINK environment</li> </ul>
	[122]	Stator current	CNN	CNN	<ul style="list-style-type: none"> <li>The original three-phase current is input</li> <li>Steady-state current fault detection</li> <li>No load affect</li> </ul>
	[123]	Stator current	ST	SVM	<ul style="list-style-type: none"> <li>Two SVM model for two faults</li> <li>ST applied</li> </ul>
	[124]	Stator current	SWT, DWT	ANN	<ul style="list-style-type: none"> <li>Several ANN build a modular neural network (MNN)</li> <li>Feature extraction by combining SWT and DWT</li> </ul>
	[119]	Stator current	DWT	ENN	<ul style="list-style-type: none"> <li>To detect and locate faults early</li> <li>For ITSC fault</li> <li>Discrete Wavelet Energy Ratio (DWER) as feature</li> </ul>

In vibration-based fault diagnosis, vibration signals are often accompanied by Gaussian and non-Gaussian background noise, and it is not easy to detect weak faults. The new strategy of LEASgram gearbox fault feature extraction proposed by He *et al.* [129] overcomes this problem. Experiments show that under the condition of Gaussian and non-Gaussian interference and the resonance frequencies of multiple faults are easily coupled with each other, the LEASgram method has significant fault identification and separation capabilities. In recent years, there are many new feature strategies partially based AI technologies designed for gearbox such as multiclass relevance vector machine (mRVM) [130], multiview sparse filtering (MVSF) [8], deep recursive dynamic principal component analysis (Deep RDPCA) [131], Resonance Residual Technique [132] and deep learning based methods [133], [134].

In the application field of ML, C. Li [135] introduced a multimodal deep support vector classification (MDSVC) approach to complete the fault diagnosis task of the gearbox in which support vector classifier (SVC) is used to fuse Gaussian-Bernoulli deep Boltzmann machine (GDBM) in different ways to build MDSVC model. Among the classic ML classifiers, SVC and SVC derived classifiers are valued by researchers due to their excellent performance. Paper [136] proposed a gearbox fault detection method based on wavelet support vector machine (WSVM) and immune genetic algorithm (IGA). There are also studies using support vector machines [137]–[139]. In the paper [3], the optimized k-NN algorithm is used to identify the severity of gear cracks under different motor speeds and loads. Paper [140] also applies k-NN based algorithm to gear fault identification. Decision Tree (DT), as a basic classifier, can convert complex gearbox failure data into simple decision-making processes to extract rules [141].

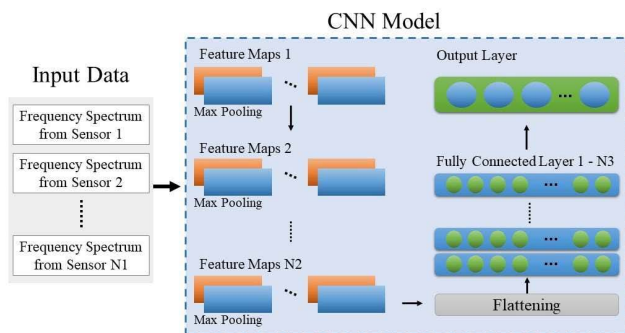


**FIGURE 9.** Diagram of CNN fault diagnosis architecture for dealing with multi-sensor fusion information ( $N_1$  = numbers of sensors,  $N_2$  = numbers of convolutional and pooling pairs,  $N_3$  = numbers of fully connected layers and the output layer is based on a SoftMax function).

Deep learning, which can analyze fault features deeper than classic classification algorithms, has also achieved great success in the classification task of gearbox. BP neural network is a classic and widely used neural network. Cheng *et al.* [142] uses the IQPSO algorithm based on the

PSO algorithm to optimize the classic BP neural network, and the IQPSOBP obtained after training has a higher accuracy for gearbox failures than PSOBP. In paper [143], the author compares the fault detection performance of the classic ML algorithms with the proposed 2-D CNN architecture (Fig. 9). The input data is got from multi-sensor fusion information. This two-dimensional neural network analyzes the current signals of multiple current sensors in real-time, and can be directly used to classify fault types, partially eliminating the need for complicated processing procedures in the middle. While a new multiscale convolutional neural network (MSCNN) [144] is proposed to be used to identify the health status of gearboxes. It can be used for both feature extraction and fault classification. [29] is also studies that use CNN to diagnose gearboxes.

### C. AI APPROACHES FOR DETECTING FAULTS OF INVERTER

Due to the rapid growth of current EV and renewable energy-related industries, people are paying more attention to low withstand voltage, high-school power inverters such as multi-level inverters. Most inverters use insulated gate bipolar transistors (IGBTs) as power devices due to their high input impedance and low state voltage drop. The status of inverter components such as power transistors is closely related to equipment reliability. Current inverter diagnosis technologies mainly include model-based methods, expert systems, and AI methods [145]. At present, there are relatively few fault types that can be monitored and diagnosed by the AI-supported approaches. And Fig. 10 shows that the failure rate of IGBTs and when the AI-based approach should be used.

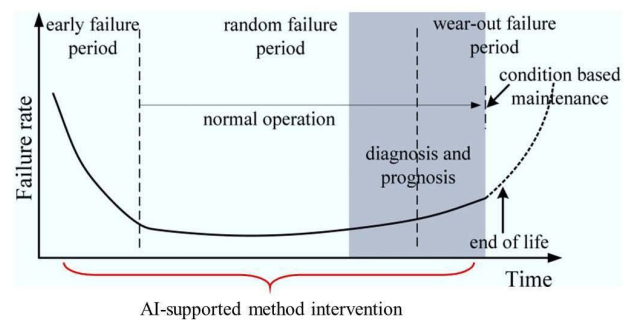


**FIGURE 10.** Failure rate of power devices/IGBTs over their lifetime.

The literature on AI diagnosis of inverters is relatively small and immature. And the types of fault in the inverter studied mainly focus on IGBT open-circuit fault. The power electronics principle of IGBT open-circuit fault could be shown in Fig. 11. The most widely used ML algorithm for IGBT faults is SVM. In the paper [146], FFT is used to extract the fault characteristics of the inverter's output voltage, RPCA reduces the dimension of the feature space, and the fault type is obtained through the classifier constructed by SVM. Moosavi *et al.* [147] uses WT to extract the waveform from the three-phase current for recognizing the IGBT open-circuit fault in the DC/AC inverter of the electric vehicle,

**TABLE 3.** Summary of contribution and AI algorithms of each paper with signals and feature methods.

Paper	Signal	Feature method	AI algorithm	Contributions
[143]	Motor current	FFT	2-D CNN	<ul style="list-style-type: none"> <li>• Data and feature level fusion</li> <li>• To preserve the dependency between different sensors</li> <li>• To introduce a multiscale coarse-grained layer into the traditional CNN</li> </ul>
[144]	Vibration	MSCNN	MSCNN	<ul style="list-style-type: none"> <li>• To learn discriminative features automatically and directly from raw temporal vibration signals</li> <li>• To classify different conditions simultaneously</li> </ul>
[29]	Vibration	FFT	CNN	<ul style="list-style-type: none"> <li>• The eigenvector is composed of RMS value, standard deviation, skewness, kurtosis, rotation frequency and applied load</li> </ul>
[135]	Vibration	GDBM	MDSVC	<ul style="list-style-type: none"> <li>• To use GDBM to learn time, frequency and pattern representation of features in wavelet modals</li> </ul>
[136]	Vibration	EMD	IGA-WSVM	<ul style="list-style-type: none"> <li>• To obtain the best WSVM parameters by IGA</li> </ul>
[3]	Vibration	WPT, PCA	k-NN	<ul style="list-style-type: none"> <li>• To identify 5 types of gear crack levels</li> </ul>
[140]	Vibration	HT and FT	Weighted k-NN	<ul style="list-style-type: none"> <li>• To use two-stage feature selection and weighting technique TFSWT technology to select sensitive features and remove irrelevant features</li> <li>• To identify early cracks in gears</li> </ul>
[130]	Vibration	-	mRVM	<ul style="list-style-type: none"> <li>• To design two features: accumulative amplitudes of carrier orders (AACO) and energy ratio based on difference spectra (ERDS)</li> </ul>
[141]	Vibration	-	DT	<ul style="list-style-type: none"> <li>• Calculation process is simple and fast by using DT</li> </ul>
[8]	Motor current stator	MVSF	SVM	<ul style="list-style-type: none"> <li>• To implement easily</li> <li>• To propose MVSF for integrating multi-view feature representation effectively</li> </ul>
[137]	or/and rotor current	-	multiclass SVM	<ul style="list-style-type: none"> <li>• To define different time domain and frequency domain features of gearbox faults in DFIG stator and rotor current signals</li> </ul>
[138]	Rotor current	HT	AE, SVM	<ul style="list-style-type: none"> <li>• To use decision-level information fusion for different solutions</li> <li>• To design angle resampling algorithm</li> <li>• To design and apply a new type of deep structure classifier</li> </ul>
[139]	Motor current	-	Radial basis function kernel-SVM	<ul style="list-style-type: none"> <li>• To be used under variable speed conditions</li> <li>• To integrate an adaptive signal resampling algorithm, a frequency tracker and a feature generation algorithm</li> </ul>

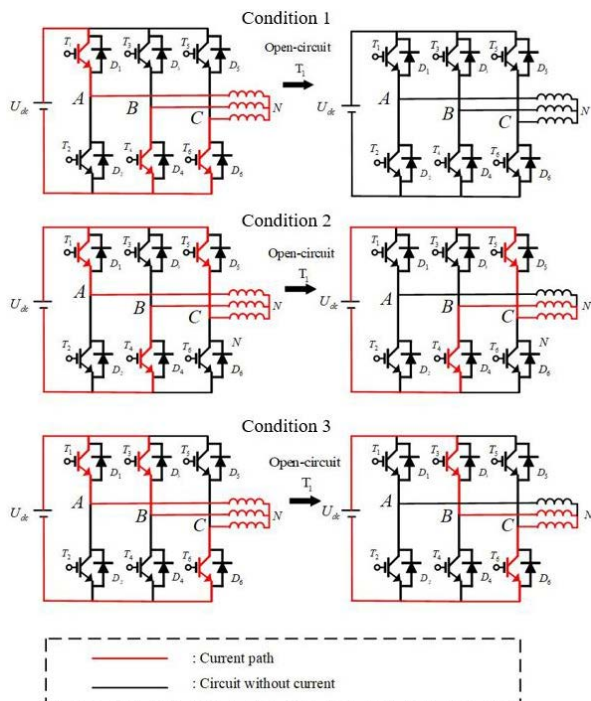

**FIGURE 11.** Diagram of EV powertrain system Diagram of IGBT open-circuit fault.

and compares the diagnostic performance of MLP, SVM, SOM, and K-means algorithm. The results show that the recognition performance of SVM and MLP is better. For

detecting faults in NPC inverter, Cheng *et al.* [148] designs the least squares support vector machine with gradient information (G-LS-SVM) diagnostic model to classify the fault voltage signal sparsely represented by compressive sensing theory, Chen *et al.* [149] uses multi-layer SVM to identify the upper, middle and down bridge voltages signals and differently Hu *et al.* [150] uses a neural network as a fault classification method. It can be seen from the trend that researchers increasingly like to use the deep analysis of the neural networks to detect the open circuit fault of the inverter [151]–[154]. For instance, ANN is used for the online monitoring of IGBTs [155]. Paper [156] also focus on IGBT open circuit fault using feed-forward back propagation neural network (FFBPNN). Performance is improved under variable load conditions of different frequencies. Gong *et al.* [157] modifies CNN with global average pooling (CNN-GAP) model using 2-D feature images to solve the fault diagnosis problem of DC-DC inverter. The method in this article is similar to the CNN feature extraction method mentioned in Section II, being supported by powerful image feature automatic deep extraction function of CNN. In the follow-up comparison with traditional intelligent methods such as SVM, BPNN, k-NN and DNN, the method proposed in the article is obviously superior in terms of accuracy, and it learns features directly from the original one-dimensional time-series data without any time-consuming manual feature extraction and signal processing operations.

Although the IGBT open circuit failure will cause the entire system to collapse due to overheating, it is relatively easier to detect in terms of timing. IGBT in the inverter only withstand short-circuit current for a short period, even only a few milliseconds. Therefore, short-circuit faults are more difficult to detect through algorithms.

#### **D. AI APPROACHES FOR MONITORING CONDITIONS AND DETECTING FAULTS OF BATTERY SYSTEM**

The battery system is the energy source of the powertrain and has an important position. As an energy storage device, it is more dangerous, and accidents may occur under extreme environmental influences. Therefore, it is very important to estimate and diagnose the condition of the battery system. Machine learning and neural networks based deep learning methods are effective methods to complete fault detection and estimate state of health (SOH), state of charge (SOC), remaining useful life (RUL) and state of energy (SOE).

The main fault types include internal short circuit (ISC) fault, external short circuit (ESC) fault, overcharge/over-discharge fault, Inconsistency within battery pack, connection fault, insulation fault, thermal management system fault, sensor fault, battery management system (BMS) hardware fault, contactor fault, etc. General battery system fault diagnosis methods probably include model-based methods, signal processing and AI-based methods, etc. Here we mainly focus on methods based on signal processing and AI. There are many types of faults in the battery system, so it is not only necessary to research single fault diagnosis, but also to solve multi-fault diagnosis problems. SVM and RF are still popular classifiers in the fault detection of battery systems. Yao *et al.* [158] proposed an SVM-based model for intelligent diagnosis of electric vehicle battery systems. In the paper [159], the author uses a RF-based classification method to analyze the influence of temperature and SOC on ESC faults characteristics of lithium-ion batteries. Yao *et al.* [160] proposes a method for classifying the fault status of lithium-ion batteries based on general regression neural networks (GRNN) and proves the voltage difference (VD) is very suitable as the input characteristic value of fault diagnosis. Paper [161] uses only voltage information to predict the current value in the battery pack through BPNN and then predicts the surface temperature of the battery based on the 3D electro-thermal battery model. LSTM algorithm (improved from RNN) is usually used for battery fault diagnosis and prediction. Hong *et al.* [162] uses LSTM neural network to predict the multi-forward-step voltage of electric vehicles to get the voltage abnormality of the battery system. It is similar to the paper [163]. This paper uses the equivalent circuit model (ECM) and also combines LSTM neural network to detect voltage abnormality for the target of battery fault diagnosis. Paper [164] proposes an LSTM-based method for predicting the surface temperature of lithium-ion batteries, which does not require complex mathematical modelling and professional knowledge of battery physics.

The real-time monitoring of battery health is closely related to the performance and cost of electronic equipment and electric vehicles. Proper battery management helps avoid failures and catastrophic hazards and improves the durability of the battery pack. Paper [165] is the first application of the method of combining sample entropy and sparse Bayesian predictive modelling (SBPM) to predict battery SOH. In the paper [166], the discharge point voltage data of the lithium battery under high-temperature operation is used as the input to train the deep neural network classifier. Feng *et al.* [167] builds a predictive diagnosis model based on SVM and the mapping relationship between battery inherent characteristics and support vectors is found based on the historical charging data of healthy batteries. The algorithm only needs a few charging curves to achieve fast on-board diagnosis of SOH. Paper [168] extracts health features (HF) from the used battery charging curve, and then use the input into a weighted least squares support vector machine (WLS). In the paper [169], the author compares data-driven ML algorithms for estimating the maximum releasable capacity of lithium-ion batteries, such as SVM, RF, ANN, etc., and optimizes the ANN algorithm.

The battery is a very sophisticated system, and its SOC is affected by many factors and is not simply linear. The accurate estimation of the battery SOC is of great significance for improving the life cycle of the battery pack and reducing the cost of charging. Traditional SOC measurement methods include the open-circuit voltage (OCV) method, current integration method, equivalent circuit model, electrochemical model and other methods. The main focus here is on the data-driven AI-supported method. According to paper [170]–[172], SVM is still a popular one in the SOC field. In [170], SVM is combined with coulomb-counting technology and Forgetting Factor Recursive Least Square (FFRLS) to estimate the SOC of the Li-S battery. SVM model in [171] is optimized parameters by the PSO algorithm. And in the paper [172] proved that SVM can also be used with high-capacity lithium iron manganese phosphate (LiFeMnPO<sub>4</sub>) battery cell SOC estimation. In the paper [173], the sparse learning machine for real-time SOC estimation is also based on LS-SVM. SOC methods based on neural networks include [174] and [175] in which RBF neural network and NARX-LSTM are used respectively. Compared with methods such as SVM, NN-based model is generally more time-consuming, but there are network structures that can process time-series data such as LSTM and GRU.

The remaining useful life (RUL) predictions are more dependent on models that can process time-series data. Neural network-based models such as LSTM and GRU in RNN variants are the first choice of researchers, especially LSTM [176]–[178]. In addition, models such as extreme learning machines also perform well in RUL prediction [179].

#### **IV. DISCUSSION AND FUTURE TRENDS**

As far as fault diagnosis is concerned, the two most important steps are how to extract fault features from a large amount

**TABLE 4. Summary of contribution and AI algorithms of each paper with signals and feature methods.**

Fault Type	Paper	Signal Input	Feature Method	AI Algorithm	Contributions
Open-circuit	[148]	Voltage		G-LS-SVM	<ul style="list-style-type: none"> <li>To use the compressed sensing theory to sparsely express the voltage fault signal</li> </ul>
	[156]	Current	DWT	FFBPNN	<ul style="list-style-type: none"> <li>To be a new method of three phase VSI fault diagnosis</li> <li>Threshold needless under variable load conditions</li> </ul>
	[150]	Voltage	JADE-ICA	NN	<ul style="list-style-type: none"> <li>To use JADE-ICA algorithm to overcome the effects of nonlinearity and time difference</li> </ul>
	[147]	Current	WT	MLP, SVM, SOM, K-means	<ul style="list-style-type: none"> <li>To analyze 5 dynamic modes and 5 static modes</li> </ul>
	[146]	Voltage	FFT, RPCA	SVM	<ul style="list-style-type: none"> <li>To select the output voltages of the inverter as the fault characteristic signal</li> </ul>
	[157]	1-D time-series voltage and current	CNN	CNN-GAP model	<ul style="list-style-type: none"> <li>To learn features directly from the original one-dimensional time-series data</li> <li>To be fast and more accurate</li> </ul>
	[151]	Three-phase current	ICA	NN	<ul style="list-style-type: none"> <li>To use ICA for three-phase current signal processing</li> </ul>
	[149]	Upper, middle and down bridge voltages	DFT	multi-layer SVM	<ul style="list-style-type: none"> <li>To Use a novel multi-layer SVM to detect the open circuit fault of the inverter</li> </ul>
	[152]	Upper, middle and down bridge voltages	PCA	multi-layer ANN	<ul style="list-style-type: none"> <li>To propose a novel multilayer neural network to diagnose all possible open-circuit faults</li> </ul>
	[153]	Current	CNN	CNN	<ul style="list-style-type: none"> <li>To learn fault features independently through a convolutional network</li> </ul>
	[154]	Three-phase currents	Park's transform	BPNN	<ul style="list-style-type: none"> <li>To apply Park's transform to obtain the three-phase current base wave amplitude as the feature variable for fault detection</li> </ul>
	[155]	Three-stator currents	CEEMD	HHT-ANN	<ul style="list-style-type: none"> <li>To use HHT to detect the harmonic characterizing the fault based on CEEMD of the three-stator currents</li> </ul>

of data and fault classification algorithms. Accurate extraction of fault features is the key to whether the fault can be classified correctly. It is the key to predict the occurrence of the fault in advance to be able to extract the fault characteristics from the weak fault signal when the fault first appears. The current diagnosis methods focus on the application and innovation of feature methods, while less attention is paid to the new application of AI algorithms. AI classification algorithms are also related to the speed and accuracy of fault classification, and the realization of multi-fault identification also relies on machine learning and deep learning. From literatures in section III, this paper gets the brief description of the application trend of main AI algorithms:

#### 1) K-NN

The K-NN algorithm is widely used in the research of fault diagnosis due to its simple structure and can be used as a classifier of fault features.

#### 2) CLASSIC MACHINE LEARNING CLASSIFIERS (SVM, RF, ETC.)

SVM has always been a very classic classifier, with good classification effect and fast calculation speed. The RF algorithm is a representative algorithm for ensemble learning, with excellent classification effects. If the training data set is small, the effect of these classifiers is likely to be due to the deep learning classifier based on neural networks. But in recent years, compared with the diagnosis research based on neural network, the fault diagnosis research based on this kind of algorithm is less.

#### 3) ANN

Fault diagnosis models based on various ANN variants were popular in the early years and often appeared in combination with various feature extraction methods such as WT. In this type of diagnostic model, ANN takes various features extracted from the original signal as input and outputs the classification result. In addition, the running speed of the ANN algorithm is slower than that of the classic machine learning algorithms in part A and B, but it has a greater advantage if the amount of training data is large.

#### 4) CNN

CNN has got the great interest of people in recent years, which is reflected in the accelerated growth of various CNN-related articles on fault diagnosis. This is because CNN has both powerful automatic feature extraction and fault classification abilities, which is able to make the diagnostic model more integrated. 1-D CNN is mainly used to process the signals collected by the original sensors. The 2-D CNN is more used in combination with signal-to-image conversion methods, which helps to show the 2-dimensional correlation between fault features.

#### 5) RNN AND LSTM AND GRU

RNN is good at processing time series data and can predict system parameters and indicators from historical time data. Due to standard RNN algorithms often suffer from gradient disappearance or gradient explosion problems, the model cannot be trained normally. In recent years, LSTM has been more used in prediction tasks, such as RUL prediction for

**TABLE 5. Summary of contribution and AI algorithms of each paper with signals and feature methods.**

Function	Paper	Signal	Feature method	AI Algorithm	Contributions
Fault detection	[158]	Voltage	Discrete Cosine Transform (DCT)	SVM	<ul style="list-style-type: none"> <li>To propose a MCM to reduce the influence of current variation on the condition indicators</li> <li>To propose grid search method to optimize the kernel function parameter and penalty factor of SVM</li> </ul>
	[159]	Battery predicting voltage	-	RF	<ul style="list-style-type: none"> <li>Random forests applied to recognize the electrolyte leakage fault</li> <li>To suggest three steps model based ESC diagnosis method to prognosis battery short circuit fault</li> </ul>
	[180]	Voltage	K-means	K-means	<ul style="list-style-type: none"> <li>To analyze the result of dimensionality reduction through the K-means clustering algorithm</li> </ul>
	[160]	Voltage	DWT	GRNN	<ul style="list-style-type: none"> <li>DWT combined with GRNN</li> <li>Strong correlation between voltage difference (VD) and fault diagnosis</li> </ul>
Voltage Prediction	[162]	Cell voltage/ pack voltage, SOC, brake pedal stroke value, vehicle speed	Pearson correlation coefficient (PCC)	LSTM	<ul style="list-style-type: none"> <li>To replace RNN with LSTM</li> <li>To consider impact of both weather and driver behaviors</li> </ul>
	[163]	SOC, cell voltage, total voltage	PCC	LSTM	<ul style="list-style-type: none"> <li>To apply a coupling module based on the modified adaptive boosting (MAB) to combining the advantages of the LSTM and the ECM</li> </ul>
Surface temperature prediction	[164]	Voltage, SOC, surrounding temperature, Squared current	-	LSTM	<ul style="list-style-type: none"> <li>To adapt to different lithium-ion chemistry and form factors</li> <li>To obtain input data from BMS</li> </ul>
	[161]	Voltage	-	BPNN	<ul style="list-style-type: none"> <li>To estimate current by only voltage</li> <li>To combine the current value with the 3D electro-thermal battery model</li> </ul>
SOH	[165]	Voltage-sequence sample entropy	-	Sparse Bayesian predictive modeling (SBPM)	<ul style="list-style-type: none"> <li>Analytical method combining SBPM and sample entropy</li> </ul>
	[166]	Discharge voltage	-	DNN	<ul style="list-style-type: none"> <li>Deep neural network state classifier used</li> </ul>
	[167]	Voltage	ICA	SVM	<ul style="list-style-type: none"> <li>To make the rapid on-board diagnosis of SOH a reality by 15-minute charging curve</li> </ul>
	[168]	Charging capacity in a partial voltage range	PCC	WLS-SVM	<ul style="list-style-type: none"> <li>To improve standard SVM by weighting function and linear equations</li> </ul>
	[169]	Battery output current, terminal voltage, time difference between samples, temperature	-	CNN GRU	<ul style="list-style-type: none"> <li>To convert ANN to ANSI C code and embedded in STM32 microcontrollers</li> </ul>
SOC	[173]	Current Voltage	-	Sparse learning machine (SLM) (based on LS-SVM)	<ul style="list-style-type: none"> <li>To use weighted regularization scheme and the differential evolution (DE) method to optimize model parameters</li> </ul>
	[174]	Cell voltage, cell SOC, group voltage, group SOC, current	-	RBFNN	<ul style="list-style-type: none"> <li>To propose a novel compact and optimized radial basis function neural network</li> </ul>
	[170]	Current Voltage	-	SVM	<ul style="list-style-type: none"> <li>To be used in Lithium-Sulfur (Li-S) batteries</li> <li>Conventional coulomb-counting technique combined</li> </ul>
	[171]	Battery terminal voltage, discharge current, battery temperature	-	SVM	<ul style="list-style-type: none"> <li>To optimize the hyper-parameters of SVM by PSO</li> </ul>
	[175]	Current, voltage, temperature	-	NARX-LSTM	<ul style="list-style-type: none"> <li>NARX-LSTM model applied to solve the problem of gradient explosion and gradient decent</li> </ul>
	[172]	Cell current, cell voltage, cell temperature	-	SVM	<ul style="list-style-type: none"> <li>To research for a high-capacity LiFeMnPO<sub>4</sub> battery cell</li> </ul>
RUL	[176]	Voltage, current, temperature	-	MC-LSTM	<ul style="list-style-type: none"> <li>To use a many-to-one structure between the input layer and the output layer in LSTM prediction</li> </ul>
	[179]	Voltage, current, temperature	-	DGWO-ELM	<ul style="list-style-type: none"> <li>To improve the accuracy of prediction DGWO-ELM algorithm</li> </ul>
	[177]	Current, temperature	-	RMSprop-LSTM	<ul style="list-style-type: none"> <li>To use RMSprop backpropagation technology for training LSTM</li> </ul>
	[178]	Voltage, current, temperature	EMD	LSTM-GPR	<ul style="list-style-type: none"> <li>To propose LSTM-GPR method for RUL prediction</li> </ul>

electric motors and battery systems, and SOC and SOH prediction for battery systems. GRU has a more forget gate than LSTM but has fewer parameters than LSTM, so the training speed is faster. It usually performs better than LSTM on the dataset with a small amount of data.

## 6) CLUSTER

Clustering algorithms such as K-Means, Fuzzy K-Means, etc. often have two functions. On the one hand, in unsupervised or self-supervised diagnosis models, clustering algorithms can classify feature vectors with similar features into one category. On the other hand, clustering algorithms also have a certain feature dimensionality reduction effect.

Most of algorithms introduced in section III are supervised learning based approaches, which usually require manually designing training datasets in practical applications. However, the application of unsupervised learning in health monitoring needs further research. AE is a classic unsupervised feature learning method, but transfer learning is often needed to apply the trained model to other applications and additional training processes are needed to adjust parameters. Self-supervised learning is also a feasible research direction. As in paper [181], unsupervised learning has been used in the field of fault diagnosis. It is not simply extracting fault features from historical fault signals, and then using labels for supervised classification. Instead, algorithms are used to detect the severity of multiple faults under variable speed and load online.

At present, machine health monitoring in engineering has applied a variety of algorithms such as machine learning and deep learning, but it has not followed the development of advanced algorithms, such as dynamic neural networks and the very popular transformer structure in natural language processing (NLP). The emergence of these cutting-edge algorithms can also have an impact on AI-supported health monitoring, but the application of these new frameworks in engineering is lagging behind. It should be that few people can transfer algorithms that are not yet fully mature in computer science to the field of engineering. For example, the attention technology in the transformer model, etc., applied to fault diagnosis or even engineering may produce better results.

The detection of a single fault in EV powertrains can no longer meet the needs of people. In the application of actual fault detection, it is often necessary to detect more and more fault types. Therefore, accurate and rapid multi-fault diagnosis is also an important direction of current development. We can adopt the thinking of lifelong learning/continuous learning in computer science. Using traditional machine learning classification algorithms and neural networks for multi-fault detection problems is not always having good accuracy/performance in distinguishing each fault. The difference between lifelong learning and transfer learning is transfer learning will forget the content learned in previous tasks after learning new tasks, and continuous learning will not forget the tasks learned earlier and will

make the trained model perform well in all tasks as possible. In practical applications, the update of this algorithm does not require the participation of old data, and the model in use can be quickly updated to achieve the purpose of extending the function of the existing algorithms.

## V. CONCLUSION

This study presents a comprehensive review on feature engineering methods and AI algorithms in EV powertrains condition monitoring and fault diagnosis. Fault diagnosis based on AI technology can overcome the need for precise physical models and parameters, so realizing a data-driven automatic diagnosis system is of great significance in applications. The main contributions include:

- 1) This review summarizes and analyzes the feature engineering methods in EV electric powertrain condition monitoring and fault diagnosis in recent years. This provides reference for method selection in further research.
- 2) This review summarizes the up-to-date AI algorithms adopted for condition monitoring and fault diagnosis of each component in EV powertrain from application and research cases.
- 3) Suggested future trends could be enlightening for future research and studies in the field of EV powertrain condition monitoring and fault diagnosis.

## REFERENCES

- [1] J. Medina-García, T. Sánchez-Rodríguez, J. Galán, A. Delgado, F. Gómez-Bravo, and R. Jiménez, "A wireless sensor system for real-time monitoring and fault detection of motor arrays," *Sensors*, vol. 17, no. 3, p. 469, Feb. 2017.
- [2] Z. Wang, Q. Zhang, J. Xiong, M. Xiao, G. Sun, and J. He, "Fault diagnosis of a rolling bearing using wavelet packet denoising and random forests," *IEEE Sensors J.*, vol. 17, no. 17, pp. 5581–5588, Sep. 2017.
- [3] D. Wang, "K-nearest neighbors based methods for identification of different gear crack levels under different motor speeds and loads: Revisited," *Mech. Syst. Signal Process.*, vols. 70–71, pp. 201–208, Mar. 2016.
- [4] H. Ding, X. Gong, and Y. Gong, "Estimation of rotor temperature of permanent magnet synchronous motor based on model reference fuzzy adaptive control," *Math. Problems Eng.*, vol. 2020, pp. 1–11, Apr. 2020.
- [5] S. Xiao and A. Griffo, "PWM-based flux linkage and rotor temperature estimations for permanent magnet synchronous machines," *IEEE Trans. Power Electron.*, vol. 35, no. 6, pp. 6061–6069, Jun. 2020.
- [6] P. C. M. L. Filho, R. Pederiva, and J. N. Brito, "Detection of stator winding faults in induction machines using flux and vibration analysis," *Mech. Syst. Signal Process.*, vol. 42, nos. 1–2, pp. 377–387, Jan. 2014.
- [7] F. B. Abid, S. Zgarni, and A. Braham, "Distinct bearing faults detection in induction motor by a hybrid optimized SWPT and aiNet-DAG SVM," *IEEE Trans. Energy Convers.*, vol. 33, no. 4, pp. 1692–1699, Dec. 2018.
- [8] Q. He, J. Zhao, G. Jiang, and P. Xie, "An unsupervised multiview sparse filtering approach for current-based wind turbine gearbox fault diagnosis," *IEEE Trans. Instrum. Meas.*, vol. 69, no. 8, pp. 5569–5578, Aug. 2020.
- [9] A. Mohammed and S. Djurovic, "Stator winding internal thermal monitoring and analysis using *in situ* FBG sensing technology," *IEEE Trans. Energy Convers.*, vol. 33, no. 3, pp. 1508–1518, Sep. 2018.
- [10] S. Cheng, Y. Du, J. A. Restrepo, P. Zhang, and T. G. Habetler, "A noninvasive thermal monitoring method for induction motors fed by closed-loop inverter drives," *IEEE Trans. Power Electron.*, vol. 27, no. 9, pp. 4122–4131, Sep. 2012.
- [11] G. Singh and V. N. A. Naikan, "Infrared thermography based diagnosis of inter-turn fault and cooling system failure in three phase induction motor," *Infr. Phys. Technol.*, vol. 87, pp. 134–138, Dec. 2017.



- [12] G. Singh, T. A. Kumar, and V. Naikan, "Induction motor inter turn fault detection using infrared thermographic analysis," *Infr. Phys. Technol.*, vol. 77, pp. 277–282, Jul. 2016.
- [13] S. Lu, X. Wang, Q. He, F. Liu, and Y. Liu, "Fault diagnosis of motor bearing with speed fluctuation via angular resampling of transient sound signals," *J. Sound Vibrat.*, vol. 385, pp. 16–32, Dec. 2016.
- [14] P. A. Delgado-Arredondo, D. Morinigo-Sotelo, R. A. Osornio-Rios, J. G. Avina-Cervantes, H. Rostro-Gonzalez, and R. de Jesus Romero-Troncoso, "Methodology for fault detection in induction motors via sound and vibration signals," *Mech. Syst. Signal Process.*, vol. 83, pp. 568–589, Jan. 2017.
- [15] A. Ulatowski and A. M. Bazzi, "A combinational-logic method for electric vehicle drivetrain fault diagnosis," *IEEE Trans. Ind. Appl.*, vol. 52, no. 2, pp. 1796–1807, Apr. 2016.
- [16] H. Shao, M. Xia, G. Han, Y. Zhang, and J. Wan, "Intelligent fault diagnosis of rotor-bearing system under varying working conditions with modified transfer convolutional neural network and thermal images," *IEEE Trans. Ind. Informat.*, vol. 17, no. 5, pp. 3488–3496, May 2021.
- [17] J. Pons-Llinares, J. A. Antonino-Daviu, M. Riera-Guasp, S. B. Lee, T.-J. Kang, and C. Yang, "Advanced induction motor rotor fault diagnosis via continuous and discrete time–frequency tools," *IEEE Trans. Ind. Electron.*, vol. 62, no. 3, pp. 1791–1802, Mar. 2015.
- [18] J. Burriel-Valencia, R. Puche-Panadero, J. Martinez-Roman, A. Sapena-Bano, M. Pineda-Sanchez, J. Perez-Cruz, and M. Riera-Guasp, "Automatic fault diagnostic system for induction motors under transient regime optimized with expert systems," *Electronics*, vol. 8, no. 1, p. 6, Dec. 2018.
- [19] H. Yan, Y. Xu, F. Cai, H. Zhang, W. Zhao, and C. Gerada, "PWM-VSI fault diagnosis for a PMSM drive based on the fuzzy logic approach," *IEEE Trans. Power Electron.*, vol. 34, no. 1, pp. 759–768, Jan. 2019.
- [20] F. Filippetti, G. Franceschini, C. Tassoni, and P. Vas, "Recent developments of induction motor drives fault diagnosis using AI techniques," *IEEE Trans. Ind. Electron.*, vol. 47, no. 5, pp. 994–1004, Oct. 2000.
- [21] K. M. Sundaram, A. Hussain, P. Sanjeevikumar, J. B. Holm-Nielsen, V. K. Kaliappan, and B. K. Santhoshi, "Deep learning for fault diagnostics in bearings, insulators, PV panels, power lines, and electric vehicle applications—The state-of-the-art approaches," *IEEE Access*, vol. 9, pp. 41246–41260, 2021.
- [22] R. Liu, B. Yang, E. Zio, and X. Chen, "Artificial intelligence for fault diagnosis of rotating machinery: A review," *Mech. Syst. Signal Process.*, vol. 108, pp. 33–47, Aug. 2018.
- [23] C. Li, R.-V. Sánchez, G. Zurita, M. Cerrada, and D. Cabrera, "Fault diagnosis for rotating machinery using vibration measurement deep statistical feature learning," *Sensors*, vol. 16, no. 6, pp. 895:1–895:19, 2016.
- [24] A. Ngaopitakkul and S. Bunjongjit, "An application of a discrete wavelet transform and a back-propagation neural network algorithm for fault diagnosis on single-circuit transmission line," *Int. J. Syst. Sci.*, vol. 44, no. 9, pp. 1745–1761, Sep. 2013.
- [25] J. W. Cooley and J. W. Tukey, "An Algorithm for the machine calculation of complex Fourier series," *Math. Comput.*, vol. 19, no. 90, p. 297, 1965.
- [26] Y. Li, W. Zhao, Q. Li, T. Wang, and G. Wang, "In-situ monitoring and diagnosing for fused filament fabrication process based on vibration sensors," *Sensors*, vol. 19, no. 11, p. 2589, Jun. 2019.
- [27] T. Yang, H. Pen, Z. Wang, and C. S. Chang, "Feature knowledge based fault detection of induction motors through the analysis of stator current data," *IEEE Trans. Instrum. Meas.*, vol. 65, no. 3, pp. 549–558, Mar. 2016.
- [28] R. de Jesus Romero-Troncoso, "Multirate signal processing to improve FFT-based analysis for detecting faults in induction motors," *IEEE Trans. Ind. Informat.*, vol. 13, no. 3, pp. 1291–1300, Jun. 2017.
- [29] Z. Chen, C. Li, and R.-V. Sanchez, "Gearbox fault identification and classification with convolutional neural networks," *Shock Vib.*, vol. 2015, pp. 1–10, Apr. 2015.
- [30] B. Gou, Y. Xu, Y. Xia, Q. Deng, and X. Ge, "An online data-driven method for simultaneous diagnosis of IGBT and current sensor fault of three-phase PWM inverter in induction motor drives," *IEEE Trans. Power Electron.*, vol. 35, no. 12, pp. 13281–13294, Dec. 2020.
- [31] D. R. Musk and F. Sullivan, "A comparison of quantum and traditional Fourier transform computations," *Comput. Sci. Eng.*, vol. 22, no. 6, pp. 103–110, Nov. 2020.
- [32] E. H. E. Bouchikhi, V. Choqueuse, and M. E. H. Benbouzid, "Current frequency spectral subtraction and its contribution to induction machines' bearings condition monitoring," *IEEE Trans. Energy Convers.*, vol. 28, no. 1, pp. 135–144, Mar. 2013.
- [33] C. Shen, D. Wang, F. Kong, and P. W. Tse, "Fault diagnosis of rotating machinery based on the statistical parameters of wavelet packet paving and a generic support vector regressive classifier," *Measurement*, vol. 46, no. 4, pp. 1551–1564, May 2013.
- [34] M. M. Rahman and M. N. Uddin, "Online unbalanced rotor fault detection of an IM drive based on both time and frequency domain analyses," *IEEE Trans. Ind. Appl.*, vol. 53, no. 4, pp. 4087–4096, Jul. 2017.
- [35] I. P. Georgakopoulos, E. D. Mitronikas, and A. N. Safacas, "Detection of induction motor faults in inverter drives using inverter input current analysis," *IEEE Trans. Ind. Electron.*, vol. 58, no. 9, pp. 4365–4373, Sep. 2011.
- [36] R. B. Randall and J. Antoni, "Rolling element bearing diagnostics—A tutorial," *Mech. Syst. Signal Process.*, vol. 25, no. 2, pp. 485–520, 2011.
- [37] B. Tang, W. Liu, and T. Song, "Wind turbine fault diagnosis based on Morlet wavelet transformation and Wigner–Ville distribution," *Renew. Energy*, vol. 35, no. 12, pp. 2862–2866, Dec. 2010.
- [38] Z. Shen, X. Chen, X. Zhang, and Z. He, "A novel intelligent gear fault diagnosis model based on EMD and multi-class TSVM," *Measurement*, vol. 45, pp. 30–40, Jan. 2012.
- [39] Y. Li, R. Zhang, Y. Guo, P. Huan, and M. Zhang, "Nonlinear soft fault diagnosis of analog circuits based on RCCA-SVM," *IEEE Access*, vol. 8, pp. 60951–60963, 2020.
- [40] T. Gao, J. Yang, and S. Jiang, "A novel incipient fault diagnosis method for analog circuits based on GMKL-SVM and wavelet fusion features," *IEEE Trans. Instrum. Meas.*, vol. 70, pp. 1–15, 2021.
- [41] S.-W. Chen and Y.-H. Chen, "Hardware design and implementation of a wavelet de-noising procedure for medical signal preprocessing," *Sensors*, vol. 15, no. 10, pp. 26396–26414, Oct. 2015.
- [42] J.-H. Zhong, P. Wong, and Z.-X. Yang, "Simultaneous-fault diagnosis of gearboxes using probabilistic committee machine," *Sensors*, vol. 16, no. 2, p. 185, Feb. 2016.
- [43] Y. Wang, G. Xu, L. Liang, and K. Jiang, "Detection of weak transient signals based on wavelet packet transform and manifold learning for rolling element bearing fault diagnosis," *Mech. Syst. Signal Process.*, vols. 54–55, pp. 259–276, Mar. 2015.
- [44] Y. Wang, P. W. Tse, B. Tang, Y. Qin, L. Deng, and T. Huang, "Kurtogram manifold learning and its application to rolling bearing weak signal detection," *Measurement*, vol. 127, pp. 533–545, Oct. 2018.
- [45] P. K. Kankar, S. C. Sharma, and S. P. Harsha, "Rolling element bearing fault diagnosis using wavelet transform," *Neurocomputing*, vol. 74, no. 10, pp. 1638–1645, May 2011.
- [46] Y. Yang, J. Cheng, and K. Zhang, "An ensemble local means decomposition method and its application to local rub-impact fault diagnosis of the rotor systems," *Measurement*, vol. 45, no. 3, pp. 561–570, Apr. 2012.
- [47] Z. Wu and N. E. Huang, "Ensemble empirical mode decomposition: A noise-assisted data analysis method," *Adv. Adapt. Data Anal.*, vol. 1, no. 1, pp. 1–41, Jan. 2009.
- [48] M. Beibei, S. Yanxia, W. Dinghui, and Z. Zhipu, "Three level inverter fault diagnosis using EMD and support vector machine approach," in *Proc. 12th IEEE Conf. Ind. Electron. Appl. (ICIEA)*, Jun. 2017, pp. 1595–1598.
- [49] H. Fan, S. Shao, X. Zhang, X. Wan, X. Cao, and H. Ma, "Intelligent fault diagnosis of rolling bearing using FCM clustering of EMD-PWVD vibration images," *IEEE Access*, vol. 8, pp. 145194–145206, 2020.
- [50] J. Yuan, H. Jiang, Q. Zhao, C. Xu, H. Liu, and Y. Tian, "Dual-mode noise-reconstructed EMD for weak feature extraction and fault diagnosis of rotating machinery," *IEEE Access*, vol. 7, pp. 173541–173548, 2019.
- [51] R. Sadeghi, H. Samet, and T. Ghanbari, "Detection of stator short-circuit faults in induction motors using the concept of instantaneous frequency," *IEEE Trans. Ind. Informat.*, vol. 15, no. 8, pp. 4506–4515, Aug. 2019.
- [52] J. Gilles, "Empirical wavelet transform," *IEEE Trans. Signal Process.*, vol. 61, no. 16, pp. 3999–4010, Aug. 2013.
- [53] F. Gougam, C. Rahmoune, D. Benazzouz, and B. Merainani, "Bearing fault diagnosis based on feature extraction of empirical wavelet transform (EWT) and fuzzy logic system (FLS) under variable operating conditions," *J. Vibroeng.*, vol. 21, no. 6, pp. 1636–1650, Sep. 2019.
- [54] Y. Jiang, H. Zhu, and Z. Li, "A new compound faults detection method for rolling bearings based on empirical wavelet transform and chaotic oscillator," *Chaos Soliton Fract.*, vol. 89, pp. 8–19, Aug. 2016.
- [55] C. Zhang and Y. Liu, "A two-step denoising strategy for early-stage fault diagnosis of rolling bearings," *IEEE Trans. Instrum. Meas.*, vol. 69, no. 9, pp. 6250–6261, Sep. 2020.

- [56] J. Tian, C. Morillo, M. H. Azarian, and M. Pecht, "Motor bearing fault detection using spectral kurtosis-based feature extraction coupled with K-nearest neighbor distance analysis," *IEEE Trans. Ind. Electron.*, vol. 63, no. 3, pp. 1793–1803, Mar. 2016.
- [57] G. Xu, M. Liu, Z. Jiang, D. Söfiker, and W. Shen, "Bearing fault diagnosis method based on deep convolutional neural network and random forest ensemble learning," *Sensors*, vol. 19, no. 5, p. 1088, 2019.
- [58] S. Guo, T. Yang, W. Gao, C. Zhang, and Y. Zhang, "An intelligent fault diagnosis method for bearings with variable rotating speed based on Pythagorean spatial pyramid pooling CNN," *Sensors*, vol. 18, no. 11, p. 3857, 2018.
- [59] F. Jia, Y. Lei, L. Guo, J. Lin, and S. Xing, "A neural network constructed by deep learning technique and its application to intelligent fault diagnosis of machines," *Neurocomputing*, vol. 272, pp. 619–628, Sep. 2018.
- [60] X. Wang, S. Si, and Y. Li, "Multiscale diversity entropy: A novel dynamical measure for fault diagnosis of rotating machinery," *IEEE Trans. Ind. Informat.*, vol. 17, no. 8, pp. 5419–5429, Aug. 2021.
- [61] X. Wang, S. Si, and Y. Li, "Variational embedding multiscale diversity entropy for fault diagnosis of large-scale machinery," *IEEE Trans. Ind. Electron.*, vol. 69, no. 3, pp. 3109–3119, Mar. 2022.
- [62] T. Liu, J. Chen, G. Dong, W. Xiao, and X. Zhou, "The fault detection and diagnosis in rolling element bearings using frequency band entropy," *Proc. Inst. Mech. Eng., C, J. Mech. Eng. Sci.*, vol. 227, no. 1, pp. 87–99, Mar. 2012.
- [63] H. Li, T. Liu, X. Wu, and Q. Chen, "Enhanced frequency band entropy method for fault feature extraction of rolling element bearings," *IEEE Trans. Ind. Informat.*, vol. 16, no. 9, pp. 5780–5791, Sep. 2020.
- [64] K. Dragomiretskiy and D. Zosso, "Variational mode decomposition," *IEEE Trans. Signal Process.*, vol. 62, no. 3, pp. 531–544, Feb. 2014.
- [65] N. U. Rehman and H. Aftab, "Multivariate variational mode decomposition," *IEEE Trans. Signal Process.*, vol. 67, no. 23, pp. 6039–6052, Dec. 2019.
- [66] S. Xue, J. Tan, L. Shi, and J. Deng, "Rope tension fault diagnosis in hoisting systems based on vibration signals using EEMD, improved permutation entropy, and PSO-SVM," *Entropy*, vol. 22, no. 2, p. 209, Feb. 2020.
- [67] W. Zhang and J. Zhou, "Fault diagnosis for rolling element bearings based on feature space reconstruction and multiscale permutation entropy," *Entropy*, vol. 21, no. 5, p. 519, May 2019.
- [68] J. Ge, T. Niu, D. Xu, G. Yin, and Y. Wang, "A rolling bearing fault diagnosis method based on EEMD-WSST signal reconstruction and multi-scale entropy," *Entropy*, vol. 22, no. 3, p. 290, Mar. 2020.
- [69] S. Zhou, S. Qian, W. Chang, Y. Xiao, and Y. Cheng, "A novel bearing multi-fault diagnosis approach based on weighted permutation entropy and an improved SVM ensemble classifier," *Sensors*, vol. 18, no. 6, p. 1934, Jun. 2018.
- [70] W. Fu, J. Tan, Y. Xu, K. Wang, and T. Chen, "Fault diagnosis for rolling bearings based on fine-sorted dispersion entropy and SVM optimized with mutation SCA-PSO," *Entropy*, vol. 21, no. 4, p. 404, Apr. 2019.
- [71] Y. Li, G. Li, Y. Wei, B. Liu, and X. Liang, "Health condition identification of planetary gearboxes based on variational mode decomposition and generalized composite multi-scale symbolic dynamic entropy," *ISA Trans.*, vol. 81, pp. 329–341, Oct. 2018.
- [72] F. Li, R. Li, L. Tian, L. Chen, and J. Liu, "Data-driven time-frequency analysis method based on variational mode decomposition and its application to gear fault diagnosis in variable working conditions," *Mech. Syst. Signal Process.*, vol. 116, pp. 462–479, Feb. 2019.
- [73] J. Yu and J. Lv, "Weak fault feature extraction of rolling bearings using local mean decomposition-based multilayer hybrid denoising," *IEEE Trans. Instrum. Meas.*, vol. 66, no. 12, pp. 3148–3159, Dec. 2017.
- [74] R. Yan and R. X. Gao, "Hilbert–Huang transform-based vibration signal analysis for machine health monitoring," *IEEE Trans. Instrum. Meas.*, vol. 55, no. 6, pp. 2320–2329, Dec. 2006.
- [75] A. Soualhi, K. Medjaher, and N. Zerhouni, "Bearing health monitoring based on Hilbert–Huang transform, support vector machine, and regression," *IEEE Trans. Instrum. Meas.*, vol. 64, no. 1, pp. 52–62, Jan. 2015.
- [76] E. Elbouchikhi, V. Choqueuse, Y. Amirat, M. E. H. Benbouzid, and S. Turri, "An efficient Hilbert–Huang transform-based bearing faults detection in induction machines," *IEEE Trans. Energy Convers.*, vol. 32, no. 2, pp. 401–413, Jun. 2017.
- [77] X. Zhao and B. Ye, "Selection of effective singular values using difference spectrum and its application to fault diagnosis of headstock," *Mech. Syst. Signal Process.*, vol. 25, no. 5, pp. 1617–1631, Jul. 2011.
- [78] H. Jiang, J. Chen, G. Dong, T. Liu, and G. Chen, "Study on Hankel matrix-based SVD and its application in rolling element bearing fault diagnosis," *Mech. Syst. Signal Process.*, vols. 52–53, pp. 338–359, Feb. 2015.
- [79] M. Zhao and X. Jia, "A novel strategy for signal denoising using reweighted SVD and its applications to weak fault feature enhancement of rotating machinery," *Mech. Syst. Signal Process.*, vol. 94, pp. 129–147, Sep. 2017.
- [80] H. Li, J. Huang, and S. Ji, "Bearing fault diagnosis with a feature fusion method based on an ensemble convolutional neural network and deep neural network," *Sensors*, vol. 19, no. 9, p. 2034, Apr. 2019.
- [81] A. Widodo and B.-S. Yang, "Application of nonlinear feature extraction and support vector machines for fault diagnosis of induction motors," *Expert Syst. Appl.*, vol. 33, no. 1, pp. 241–250, 2007.
- [82] A. Widodo, B.-S. Yang, and T. Han, "Combination of independent component analysis and support vector machines for intelligent faults diagnosis of induction motors," *Expert Syst. Appl.*, vol. 32, no. 2, pp. 299–312, 2007.
- [83] M. Z. Ali, M. N. S. K. Shabbir, S. M. K. Zaman, and X. Liang, "Single- and multi-fault diagnosis using machine learning for variable frequency drive-fed induction motors," *IEEE Trans. Ind. Appl.*, vol. 56, no. 3, pp. 2324–2337, May 2020.
- [84] M. H. Gharavian, F. A. Ganj, A. R. Ohadi, and H. H. Bafroui, "Comparison of FDA-based and PCA-based features in fault diagnosis of automobile gearboxes," *Neurocomputing*, vol. 121, pp. 150–159, Dec. 2013.
- [85] F. Pacheco, J. V. de Oliveira, R.-V. Sánchez, M. Cerrada, D. Cabrera, C. Li, G. Zurita, and M. Artés, "A statistical comparison of neuroclassifiers and feature selection methods for gearbox fault diagnosis under realistic conditions," *Neurocomputing*, vol. 194, pp. 192–206, Jun. 2016.
- [86] X. Jin, M. Zhao, T. W. S. Chow, and M. Pecht, "Motor bearing fault diagnosis using trace ratio linear discriminant analysis," *IEEE Trans. Ind. Electron.*, vol. 61, no. 5, pp. 2441–2451, May 2014.
- [87] R. Z. Haddad and E. G. Strangas, "On the accuracy of fault detection and separation in permanent magnet synchronous machines using MCSA/MVSA and LDA," *IEEE Trans. Energy Convers.*, vol. 31, no. 3, pp. 924–934, Sep. 2016.
- [88] J. Harmouche, C. Delpha, and D. Diallo, "Improved fault diagnosis of ball bearings based on the global spectrum of vibration signals," *IEEE Trans. Energy Convers.*, vol. 30, no. 1, pp. 376–383, Mar. 2015.
- [89] B. R. Nayana and P. Geethanjali, "Improved identification of various conditions of induction motor bearing faults," *IEEE Trans. Instrum. Meas.*, vol. 69, no. 5, pp. 1908–1919, May 2020.
- [90] D.-H. Lee, J.-H. Ahn, and B.-H. Koh, "Fault detection of bearing systems through EEMD and optimization algorithm," *Sensors*, vol. 17, no. 11, p. 2477, Oct. 2017.
- [91] R. N. Toma, A. E. Prosvirin, and J.-M. Kim, "Bearing fault diagnosis of induction motors using a genetic algorithm and machine learning classifiers," *Sensors*, vol. 20, no. 7, p. 1884, Mar. 2020.
- [92] B.-S. Yang, X. Di, and T. Han, "Random forests classifier for machine fault diagnosis," *J. Mech. Sci. Technol.*, vol. 22, no. 9, pp. 1716–1725, Sep. 2008.
- [93] C. Gong, Y. Hu, G. Chen, H. Wen, Z. Wang, and K. Ni, "A DC-bus capacitor discharge strategy for PMSM drive system with large inertia and small system safe current in EVs," *IEEE Trans. Ind. Informat.*, vol. 15, no. 8, pp. 4709–4718, Aug. 2019.
- [94] J. Jung, Y. Park, S. B. Lee, C.-H. Cho, K. Kim, E. J. Wiedenbrug, and M. Teska, "Monitoring journal-bearing faults: Making use of motor current signature analysis for induction motors," *IEEE Ind. Appl. Mag.*, vol. 23, no. 4, pp. 12–21, Jul. 2017.
- [95] H. Shi, L. Guo, S. Tan, and X. Bai, "Rolling bearing initial fault detection using long short-term memory recurrent network," *IEEE Access*, vol. 7, pp. 171559–171569, 2019.
- [96] S. Haidong, J. Hongkai, L. Xingqiu, and W. Shuaipeng, "Intelligent fault diagnosis of rolling bearing using deep wavelet auto-encoder with extreme learning machine," *Knowl.-Based Syst.*, vol. 140, pp. 1–14, Jan. 2018.
- [97] S. Xie, G. Ren, and J. Zhu, "Application of a new one-dimensional deep convolutional neural network for intelligent fault diagnosis of rolling bearings," *Sci. Prog.*, vol. 103, no. 3, Jul. 2020, Art. no. 003685042095139.
- [98] L. Wan, K. Gong, G. Zhang, X. Yuan, C. Li, and X. Deng, "An efficient rolling bearing fault diagnosis method based on spark and improved random forest algorithm," *IEEE Access*, vol. 9, pp. 37866–37882, 2021.

- [99] M. Kuncan, "An intelligent approach for bearing fault diagnosis: Combination of 1D-LBP and GRA," *IEEE Access*, vol. 8, pp. 137517–137529, 2020.
- [100] L. Chen, G. Xu, T. Tao, and Q. Wu, "Deep residual network for identifying bearing fault location and fault severity concurrently," *IEEE Access*, vol. 8, pp. 168026–168035, 2020.
- [101] L. Hou, R. Jiang, Y. Tan, and J. Zhang, "Input feature mappings-based deep residual networks for fault diagnosis of rolling element bearing with complicated dataset," *IEEE Access*, vol. 8, pp. 180967–180976, 2020.
- [102] T. Wang, Z. Liu, G. Lu, and J. Liu, "Temporal-spatio graph based spectrum analysis for bearing fault detection and diagnosis," *IEEE Trans. Ind. Electron.*, vol. 68, no. 3, pp. 2598–2607, Mar. 2021.
- [103] L. Guo, Y. Lei, S. Xing, T. Yan, and N. Li, "Deep convolutional transfer learning network: A new method for intelligent fault diagnosis of machines with unlabeled data," *IEEE Trans. Ind. Electron.*, vol. 66, no. 9, pp. 7316–7325, Sep. 2019.
- [104] Q. Jiang, F. Chang, and B. Sheng, "Bearing fault classification based on convolutional neural network in noise environment," *IEEE Access*, vol. 7, pp. 69795–69807, 2019.
- [105] Y. Wang, X. Ding, Q. Zeng, L. Wang, and Y. Shao, "Intelligent rolling bearing fault diagnosis via vision ConvNet," *IEEE Sensors J.*, vol. 21, no. 5, pp. 6600–6609, Mar. 2021.
- [106] L. Yuan, D. Lian, X. Kang, Y. Chen, and K. Zhai, "Rolling bearing fault diagnosis based on convolutional neural network and support vector machine," *IEEE Access*, vol. 8, pp. 137395–137406, 2020.
- [107] M. Hamadache, D. Lee, and K. C. Veluvolu, "Rotor speed-based bearing fault diagnosis (RSB-BFD) under variable speed and constant load," *IEEE Trans. Ind. Electron.*, vol. 62, no. 10, pp. 6486–6495, Oct. 2015.
- [108] M. Kang, J. Kim, and J. M. Kim, "An FPGA-based multicore system for real-time bearing fault diagnosis using ultrasampling rate AE signals," *IEEE Trans. Ind. Electron.*, vol. 62, no. 4, pp. 2319–2329, Apr. 2015.
- [109] M. Kang, J. Kim, L. M. Wills, and J.-M. Kim, "Time-varying and multiresolution envelope analysis and discriminative feature analysis for bearing fault diagnosis," *IEEE Trans. Ind. Electron.*, vol. 62, no. 12, pp. 7749–7761, Dec. 2015.
- [110] H. Keskes and A. Braham, "Recursive undecimated wavelet packet transform and DAG SVM for induction motor diagnosis," *IEEE Trans. Ind. Informat.*, vol. 11, no. 5, pp. 1059–1066, Oct. 2015.
- [111] S. Zgarni, H. Keskes, and A. Braham, "Nested SVDD in DAG SVM for induction motor condition monitoring," *Eng. Appl. Artif. Intell.*, vol. 71, pp. 210–215, May 2018.
- [112] B. Bessam, A. Menacer, M. Boumehraz, and H. Cherif, "Detection of broken rotor bar faults in induction motor at low load using neural network," *ISA Trans.*, vol. 64, pp. 241–246, Sep. 2016.
- [113] H. Oh, J. H. Jung, B. C. Jeon, and B. D. Youn, "Scalable and unsupervised feature engineering using vibration-imaging and deep learning for rotor system diagnosis," *IEEE Trans. Ind. Electron.*, vol. 65, no. 4, pp. 3539–3549, Apr. 2018.
- [114] M. Kim, J. H. Jung, J. U. Ko, H. B. Kong, J. Lee, and B. D. Youn, "Direct connection-based convolutional neural network (DC-CNN) for fault diagnosis of rotor systems," *IEEE Access*, vol. 8, pp. 172043–172056, 2020.
- [115] X. Zhu, D. Hou, P. Zhou, Z. Han, Y. Yuan, W. Zhou, and Q. Yin, "Rotor fault diagnosis using a convolutional neural network with symmetrized dot pattern images," *Measurement*, vol. 138, pp. 526–535, May 2019.
- [116] X. Yan, C.-A. Zhang, and Y. Liu, "Multi-branch convolutional neural network with generalized shaft orbit for fault diagnosis of active magnetic bearing-rotor system," *Measurement*, vol. 171, Feb. 2021, Art. no. 108778.
- [117] G. Singh, T. A. Kumar, and V. Naikan, "Induction motor inter turn fault detection using infrared thermographic analysis," *Infr. Phys. Technol.*, vol. 77, pp. 277–282, Jul. 2016.
- [118] J. Seshadrinath, B. Singh, and B. K. Panigrahi, "Vibration analysis based interturn fault diagnosis in induction machines," *IEEE Trans. Ind. Informat.*, vol. 10, no. 1, pp. 340–350, Jul. 2014.
- [119] H. Cherif, A. Benakcha, I. Laib, S. E. Chehaidia, A. Menacer, B. Soudan, and A. G. Olabi, "Early detection and localization of stator inter-turn faults based on discrete wavelet energy ratio and neural networks in induction motor," *Energy*, vol. 212, Dec. 2020, Art. no. 118684.
- [120] S. Toma, L. Capocchi, and G.-A. Capolino, "Wound-rotor induction generator inter-turn short-circuits diagnosis using a new digital neural network," *IEEE Trans. Ind. Electron.*, vol. 60, no. 9, pp. 4043–4052, Sep. 2013.
- [121] Y. Nyanteh, C. Edrington, S. Srivastava, and D. Cartes, "Application of artificial intelligence to real-time fault detection in permanent-magnet synchronous machines," *IEEE Trans. Ind. Appl.*, vol. 49, no. 3, pp. 1205–1214, May 2013.
- [122] L. S. Maraaba, A. S. Milhem, I. A. Nemer, H. Al-Duwaish, and M. A. Abido, "Convolutional neural network-based inter-turn fault diagnosis in LSPMSMs," *IEEE Access*, vol. 8, pp. 81960–81970, 2020.
- [123] M. Singh and A. G. Shaik, "Incipient fault detection in stator windings of an induction motor using stockwell transform and SVM," *IEEE Trans. Instrum. Meas.*, vol. 69, no. 12, pp. 9496–9504, Dec. 2020.
- [124] N. R. Devi, D. V. S. S. S. Sarma, and P. V. R. Rao, "Diagnosis and classification of stator winding insulation faults on a three-phase induction motor using wavelet and MNN," *IEEE Trans. Dielectr. Electr. Insul.*, vol. 23, no. 5, pp. 2543–2555, Oct. 2016.
- [125] T. A. Shifat and H. Jang-Wook, "Remaining useful life estimation of BLDC motor considering voltage degradation and attention-based neural network," *IEEE Access*, vol. 8, pp. 168414–168428, 2020.
- [126] B. Wang, Y. Lei, N. Li, and W. Wang, "Multiscale convolutional attention network for predicting remaining useful life of machinery," *IEEE Trans. Ind. Electron.*, vol. 68, no. 8, pp. 7496–7504, Aug. 2021.
- [127] M. Z. Ali, M. N. S. K. Shabbir, X. Liang, Y. Zhang, and T. Hu, "Machine learning-based fault diagnosis for single- and multi-faults in induction motors using measured stator currents and vibration signals," *IEEE Trans. Ind. Appl.*, vol. 55, no. 3, pp. 2378–2391, May 2019.
- [128] X. Jin, F. Cheng, Y. Peng, W. Qiao, and L. Qu, "Drivetrain gearbox fault diagnosis: Vibration- and current-based approaches," *IEEE Ind. Appl. Mag.*, vol. 24, no. 6, pp. 56–66, Nov. 2018.
- [129] X. He, Q. Liu, W. Yu, C. K. Mechefske, and X. Zhou, "A new autocorrelation-based strategy for multiple fault feature extraction from gearbox vibration signals," *Measurement*, vol. 171, Feb. 2021, Art. no. 108738.
- [130] Y. Lei, Z. Liu, X. Wu, N. Li, W. Chen, and J. Lin, "Health condition identification of multi-stage planetary gearboxes using a mRVM-based method," *Mech. Syst. Signal Process.*, vols. 60–61, no. 8, pp. 289–300, Aug. 2015.
- [131] H. Shi, J. Guo, X. Bai, L. Guo, Z. Liu, and J. Sun, "Gearbox incipient fault detection based on deep recursive dynamic principal component analysis," *IEEE Access*, vol. 8, pp. 57646–57660, 2020.
- [132] J. Zhang, J. S. Dhupia, and C. J. Gajanayake, "Stator current analysis from electrical machines using resonance residual technique to detect faults in planetary gearboxes," *IEEE Trans. Ind. Electron.*, vol. 62, no. 9, pp. 5709–5721, Sep. 2015.
- [133] Y. Qin, S. Xiang, Y. Chai, and H. Chen, "Macroscopic–microscopic attention in LSTM networks based on fusion features for gear remaining life prediction," *IEEE Trans. Ind. Electron.*, vol. 67, no. 12, pp. 10865–10875, Dec. 2020.
- [134] D.-F. Wang, Y. Guo, X. Wu, J. Na, and G. Litak, "Planetary-gearbox fault classification by convolutional neural network and recurrence plot," *Appl. Sci.*, vol. 10, no. 3, p. 932, Jan. 2020.
- [135] C. Li, R.-V. Sanchez, G. Zurita, M. Cerrada, D. Cabrera, and R. E. Vásquez, "Multimodal deep support vector classification with homologous features and its application to gearbox fault diagnosis," *Neurocomput.*, vol. 168, pp. 119–127, Nov. 2015.
- [136] F. Chen, B. Tang, and R. Chen, "A novel fault diagnosis model for gearbox based on wavelet support vector machine with immune genetic algorithm," *Measurement*, vol. 46, no. 1, pp. 220–232, 2013.
- [137] F. Cheng, Y. Peng, L. Qu, and W. Qiao, "Current-based fault detection and identification for wind turbine drivetrain gearboxes," *IEEE Trans. Ind. Appl.*, vol. 53, no. 2, pp. 878–887, Mar. 2017.
- [138] F. Cheng, J. Wang, L. Qu, and W. Qiao, "Rotor-Current-Based fault diagnosis for DFIG wind turbine drivetrain gearboxes using frequency analysis and a deep classifier," *IEEE Trans. Ind. Appl.*, vol. 54, no. 2, pp. 1062–1071, Mar. 2018.
- [139] D. Lu and W. Qiao, "Adaptive feature extraction and SVM classification for real-time fault diagnosis of drivetrain gearboxes," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2013, pp. 3934–3940.
- [140] Y. Lei and M. J. Zuo, "Gear crack level identification based on weighted K nearest neighbor classification algorithm," *Mech. Syst. Signal Process.*, vol. 23, no. 5, pp. 1535–1547, 2009.
- [141] S. Zhu and B. Jiao, "Fault diagnosis of gearbox of wind turbine based on improved decision tree algorithm," in *Proc. 2nd Int. Conf. Control, Autom. Artif. Intell. (CAAI)*, 2017, pp. 1–3.

- [142] J. Cheng and Y. Xiong, "Fault diagnosis of wind turbine gearbox based on improved QPSO algorithm," *Recent Adv. Electr. Electron. Eng. Formerly Recent Patents Electr. Electron. Eng.*, vol. 12, no. 3, pp. 277–283, Jun. 2019.
- [143] M. Azamfar, J. Singh, I. Bravo-Imaz, and J. Lee, "Multisensor data fusion for gearbox fault diagnosis using 2-D convolutional neural network and motor current signature analysis," *Mech. Syst. Signal Process.*, vol. 144, Oct. 2020, Art. no. 106861.
- [144] G. Jiang, H. He, J. Yan, and P. Xie, "Multiscale convolutional neural networks for fault diagnosis of wind turbine gearbox," *IEEE Trans. Ind. Electron.*, vol. 66, no. 4, pp. 3196–3207, Apr. 2019.
- [145] K.-H. Chao, L.-Y. Chang, and F.-Q. Xu, "Three-level T-type inverter fault diagnosis and tolerant control using single-phase line voltage," *IEEE Access*, vol. 8, pp. 44075–44086, 2020.
- [146] T. Wang, J. Qi, H. Xu, Y. Wang, L. Liu, and D. Gao, "Fault diagnosis method based on FFT-RPCA-SVM for cascaded-multilevel inverter," *ISA Trans.*, vol. 60, pp. 156–163, Jan. 2016.
- [147] S. S. Moosavi, A. Kazemi, and H. Akbari, "A comparison of various open-circuit fault detection methods in the IGBT-based DC/AC inverter used in electric vehicle," *Eng. Failure Anal.*, vol. 96, pp. 223–235, Feb. 2019.
- [148] Y. Cheng, W. Dong, F. Gao, and G. Xin, "Open-circuit fault diagnosis of traction inverter based on compressed sensing theory," *Chin. J. Electr. Eng.*, vol. 6, no. 1, pp. 52–60, Mar. 2020.
- [149] D. Chen, Y. Ye, and R. Hua, "Fault diagnosis of NPC inverter based on multi-layer SVM," in *Information Computing and Applications* (Communications in Computer and Information Science). Berlin, Germany: Springer, 2012, pp. 611–621.
- [150] H. Hu, F. Feng, and T. Wang, "Open-circuit fault diagnosis of NPC inverter IGBT based on independent component analysis and neural network," *Energy Rep.*, vol. 6, pp. 134–143, Dec. 2020.
- [151] X. Wan, H. Hu, Y. Yu, L. Kang, and F. Zeng, "Open-circuit fault diagnosis for grid-connected NPC inverter based on independent component analysis and neural network," *TELEKOMNIKA Telecommun. Comput. Electron. Control*, vol. 15, no. 1, p. 36, Mar. 2017.
- [152] D. Chen, Y. Ye, and R. Hua, "Fault diagnosis system for NPC inverter based on multi-layer principal component neural network," *J. Comput.*, vol. 8, no. 6, pp. 1464–1471, Jun. 2013.
- [153] J. Liu, J. Wang, W. Yu, Z. Wang, and G. Zhong, "Open-circuit fault diagnosis of traction inverter based on improved convolutional neural network," *J. Phys., Conf. Ser.*, vol. 1633, no. 1, Sep. 2020, Art. no. 012099.
- [154] Z. Ji and W. Liu, "Open-circuit fault detection for three-phase inverter based on backpropagation neural network," *Neural Comput. Appl.*, vol. 31, no. 9, pp. 4665–4674, Jul. 2018.
- [155] B. D. E. Cherif, A. Bendiabdellah, and M. Tabbakh, "An automatic diagnosis of an inverter IGBT open-circuit fault based on HHT-ANN," *Electr. Power Compon. Syst.*, vol. 48, nos. 6–7, pp. 589–602, Apr. 2020.
- [156] R. B. Dhumale and S. D. Lokhande, "Neural network fault diagnosis of voltage source inverter under variable load conditions at different frequencies," *Measurement*, vol. 91, pp. 565–575, Sep. 2016.
- [157] W. Gong, H. Chen, Z. Zhang, M. Zhang, and H. Gao, "A data-driven-based fault diagnosis approach for electrical power DC–DC inverter by using modified convolutional neural network with global average pooling and 2-D feature image," *IEEE Access*, vol. 8, pp. 73677–73697, 2020.
- [158] L. Yao, Z. Fang, Y. Xiao, J. Hou, and Z. Fu, "An intelligent fault diagnosis method for lithium battery systems based on grid search support vector machine," *Energy*, vol. 214, Jan. 2021, Art. no. 118866.
- [159] R. Yang, R. Xiong, H. He, and Z. Chen, "A fractional-order model-based battery external short circuit fault diagnosis approach for all-climate electric vehicles application," *J. Cleaner Prod.*, vol. 187, pp. 950–959, Jun. 2018.
- [160] L. Yao, Y. Xiao, X. Gong, J. Hou, and X. Chen, "A novel intelligent method for fault diagnosis of electric vehicle battery system based on wavelet neural network," *J. Power Sources*, vol. 453, Mar. 2020, Art. no. 227870.
- [161] R. Yang, R. Xiong, S. Ma, and X. Lin, "Characterization of external short circuit faults in electric vehicle Li-ion battery packs and prediction using artificial neural networks," *Appl. Energy*, vol. 260, Feb. 2020, Art. no. 114253.
- [162] J. Hong, Z. Wang, and Y. Yao, "Fault prognosis of battery system based on accurate voltage abnormality prognosis using long short-term memory neural networks," *Appl. Energy*, vol. 251, Oct. 2019, Art. no. 113381.
- [163] D. Li, Z. Zhang, P. Liu, Z. Wang, and L. Zhang, "Battery fault diagnosis for electric vehicles based on voltage abnormality by combining the long short-term memory neural network and the equivalent circuit model," *IEEE Trans. Power Electron.*, vol. 36, no. 2, pp. 1303–1315, Feb. 2021.
- [164] O. Ojo, H. Lang, Y. Kim, X. Hu, B. Mu, and X. Lin, "A neural network based method for thermal fault detection in lithium-ion batteries," *IEEE Trans. Ind. Electron.*, vol. 68, no. 5, pp. 4068–4078, May 2021.
- [165] X. Hu, J. Jiang, D. Cao, and B. Egardt, "Battery health prognosis for electric vehicles using sample entropy and sparse Bayesian predictive modeling," *IEEE Trans. Ind. Electron.*, vol. 63, no. 4, pp. 2645–2656, Apr. 2016.
- [166] J.-H. Lee, H.-S. Kim, and I.-S. Lee, "Deep neural network based SOH monitoring of battery module," in *Proc. IEEE Eurasia Conf. IoT, Commun. Eng. (ECICE)*, Oct. 2019, pp. 14–16.
- [167] X. Feng, C. Weng, X. He, X. Han, L. Lu, D. Ren, and M. Ouyang, "Online state-of-health estimation for Li-ion battery using partial charging segment based on support vector machine," *IEEE Trans. Veh. Technol.*, vol. 68, no. 9, pp. 8583–8592, Sep. 2019.
- [168] W. Xiong, Y. Mo, and C. Yan, "Online state-of-health estimation for second-use lithium-ion batteries based on weighted least squares support vector machine," *IEEE Access*, vol. 9, pp. 1870–1881, 2021.
- [169] G. Crocioni, D. Pau, J.-M. Delorme, and G. Gruosso, "Li-ion batteries parameter estimation with tiny neural networks embedded on intelligent IoT microcontrollers," *IEEE Access*, vol. 8, pp. 122135–122146, 2020.
- [170] N. Shateri, Z. Shi, D. J. Auger, and A. Fotouhi, "Lithium-sulfur cell state of charge estimation using a classification technique," *IEEE Trans. Veh. Technol.*, vol. 70, no. 1, pp. 212–224, Jan. 2021.
- [171] R. Li, S. Xu, S. Li, Y. Zhou, K. Zhou, X. Liu, and J. Yao, "State of charge prediction algorithm of lithium-ion battery based on PSO-SVR cross validation," *IEEE Access*, vol. 8, pp. 10234–10242, 2020.
- [172] J. c. A. Antón, P. J. G. Nieto, C. B. Viejo, and J. A. V. Vilán, "Support vector machines used to estimate the battery state of charge," *IEEE Trans. Power Electron.*, vol. 28, no. 12, pp. 5919–5926, Dec. 2013.
- [173] L. Zhang, K. Li, D. Du, Y. Guo, M. Fei, and Z. Yang, "A sparse learning machine for real-time SOC estimation of Li-ion batteries," *IEEE Access*, vol. 8, pp. 156165–156176, 2020.
- [174] Y. Guo, Z. Yang, K. Liu, Y. Zhang, and W. Feng, "A compact and optimized neural network approach for battery state-of-charge estimation of energy storage system," *Energy*, vol. 219, Mar. 2021, Art. no. 119529.
- [175] M. Wei, M. Ye, J. B. Li, Q. Wang, and X. Xu, "State of charge estimation of lithium-ion batteries using LSTM and NARX neural networks," *IEEE Access*, vol. 8, pp. 189236–189245, 2020.
- [176] K. Park, Y. Choi, W. J. Choi, H.-Y. Ryu, and H. Kim, "LSTM-based battery remaining useful life prediction with multi-channel charging profiles," *IEEE Access*, vol. 8, pp. 20786–20798, 2020.
- [177] Y. Zhang, R. Xiong, H. He, and M. G. Pecht, "Long short-term memory recurrent neural network for remaining useful life prediction of lithium-ion batteries," *IEEE Trans. Veh. Technol.*, vol. 67, no. 7, pp. 5695–5705, Jul. 2018.
- [178] K. Liu, Y. Shang, Q. Ouyang, and W. D. Widanage, "A data-driven approach with uncertainty quantification for predicting future capacities and remaining useful life of lithium-ion battery," *IEEE Trans. Ind. Electron.*, vol. 68, no. 4, pp. 3170–3180, Apr. 2021.
- [179] J. Zhu, T. Tan, L. Wu, and H. Yuan, "RUL prediction of lithium-ion battery based on improved DGWO-ELM method in a random discharge rates environment," *IEEE Access*, vol. 7, pp. 125176–125187, 2019.
- [180] Q. Xue, G. Li, Y. Zhang, S. Shen, Z. Chen, and Y. Liu, "Fault diagnosis and abnormality detection of lithium-ion battery packs based on statistical distribution," *J. Power Sources*, vol. 482, Jan. 2021, Art. no. 228964.
- [181] J. S. L. Senanayaka, H. Van Khang, and K. G. Robbersmyr, "Toward self-supervised feature learning for online diagnosis of multiple faults in electric powertrains," *IEEE Trans. Ind. Informat.*, vol. 17, no. 6, pp. 3772–3781, Jun. 2021.



**XIAOTIAN ZHANG** (Student Member, IEEE) was born in Shandong, China, in August 1996. He received the B.Sc. degree in applied physics from Hohai University, Nanjing, China, in 2018, and the M.Sc. degree in electronic engineering from King's College London, London, U.K., in 2020. He is currently pursuing the Ph.D. degree in electrical engineering with the Department of Electronic Engineering, University of York, Heslington, York, U.K. His research interests include advanced AI condition monitoring, fault recognition, and engineering application of AI.



**YIHUA HU** (Senior Member, IEEE) received the B.S. degree in electrical engineering and the Ph.D. degree in power electronics and drives from the China University of Mining and Technology, in 2003 and 2011, respectively. From 2011 to 2013, he was a Postdoctoral Fellow with the College of Electrical Engineering, Zhejiang University. From 2013 to 2015, he worked as a Research Associate at the Power Electronics and Motor Drive Group, University of Strathclyde.

From 2016 to 2019, he was a Lecturer at the Department of Electrical Engineering and Electronics, University of Liverpool (UoL). He is currently a Reader at the Electronics Engineering Department, University of York (UoY). He has published over 100 articles in IEEE TRANSACTIONS journals. His research interests include renewable generation, power electronics converters and control, electric vehicle, more electric ship/aircraft, smart energy systems, and non-destructive test technology. He is a fellow of the Institution of Engineering and Technology (FIET). He was awarded the Royal Society Industry Fellowship. He is an Associate Editor of the IEEE TRANSACTIONS ON INDUSTRIAL ELECTRONICS, *IET Renewable Power Generation*, *IET Intelligent Transport Systems*, and *Power Electronics and Drives*.



**JIAMEI DENG** (Senior Member, IEEE) received the B.S. degree from the Huazhong University of Science and Technology, Wuhan, China, in 1988, the M.S. degree from the Shanghai Institute of Mechanical Engineering, Shanghai, China, and the Ph.D. degree from Reading University, U.K., in 2005. She is currently a Professor of artificial intelligence and energy with Leeds Beckett University with emphasis on control systems design, predictive models, data-driven, and power plant safety monitoring.



**HUI XU** received the B.S., M.Eng., and Ph.D. degrees from the China University of Mining and Technology, China, in 2005, 2009, and 2012, respectively. During 2012–2013, she was a Postdoctoral Researcher at Zhejiang University. She is currently a Research Assistant in artificial intelligence and energy with Leeds Beckett University.



**HUIQING WEN** (Senior Member, IEEE) received the B.S. and M.S. degrees in electrical engineering from Zhejiang University, Hangzhou, China, in 2002 and 2006, respectively, and the Ph.D. degree in electrical engineering from the Chinese Academy of Sciences, Beijing, China, in 2009. From 2009 to 2010, he was an Electrical Engineer working with GE (China) Research and Development Center Company Ltd., Shanghai, China. From 2010 to 2011, he was an Engineer with the China Coal Research Institute, Beijing. From 2011 to 2012, he was a Postdoctoral Fellow with the Masdar Institute of Science and Technology, Abu Dhabi, United Arab Emirates. In 2013, he joined the Electrical and Electronic Engineering Department, Xi'an Jiaotong-Liverpool University (XJTLU), Suzhou, China. He is currently a Senior Associate Professor with XJTLU. He has published more than 100 peer-reviewed technical articles in leading journals/conferences and holds over 20 issued/pending patents. His research interests include renewable energy, electric vehicle, power electronics, microgrid, and power semiconductor devices. He is an Associate Editor of IEEE ACCESS, *International Journal of Photoenergy*, and *Journal of Power Electronics*.

...