



LJMU Research Online

Thisani, SK, Kallon, DVV and Byrne, PA

Co-remediation of acid mine drainage and industrial effluent using passive permeable reactive barrier pre-treatment and active co-bioremediation

<http://researchonline.ljmu.ac.uk/id/eprint/16769/>

Article

Citation (please note it is advisable to refer to the publisher's version if you intend to cite from this work)

Thisani, SK, Kallon, DVV and Byrne, PA (2022) Co-remediation of acid mine drainage and industrial effluent using passive permeable reactive barrier pre-treatment and active co-bioremediation. Minerals, 12 (5). ISSN 2075-163X

LJMU has developed **LJMU Research Online** for users to access the research output of the University more effectively. Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. Users may download and/or print one copy of any article(s) in LJMU Research Online to facilitate their private study or for non-commercial research. You may not engage in further distribution of the material or use it for any profit-making activities or any commercial gain.

The version presented here may differ from the published version or from the version of the record. Please see the repository URL above for details on accessing the published version and note that access may require a subscription.

For more information please contact researchonline@ljmu.ac.uk

<http://researchonline.ljmu.ac.uk/>

Article

Co-Remediation of Acid Mine Drainage and Industrial Effluent Using Passive Permeable Reactive Barrier Pre-Treatment and Active Co-Bioremediation

Sandisiwe Khanyisa Thisani ^{1,*}, Daramy Vandi Von Kallon ¹  and Patrick Byrne ² 

¹ Department of Mechanical and Industrial Engineering Technology, University of Johannesburg, Johannesburg 2006, South Africa; dkallon@uj.ac.za

² School of Biological and Environmental Sciences, Liverpool John Moores University, Liverpool L2 2QP, UK; p.a.byrne@ljmu.ac.uk

* Correspondence: 201113370@student.uj.ac.za

Abstract: This study evaluated the co-remediation performance of an active–passive process comprised of passive permeable reactive barrier acid mine drainage (AMD) pre-treatment and active anaerobic digestion treatment of AMD with effluent as a carbon source. The bioreactor was operated for 24 consecutive days with peak chemical oxygen demand (COD) and sulphate loading rates of 6.6 kg COD/m³/day and 0.89 kg SO₄²⁻/m³/day, respectively. The AMD pre-treatment was capable of removing 99%, 94% and 42% of iron (Fe), potassium (K), and aluminium (Al) concentrations, respectively. The biological treatment process was capable of removing 89.7% and 99% of COD and sulphate concentrations, respectively. The treated wastewater copper (Cu), sulphate (SO₄²⁻), and pH were within the effluent discharge limits and the potable water standards of South Africa. Fe, Al, manganese (Mn), nickel (Ni), and zinc (Zn) concentrations in the treated wastewater were marginally higher than the discharge and potable water limit with all concentrations exceeding the limit by less than 0.65 mg/L. The remediation performance of the process was found to be effective with limited operational inputs, which can enable low cost co-remediation.

Keywords: acid mine drainage (AMD); anaerobic digestion; pervious concrete; biological co-remediation; effluent treatment



Citation: Thisani, S.K.; Kallon, D.V.V.; Byrne, P. Co-Remediation of Acid Mine Drainage and Industrial Effluent Using Passive Permeable Reactive Barrier Pre-Treatment and Active Co-Bioremediation. *Minerals* **2022**, *12*, 565. <https://doi.org/10.3390/min12050565>

Academic Editors: Chiharu Tokoro, Shigeshi Fuchida and Yutaro Takaya

Received: 12 March 2022

Accepted: 15 April 2022

Published: 30 April 2022

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2022 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

Acid mine drainage (AMD) and effluent from food and beverage (F&B) industries are toxic wastewater streams that are generated from mining and industrial operations, respectively. These wastewater streams can pose severe harm to the natural environment and to living organisms when allowed to decant to natural water bodies [1,2]. Acid mine drainage is characterised by low pH, high concentrations of dissolved heavy metals, and high concentrations of sulphate (SO₄²⁻) [3,4]. Effluent from F&B industries is typically characterised by high organic content, high suspended solids, and low pH [5,6]. Chemical oxygen demand (COD) is a critical indicator of effluent quality of F&B industries due to the high organic contents in the manufacturing processes [7,8].

Conventional anaerobic bioremediation is comprised of numerous interdependent microbial species that breakdown organic pollutants to remediate wastewater streams [6]. The microbial food web in anaerobic digestion (AD) presents an opportunity to integrate a second inorganic wastewater stream such as AMD for co-bioremediation [9]. In the co-bioremediation approach, reducing microorganisms can use the carbon from the organic wastewater stream as an electron donor to breakdown inorganic pollutants [10]. This dual treatment approach where a pollutant from one stream works as an intermediary for the remediation of another has been the topic of much research in recent years [11–15]. However, the research has currently mostly been limited to the use of complex organic

matter sources such as primary sewage sludge for co-remediation with AMD [14,16–18]. The operational efficiency of sulphidogenic AD solutions are largely dependent on the carbon source utilised [19–22]. The co-bioremediation of AMD and easily biodegradable industrial effluent could be more efficient, have lower operational costs, and could have a higher remediation quality of both wastewater streams than the existing co-bioremediation of AMD with complex organic matter sources. If suitable treatment quality can be achieved on both streams, industrial effluents could be a cost effective and readily available carbon source for AMD bioremediation.

A major constraint towards the co-bioremediation of AMD using easily biodegradable industrial effluent is the rapid utilisation of the simple organic matter resulting in low pH and acidification of the reactor [10,17]. To mitigate this, an active–passive process has been developed to neutralise the acidity developed by the acidogenic microorganisms in the bioreactor. The active–passive process comprises of passive permeable reactive barrier (PRB) pre-treatment and an active fixed bed pervious concrete anaerobic digester where pH can be neutralised by the dissolution of calcium (Ca) ions from the pervious concrete. The evaluation of the co-remediation capabilities of this process forms the basis of this research.

This research was undertaken to evaluate the co-remediation capabilities of the active–passive process. The research aimed to test the treated AMD and industrial effluent quality achievable during continuous batch operation. The research methodology was designed to test performance at increasing SO_4^{2-} and COD loading rates. The findings of this research contribute towards the sustainable management of AMD and industrial effluent pollutants. Apart from the loading of the wastewater streams and maintaining the digester temperature, no other external interventions were taken to control the AD operation during the experiment.

2. Methodology

2.1. Acid Mine Drainage and Industrial Effluent Collection and Storage

AMD was collected from an abandoned coal mine in the north-eastern coal fields of KwaZulu-Natal province of South Africa. The AMD was collected at the overflow weir of the mine tailing in 20 L plastic containers, which were kept closed and refrigerated at 4 °C for three days before experimentation. A sample of the collected AMD was analysed for chemical determinands and the results are presented in Table 1.

Table 1. Acid mine drainage determinands. DO—Dissolved Oxygen; ORP—Oxygen Reduction Potential.

DO (mg/L)	ORP (mV)	pH	SO ₄ (mg/L)	TDS (mg/L)	TSS (mg/L)	Al (mg/L)	Ca (mg/L)	Cu (µm/L)	Fe (mg/L)	K (mg/L)	Mg (mg/L)	Mn (mg/L)	Na (mg/L)	Ni (mg/L)	Zn (mg/L)
5.91	636.6	2.56	1642	3357	10	53.8	408	13.1	104	9.31	306	12.8	224	0.62	1.02

Effluent wastewater was collected from the effluent holding tank of a confectionary production factory. Major raw ingredients used by the factory include glucose, gelatine, sugar, and starch. The effluent was collected in 20 L plastic containers and kept refrigerated for three days at 4 °C before experimentation commenced. A sample of the effluent was analysed for chemical determinands and the results are presented in Table 2.

Table 2. Effluent determinands.

pH	Chemical Oxygen Demand (mg/L)	Total Organic Carbon (mg/L)
3.43	19,500	5543

2.2. Process Design and Description

The co-remediation process comprised of an AMD pre-treatment stage to precipitate some of the heavy metals, mainly iron, from solution and a secondary treatment stage for

co-bioremediation of AMD with industrial effluent. The pre-treatment utilises pervious concrete as a PRB for pH correction and metal precipitation. The PRB was operated under gravitation flow conditions due to the proven remediation capabilities of this configuration over column flow [23]. Four 150 mm pervious concrete cubes were stacked vertically in a rectangular container constructed from Perspex sheeting. Raw AMD was discharged at the top of the PRB using a peristaltic pump at a flow rate of 800 mL/min. The AMD was allowed to trickle through the pervious concrete's porous network. The pre-treated AMD was stored in 20 L containers and the precipitated suspended solids allowed to settle. The supernatant was decanted for secondary treatment. A sample of the pre-treated AMD was collected at 5 L intervals of AMD flow. Figure 1 schematically illustrates the AMD pre-treatment process described.

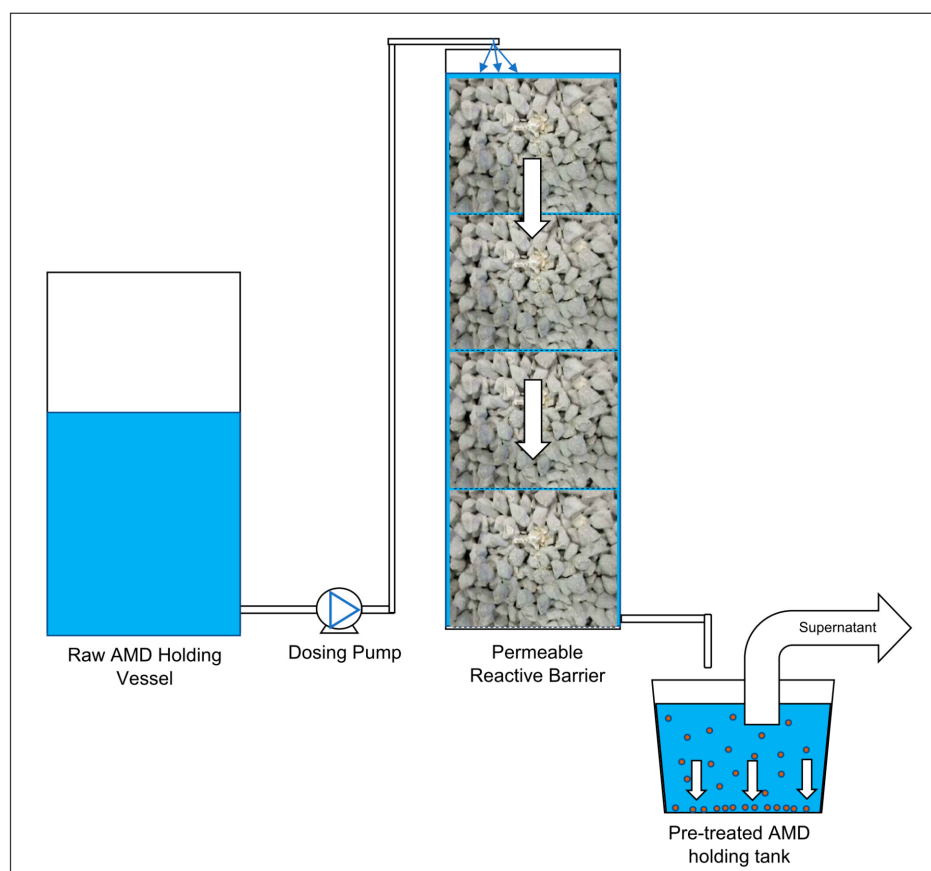


Figure 1. Permeable reactive barrier pre-treatment.

The pre-treated AMD supernatant was bio-remediated with industrial effluent as the carbon source using the fixed bed pervious concrete bioreactor process. The bioreactor process was comprised of two 150 mm × 150 mm × 150 mm pervious concrete cubes, a recycling tank where the AMD and industrial effluent were introduced, and a peristaltic pump to circulate the effluent AMD mixture through the reactor. The porous network of the pervious concrete cubes was used to house seed sludge floc particles. The reactor was fitted with a heating element to maintain the liquid temperature between 37 °C and 38 °C and a vent to release biogas generated during treatment. The recycling tank was fitted with a valve for collection of the treated effluent and sample collection. Figure 2 schematically illustrates the fixed bed pervious concrete co-bioremediation process.

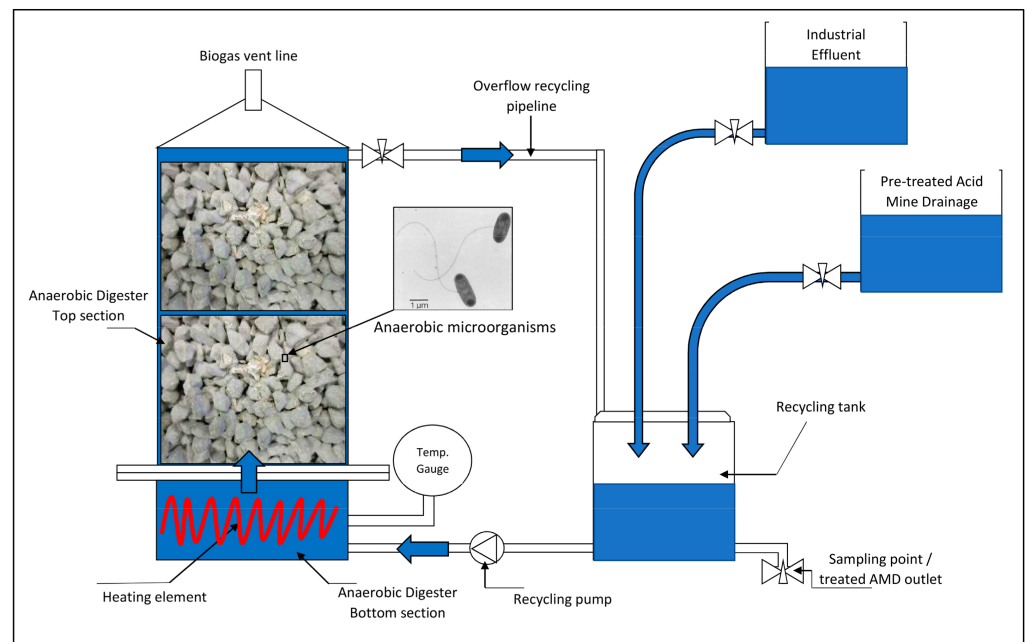


Figure 2. Schematic layout of the bioreactor.

2.3. Equipment and Materials

2.3.1. Pervious Concrete Materials and Construction

Pozzolanic CEM IV and granite stone were used as the cement and aggregate type for the pervious concrete cubes. The CEM IV mix design comprised of Portland CEM I with 4% silica fume CSF-90™ and 8% siliceous fly ash [23]. Granite stone sizes of 13.2 mm and 9.5 mm were selected for the bioreactor and pre-treatment pervious concrete cubes, respectively. Table 3 shows the mix designs for the pervious concrete cubes.

Table 3. Pervious concrete mix designs and porosity.

Cube Description	Mix Proportion (Dry)-kg per m ³							% Extender	Porosity
	CEM 1	Fly Ash	Silica Fume	9.5 mm Granite	13.2 mm Granite	Optima 175	Water		
Pre-treatment	197	18	9	1462	-	1.75	75	12.1%	21.5%
Fixed Bed AD	152	14	7	-	1468	1.35	60	12.1%	33.2%

2.3.2. Seed Sludge Collection, Storage and Loading

Granular seed sludge was sourced from an effluent treatment plant (ETP) of a yeast manufacturing company. This seed sludge was sourced due to the consortium of anaerobic microorganisms present including sulphide reducing prokaryotes and methanogens, which are required for AMD and effluent bioremediation. The granular sludge was collected from the anaerobic digester tank of the ETP and stored in a 5 L plastic container. The container was kept closed and refrigerated at 4 °C for 14 days prior to the commencement of the experimentation. A day before the commencement of the experiments, the 5 L container was kept at approximately 21 °C. Prior to the commencement of the experiment, 1.2 L of sludge was poured uniformly over each concrete cube. The sludge was allowed to seep into the porous void network of the concrete cube for 10 min. Figure 3 shows the granular seed sludge used.



Figure 3. Granular seed sludge.

2.4. Bioreactor Operational Protocol

Biological co-remediation of pre-treated AMD and industrial effluent was conducted in batch operation in the fixed bed pervious concrete bioreactor over a period of 24 consecutive days. The start-up operation of the bioreactor comprised of a gradual increase in the batch loading rates of AMD SO_4^{2-} from 0.054 kg $\text{SO}_4^{2-}/\text{m}^3/\text{day}$ on day 1 to 0.89 kg $\text{SO}_4^{2-}/\text{m}^3/\text{day}$ on day 22. The effluent COD batch loading rate was gradually increased from 2.64 kg COD/ m^3/day on day 1 to 6.6 kg/COD/ m^3/day on day 18. COD to SO_4^{2-} ratio was gradually reduced from 164.6:1 to 5.14:1. It has been established in the literature that COD to SO ratios below 5:1 when using an easily biodegradable carbon source can be performance limiting [10]. A hydraulic retention time of 48 h was maintained between each batch loading cycle. The recycling pump flow rate was maintained at 15.4 mL/min. Equations (1) and (2) show the formulae used to determine the SO_4^{2-} and COD loading rates, respectively. Table 4 shows the SO_4^{2-} and COD loading rates for the experiment.

$$\text{SO}_4^{2-} \text{ Loading Rate (kgSO}_4^{2-}/\text{m}^3/\text{day}) = \frac{\text{SO}_4^{2-} (\text{mg/L}) \times \text{Volume added per day (m}^3/\text{day)}}{1000 (\text{g/kg}) \times \text{Reactor volume (m}^3)} \quad (1)$$

$$\text{COD Loading Rate (kgCOD/m}^3/\text{day}) = \frac{\text{COD (mg/L)} \times \text{Volume added per day (m}^3/\text{day)}}{1000 (\text{g/kg}) \times \text{Reactor volume (m}^3)} \quad (2)$$

Table 4. Operational protocol—sulphate and COD loading rate.

Ramp-up Cycle No	Experimental Duration (h)	AMD Loading Volume (L)	SO_4^{2-} Loading Rate (kg $\text{SO}_4^{2-}/\text{m}^3/\text{Day}$)	COD Loading Volume (L)	COD Loading Rate (kg COD/ m^3/Day)	COD to SO_4^{2-} Ratio
0	0	0.054	0.02	0.72	2.64	164.56
	24					
1	48	0.1	0.03	0.70	2.57	86.39
	72					
2	96	0.12	0.04	1.04	3.08	86.39
	120					

Table 4. Cont.

Ramp-up Cycle No	Experimental Duration (h)	AMD Loading Volume (L)	SO ₄ ²⁻ Loading Rate (kg SO ₄ ²⁻ /m ³ /Day)	COD Loading Volume (L)	COD Loading Rate (kg COD/m ³ /Day)	COD to SO ₄ ²⁻ Ratio
3	144	0.22	0.07	0.84	3.30	50.49
	168					
4	192	0.3	0.09	0.84	3.30	37.03
	216					
5	240	0.4	0.12	1.26	4.62	38.88
	264					
6	288	0.64	0.19	1.60	5.87	30.85
	312					
7	336	0.9	0.27	1.7	6.23	23.31
	360					
8	384	1	0.30	1.8	6.60	22.22
	408					
9	432	2	0.59	1.8	6.60	11.11
	456					
10	480	2475	0.74	1.2	4.40	5.98
	504					
11	528	3	0.89	1.25	4.58	5.14
	552					
	576					

An initial recycling tank sample was collected on day 1 following AD start-up and further samples were collected at 48 h intervals for chemical analyses. Biologically treated effluent samples were extracted from the bioreactor followed by the addition of effluent and AMD at the required loading rates. The liquid volumes in the recycling tank and the bioreactor were measured before loading. Following the loading of AMD and effluent, the new concentrations of COD and SO₄²⁻ in the process were determined through mass balance calculations. The mass balance was conducted using the known quantities of AMD SO₄²⁻ and effluent COD added to the process summed up with their volumetric concentrations in the process determined from chemical analysis of the extracted samples. Equations (3) and (4) show the mass balance calculations used to determine the concentrations of SO₄²⁻ and COD, respectively, post loading.

$$SO_4^{2-} \text{ post} = \left[\frac{(\text{AMD load vol} \times \text{AMD } SO_4^{2-})}{1,000,000} + \frac{(\text{water vol} \times \text{water } SO_4^{2-})}{1,000,000} + \frac{\text{AD vol} \times \text{AD } SO_4^{2-}}{1,000,000} + \frac{(\text{Eff load vol} \times \text{Eff } SO_4^{2-})}{1,000,000} \right] \times \frac{1,000,000}{\text{AMD load vol} + \text{water vol} + \text{AD vol} + \text{Eff load vol}} \quad (3)$$

where $SO_4^{2-} \text{ post}$ is the SO₄²⁻ concentration in the bioreactor post loading (mg/L); *AMD load vol* and *Eff load vol* are the loading volumes of AMD and effluent added to the recycling tank (litres), respectively; *AMD SO₄²⁻* and *Eff SO₄²⁻* are the concentrations of SO₄²⁻ in the pre-treated AMD (mg/L) and effluent, respectively; *water vol* is the volume of dilution water added when applicable (litres); *water SO₄²⁻* is the concentration of SO₄²⁻ in the dilution water (mg/L); *AD vol* is the liquid volume in the bioreactor and recycling tank

before loading (litres); and $AD\ SO_4^{2-}$ is the measured SO_4^{2-} concentration in the bioreactor before loading (mg/L).

$$\text{COD post} = \left[\frac{(\text{Eff load vol} \times \text{Eff COD})}{1,000,000} + \frac{(\text{water vol} \times \text{water COD})}{1,000,000} + \frac{AD\ \text{vol} \times AD\ \text{COD}}{1,000,000} + \frac{(\text{AMD load vol} \times \text{AMD COD})}{1,000,000} \right] \times \frac{1,000,000}{\text{Eff load vol} + \text{water vol} + AD\ \text{vol} + \text{AMD load vol}} \quad (4)$$

where *COD post* is the COD concentration in the bioreactor post loading (mg/L); *Eff load vol* and *AMD load vol* are the loading volumes of effluent and AMD added to the recycling tank (litres), respectively; *Eff COD* and *AMD COD* are the concentration of COD in the effluent and AMD (mg/L), respectively; *water vol* is the volume of dilution water when applicable (litres); *water COD* is the concentration of COD in the dilution water (mg/L); *AD vol* is the liquid volume in the bioreactor and recycling tank before loading (litres); and *AD COD* is the measured COD concentration in the bioreactor before loading (mg/L).

2.5. Chemical Analysis

Chemical analyses were conducted to assess the treatment performance of the process. The analyses were conducted by a South African commercial laboratory accredited by the South African National Accreditation System (SANAS).

Concentrations of the dissolved metals were determined using the Varian 700-ES inductive coupled plasma atomic emission spectroscopy (ICP-OES) instrument. The samples were prepared by filtering through a 0.45 µm cellulose nitrate filter paper and acidified with trace metal grade nitric acid.

The SO_4^{2-} concentration was determined using a Thermo Scientific Aquakem 200 selective photometric analyser. The samples were diluted, followed by precipitation of the sulphate ion using a strong acid medium with barium chloride. The resulting turbidity was measured photometrically at 405 nm against calibration standard solutions.

The pH was measured immediately after sample collection using a Hanna Instruments HI9813-6 portable meter. The meter was manually calibrated using pH 7.01 and pH 4.01 buffer solutions before taking each pH reading.

The TSS was determined by agitating the sample and filtering through 2 µm filter paper with the residue retained dried at $105\ ^\circ\text{C} \pm 2\ ^\circ\text{C}$. The weight of the dried solids was measured to determine the TSS.

COD was determined using a HACH DR3900 spectrophotometer following the reactor digestion method. The organic material in the samples was oxidised using a boiling mixture of sulphuric acid with a known excess of potassium dichromate ($K_2Cr_2O_7$). Following the digestion, the amount of oxygen consumed was measured against standards at 420 nm for low wavelength ranges and 620 nm for high wavelength ranges using the spectrophotometer.

Alkalinity was determined using a Thermo Scientific Orion 5-Star Plus portable multi-meter following the potentiometric titration method. Samples were titrated to pH 4.00 using standard 0.1 M H_2SO_4 solution. Titrant was added in increments and the pH recorded for the corresponding titrant volume. The potentiometric titration end-point was detected using a titration curve. On completion of the titration process, the potential difference was measured using the multi-meter electrode. Alkalinity was calculated from the volume of titrate used.

Volatile fatty acids (VFAs) was determined using Thermo Scientific Orion 5-Star Plus portable multi-meters following the potentiometric titration method. Samples were titrated to pH 7.00 using standard 0.10 normality NaOH solution. Titrant was added in increments and the pH recorded for the corresponding titrant volume. The potentiometric titration end-point was detected using a titration curve. On completion of the titration process, the potential difference was measured using the multi-meter electrode. The volatile acid concentration was calculated from the volume of titrate used.

3. Results and Discussions

3.1. Acid Mine Drainage Pre-Treatment

The chemical analysis results from the samples collected during the conduct of pervious concrete PRB pre-treatment experiments are graphically illustrated in Figure 4. The raw AMD indicates the initial determinands of the untreated AMD. The 5 L intervals indicate the quality of the pre-treated AMD following each 5 L interval of treatment completed.

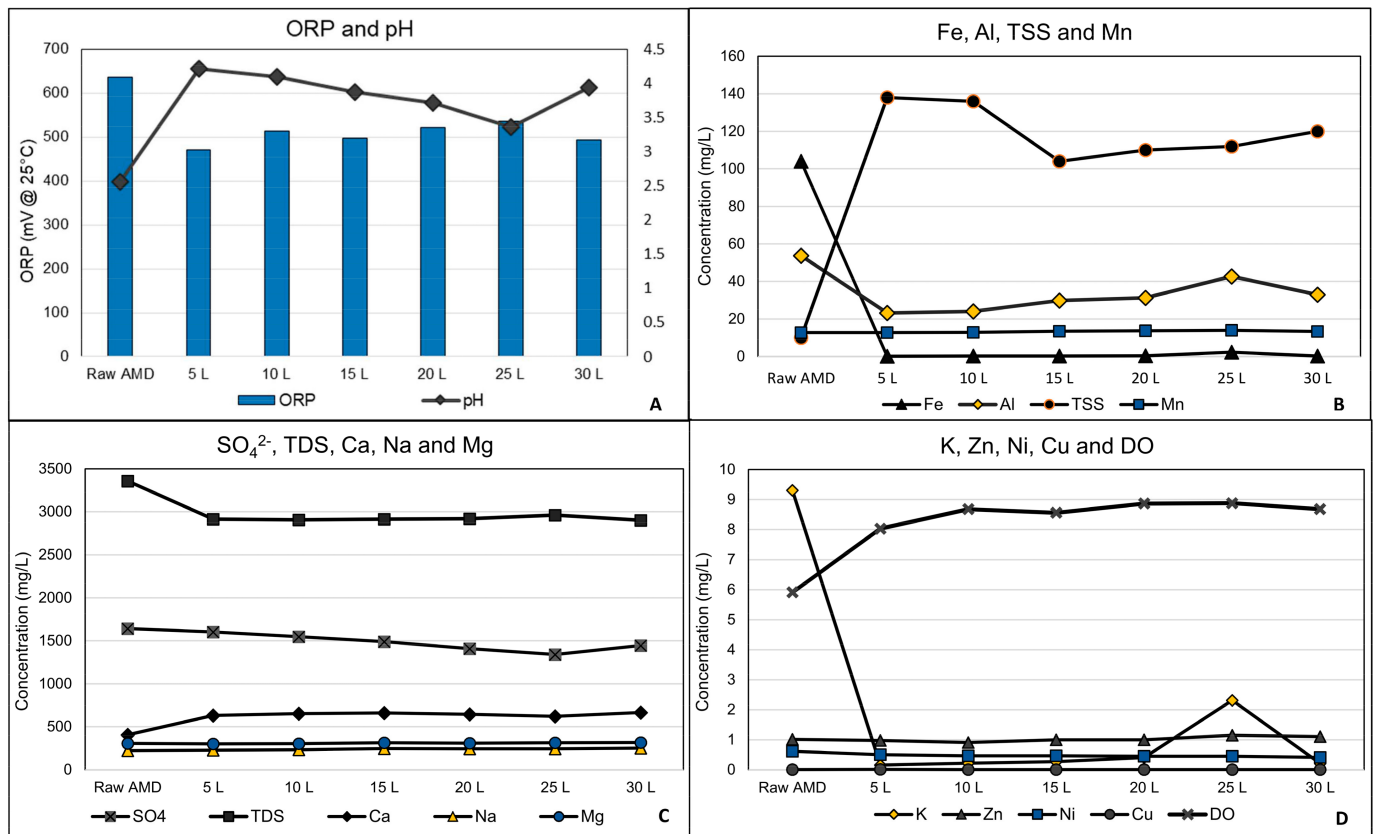


Figure 4. Pre-treatment results: (A) results for ORP and pH, (B) results for Fe, Al, TSS and Mn, (C) results for SO₄²⁻, TDS, Ca, Na and Mg, (D) results for K, Zn, Cu and DO.

The pH increased from 2.56 to an average pH of 3.9, the oxygen reduction potential (ORP) reduced from 636.6 mV to an average of 505.6 mV and the dissolved oxygen (DO) concentration was increased from 5.91 mg/L to an average concentration of 8.62 mg/L post treatment. The change in pH is attributed to the dissolution of Ca ions from the pervious concrete, which was observed through the increase in the pre-treated AMD's Ca concentration from 408 mg/L to an average concentration of 647 mg/L, refer to Figure 4C. The pre-treatment process was most effective at precipitating Fe and K with average concentration reduction rates of 99% and 94%, respectively. The effective precipitation of Fe can be attributed to the oxygen conditions due to increased DO resulting in the oxidation of Fe²⁺ to the highly insoluble Fe³⁺ [24] and precipitation as ferric iron compounds such as FeOOH [24,25]. The effective removal of K may be attributed to ion exchange with Na. This finding is supported by the increase in Na concentration from 224 mg/L to an average treated concentration of 243.3 mg/L.

The Al concentration was reduced by 43% from an initial concentration of 53.8 mg/L to an average concentration of 30.6 mg/L, refer to Figure 4B. The removal of Al from solution may be attributed to the formation of Al(OH)₃ [25,26] as well as co-precipitation [27]. The Ni concentration was reduced by 26% to an average pre-treated concentration of 0.46 mg/L. The sorption and co-precipitation of Ni with the solid phase of Fe and Al precipitants may be associated with the reduction in Ni concentration as shown in the findings by

Olds et al. (2013), where a linear trend between pH increase and Ni co-precipitation was observed [28]. The SO_4^{2-} concentration was reduced by 13% from 1642 mg/L to an average concentration of 1446 mg/L (refer to Figure 4C). Shabalala et al. (2017) established that the precipitation of SO_4^{2-} from AMD when using pozzolanic pervious concrete was attributed to the dissolution of Ca from the reactive surface of the PRB and the formation of gypsum precipitants [25]. The concentrations of Cu, Mg, Mn, Na, and Zn remained relatively unchanged following PRB treatment.

The precipitation of the discussed minerals resulted in an increase in the total suspended solids (TSS) from 10 mg/L to average concentration of 110 mg/L while total dissolved solids (TDS) concentration reduced by 13% from 3357 mg/L to average concentration of 2920 mg/L. Pre-treated AMD was homogenised and tested for settleability of the precipitated suspended solids. Three samples were collected in 50 mL glass beakers of 120 mm height. The suspended solids were allowed to completely settle. The average settling time required for complete sedimentation was 105 min. The settling rate equated to a settling velocity of 1.14 mm/min. Figure 5 shows the settleability test results. The AMD supernatant was further treated in the anaerobic digester.

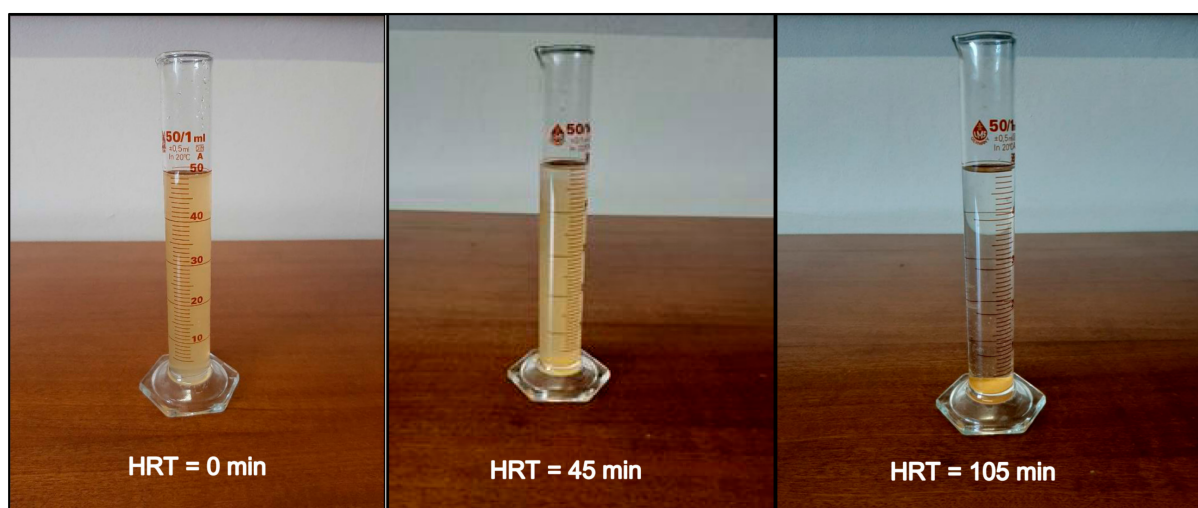


Figure 5. Settleability of pre-treated AMD.

3.2. Biological Co-Remediation

The pre-treated AMD and industrial effluent were batch loaded into the digester for co-remediation in 48 h intervals. Figure 6 shows the calculated concentrations of SO_4^{2-} from the AMD and COD from the effluent after loading. The calculated loading rates of SO_4^{2-} and COD were determined using Equations (3) and (4), respectively. The pre-treated AMD and effluent had pH values of 3.68 and 3.43, respectively. Figure 7 shows the pH in 48 h intervals measured before the next batch loading of AMD and effluent. The results show that the process is capable of neutralising the acidity from the AMD and effluent to a pH range between 7.45 and 8.05 without any external chemical dosing. The neutralisation of pH is primarily attributed to the dissolution of Ca ions from the pervious concrete reactive medium [10]. This is supported by the increase in dissolved Ca concentration measured in the treated effluent stream from a concentration of 168 mg/L on day 6 to a final concentration of 480 mg/L on day 24 (refer to Figure 8A). The increase in pH may also be contributed by the alkalisng methanogenic bacteria and sulphate reducing prokaryotes (SRP) present in the bioreactor sludge [6]. These microorganisms compete to breakdown volatile fatty acids (VFAs), resulting in the release of methane, hydrogen sulphide, and carbon dioxide.

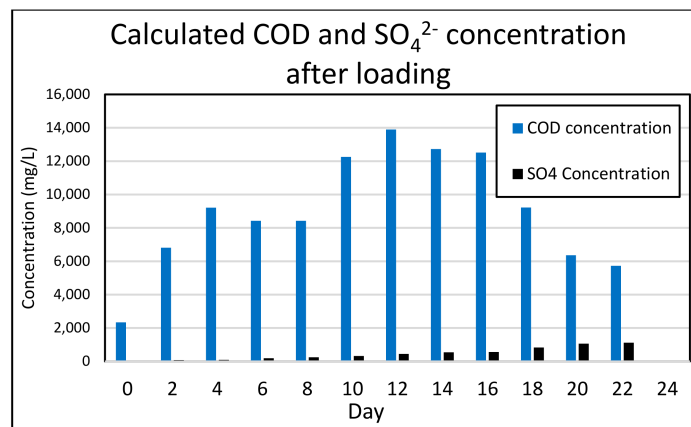


Figure 6. Calculated COD and SO₄²⁻ concentrations following loading.

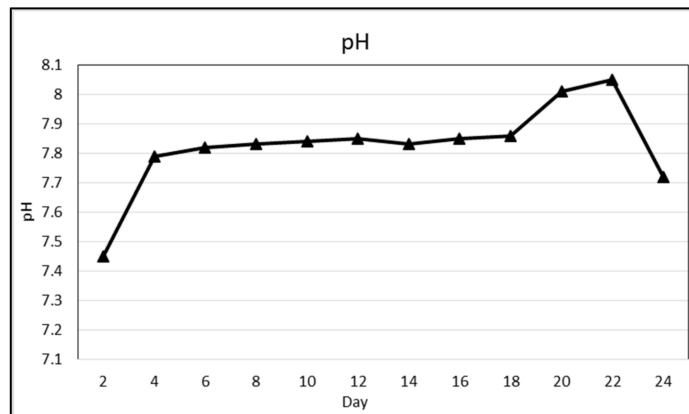


Figure 7. pH readings at 48 h intervals from loading.

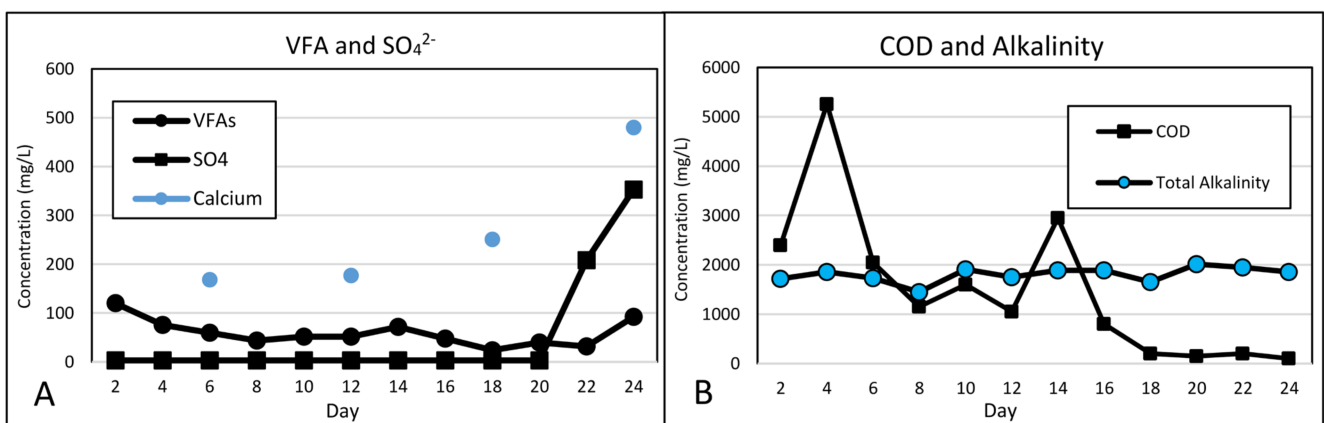


Figure 8. Treated COD, alkalinity, VFA, and SO₄²⁻: (A) Results for VFA, SO₄²⁻, Ca, (B) Results for COD and total alkalinity.

Figure 8A shows the total acidity, SO₄²⁻, and Ca concentrations after 48 h of HRT between each loading regime while Figure 8B shows the COD and total alkalinity concentrations at the same periods. Figure 9 shows the percentage removal of SO₄²⁻ and COD concentrations after 48 h of HRT between each loading regime. The treated water alkalinity was between 1449 mg/L and 2014 mg/L as a result of the alkalisng capabilities of the reactive media while total acidity concentrations were maintained below 120 mg/L throughout the experiment. A high degree of COD bioremediation was achieved in the study with an overall COD removal rate of 78% for the experimental duration and peak

removal rates exceeding 90% from days 16 to 20 when COD loading was the highest. At peak loading, exceeding 6 kg COD/m³/day, the bioreactor was capable of treating COD concentrations of 12,512 mg/L to below 300 mg/L. The bioremediation of SO₄²⁻ was also high with an overall removal rate of 94% for the experimental duration. At peak loading, SO₄²⁻ concentrations were reduced from 830 mg/L to below 10 mg/L. The high degree of SO₄²⁻ remediation can be attributed to the rapid biodegradation of the glucose based confectionary effluent, enabling the availability of the VFA intermediaries required for biological sulphate reduction [10]. The use of granular seed sludge has also been attributed to accelerated bioreactor ramp-ups and improved resistance against organic shock loading [29].

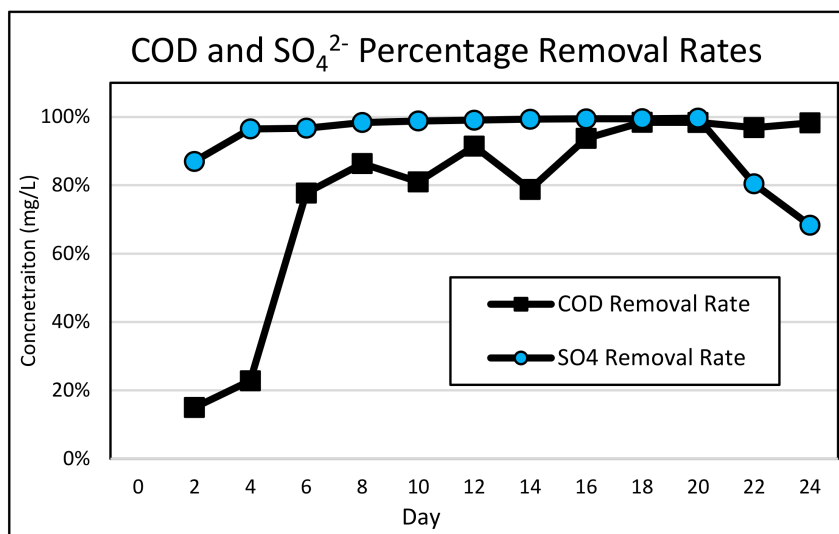


Figure 9. COD and SO₄²⁻ percentage removal rates.

Figure 10 shows the concentrations of Al, Fe, and S²⁻ samples taken in six day intervals. The concentrations of Al were below 1 mg/L as a result of the high pH, allowing for the precipitation of aluminium hydroxide. Concentrations of Fe remained below 1 mg/L following biological treatment. An increase in the concentration of S²⁻ was observed, which can be attributed to the biological reduction of SO₄²⁻ to H₂S gas by SRP and some sulphide being dissolved in solution.

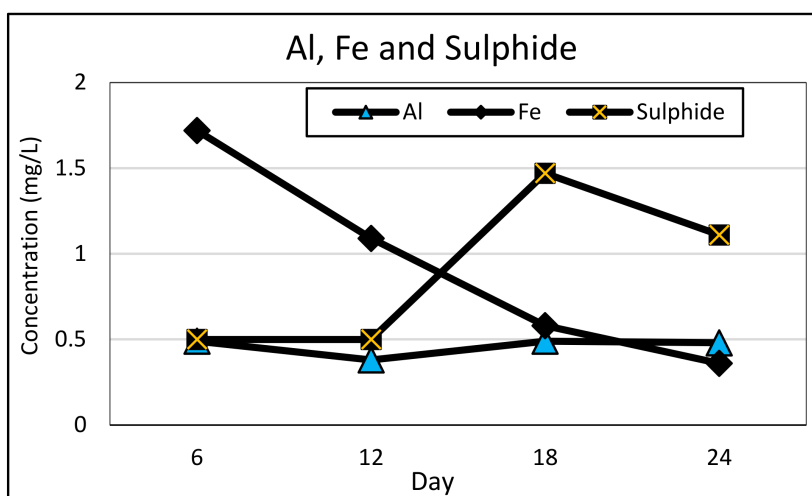


Figure 10. Treated Al, Fe, S²⁻, and Zn.

Toxic metals Ni, Mn, and Zn were pre-treated to average concentrations of 0.461 mg/L, 13.3 mg/L, and 1.025 mg/L, respectively. Figure 11 shows the concentrations of Mn, Ni, Cu, and Zn following biological treatment. The average concentrations of Ni, Mn, and Zn in the treated effluent were 0.171 mg/L, 0.716 mg/L, and 0.153 mg/L, respectively. The reduction in concentrations of these toxic metals may be primarily attributed to the neutralisation of pH, resulting in precipitation as metal hydroxides and metal sulphides.

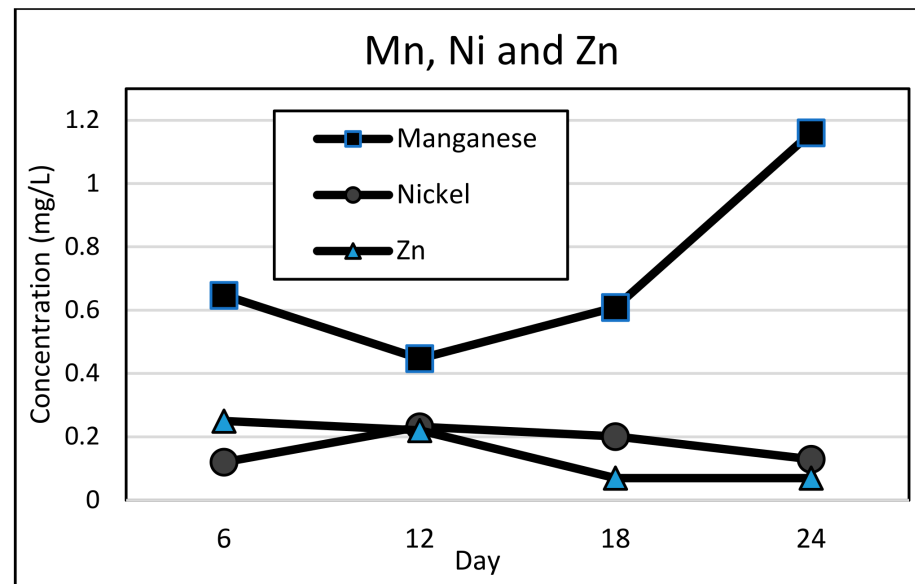


Figure 11. Treated Mn, Ni, and Zn.

4. Discussions

The results for the AMD pre-treatment process found that Fe could be precipitated effectively in a short contact time of 37 s, which can result in small footprint requirements. The high removal of Fe during pre-treatment, which exceeded 99%, and the settleability of the suspended ions presents an opportunity for the recovery of Fe from the settled sludge for reuse. The other major ions present in the precipitant sludge was Al, where a 43% concentration removal was achieved, presenting further mineral recovery opportunity. Table 5 shows the raw and treated wastewater quality and the South African water quality standards for discharge and potable quality. The treated wastewater quality is the average biological treated quality achieved throughout the experimental duration. The raw pH, COD, SO_4^{2-} , Mn, Ni, Fe, and Al concentrations significantly exceeded the guidelines for discharge. Following co-biological treatment, the treated wastewater determinands pH, SO_4^{2-} , and Cu were within the discharge and potable water specifications. Concentrations of Fe, Al, Mn, and Zn were marginally higher than the discharge and potable water limit with all concentrations exceeding the limit by less than 0.65 mg/L. The average percentage reduction in the final treated water concentrations of Ni, Zn, Mn, Al, Fe, and SO_4^{2-} were 74%, 85%, 94%, 99%, 99%, and 96.98%, respectively. Although a high concentration removal efficiency of 89.7% was achieved for the COD throughout the experiment, the average treated wastewater concentration achieved was 3.75 times greater than the discharge limit. During peak COD loading over the final six days of experimental operation, the bioreactor demonstrated capabilities of achieving COD concentrations of 200 mg/L, well below the 400 mg/L discharge limit, with up to 98.9% concentration removal.

Table 5. Raw and treated wastewater quality vs. standards.

	Raw AMD	Raw Confectionery Effluent	Treated Wastewater Quality	DWA Discharge Standards	SANS 241:2015 Potable Quality	Units
pH	2.56	3.43	7.45–8.05	5.5–9.5	5.5–9.5	
COD	-	19,500	1493	400		mg/L
SO ₄ ²⁻	1642		49.25		250	mg/L
Fe	104		0.94	0.3	0.3	mg/L
Al	53.80		0.46	0.03	0.3	mg/L
Zn	1.02		0.15	0.1	5	mg/L
Cu	0.01		0.01	0.01	2	mg/L
Ni	0.662		0.171		0.07	mg/L
Mn	12.8		0.716		0.1	mg/L

Easily biodegradable high COD confectionary effluent was used as the sole carbon source in this study. The major difference in this approach versus the more conventional use of complex organic matter is that the slower biodegradation of complex carbons allows for optimal anaerobic digestion at a low COD to SO₄²⁻ ratio of typically 2:1 [14]. When using easily biodegradable organic matter, COD to SO₄²⁻ ratios below 5:1 have been found to be rate limiting [10]. However, the effluent liquid volume used during operation in this study versus the liquid volume required by low COD complex matter was less than 10% due to the high COD concentration of the untreated effluent, which exceeded 19,000 mg/L. In comparison, sewage COD concentrations typically range between 600 and 900 mg/L. The transportation of carbon is a major cost driver in active AMD anaerobic digestion [30,31]. The lower effluent volume requirement for continuous operation when using high COD easily degradable substrates can significantly lower the costs associated with biological sulphate reduction. The added benefit of effective co-remediation of AMD with another toxic industrial wastewater is the increased commercial viability of the process with cost sharing opportunities amongst parties.

Existing bioremediation processes are limited to the remediation of partially oxidised and neutralised AMD with low heavy metal concentrations [16,19,30]. The typical pre-treatment undertaken for conventional bioremediation is chemical neutralisation and sedimentation where metals are precipitated through pH correction and oxidation. The required chemical pre-treatment adds operational cost and supply chain complexity to existing bioremediation solutions. The active–passive process evaluated in this paper, however, is capable of neutralising highly acidic AMD and effluent passively through the dissolution of Ca from the reactive surface of pervious concrete. This research found that the process is capable of self-regulated pH neutralisation at COD loading rates exceeding 6 kg COD/m³/day and SO₄²⁻ loading rates approaching 1 kg SO₄²⁻/m³/day. This pH self-regulating capability can eliminate the need for external chemical dosing, leading to operational cost savings. The main challenge associated with AMD treatment using pervious concrete is the accumulation of metal precipitants in the flow path [25]. The AMD pre-treatment results indicate that approximately 23% of the precipitated solid concentration exit the pervious concrete as suspended solids. The remaining 77% of precipitated solids remain inside the porous network of the pervious concrete, which can lead to clogging of the flow path or armouring of the reactive surface over time. In the fixed bed pervious concrete anaerobic digester, further precipitation of solids was observed and similarly, armouring or clogging may take place over time. The longevity of pervious concrete as a PRB when exposed to solids accumulating is yet to be fully understood and requires further investigation.

5. Conclusions

This study was undertaken to evaluate the remediation capabilities of a hybrid active-passive process on AMD and confectionery effluent treatment. The process comprised of passive PRB pre-treatment of the AMD and co-bioremediation of AMD and confectionery effluent. Over the 24 day operation of the bioreactor, the research findings showed that the process was capable of treating pH, SO_4^{2-} , Fe, Al, and Cu to within the discharge standards. The COD discharge limit of 400 mg/L was achieved during the final six days of operational under peak COD loading rates exceeding 6 kg COD/m³/day. The treated concentrations of Fe, Al, Ni, Mn, and Zn exceeded the DWA discharge limit by less than 0.65 mg/L. The process was found to be effective for treatment and the limited operational inputs could minimise operational costs, allowing the process to be more financially viable for abandoned mines where AMD discharge is most prevalent. From an operational and cost prospectively, the greatest limitation towards the largescale implementation of the developed process is the transportation of effluent to mine sites. Excessive fluctuations in chemical composition of AMD and effluent may also pose operational challenges when regulating the AMD to effluent ratios. The process possesses great potential for economical and environmentally friendly treatment of AMD and effluent streams. Further evaluation is required to assess the sensitivity of the process to condition changes and the operational longevity of pervious concrete as a fixed bed reactive medium in an anaerobic digestion.

Author Contributions: Conceptualization, S.K.T.; Methodology, S.K.T.; Formal analysis, S.K.T.; Resources, D.V.V.K. and S.K.T.; Writing—original draft preparation, S.K.T.; Writing—review and editing, D.V.V.K. and P.B.; Supervision, D.V.V.K. and P.B.; Funding acquisition, D.V.V.K. All authors have read and agreed to the published version of the manuscript.

Funding: This research was funded by the South African Systems Analysis Centre (SASAC)—Newton Fund. The funding was facilitated by SASAC and the British Council through the South African National Research Foundation (NRF). The open access funding was provided by the University of Johannesburg Library, Doonfontein Campus (DFC), Doonfontein, Johannesburg 2006, South Africa.

Data Availability Statement: Data are contained within the article.

Acknowledgments: We would like to acknowledge the South African Systems Analysis Centre (SASAC)—Newton Fund for funding this research. We would also like to acknowledge the South African National Research Foundation (NRF) and the British Council for facilitating the funding.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Byrne, P.; Wood, P.J.; Reid, I. The Impairment of River Systems by Metal Mine Contamination: A Review Including Remediation Options. *Crit. Rev. Environ. Sci. Technol.* **2012**, *42*, 2017–2077.
2. Park, I.; Tabelin, C.B.; Jeon, S.; Li, X.; Seno, K.; Ito, M.; Hiroyoshi, N. A review of recent strategies for acid mine drainage prevention and mine tailings recycling. *Chemosphere* **2019**, *219*, 588–606. [[PubMed](#)]
3. Taylor, J.; Pape, S.; Murphy, N. *A Summary of Passive and Active Treatment Technologies for Acid and Metalliferous Drainage (AMD)*; Earth Systems: Fremontle, Australia, 2005.
4. Thisani, S.; Kallon, D.; Byrne, P. Geochemical Classification of Global Mine Water Drainage. *Sustainability* **2020**, *12*, 10244.
5. Gunes, B.; Stokes, J.; Davis, P.; Connolly, C.; Lawler, J. Pre-treatments to enhance biogas yield and quality from anaerobic digestion of whiskey distillery and brewery wastes: A review. *Renew. Sustain. Energy Rev.* **2019**, *113*, 109281.
6. Opollo, S.O. Integrated Anaerobic Digestion and UV Photocatalytic Treatment of Industrial Wastewater in Fluidized Bed Reactors. Ph.D. Thesis, Vaal University of Technology, Vanderbijlpark, South Africa, 2016.
7. Ahmad, T.; Aadil, R.M.; Ahmed, H.; Rahman, U.U.; Soares, B.C.; DE Souza, S.L.Q.; Pimentel, T.C.; Scudino, H.; Guimarães, J.T.; Esmerino, E.A.; et al. Treatment and utilization of dairy industrial waste: A review. *Trends Food Sci. Technol.* **2019**, *88*, 361–372.
8. Li, J.; Luo, G.; He, L.; Xu, J.; Lyu, J. Analytical Approaches for Determining Chemical Oxygen Demand in Water Bodies: A Review. *Crit. Rev. Anal. Chem.* **2018**, *48*, 47–65.
9. Papirio, S.; Villa-Gomez, D.K.; Esposito, G.; Pirozzi, F.; Lens, P.N. Acid Mine Drainage Treatment in Fluidized Bed Bioreactors by Sulfate Reducing Bacteria: A Critical Review. *Critical Rev. Environ. Sci. Technol.* **2013**, *43*, 2545–2580.
10. Thisani, S.K.; Kallon, D.V.V.; Byrne, P. A fixed bed pervious concrete anaerobic bioreactor for biological sulphate remediation of acid mine drainage using simple organic matter. *Sustainability* **2021**, *13*, 6529.

11. Akinpelu, E.A.; Ntwampe, S.K.O.; Fosso-Kankeu, E.; Waanders, F. Comparative analysis of brewing wastewater and lactate as carbon sources for microbial community treating acid mine drainage in anaerobic MBBR systems. *Environ. Technol.* **2020**, *42*, 3955–3962.
12. Moodley, I.; Sheridan, C.M.; Kappelmeyer, U.; Akcil, A. Environmentally sustainable acid mine drainage remediation: Research developments with a focus on waste/by-products. *Miner. Eng.* **2018**, *126*, 207–220.
13. Novhe, O.; Yibas, B.; Coetzee, H.; Atanasova, M.; Netshitungulwana, R.; Modiba, M.; Mashalane, T. Long-Term Remediation of Acid Mine Drainage from Abandoned Coal Mine Using Integrated (Anaerobic and Aerobic) Passive Treatment System, in South Africa: A Pilot Study. In Proceedings of the International Mine Water Association Conference, Freiberg, Germany, 11–15 July 2016; pp. 668–674.
14. Rose, P. Review: Long-term sustainability in the management of acid mine drainage wastewaters—Development of the Rhodes BioSURE Process. *Water SA* **2013**, *39*, 582.
15. Sun, R.; Li, Y.; Lin, N.; Ou, C.; Wang, W.; Zhang, L.; Jiang, F. Removal of heavy metals using a novel sulfidogenic AMD treatment system with sulfur reduction: Configuration, performance, critical parameters and economic analysis. *Environ. Int.* **2020**, *136*, 105457.
16. Neda, A.; Whittington-Jones, K.; Rose, P.D. *Salinity, Sanitation and Sustainability Vol. 4: The Rhodes BioSURE Process*; Water Research Commission: Pretoria, South Africa, 2007; Volume 4.
17. Pionapen, J.; Wentzel, M.C.; Ekama, G.A. Biological sulphate reduction with primary sewage sludge in an upflow anaerobic sludge bed (UASB) reactor—Part 1: Feasibility study. *Water SA* **2009**, *35*, 525–534.
18. Thisani, S.; Kallon, D.; Byrne, P. Review of Remediation Solutions for Acid Mine Drainage Using the Modified Hill Framework. *Sustainability* **2021**, *13*, 8118.
19. Kaksonen, A.H.; Sahinhaya, E. Review of sulfate reduction based bioprocesses for acid mine drainage treatment and metals recovery. *Eng. Life Sci.* **2007**, *7*, 541–564.
20. Opollo, S.; Aoyi, O. Combined anaerobic digestion and photocatalytic treatment of distillery effluent in fluidized bed reactors focusing on energy conservation. *Environ. Technol.* **2016**, *37*, 2243–2251.
21. Sánchez, E.; Borja, R.; Travieso, L.; Martín, A.; Colmenarejo, M.F. Effect of organic loading rate on the stability, operational parameters and performance of a secondary upflow anaerobic sludge bed reactor treating piggery waste. *Bioresour. Technol.* **2005**, *3*, 335–344.
22. Rosanti, D.; Wibowo, Y.G.; Safri, M.; Maryani, A.T.; Ramadhan, R.S. Bioremediations Technologies on Wastewater Treatment: Opportunities, Challenges and Economic Perspective. *Sainmatika J. Ilm. Mat. Ilmu Pengetah. Alam* **2020**, *17*, 142–156.
23. Thisani, S.K.; Von Kallon, D.V.; Byrne, P. Effects of Contact Time and Flow Configuration on the Acid Mine Drainage Remediation Capabilities of Pervious Concrete. *Sustainability* **2021**, *13*, 10847.
24. Suponik, T. Ensuring permeable reactive barrier efficacy and longevity. *Arch. Environ. Prot.* **2010**, *36*, 59–73.
25. Shabalala, A.N.; Ekolu, S.O.; Diop, S.; Solomon, F. Pervious concrete reactive barrier for removal of heavy metals from acid mine drainage-column study. *J. Hazard. Mater.* **2017**, *323*, 641–653. [[PubMed](#)]
26. Majersky, G. *Metals Recovery from Acid Mine Drainage Using Pervious Concrete*; VDM Publishing: Saarbrücken, Germany, 2009; p. 69.
27. Solpuker, U.; Sheets, J.; Kim, Y.; Schwartz, F.W. Leaching potential of pervious concrete and immobilization of Cu, Pb and Zn using pervious concrete. *J. Contam. Hydrol.* **2014**, *161*, 35–48. [[PubMed](#)]
28. Olds, W.E.; Tsang, D.C.W.; Weber, P.A.; Weisener, C.G. Nickel and Zinc Removal from Acid Mine Drainage: Roles of Sludge Surface Area and Neutralising Agents. *J. Min.* **2013**, *2013*, 698031.
29. Rico, C.; Montes, J.A.; Rico, J.L. Evaluation of different types of anaerobic seed sludge for the high rate anaerobic digestion of pig slurry in UASB reactors. *Bioresour. Technol.* **2017**, *238*, 147–156.
30. Gilbert, O.; de Pablo, J.; Cortina, J.L.; Ayora, C. Chemical characterization of natural organic substrates for biological mitigation of acid mine drainage. *Water Res.* **2004**, *38*, 4186–4196.
31. Zhou, S.; Wang, J.; Peng, S.; Chen, T.; Yue, Z. Anaerobic co-digestion of landfill leachate and acid mine drainage using up-flow anaerobic sludge blanket reactor. *Environ. Sci. Pollut. Res.* **2021**, *28*, 8498–8506.