

University of Groningen

## Mixed modeling for large-eddy simulation

Streher, L. B.; Silvis, M. H.; Cifani, P.; Verstappen, R. W. C. P.

*Published in:*  
AIP Advances

*DOI:*  
[10.1063/5.0015293](https://doi.org/10.1063/5.0015293)

**IMPORTANT NOTE:** You are advised to consult the publisher's version (publisher's PDF) if you wish to cite from it. Please check the document version below.

*Document Version*  
Publisher's PDF, also known as Version of record

*Publication date:*  
2021

[Link to publication in University of Groningen/UMCG research database](#)

*Citation for published version (APA):*

Streher, L. B., Silvis, M. H., Cifani, P., & Verstappen, R. W. C. P. (2021). Mixed modeling for large-eddy simulation: The single-layer and two-layer minimum-dissipation-Bardina models. *AIP Advances*, *11*(1), [015002]. <https://doi.org/10.1063/5.0015293>

### Copyright

Other than for strictly personal use, it is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license (like Creative Commons).

The publication may also be distributed here under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license. More information can be found on the University of Groningen website: <https://www.rug.nl/library/open-access/self-archiving-pure/taverne-amendment>.

### Take-down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

*Downloaded from the University of Groningen/UMCG research database (Pure): <http://www.rug.nl/research/portal>. For technical reasons the number of authors shown on this cover page is limited to 10 maximum.*

# Mixed modeling for large-eddy simulation: The single-layer and two-layer minimum-dissipation-Bardina models

Cite as: AIP Advances 11, 015002 (2021); <https://doi.org/10.1063/5.0015293>

Submitted: 26 May 2020 • Accepted: 04 December 2020 • Published Online: 05 January 2021

 L. B. Streher,  M. H. Silvis,  P. Cifani, et al.



View Online



Export Citation



CrossMark

## ARTICLES YOU MAY BE INTERESTED IN

[Hydrogel: A potential therapeutic material for bone tissue engineering](#)

AIP Advances 11, 010701 (2021); <https://doi.org/10.1063/5.0035504>

[Externally driven bifurcation of current sheet: A particle-in-cell simulation](#)

AIP Advances 11, 015001 (2021); <https://doi.org/10.1063/5.0037770>

[Simulation and optimization of working parameters of the rapid-dissolution device of hydrophobically associating polymer](#)

AIP Advances 11, 015003 (2021); <https://doi.org/10.1063/5.0036883>

Call For Papers!

AIP Advances

**SPECIAL TOPIC:** Advances in  
Low Dimensional and 2D Materials

# Mixed modeling for large-eddy simulation: The single-layer and two-layer minimum-dissipation-Bardina models

Cite as: AIP Advances 11, 015002 (2021); doi: 10.1063/5.0015293

Submitted: 26 May 2020 • Accepted: 4 December 2020 •

Published Online: 5 January 2021



View Online



Export Citation



CrossMark

L. B. Streher,<sup>a)</sup>  M. H. Silvis,<sup>b)</sup>  P. Cifani,<sup>c)</sup>  and R. W. C. P. Verstappen<sup>d)</sup>

## AFFILIATIONS

Bernoulli Institute for Mathematics, Computer Science and Artificial Intelligence, University of Groningen, 9700 AK Groningen, The Netherlands

<sup>a)</sup> Author to whom correspondence should be addressed: [l.b.streher@rug.nl](mailto:l.b.streher@rug.nl)

<sup>b)</sup> Electronic mail: [m.h.silvis@rug.nl](mailto:m.h.silvis@rug.nl)

<sup>c)</sup> Electronic mail: [p.cifani@rug.nl](mailto:p.cifani@rug.nl)

<sup>d)</sup> Electronic mail: [r.w.c.p.verstappen@rug.nl](mailto:r.w.c.p.verstappen@rug.nl)

## ABSTRACT

Predicting the behavior of turbulent flows using large-eddy simulation requires a modeling of the subgrid-scale stress tensor. This tensor can be approximated using mixed models, which combine the dissipative nature of functional models with the capability of structural models to approximate out-of-equilibrium effects. We propose a mathematical basis to mix (functional) eddy-viscosity models with the (structural) Bardina model. By taking an anisotropic minimum-dissipation (AMD) model for the eddy viscosity, we obtain the (single-layer) AMD–Bardina model. In order to also obtain a physics-conforming model for wall-bounded flows, we further develop this mixed model into a two-layer approach: the near-wall region is parameterized with the AMD–Bardina model, whereas the outer region is computed with the Bardina model. The single-layer and two-layer AMD–Bardina models are tested in turbulent channel flows at various Reynolds numbers, and improved predictions are obtained when the mixed models are applied in comparison to the computations with the AMD and Bardina models alone. The results obtained with the two-layer AMD–Bardina model are particularly remarkable: both first- and second-order statistics are extremely well predicted and even the inflection of the mean velocity in the channel center is captured. Hence, a very promising model is obtained for large-eddy simulations of wall-bounded turbulent flows at moderate and high Reynolds numbers.

© 2021 Author(s). All article content, except where otherwise noted, is licensed under a Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>). <https://doi.org/10.1063/5.0015293>

## I. INTRODUCTION

Accurately predicting the behavior of turbulent flows is still one of the major challenges in the field of computational fluid dynamics. The large spectrum of scales of motion present in turbulent flows and the lack of computational power have hindered the direct computation of all eddies. Therefore, finding a coarse-grained description is one of the main challenges to turbulence research. A promising methodology for that is large-eddy simulation (LES).

LES reduces the complexity of the turbulence problem through the utilization of a spatial filter (see, for instance, the monographs of Sagaut<sup>1</sup> and Pope<sup>2</sup>). The application of a filter to the convective nonlinearity in the Navier–Stokes equations, however, results

in an unclosed term: the subgrid-scale stress tensor. The subgrid-scale stress tensor accounts for the effects of the small scales on the large ones and cannot be directly computed. This tensor, therefore, is to be modeled. A great variety of subgrid-scale models is already available and can be divided into functional, structural, and mixed models (refer to the work of Sagaut<sup>1</sup> for an extensive overview of these models in the context of incompressible flows).

Functional models aim at representing the kinetic energy cascade through the introduction of a dissipative term. These physics-based models describe the effect of the subgrid terms on the filtered velocity. Therefore, functional models generally take into account the net kinetic energy transfer from the resolved scales to the subgrid modes. However, the structure of the unresolved stress tensor, i.e., its eigenvectors, is poorly predicted.<sup>1,3–7</sup>

Structural models, on the other hand, aim at mathematically reconstructing the subgrid-scale stress tensor from an evaluation of the filtered velocity (e.g., through the scale-similarity hypothesis<sup>4,5,8</sup>) or through formal series expansions of the unknown terms.<sup>9,10</sup> The structural models based on the scale-similarity hypothesis generally predict the structure of the subgrid-scale stress tensor well and are therefore able to predict out-of-equilibrium effects in a numerically stable manner. These models often do not dissipate enough kinetic energy.<sup>1,3–7</sup>

Both functional and structural modeling approaches have their strengths and weaknesses, which can be seen as complementary. The complementary nature of these modeling approaches was first investigated by Bardina *et al.*<sup>4</sup> They analyzed the average correlation between the exact and the modeled subgrid-scale stresses for homogeneous isotropic turbulence and homogeneous turbulence in the presence of mean shear. The subgrid-scale stress tensor was modeled with eddy-viscosity models (such as the Smagorinsky model,<sup>11</sup> the vorticity model,<sup>12</sup> and the turbulent kinetic energy model<sup>4</sup>) as well as with their scale-similarity model, here referred to as the “Bardina model.”

All eddy-viscosity models studied by Bardina *et al.*<sup>4</sup> produced essentially equivalent low average correlation coefficients between modeled and exact subgrid-scale stresses. These results were consistent with the low correlations obtained previously by Clark *et al.*<sup>3</sup> and McMillan and Ferziger.<sup>13</sup> The Bardina model, on the other hand, yielded high average correlation coefficients between exact and modeled values of the subgrid-scale stresses. This scale-similarity model, however, often does not provide enough dissipation, i.e., it is not able to provide the proper net energy removal from the resolved scales. As eddy-viscosity models can provide the proper amount of energy dissipation and the Bardina model provides a good representation of the local subgrid-scale stress, the linear combination of the Smagorinsky<sup>11</sup> and Bardina models was studied by Bardina *et al.*<sup>4</sup> With this mixed Smagorinsky–Bardina model, Bardina *et al.*<sup>4</sup> obtained good predictions of the energy dissipation and structure of the subgrid-scale stress tensor in simulations of homogeneous isotropic turbulence and homogeneous turbulence in the presence of mean shear.

Since the pioneering mixed Smagorinsky–Bardina model,<sup>4</sup> various mixed models have been proposed. Zang *et al.*<sup>14</sup> applied the dynamic procedure of Germano *et al.*<sup>15</sup> to the Smagorinsky–Bardina model<sup>4</sup> and obtained a mixed model in which the model parameter of the eddy-viscosity part was determined dynamically. This dynamic mixed model was tested for turbulent flows in a lid-driven cavity, and although the computations were performed at relatively low Reynolds numbers, the results were promising.

Salveti and Banerjee<sup>16</sup> improved the dynamic mixed model of Zang *et al.*,<sup>14</sup> dynamically computing the model parameters of the eddy-viscosity and the scale-similar parts. Their so-called dynamic two-parameter model was tested for the flow between a no-slip wall and a free-slip surface, and the results were compared to the predictions obtained with the application of the dynamic Smagorinsky model of Germano *et al.*,<sup>15</sup> the dynamic mixed model of Zang *et al.*,<sup>14</sup> and DNS data from Lam and Banerjee.<sup>17</sup> The results obtained with both mixed models exhibited great improvements in comparison to the dynamic Smagorinsky model. Both mixed models dissipate enough energy while accounting for backscatter and provide good results on structural levels. The results obtained

with the dynamic two-parameter model are, however, of superior quality.

Sarghini *et al.*<sup>18</sup> tested several eddy-viscosity models and mixed models in equilibrium and non-equilibrium flows, i.e., in a two-dimensional plane channel and in a three-dimensional boundary layer generated by moving the lower wall of a fully developed plane channel in the spanwise direction. The results were compared to direct numerical simulations and experimental data, and in general, mixed models gave more accurate results than eddy-viscosity models.

Several other mixed models and dynamic mixed models have been proposed and tested (see, e.g., Refs. 10, 19, and 20–23). The derivation of mixed models, however, often lacks a formal mathematical basis, i.e., the two components are joined together to simply obtain a better mix of properties. In this paper, we show that mixed models can be derived in a mathematically consistent manner. We thereby obtain a mix composed of an eddy-viscosity part and the Bardina model. Here, the anisotropic minimum-dissipation model (AMD) of Rozema *et al.*<sup>24</sup> is applied to model the eddy-viscosity because of its low dissipation characteristics, i.e., this model dissipates only the minimal amount of turbulent kinetic energy required to remove subgrid scales from the solution (see Ref. 25). In this way, we ensure that the AMD model does not add an excessive amount of dissipation to the numerical scheme.

For the case of wall-bounded turbulence, the AMD–Bardina model is adapted to better represent the physics of near-wall turbulence. Wall-bounded flows are characterized by physical processes that vary with the distance to the wall, i.e., the farther away from the wall, the higher the influence of the turbulent stresses and the lower the influence of the viscous stresses (see, e.g., Ref. 26). Here, we divide the wall-bounded flow domain into a near-wall region and an outer region (as is commonly done by hybrid RANS-LES approaches<sup>27</sup>). The AMD–Bardina model is utilized in the near-wall domain since this model introduces enough dissipation while accounting for the interaction between turbulent structures. In the outer region, the subgrid-scale stress tensor is approximated by the Bardina model only, as relatively little energy is dissipated in this region. This new two-layered mixed model is here called the two-layer AMD–Bardina model, whereas the model that does not consider the division of domains is called the single-layer AMD–Bardina model. Both the single-layer and two-layer AMD–Bardina mixed models are tested in turbulent channel flows at various Reynolds numbers, and the results are compared to DNS results and discussed.

The outline of this paper is as follows: Section II provides a description of the applied methodology to achieve a mathematical basis to mix LES models. To start, the methodology is described for a convection–diffusion equation. Then, the methodology is extended to the incompressible Navier–Stokes equations. This process results in spatially filtered incompressible Navier–Stokes equations, which naturally include an eddy-viscosity model part, here represented by the AMD model,<sup>24</sup> and a scale-similarity model part, i.e., the Bardina model.<sup>4</sup> Next, the application of the AMD–Bardina model to wall-bounded flows is considered for which a two-layer AMD–Bardina model is developed. Thereafter, in Sec. III, an overview of the numerical setup for the computation of turbulent channel flows is given. The results obtained with the single-layer and two-layer AMD–Bardina models are presented, discussed, and compared to

reference data from the literature in Sec. IV. Finally, in Sec. V, the current work is summarized, and further directions of study are suggested.

## II. MATHEMATICAL METHODOLOGY

Mixing LES models is a promising approach to achieve subgrid-scale models that can capture the complex dynamics of turbulence. We therefore propose a mathematical basis to obtain a combination of a scale-similarity model and an eddy-viscosity model.

To demonstrate this approach, first, a two-dimensional convection–diffusion equation is analyzed in Sec. II A. This equation is simpler than the Navier–Stokes equations while containing all key ingredients of our approach. Second, in Sec. II B, the proposed methodology is extended to the full three-dimensional incompressible Navier–Stokes equations, and a mixed model is obtained. This model consists of a combination of the scale-similarity model proposed by Bardina *et al.*<sup>4</sup> and an eddy-viscosity model. In Sec. II C, we apply the anisotropic minimum-dissipation model (AMD) proposed by Rozema *et al.*<sup>24</sup> to model the dissipative effects in turbulent flows and we obtain the (single-layer) AMD–Bardina model. Finally, in Sec. II D, the AMD–Bardina model is extended to wall-bounded flows in a physics-conforming manner and the two-layer AMD–Bardina model is developed.

### A. Convection–diffusion equation

The convection–diffusion equation

$$\frac{\partial f_i}{\partial t} + \frac{\partial f_i u_j}{\partial x_j} = D \frac{\partial^2 f_i}{\partial x_j \partial x_j} \quad (1)$$

is used as a simplified problem to illustrate the developed mathematical methodology for coarse-staggered grids. Here, the quantity  $f_i$  represents the density of any physical variable. The time variation of the density is given by the balance of two terms: the nonlinear, convective term on the left-hand side and the diffusive term on the right-hand side. The diffusion coefficient is denoted by  $D$ , and the velocity field is given by  $u_j$ . Einstein’s summation convention is implied for repeated indices.

Schumann’s<sup>28</sup> filter is applied to Eq. (1). This filter is defined by

$$\overline{f_i}^V = \frac{1}{|V|} \int_V f_i dV, \quad (2)$$

where  $V$  denotes the volume of the filter box, i.e., the volume of a grid cell. The volume-averaged convective and diffusive terms are rewritten by applying Gauss’ divergence theorem. This procedure leads to the appearance of surface-averaged terms, which are defined by

$$\overline{f_i}^S = \frac{1}{|S|} \int_S f_i n_i dS, \quad (3)$$

where  $S$  denotes a surface (the surface of  $V$ ) and  $n_i$  is the outward-pointing unit normal on  $S$ . Thus, the spatially filtered convection–diffusion equation becomes

$$\frac{|V|}{|S|} \frac{\partial \overline{f_i}^V}{\partial t} + \overline{f_i u_j}^S = D \frac{\partial \overline{f_i}^S}{\partial x_j}. \quad (4)$$

This equation is, however, not closed due to the nonlinearity of the convective term [the second term on the left-hand side of Eq. (4)]. Specifically, the spatially filtered convection–diffusion equation cannot be expressed in terms of  $\overline{f_i}$  and  $\overline{u_j}$ . We therefore decompose this term according to

$$\overline{f_i u_j}^S = \overline{f_i}^V \overline{u_j}^S + \tau_{ij}^\alpha, \quad (5)$$

where the residual between the nonlinear term  $\overline{f_i u_j}^S$  and the term  $\overline{f_i}^V \overline{u_j}^S$ , i.e.,  $\tau_{ij}^\alpha$ , accounts for the effects of the subgrid modes on the resolved scales of the solution.

Here, a volume average is the natural choice for the physical variable  $f_i$  since it is a density. The convective velocity  $u_j$ , on the other hand, is surface averaged since it is directly related to the fluxes through the surfaces. It may be emphasized that the decomposition of Eq. (5) differs from the usual approach in which only one filter operation is used. We apply both a volume filter, to the density, and a surface filter, to the flux.

In order to compute Eq. (5), we begin by considering the first term on the right-hand side of this equation. Since this term contains both a volume and a surface integral, shifted control volumes are introduced to compute both at the same location of the staggered grid. On a uniform mesh, the shifted volumes have the same size and form as the original volumes from Eq. (2) but are shifted so that they are centered around a surface. As an example, Fig. 1 illustrates the volume  $V_{j+1/2}$ , which is shifted in the  $j$ -direction.

Obviously, the fluxes through all cell surfaces must be determined. Here, we first consider the volume average of the convected density, and then, we treat the surface average of the normal velocity. We focus only on the surface  $S_{j+1/2}$  for the sake of brevity. This surface is the intersection of the  $V_j$  and  $V_{j+1}$  volumes, i.e.,  $V_j \cap V_{j+1}$  (see Fig. 1).

In order to evaluate the factor  $\overline{f_i}^V$  of the right-hand side of Eq. (5) at the surface  $S_{j+1/2}$ , we consider the volume average regarding the shifted volume  $V_{j+1/2}$  (see Fig. 1). This average is

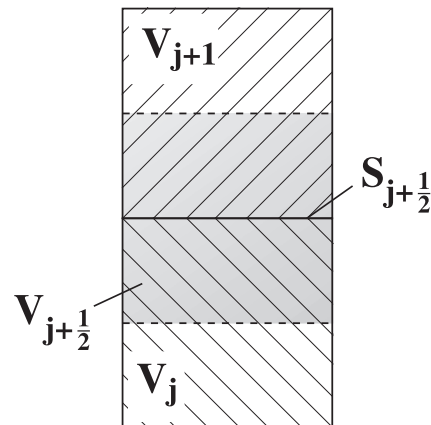


FIG. 1. Shifted volume in relation to the  $j$ -direction.  $V_{j+1/2}$  is the shifted volume, whereas  $V_j$  and  $V_{j+1}$  are the original volumes.  $S_{j+1/2}$  denotes the surface that separates  $V_j$  and  $V_{j+1}$ .

approximated according to

$$V_{j+1/2} \bar{f}_i = V_j \cup V_{j+1} \bar{f}_i + r_i|_{S_{j+1/2}}, \tag{6}$$

where  $V_j \cup V_{j+1} \bar{f}_i$  represents the volume average of  $f_i$  over the volume consisting of the union of the  $V_j$  and  $V_{j+1}$  cells, i.e.,  $V_j \cup V_{j+1}$ , and  $r_i$  describes the residual at the considered surface.

We compute the first term on the right-hand side of Eq. (6) by interpolating the known volume averages of the physical variable  $f_i$ ,

$$V_j \cup V_{j+1} \bar{f}_i = \frac{1}{2} (V_j \bar{f}_i + V_{j+1} \bar{f}_i). \tag{7}$$

Equation (7) shows that the interpolation of  $V_j \bar{f}_i$  and  $V_{j+1} \bar{f}_i$  can be seen as a filter over the volume  $V_j \cup V_{j+1}$  (see Fig. 1). Hence,  $V_j \cup V_{j+1} \bar{f}_i$  is considered a doubly filtered variable. The first filter level is then characterized by the same filter width as the Schumann filter, i.e.,  $V_j$  or  $V_{j+1}$ . The second filter level is characterized by a double filter width in the direction normal to the surface  $S_{j+1/2}$ , i.e., a volume filter over  $V_j \cup V_{j+1}$ .

The current mathematical methodology, thus, naturally introduces a relation between a singly filtered variable, i.e.,  $V_{j+1/2} \bar{f}_i$ , and a doubly filtered variable, i.e.,  $V_j \cup V_{j+1} \bar{f}_i$ . The residual  $r_i$  in Eq. (6) is a direct result of applying filters with different filter widths. It is therefore natural to adopt a scale-similarity hypothesis to approximate this residual. This hypothesis states that the effect of the unresolved scales on the resolved ones can be approximated through the similarity of the smallest resolved scales and the biggest unresolved modes,

$$f_i' \approx \bar{f}_i' = \bar{f}_i - \tilde{\tilde{f}}_i, \tag{8}$$

where the unresolved modes  $f_i'$  are defined by  $f_i = \bar{f}_i + f_i'$ . The first and second filter levels are characterized, respectively, by the filter widths  $\bar{\Delta}$  and  $\tilde{\tilde{\Delta}}$ , where  $\tilde{\tilde{\Delta}} > \bar{\Delta}$ . The residual  $r_i$  in Eq. (6) can then be modeled as

$$r_i|_{S_{j+1/2}} = V_{j+1/2} \bar{f}_i'. \tag{9}$$

It may be remarked that Eq. (8) applies to a volume filter as well as to a surface filter.

In order to evaluate the first term on the right-hand side of Eq. (5), the surface averaged velocity  ${}^s \bar{u}_j$  is to be located at the surface  $S_{j+1/2}$ . In the case of collocated grids, no further interpolation is required due to the fact that  $V_j \bar{f}_i$  and  ${}^s \bar{u}_j$  are already located at the same position. In the case of staggered grids, however,  ${}^{S_{j+1/2}} \bar{u}_j$  can be approximated by the following interpolation:

$${}^{S_{j+1/2}} \bar{u}_j = S_i \cup S_{i+1} \bar{u}_j + q_j|_{S_{j+1/2}}, \tag{10}$$

where  $S_i \cup S_{i+1} \bar{u}_j$  represents the surface average of  $u_j$  over the surface consisting of the union of the  $S_i$  and  $S_{i+1}$  surfaces (see Fig. 2) and  $q_j$  is the residual of the approximation. Here, we abolish double indices and show only the essential index for the sake of simplicity. For instance, the  $j$ -index is abolished for the variables located at  $j + 1/2$ , e.g.,  $S_{i,j+1/2}$  is simplified to  $S_i$ .

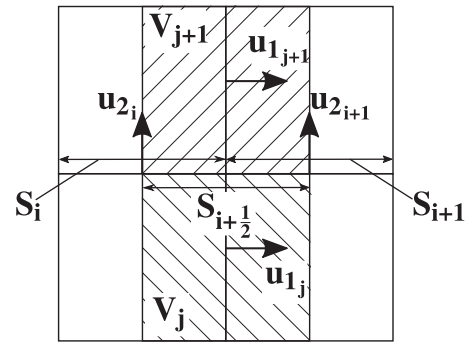


FIG. 2. Staggered grid: surfaces and velocities.

Here, we demonstrate only the interpolation of the  $y$ -component of the velocity vector, i.e.,  $u_2$ , for the sake of brevity. The surface average of this component at  $S_{j+1/2}$  can then be written as

$$S_i \cup S_{i+1} \bar{u}_2 = \frac{1}{2} (S_i \bar{u}_2 + S_{i+1} \bar{u}_2). \tag{11}$$

As for the volume averages of  $f_i$ , the applied interpolation is interpreted as a filtering process characterized by a filter width of  $S_i \cup S_{i+1}$ . Hence,  $S_i \cup S_{i+1} \bar{u}_2$  is also considered a doubly filtered variable, where the first and second filter levels are characterized by filters over  $S_i$  or  $S_{i+1}$  and  $S_i \cup S_{i+1}$ , respectively. Again, a natural relation between a singly filtered variable, i.e.,  ${}^{S_{j+1/2}} \bar{u}_2$ , and a doubly filtered variable, i.e.,  $S_i \cup S_{i+1} \bar{u}_2$ , is obtained. Therefore, the scale-similarity hypothesis [see Eq. (8)] can be applied to model the residual  $q_j$ ,

$$q_j|_{S_{j+1/2}} = S_{j+1/2} \bar{u}_j'. \tag{12}$$

Since all the variables of Eq. (5) are now specified at the surface  $S_{j+1/2}$ , the convective flux through this surface can finally be determined. For that purpose, we introduce Eqs. (6) and (10) in Eq. (5) and obtain

$${}^{S_{j+1/2}} \bar{f}_i u_j = V_j \cup V_{j+1} \bar{f}_i S_i \cup S_{i+1} \bar{u}_j + \tau_{ij}^\alpha|_{S_{j+1/2}} + \tau_{ij}^\beta|_{S_{j+1/2}}, \tag{13}$$

where  $\tau_{ij}^\alpha$  is the first model part (which is still to be determined) and  $\tau_{ij}^\beta$  is the second model part, which is defined as

$$\tau_{ij}^\beta|_{S_{j+1/2}} = V_j \cup V_{j+1} \bar{f}_i q_j|_{S_{j+1/2}} + S_i \cup S_{i+1} \bar{u}_j r_i|_{S_{j+1/2}} + (r_i q_j)|_{S_{j+1/2}}. \tag{14}$$

The residuals  $r_i$  and  $q_j$  at the surface  $S_{j+1/2}$  [see Eqs. (9) and (12)] are then introduced in Eq. (14). This results in

$$\tau_{ij}^\beta|_{S_{j+1/2}} = V_{j+1/2} \bar{f}_i S_{j+1/2} \bar{u}_j' - V_j \cup V_{j+1} \bar{f}_i S_i \cup S_{i+1} \bar{u}_j. \tag{15}$$

So far, we considered only the surface  $S_{j+1/2}$ . By applying the above methodology to all other surfaces, we obtain the following second model part:

$$\tau_{ij}^\beta = V_j \bar{f}_i \bar{u}_j' - \tilde{\tilde{f}}_i \tilde{\tilde{u}}_j', \tag{16}$$

where the notation of the doubly filtered variables is simplified to  $\overline{\overline{f_i}}$  and  $\overline{\overline{u_j}}$ .

In order to compute the nonlinear convective term in the current form [Eq. (13) generalized to all surfaces],

$$\overline{\overline{f_i u_j}} = \overline{\overline{f_i}} \overline{\overline{u_j}} + \tau_{ij}^\alpha + \tau_{ij}^\beta, \tag{17}$$

we still need to define the  $\tau_{ij}^\alpha$  tensor. As the second model part  $\tau_{ij}^\beta$  can be fully computed based on resolved scales and is, therefore, time reversible, it is natural to model the  $\tau_{ij}^\alpha$  tensor with an approach that includes an irreversible loss of information into the velocity field. Since eddy-viscosity models introduce such a loss of information in the form of dissipation,<sup>9,10</sup> this approach is applied here. To that end, the  $\tau_{ij}^\alpha$  stress tensor is first decomposed into a volumetric and deviatoric part,

$$\tau_{ij}^\alpha = \tau_{ij}^{\alpha, \text{iso}} + \tau_{ij}^{\alpha, \text{dev}}, \tag{18}$$

where the volumetric part is

$$\tau_{ij}^{\alpha, \text{iso}} = \frac{1}{3} \tau_{kk} \delta_{ij}. \tag{19}$$

Here,  $\delta_{ij}$  is the Kronecker delta and  $\tau_{kk}$  are the normal stresses. The anisotropic part of the stress tensor is then modeled according to the eddy-viscosity approach,

$$\tau_{ij}^{\alpha, \text{dev}} \approx -D_e \frac{\partial \overline{\overline{f_i}}}{\partial x_j}, \tag{20}$$

which results in an increase in the diffusion coefficient. The total diffusion coefficient becomes  $D + D_e$ , where  $D_e$  is the diffusion coefficient related to the small scales of motion.

It may be noted that the eddy-viscosity assumption breaks the time reversal symmetry of the underlying subgrid stress tensor, as desired.<sup>9,10</sup> Furthermore, it should be emphasized that although two different filters are used to decompose the nonlinear convective term [see Eqs. (5) and (17)], when applying these filters on a staggered grid, they are very similar [see, e.g., Eqs. (7) and (11)]. Therefore, even with the definition of two different filters, an eddy-viscosity approach can still be applied to model the  $\tau_{ij}^{\alpha, \text{dev}}$  stress tensor.

With the definition of the first ( $\tau_{ij}^\alpha$ ) and second ( $\tau_{ij}^\beta$ ) model parts, the nonlinear convective term [see Eq. (17)] can finally be computed and the convection–diffusion equation for large-scale quantities on staggered grids is obtained,

$$\begin{aligned} \frac{\partial \overline{\overline{f_i}}}{\partial t} + \delta_j \left( \overline{\overline{f_i}} \overline{\overline{u_j}} \right) &= \delta_j \left( \overline{\overline{D}} \frac{\partial \overline{\overline{f_i}}}{\partial x_j} \right) \\ &\quad - \delta_j \left( \tau_{ij}^{\alpha, \text{dev}} + \tau_{ij}^{\alpha, \text{iso}} + \tau_{ij}^\beta \right), \end{aligned} \tag{21}$$

where  $\delta_j$  denotes the finite difference operator, as defined by Williams,<sup>29</sup>

$$\delta_j(f_i) = \frac{1}{\Delta x_j} (f_{i, j+1/2, k} - f_{i, j-1/2, k}). \tag{22}$$

Emphasis should be placed on the fact that Eq. (21) depends on two models ( $\tau_{ij}^\alpha$  and  $\tau_{ij}^\beta$ ), and that this dependence appears naturally through the utilization of volume and surface averages to close the nonlinear convection term on a staggered grid.

## B. Incompressible Navier–Stokes equations

The methodology described in Sec. II A is extended to the incompressible Navier–Stokes equations. First, in Sec. II B 1, the evolution equation for the spatially averaged mass is obtained. Second, in Sec. II B 2, the equations for the conservation of filtered momentum are derived. Finally, the subgrid-scale stress tensor is analyzed, and the subgrid-scale models are defined in Secs. II C and II D.

### 1. Conservation of mass

In order to obtain the equation for the volume-averaged mass conservation, the incompressibility condition  $\partial u_i / \partial x_i = 0$  is integrated over one grid cell  $V$ . Gauss’s divergence theorem is applied, and the continuity equation for large scales of motion is obtained,

$$\delta_j \overline{\overline{u_j}} = 0. \tag{23}$$

### 2. Conservation of momentum

In this section, the volume-averaged convection–diffusion equation derived in Sec. II A [see Eq. (21)] forms the basis to obtain the equation for the conservation of momentum of the large scales of motion. Since Eq. (21) does not account for the effects of the pressure, we first take the gradient of the pressure and filter it according to Schumann’s<sup>28</sup> approach,

$$\overline{\overline{\frac{\partial p}{\partial x_i}}} = \frac{|S|}{|V|} \overline{\overline{p}} \delta_{ij} = \delta_i (\overline{\overline{p}} \delta_{ij}), \tag{24}$$

where  $p$  is the kinematic pressure. Here, the volume-averaged pressure term is rewritten using Gauss’s divergence theorem and added to the convection–diffusion equation [Eq. (21)].

The physical variable  $f_i$  is substituted by the momentum density  $\rho u_i$ , where the fluid density is constant. Moreover, the diffusion coefficients  $D$  and  $D_e$  are substituted by the kinematic viscosities  $\nu$  and  $\nu_e$ , respectively. The former is the fluid kinematic viscosity, while the latter is the effective viscosity related to the turbulence, i.e., the eddy viscosity. In this way, we obtain a filtered momentum equation for incompressible fluids,

$$\begin{aligned} \frac{\partial \overline{\overline{u_i}}}{\partial t} + \delta_j \left( \overline{\overline{u_i}} \overline{\overline{u_j}} \right) &= -\delta_i (\overline{\overline{p}} \delta_{ij}) + \delta_j \left( \nu \frac{\partial \overline{\overline{u_j}}}{\partial x_j} \right) \\ &\quad - \delta_j \left( \tau_{ij}^{\alpha, \text{dev}} + \tau_{ij}^\beta \right), \end{aligned} \tag{25}$$

where the dependence on two subgrid-scale models, i.e., an eddy-viscosity model ( $\tau_{ij}^{\alpha, \text{dev}}$ ) and a scale-similarity model ( $\tau_{ij}^\beta$ ) is obtained as before.

The first model component of the mixed model, i.e.,  $\tau_{ij}^\alpha$ , is an eddy-viscosity model [see also Eqs. (18)–(20)]. Here, the isotropic part  $\tau_{ij}^{\alpha, \text{iso}}$  is incorporated in the pressure term and the anisotropic part of this tensor ( $\tau_{ij}^{\alpha, \text{dev}}$ ) is modeled as

$$\tau_{ij}^{\alpha, \text{dev}} \approx -2 \nu_e \overline{\overline{S_{ij}}}, \tag{26}$$

with

$$s\bar{S}_{ij} = \frac{1}{2} \left( \frac{\partial}{\partial x_j} s\bar{u}_i + \frac{\partial}{\partial x_i} s\bar{u}_j \right), \quad (27)$$

where the symmetric part of the velocity gradient, i.e.,  $s\bar{S}_{ij}$ , is used instead of the full gradient [see Eq. (20)] to ensure conservation of angular momentum.

The second component of the mixed model, i.e.,  $\tau_{ij}^\beta$ , is a scale-similarity model [see Eq. (16)], which is defined by

$$\tau_{ij}^\beta = c_B \left( v\bar{u}_i s\bar{u}_j - \bar{u}_i \bar{u}_j \right). \quad (28)$$

The tensor  $\tau_{ij}^\beta$  can be interpreted as a variation of the scale-similarity model proposed by Bardina *et al.*,<sup>4</sup> where both volume and surface averages are employed (note that the Bardina model contains only volume averages,  $\bar{u}_i \bar{u}_j - \bar{u}_i \bar{u}_j$ ). The Bardina model approximates the interaction of turbulent structures and is known for being able to include backscatter of energy. Speziale<sup>30</sup> recommended to take a Bardina model constant of  $c_B = 1.0$  to ensure that the model is Galilean invariant.

The mixed model obtained here has a similar form as the mixed models generated by *ad hoc* linear combinations of models, as, for instance, proposed by Bardina *et al.*<sup>4</sup> Therefore, the derivation proposed in this work provides a mathematical basis for mixed models. Moreover, the proposed methodology also substantiates the power of these models, since they naturally follow from the filtered Navier–Stokes equations.

### C. Single-layer AMD–Bardina model

In the current work, the eddy viscosity  $\nu_e$  [see Eq. (26)] is computed according to the anisotropic minimum-dissipation (AMD) model proposed by Rozema *et al.*,<sup>24</sup>

$$\nu_e = c_{AMD} \frac{\max \left\{ - \left( \frac{s\bar{\Delta}_k}{\Delta_k} \frac{\partial s\bar{u}_i}{\partial x_k} \right) \left( \frac{s\bar{\Delta}_k}{\Delta_k} \frac{\partial s\bar{u}_j}{\partial x_k} \right) s\bar{S}_{ij}, 0 \right\}}{\left( \frac{\partial s\bar{u}_m}{\partial x_i} \right) \left( \frac{\partial s\bar{u}_m}{\partial x_i} \right)}. \quad (29)$$

The AMD model is applied in this work since it aims to provide the minimum necessary dissipation to remove the subgrid scales from the solution.<sup>25</sup> Moreover, this turbulence model has already been successfully tested, for instance, in simulations of turbulent channel flows discretized on anisotropic grids (see Refs. 24 and 31). Since we have used two filters (a volume filter for the densities and a surface filter for the fluxes) to define the subgrid term, the filter length is to be taken slightly different than in the standard AMD model. Here,  $s\bar{\Delta}_k$  is the filter width in the  $k$ -direction of the surface filter, and  $c_{AMD}$  is the model constant for which the recommended value in the literature is  $c_{AMD} = 0.3$  for a central spatial discretization (see Ref. 24).

When applying the AMD model as the eddy-viscosity model part, we obtain the single-layer AMD–Bardina model (also referred to as the AMD–Bardina model),

$$\tau_{ij}^{AMD, B} = \tau_{ij}^{\alpha, dev} + \tau_{ij}^\beta, \quad (30)$$

where  $\tau_{ij}^{\alpha, dev}$  and  $\tau_{ij}^\beta$  are defined by Eqs. (26) and (28), respectively, and the eddy viscosity is given by Eq. (29). This mixed

model is promising due to the complimentary nature of the applied functional and structural models, i.e., the AMD model accounts for the turbulent kinetic energy dissipation, whereas the Bardina model accounts for the interaction between turbulent structures. In order to also introduce boundary-layer physics in the AMD–Bardina model for wall-bounded flows, we further develop this model into a two-layer approach.


### D. Two-layer AMD–Bardina model for wall-bounded flows

The physical processes present in wall-bounded flows vary with the distance to the wall, i.e., the farther away from the wall, the higher the influence of the turbulent transport and the lower the influence of the viscous stresses. In order to obtain a mixed model that respects the physics of boundary layers, we propose a two-layer approach of the AMD–Bardina model for wall-bounded flows.

Wall-bounded flows can be roughly divided into a universal inner layer and a flow-dependent outer layer, each characterized by specific flow dynamics and scaled with different sets of variables (see, e.g., Ref. 26). The dynamics of the inner layer is universal, however still highly complex. Usually, this layer is further divided into the viscous, buffer, and log-law layers. The viscous sublayer is characterized by viscous stresses, whereas the log-law region is characterized by turbulent stresses. The buffer layer is considered a transition region, and therefore, both momentum transport due to dissipation and turbulent fluctuations must be considered. The outer layer, on the other hand, is dominated by the interaction of turbulent structures.


In order to take the various flow phenomena present in near-wall turbulence into account, we propose the utilization of a two-layer approach for the AMD–Bardina mixed model (see Fig. 3): the AMD–Bardina model is utilized in the near-wall domain, i.e., in the inner layer, since this model introduces dissipation through the eddy-viscosity model part while accounting for the interaction between turbulent structures as well as for backscatter of energy through the scale-similarity part. Farther away from the wall, the viscous stresses play a less important role than the turbulent stresses. We then apply only the scale-similarity model in the outer layer since this model, i.e., the Bardina model, is able to capture the interaction between turbulent structures that characterize this region.

The interface between the near-wall and channel-center domains is located at  $y_{int}$  (considering the bottom half of the

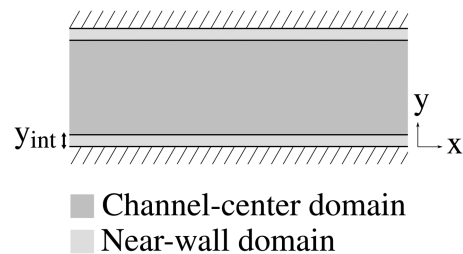

**FIG. 3.** Turbulent channel flow divided into the near-wall and channel-center domains. The matching line, i.e., interface, between both regions is located at  $y_{int}$  for the bottom half of the channel, and at  $L_y - y_{int}$  for the top half of the channel, with  $L_y$  being the channel height.



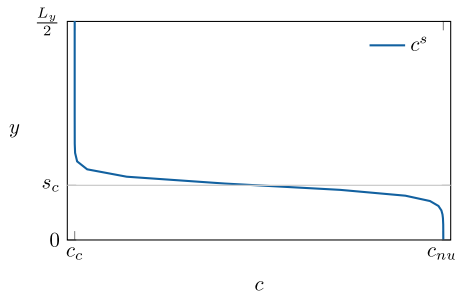

**FIG. 4.** Graphical representation of the smoothed model constant  $c^s$  for a channel with half-channel width  $L_y/2$ . The model constants used in the smoothing function are  $c_{nw}$  at the near-wall region and  $c_c$  at the channel-center region. The smoothing center is located at  $s_c$ .

channel), as illustrated in Fig. 3. This interface divides the channel flow into two regions: the near-wall domain solved with the AMD–Bardina model and the channel-center domain computed with the Bardina model. In order to follow the boundary-layer physics, the matching line must be located in the log-law region so that the inner and buffer layers are entirely solved with the AMD–Bardina model, whereas the outer layer is fully computed with the Bardina model.

As in two-layer approaches such as hybrid RANS-LES and detached-eddy simulation (DES), a mismatch in the statistics occurs in the interface of near-wall and outer regions (see Refs. 32 and 33) if the transition from one model/approach to the other is not correctly treated. Here, we apply a hyperbolic tangent smoothing function for the model constants in order to smoothly turn off the AMD model and avoid a jump in the subgrid-scale stresses at the matching position. Although the model constants vary with the distance to the wall and could therefore be interpreted as model coefficients, we keep referring to these variable (as  $c_{AMD}$  and  $c_B$ ) as model constants. For the bottom half of the channel domain, this smoothing function is given by

$$c_j^s = c_{nw} + \left( 0.5 + 0.5 \tanh\left(\frac{y_j - s_c}{s_f}\right) \right) (c_c - c_{nw}), \quad (31)$$

which is graphically represented in Fig. 4.

Here,  $c_j^s$  is the smoothed model constant of the  $j$ -th cell in the  $y$ -direction. The desired model constants at the near-wall and channel-center regions are  $c_{nw}$  and  $c_c$ , respectively. The wall-normal

coordinate of the cell is  $y_j$ , and the smoothing center and smoothing factor are  $s_c$  and  $s_f$ , respectively.

### III. NUMERICAL SETUP

In order to test the original single-layer and two-layer AMD–Bardina models, turbulent channel flows at several values of Reynolds numbers are computed with a code derived from the TBFsolver.<sup>34</sup> The considered test cases are summarized in Table I.

The governing equations, i.e., Eqs. (23) and (25), are discretized in time using a second-order Adams–Bashforth time integration scheme and are discretized in space using a central second-order-accurate symmetry-preserving discretization for the convective and diffusive terms (see Ref. 35). Perturbed parabolic profiles are used as initial conditions, and a constant pressure gradient is imposed in order to achieve the desired friction Reynolds numbers. No-slip boundary conditions are applied at the wall, and periodic boundary conditions are applied in the streamwise ( $x_1$ ) and spanwise ( $x_3$ ) directions.

Staggered grids are applied, which are stretched near the wall according to a hyperbolic tangent function. The applied stretching factor is adapted to each case in order to ensure that the first-grid point is located at  $x_2^+ < 2$ , and the wall-normal resolution at the channel center is fine enough to capture the large eddies. The applied grid resolutions are consistent with the resolutions suggested by Georgiadis *et al.*<sup>36</sup> and Choi and Moin<sup>37</sup> for the spanwise direction and for the streamwise direction of the channel flows at  $Re_\tau = 180$  and  $Re_\tau = 590$ . The streamwise grid sizes in terms of the viscous length scales of the channel flows at  $Re_\tau = 395$  and  $Re_\tau = 950$  are slightly smaller than those recommended by Georgiadis *et al.*<sup>36</sup> for wall resolved LES, i.e.,  $50 \leq \Delta x_1^+ \leq 150$ . These grid resolutions are, nevertheless, not DNS resolutions,<sup>36</sup> i.e.,  $10 \leq \Delta x_1^+ \leq 20$ . Therefore, the subgrid-scale models still have an effect on the momentum equations of the channel flows at  $Re_\tau = 395$  and  $Re_\tau = 950$ .

The subgrid-scale stress tensor is approximated with the single-layer and two-layer AMD–Bardina models, as well as with the AMD and Bardina models alone. In order to compare the effect of the applied turbulence models, simulations are also carried out on a coarse grid neglecting the effect of the small scales, i.e., without applying any subgrid-scale model.

### IV. RESULTS AND DISCUSSION

The results of the simulations are presented as time- and spatially averaged values, denoted by  $\langle \cdot \rangle$ . The spatial average is

**TABLE I.** Summary of simulation parameters. Here,  $L_i$  and  $n_i$ , with  $i = 1, 2, 3$ , are the dimensions of the channel and the number of grid points in the streamwise, wall-normal, and spanwise directions. The grid spacings in units of the viscous length scales are  $\Delta x_1^+$  and  $\Delta x_3^+$  for the streamwise and spanwise directions, respectively. For the wall-normal direction, the grid spacings in wall units are reported at the first cell near the wall ( $\Delta x_{2,w}^+$ ) and at the channel center ( $\Delta x_{2,c}^+$ ). The friction Reynolds number ( $Re_\tau$ ) is based on the half-channel height  $\delta$  and the friction velocity  $u_\tau = \sqrt{\frac{\tau_w}{\rho}}$ , with  $\tau_w$  being the mean wall shear stress.

$Re_\tau$	$L_1$	$L_2$	$L_3$	$n_1$	$n_2$	$n_3$	$\Delta x_1^+$	$\Delta x_{2,w}^+$	$\Delta x_{2,c}^+$	$\Delta x_3^+$
180	$4\pi\delta$	$2\delta$	$\frac{4}{3}\pi\delta$	32	32	32	71	1.17	21	24
395	$2\pi\delta$	$2\delta$	$\pi\delta$	64	64	64	39	1.25	23	19
590	$2\pi\delta$	$2\delta$	$\pi\delta$	64	64	64	58	1.86	35	29
950	$2\pi\delta$	$2\delta$	$\pi\delta$	128	128	128	47	1.48	28	21

applied in the homogeneous directions, i.e., in the stream- and span-wise directions. Furthermore, the results are normalized in wall units, indicated by a superscript + (the coordinates and velocities, and Reynolds stresses in plus units are defined by  $x_i^+ = \frac{x_i u_\tau}{\nu}$ ,  $u_i^+ = \frac{u_i}{u_\tau}$ , and  $R_{ij}^+ = \frac{R_{ij}}{u_\tau^2}$ , respectively). The coordinates  $x_1, x_2, x_3$  and  $x, y, z$  are used interchangeably.

The results are presented and compared with the direct numerical simulations (DNS) of Moser *et al.*<sup>38</sup> and of Hoyas and Jiménez.<sup>39</sup> Since this work applies LES models that are traceless (the AMD model) or partially traceless (the AMD–Bardina model), only the deviatoric Reynolds stresses can be reconstructed and directly compared with the DNS data.<sup>40</sup> This comparison is carried out through

$$R_{ij}^{\text{DNS, dev}} = R_{ij}^{\text{LES, dev}} + \langle \tau_{ij}^{\text{SGS, dev}} \rangle, \quad (32)$$

where  $\langle \tau_{ij}^{\text{SGS, dev}} \rangle$  is the averaged deviatoric subgrid-scale stress tensor and  $R_{ij}^{\text{dev}}$  is the deviatoric Reynolds stress tensor. Here, the Reynolds stress tensor is defined as

$$R_{ij} = \langle u_i u_j \rangle - \langle u_i \rangle \langle u_j \rangle, \quad (33)$$

where  $u_i$  represents the velocity vector in DNS simulations and the coarse-grid velocity vector in LES simulations. In order to maintain consistency, the deviatoric part of the second-order statistics is used as a comparison tool even for simulations that could reconstruct the full Reynolds stress tensor, i.e., the computations with the Bardina model.

This section is organized as follows: First, in Sec. IV A, the sensitivity of the single-layer AMD–Bardina model to the model constants is studied. The optimal model constants for the single-layer AMD–Bardina model are then selected, and the predictions obtained with the mixed model are compared with the DNS database of Moser *et al.*,<sup>38</sup> as well as with large-eddy simulations using the AMD model, the Bardina model and, no subgrid-scale model. After that, in Sec. IV B, the two-layer AMD–Bardina model is applied. The interface location is studied, and a rule of thumb is defined for the positioning of this matching location. Finally, the obtained results for both the single-layer and two-layer approaches of the AMD–Bardina model are compared with the DNS database of Moser *et al.*<sup>38</sup> and Hoyas and Jiménez.<sup>39</sup>

## A. Single-layer AMD–Bardina model

In this section, the effects of the single-layer AMD–Bardina model on turbulent channel flows are investigated. Simulations are carried out at  $Re_\tau = 180$ ,  $Re_\tau = 395$ , and  $Re_\tau = 590$ . We however show detailed results only for turbulent channel flows at  $Re_\tau = 590$  for the sake of brevity. The sensitivity of the single-layer AMD–Bardina model to the model constants is investigated first. Then, the optimal constants for this mixed model are selected. Finally, the results obtained with the single-layer AMD–Bardina model are compared to the results of large-eddy simulations applying the AMD model, the Bardina model, and no model, as well as the DNS results of Moser *et al.*<sup>38</sup>

### 1. Model setup

Here, the robustness of the single-layer AMD–Bardina model is investigated with respect to changes in the model constants, aiming

at the determination of the optimal model constants to be applied in this work. In order to provide a better quantitative evaluation of the results, we normalize the LES results by the DNS results. For instance, the DNS normalized mean bulk velocity is given by

$$\|u_b\|_{\text{DNS}} = \frac{u_{b, \text{LES}}}{u_{b, \text{DNS}}}, \quad (34)$$


where  $\|u_b\|_{\text{DNS}}$  is the DNS normalized mean bulk velocity and  $u_{b, \text{LES}}$  and  $u_{b, \text{DNS}}$  are the mean bulk velocities obtained with the large-eddy simulation and from the DNS reference data, respectively.

First, we analyze the sensitivity of the single-layer AMD–Bardina model to the model constants with regard to the normalized bulk velocity and peak height of the Reynolds stresses (see Fig. 5). A total of 36 simulations at  $Re_\tau = 590$  with model constants in the interval of  $0 \leq c_B \leq 1.1$  and  $0 \leq c_{\text{AMD}} \leq 0.4$  are carried out and indicated with black dots in Fig. 5. Here, all results are normalized by the DNS results of Moser *et al.*<sup>38</sup>

The mean bulk velocity varies significantly with the model constants, as illustrated in Fig. 5(a). An increase in the AMD model constant increases the prediction of the bulk velocity, whereas an increase in the Bardina model constant tends to decrease the bulk velocity. Although the bulk velocity is well predicted for  $c_{\text{AMD}} = 0.2$  and  $c_B = 0.2$ , as well as for  $c_{\text{AMD}} = 0.2$  and  $c_B = 0.4$ , the mean velocity profile is overestimated in the first half of the outer region (as illustrated in Fig. 6). A compromise in the prediction of the mean velocity profile must then be reached: the mean velocity is either well predicted until the first half of the outer region and underpredicted in the bulk or the bulk velocity is well predicted, while the mean velocity profile in the first half of the outer region is overestimated. Here, we prefer to compromise the quality of the mean bulk velocity while obtaining a good estimation of the mean velocity profile until the first half of the channel-center region.

The prediction of the peak heights of the Reynolds stresses is subsequently analyzed [see Figs. 5(b)–5(e)]. The peak height of the Reynolds shear stress  $R_{12}$  is well predicted for all model constants [see Fig. 5(e)], whereas the peak heights of the normal Reynolds stresses [see Figs. 5(b)–5(d)] are strongly dependent on the model constants when applying the mixed model or the Bardina model alone ( $c_{\text{AMD}} = 0$ ). The AMD model tends to overestimate the peak heights of all normal Reynolds stresses independently of the applied model constants, which seems to be a feature of eddy-viscosity models.<sup>41</sup> The Bardina model, on the other hand, is very sensitive to variations in the model constants and yields a better prediction of the peak heights for model constants near the unity. As the unity Bardina model constant, i.e.,  $c_B = 1.0$ , maintains the Galilean invariance of the governing equations (see Ref. 30) while accurately predicting the peak heights of the mean Reynolds stresses, this model constant is further applied in this work for the single-layer AMD–Bardina model.

Here, we take  $c_B = 1.0$  and proceed with the analysis of the AMD model constant. Figure 7 illustrates the normalized mean bulk velocity, and the normalized peak height (lines without markers) and peak width (lines with circular markers) of the Reynolds stresses as a function of the AMD model constant (with  $c_B = 1.0$ ). An increase in the AMD model constant improves the prediction of the bulk velocity, whereas the prediction of the peak width of the Reynolds stresses is strongly deteriorated. The peak height of the Reynolds

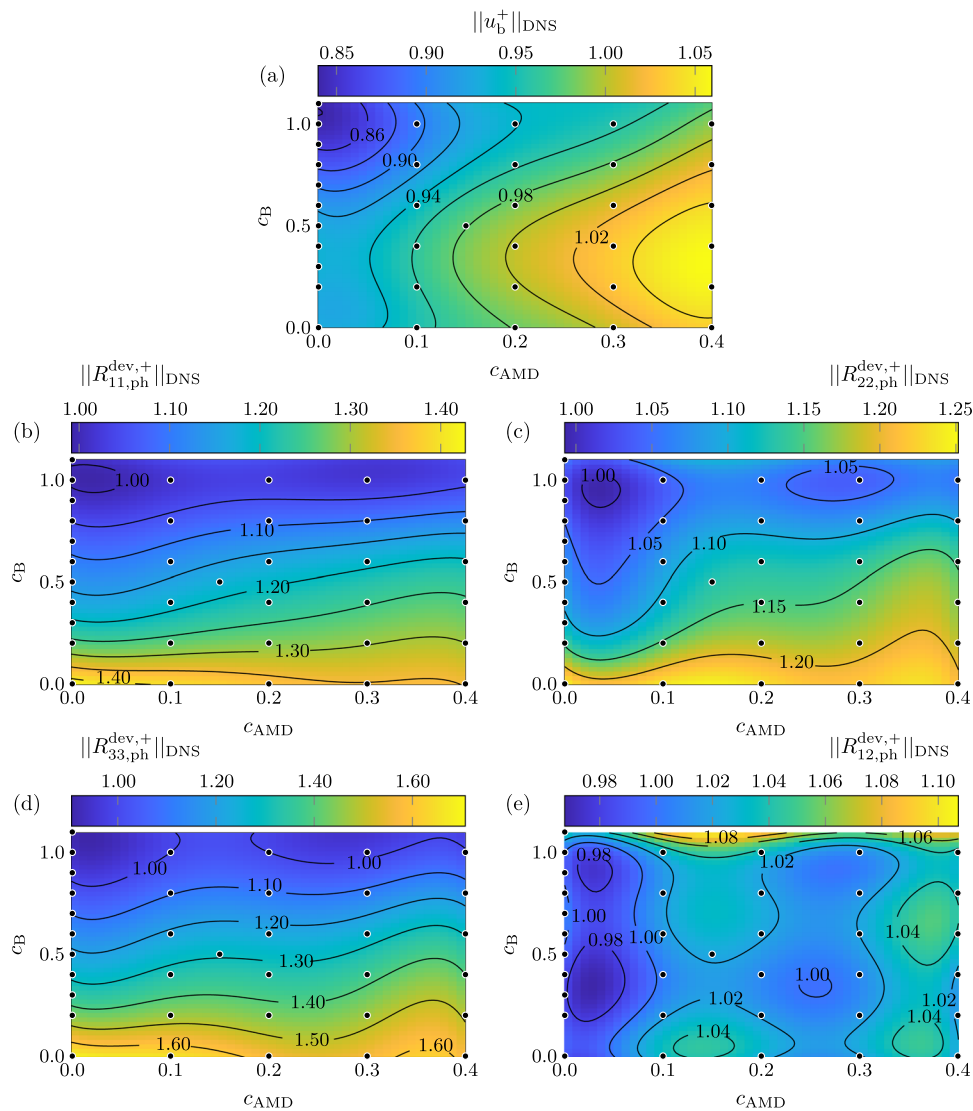


**FIG. 5.** Sensitivity of the AMD–Bardina model to the model constants for a turbulent channel flow at  $Re_\tau = 590$ . Black dots represent the simulations that were actually carried out. A polynomial interpolation of fifth degree is applied in order to generate a surface from the scattered data. The color map indicates how well the LES simulations predict (a) the mean bulk velocity and the peak height of the (b) stream-wise, (c) wall-normal, (d) span-wise, and (e) Reynolds shear stresses compensated with the averaged model contribution. The results are normalized by the DNS results of Moser *et al.*<sup>38</sup>


stresses, on the other hand, is only slightly affected by the AMD model constant when applying  $c_B = 1.0$  [as concluded earlier after the analysis in Figs. 5(b)–5(e)]. The best results for the single-layer AMD–Bardina model are obtained with  $c_B = 1.0$  and  $c_{AMD} = 0.2$ . These constant values are then further applied in this work. An AMD model constant of  $c_{AMD} = 0.2$  is smaller than the  $c_{AMD} = 0.3$  recommended by Rozema *et al.*<sup>24</sup> for a central second-order-accurate spatial discretization using solely the AMD model. A reduction in the eddy-viscosity model constant is, however, not surprising and was already reported by Zang *et al.*<sup>14</sup> when using a dynamic mixed model that applies the Bardina–Smagorinsky model as the base model. The

Bardina model clearly introduces some dissipation, which must be accounted for through a decrease in the AMD model constant when applying the mixed model.

The thorough analysis of the constants of the AMD and the Bardina model parts for the single-layer AMD–Bardina model revealed that the optimal constants for this mixed model are  $c_{AMD} = 0.2$  and  $c_B = 1.0$  for channel flows at  $Re_\tau = 590$ . Similar studies were performed for channel flows at  $Re_\tau = 180$ ,  $Re_\tau = 395$ , and  $Re_\tau = 950$  and are not shown here for the sake of brevity. Only a weak dependence of the model constants on the friction Reynolds number was observed, and the model constants  $c_{AMD} = 0.2$  and  $c_B = 1.0$

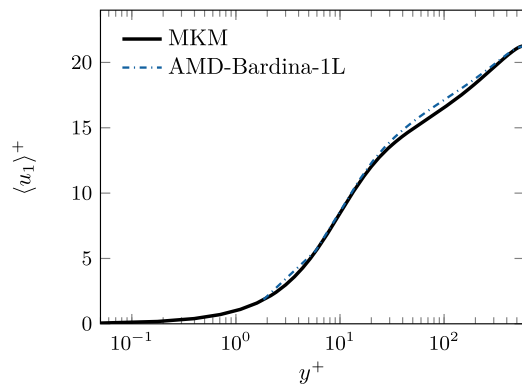

**FIG. 6.** Mean velocity profile for a turbulent channel flow at  $Re_\tau = 590$  approximated with the single-layer AMD–Bardina model with the model constants  $c_{AMD} = 0.2$  and  $c_B = 0.2$ . DNS results of Moser *et al.*<sup>38</sup> (MKM) are depicted for reference.

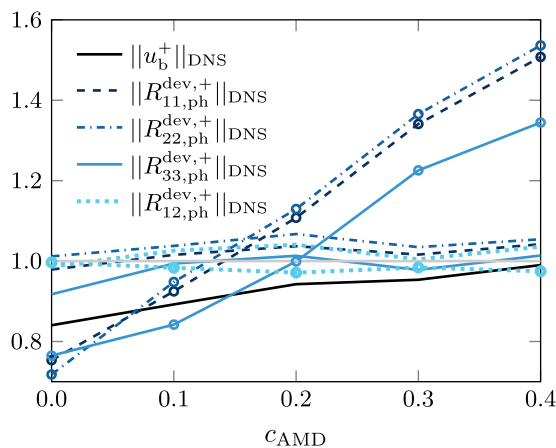

**FIG. 7.** Normalized mean bulk velocity (black solid line), and normalized peak height (without markers) and peak width (with markers) of the stream-wise (black dashed curve), wall-normal (blue dotted-dashed curve), span-wise (blue solid curve), and shear (blue dotted curve) Reynolds stresses, as obtained from large-eddy simulations at  $Re_\tau = 590$  applying the single-layer AMD–Bardina model with  $c_B = 1.0$ . The peak width of the Reynolds stresses is computed at half prominence, and all results are normalized by the DNS results of Moser *et al.*<sup>38</sup>

are, therefore, applied for the single-layer mixed model in the rest of this work.

## 2. Model predictions


The quality of the single-layer AMD–Bardina model (with  $c_{AMD} = 0.2$  and  $c_B = 1.0$ ) is assessed through turbulent channel flow simulations at  $Re_\tau = 590$ . The first- and second-order statistics obtained with the single-layer mixed model are compared to the outcome of the simulations with the AMD model (with  $c_{AMD} = 0.3$ ) and the Bardina model (with  $c_B = 1.0$ ), as well as with the results of a no-model simulation and the DNS database of Moser *et al.*<sup>38</sup> The results are illustrated in Fig. 8, and the Reynolds numbers of the converged simulations are summarized in Table II.

The mean velocity profile is underpredicted by both the no-model and Bardina model simulations [see Fig. 8(a)]. These underestimations can be explained by the fact that the no-model simulation does not account for the effect of the small scales, and the Bardina model is known for not providing enough dissipation.<sup>4</sup> The mean velocity profile predicted with the Bardina model is also underestimated in comparison to the no-model simulation. This behavior is not surprising if the friction Reynolds numbers of the converged simulations are analyzed (see Table II). The friction Reynolds number of the LES simulation with the Bardina model is 1.6% higher than the friction Reynolds number achieved by the direct numerical simulations (and 1.5% higher than the no-model simulations). Due to the fact that the friction Reynolds number is inversely proportional to the mean velocity in plus units, the underestimation of the mean velocity is expected for the Bardina model simulation. In contrast to the Bardina model, the AMD model dissipates enough turbulent kinetic energy to remove the subgrid scales from the solution,<sup>24</sup> predicting well the mean velocity in the near-wall region and in the bulk. The mean velocity between the near-wall region and the bulk is, however, overpredicted since the AMD model is not capable of representing the interactions between turbulent structures.

From the mean velocity fields of the AMD and Bardina models alone, it is clear that these models are of complementary nature. The AMD–Bardina model combines the dissipative properties of the AMD model with the abilities of the Bardina model to account for the interactions of turbulent structures, as well as the backward energy cascade. The results obtained with the single-layer AMD–Bardina model show a great improvement in comparison to the utilization of the regarded models alone. The single-layer mixed model is able to predict really well the mean velocity profile up to  $y^+ \approx 200$ . This mixed model is, however, not able to capture the inflection of the mean velocity in the second half of the outer region.

Not surprisingly, the mixed model has, in overall, also a positive effect on the prediction of the second-order statistics. The near-wall peak heights of the normal Reynolds stresses are overpredicted (in magnitude) in the streamwise, wall-normal, and spanwise directions for the AMD and no-model simulations [see Figs. 8(b)–8(d)]. The AMD model has almost no effect on the prediction of the peak height when compared to the no-model simulation, which seems to be a feature of eddy-viscosity models.<sup>41</sup> This eddy-viscosity model however overpredicts the peak width of the normal Reynolds stresses. The Reynolds shear stress is overestimated for the no-model, AMD, and AMD–Bardina simulations [see Fig. 8(e)]. The Bardina model works remarkably well for the prediction of the shear stress, as well as for the prediction of the near-wall peak height of the normal stresses. The peak width of the normal stresses is, however, underestimated.

The complementary nature of the AMD and Bardina models can also be observed from the second-order statistics: the AMD model overpredicts the peak heights and widths of the normal Reynolds stresses, whereas the Bardina model predicts well the peak heights and underestimates the peak widths. Mixing the AMD and Bardina models yields, then, a great improvement in the prediction of the normal stress peak heights and peak widths when compared to the AMD model alone, although the peak widths of the stream-wise and wall-normal stresses are still somewhat overestimated.

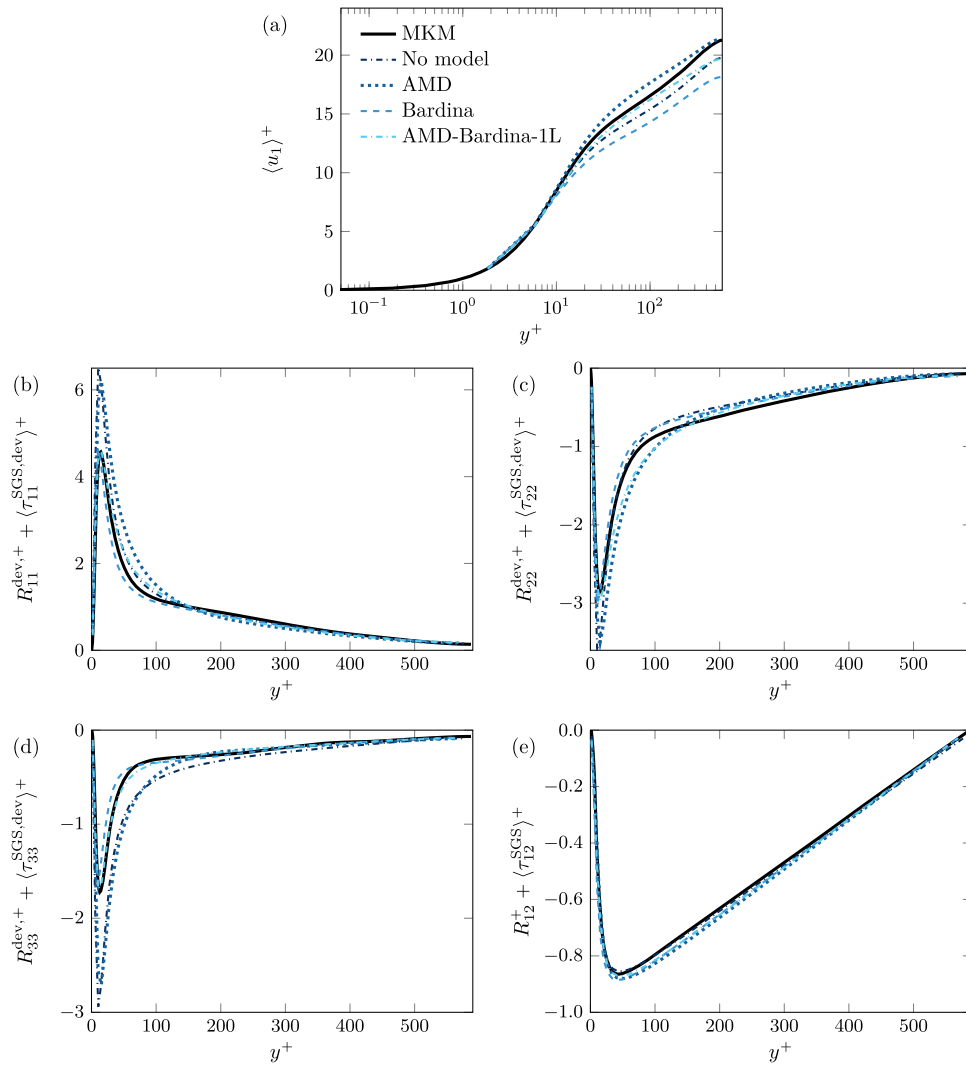

**FIG. 8.** (a) Mean velocity profile, and (b) streamwise, (c) wall-normal, (d) spanwise, and (e) Reynolds shear stresses considering the contribution of the model for a turbulent channel flow at  $Re_\tau = 590$ . Results are shown for simulations without a subgrid-scale model (no-model simulation), with the AMD model ( $c_{AMD} = 0.3$ ), with the Bardina model ( $c_B = 1.0$ ), and with the single-layer AMD–Bardina model ( $c_{AMD} = 0.2$  and  $c_B = 1.0$ ). DNS results of Moser *et al.*<sup>38</sup> (MKM) are depicted for reference.

**B. Two-layer AMD–Bardina model**

The two-layer AMD–Bardina model is investigated for turbulent channel flows at  $Re_\tau = 180$ ,  $Re_\tau = 395$ ,  $Re_\tau = 590$ , and  $Re_\tau = 950$ . First, the effect of the smoothing function [see Eq. (31)] on the model constants is investigated, and the function parameters are fixed for the two-layer AMD–Bardina model. Second, the location

of the interface between near-wall and outer domains is studied and its proper location is defined. Afterward, we fix the constants of the two-layer AMD–Bardina model in order to enable an easy application of the mixed model. Finally, the two-layer AMD–Bardina model is applied in simulations of flows having various Reynolds numbers, and the results are compared to the single-layer AMD–Bardina model, as well as to no-model simulations and to DNS databases.

**TABLE II.** Friction Reynolds numbers obtained for the simulations of turbulent channel flows at  $Re_\tau = 590$ . MKM represents the DNS results of Moser *et al.*<sup>38</sup>

MKM	No model	AMD	Bardina	AMD–Bardina-1L
587.19	587.80	582.56	596.77	586.71

**1. Model setup**

Conceptually, the two-layer AMD–Bardina model divides the flow domain into two regions: a near-wall region and an outer region. Because the AMD–Bardina model is applied in the near-wall region and the Bardina model is used in the outer region,

a smoothing function is needed in order to avoid a mismatch of the flow statistics at the interface (as commonly happens in two-layered approaches such as hybrid RANS-LES<sup>32,33</sup>). Here, we apply the hyperbolic tangent smoothing function given by Eq. (31) to smoothly turn off the AMD model at the interface. This smoothing function has two parameters: the smoothing center  $s_c$  and the smoothing factor  $s_f$ . Here, we want to fix these parameters for all two-layer AMD–Bardina model simulations in order to simplify the usage of the two-layer mixed model.

The smoothing center is simply fixed at the interface location  $y_{int}$  since this is the location where the model constants change abruptly. The smoothing factor, on the other hand, is taken as a linear function of the interface location in order to guarantee an adequate level of smoothness for interfaces located both close to the wall and distant from the wall. Here, we define the smoothing factor as

$$s_f = b_{sf} y_{int}, \tag{35}$$

where the slope of the smoothing factor function is called the smoothing factor coefficient  $b_{sf}$ .


The influence of the smoothing factor coefficient is investigated for two different channel flows with a height of  $L_y = 2.0$ : one with the interface located at  $y_{int} = 0.03$  and the other with the interface located at  $y_{int} = 0.2$ . Here, the coordinates of the interface are not taken in wall units since the smoothing function is only related to the physical dimensions of the channel. Three smoothing factor coefficients are tested for both interface locations ( $b_{sf} = 0.2$ ,  $b_{sf} = 0.7$ , and  $b_{sf} = 1.0$ ); the results are illustrated in Fig. 9.

Although an increase in the smoothing factor coefficient increases the smoothness of the model constant, the values of the smoothed constants deviate more from the desired value in the near-wall region, i.e.,  $c_{nw}$  [see Eq. (31)]. In order to maintain consistency with the determined model constants for the near-wall and channel-center regions, and to ensure the smoothness of the constants in the

whole domain, we further apply a smoothing factor coefficient of  $b_{sf} = 0.7$ . This coefficient guarantees low constant gradients in the whole domain while ensuring that the smoothed constants remain close to the desirable values even for small  $y_{int}$ .

The location of the interface is viewed as a parameter of the smoothing function. As this variable depends on the flow conditions, it needs to be studied closely. The location of the matching line is investigated for two turbulent channel flows at  $Re_\tau = 590$ : one with the interface located at  $y_{int,1} = 0.08$  and the other with the matching line located at  $y_{int,2} = 0.35$ . The former interface position, i.e.,  $y_{int,1} = 0.08$ , is chosen since it is located in the log-law region of the boundary layer. This choice allows for the computation of the peaks of the Reynolds stresses with the mixed AMD–Bardina model (see Fig. 8 for the DNS reference of the peak location of the Reynolds stresses). Moreover, this interface is located close to the peak of the Reynolds shear stress (see Table III), which lies the farthest away from the wall (compared to the other Reynolds stress peaks). The latter interface location, i.e.,  $y_{int,2} = 0.35$ , is based on the position of the matching line used in the hybrid RANS/LES simulations of Hamba.<sup>33</sup> The model constants are obtained in a similar manner as done for the single-layer AMD–Bardina model (see Sec. IV A 1). The optimal values for each case are (1)  $c_{AMD,1} = 0.5$  in the near-wall region and  $c_{B,1} = 0.6$  in the whole domain, and (2)  $c_{AMD,2} = 0.3$  in the near-wall region and  $c_{B,2} = 0.6$  in the whole domain. The results obtained for both interface locations are illustrated in Fig. 10. Here, the bulk velocity and the peak height and width of the Reynolds stresses are normalized using the DNS results of Moser *et al.*<sup>38</sup>

Figure 10 shows that the location of the interface has a strong influence on the statistics. The Reynolds shear stress is clearly better predicted if the interface is located farther away from the wall ( $y_{int,2} = 0.35$ ). The peak heights of the normal Reynolds stresses are, on the other hand, more accurately predicted if the interface is located closer to the wall, i.e., at  $y_{int,1} = 0.08$ . The peak widths of

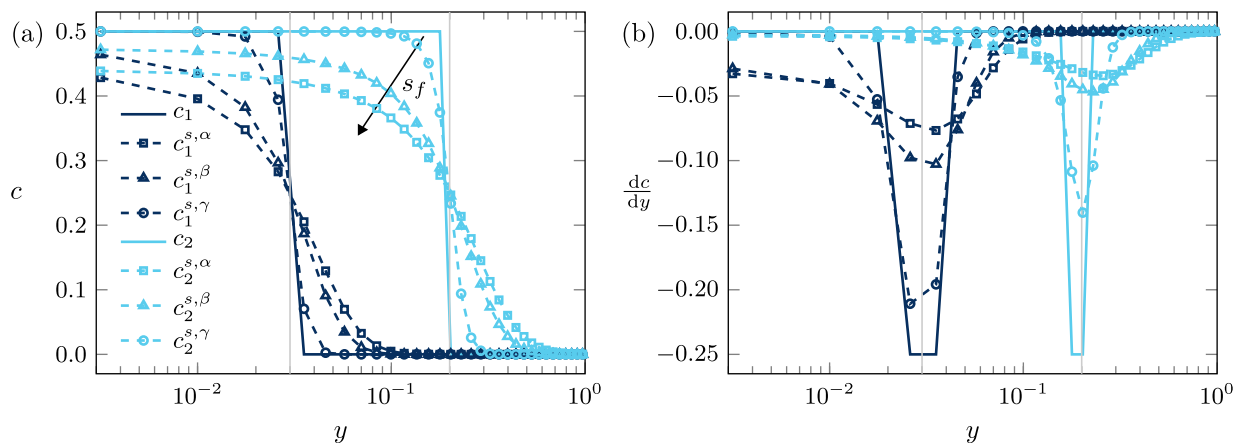


**FIG. 9.** Outcome of the application of the smoothing function to (a) the model constant and (b) the model constant gradient with regard to a channel flow. Two cases are illustrated and indicated by a subscript: (1) the interface is located at  $y_{int} = 0.03$  and is depicted with dark-colored lines and (2) the interface is located at  $y_{int} = 0.2$  and is depicted with light-colored lines. The non-smoothed constants  $c$  are indicated by a solid line, whereas the smoothed constants  $c^s$  are indicated by a dashed line. The quadratic, triangular, and circular markers indicate that the smoothing factor coefficients are  $b_{sf}^\alpha = 1.0$ ,  $b_{sf}^\beta = 0.7$ , and  $b_{sf}^\gamma = 0.2$ , respectively. The channel flow has a height of  $L_y = 2.0$ , which is discretized with 64 grid points that are stretched in the wall-normal direction with a stretching factor of  $\gamma = 1.8$ . The thin light-colored lines indicate the location of the interfaces, i.e.,  $y_{int}$ , and the arrow indicates the direction in which the smoothing factor  $s_f$  increases.

**TABLE III.** Turbulent channel flow simulations with the two-layer AMD–Bardina model:  $Re_\tau$  is the desired friction Reynolds number, whereas  $Re_\tau^a$  is the actual Reynolds number obtained in the simulations. The interface is located at  $y_{int}$  ( $y_{int}^+$  in plus coordinates), close to the location of the peak of the Reynolds shear stress  $R_{12}^{pl,+}$ . This location ensures that the peaks of all Reynolds stresses are solved with the AMD–Bardina model.

$Re_\tau$	$Re_\tau^a$	$y_{int}$	$y_{int}^+$	$R_{12}^{pl,+}$
180	178.69	0.24	42.88	30.02
395	392.61	0.11	43.19	41.88
590	578.27	0.08	46.26	44.70
950	941.28	0.08	75.30	52.05

the normal Reynolds stresses are only slightly better predicted if the interface location is based on the work of Hamba<sup>33</sup> ( $y_{int,1} = 0.35$ ). In short, taking the interface at  $y_{int,1} = 0.08$  provides, in general, the best results for the Reynolds stresses.

The bulk velocity illustrated in Fig. 10 is well predicted for both interface locations. The mean velocity profiles, however, differ. Figure 13(a) shows that the whole mean velocity profile is well predicted if the interface is located at  $y_{int,1} = 0.08$ . On the other hand, if the interface is located at  $y_{int,2} = 0.35$ , the inflection of the mean velocity in the channel center cannot be captured and the mean velocity profile has a similar slope to the one obtained with the single-layer AMD–Bardina model [see Fig. 8(a)]. The two-layer AMD–Bardina model with  $y_{int,2} = 0.35$  presents, then, the same behavior as the single-layer AMD–Bardina model for the first-order

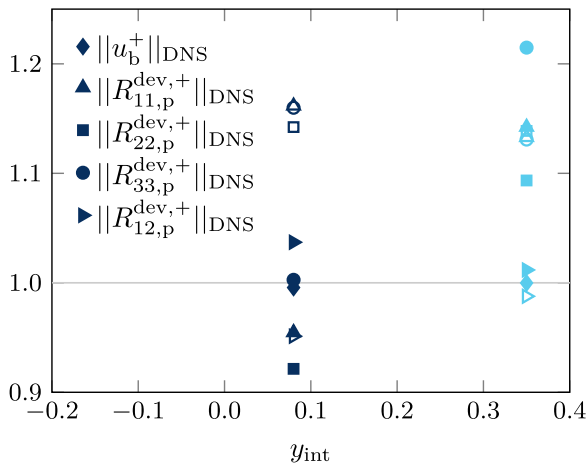

**FIG. 10.** Influence of the interface location on the first- and second-order statistics for a turbulent channel flow at  $Re_\tau = 590$ . The bulk velocity is indicated by a rhombus, whereas the  $R_{11}$ ,  $R_{22}$ ,  $R_{33}$ , and  $R_{12}$  Reynolds stresses are indicated by an upward-pointing triangle, a square, a circle, and a right-pointing triangle, respectively. For the Reynolds stresses, the filled markers indicate the peak height, whereas the empty markers indicate the peak width computed at half prominence. Two interface locations are analyzed:  $y_{int,1} = 0.08$  depicted with dark-colored markers and  $y_{int,2} = 0.35$  indicated with light-colored markers. The simulation for the former interface location applies  $c_{AMD,1} = 0.5$  in the near-wall region and  $c_{B,1} = 0.6$  in the whole domain, whereas the simulation for the latter interface location applies  $c_{AMD,2} = 0.3$  in the near-wall region and  $c_{B,2} = 0.6$  in the whole flow domain. All results are normalized by the DNS results of Moser *et al.*<sup>38</sup>

statistics: it can capture either the inflection of the mean velocity in the first half of the outer region (with lower AMD model constants) or in the second half of the outer region (with higher AMD model constants).

The differences in the mean velocity profiles obtained with both interface locations are further quantified using a relative error measure that is given by the  $L^2$  norm of the difference of the DNS and LES mean velocities, scaled by the DNS mean velocity,

$$Er = L^2(u_{j,DNS/LES}) = \sqrt{\sum_{j=1}^{n_2} u_{j,DNS/LES}^2}, \quad (36)$$

with

$$u_{j,DNS/LES} = \frac{\langle u_{1,j}^{+,DNS} \rangle - \langle u_{1,j}^{+,LES} \rangle}{\langle u_{1,j}^{+,DNS} \rangle}, \quad (37)$$

where  $n_2$  is the number of grid points in the wall-normal direction. The relative error is  $Er_2 = 0.130$  if the interface is located at  $y_{int,2} = 0.35$ , whereas the relative error is only  $Er_1 = 0.042$  if the interface is located closer to the wall. The velocity profile in the whole domain is, thus, much better estimated when the interface is located near the wall, i.e., at  $y_{int,1} = 0.08$ . Therefore, using the AMD model for a smaller region, i.e., up to  $y_{int,1} = 0.08$ , provides the best results for the first-order statistics.

Considering the mean velocity and the Reynolds stresses, the interface must, then, be located near the wall in order to obtain a good prediction of the first- and second-order statistics. The matching line, however, must not be located too close to the wall in order to ensure that the viscous sublayer and the buffer layer are modeled with the AMD–Bardina model. The interface must, in fact, be located in the log-law region. Note that in this subregion of the boundary layer, the viscous effects can be neglected. The log-law region is, however, large, and significant differences in the first- and second-order statistics are observed for interfaces located at different points in the log-law region. As a rule of thumb, we position the interface such that the peaks of all Reynolds stresses are solved with the AMD–Bardina model. Since the peak of the Reynolds shear stress is located the farthest away from the wall for turbulent channel flows, we position the interface near this peak in order to obtain optimal results with the two-layer AMD–Bardina model. Hence, we place the matching line in the interval  $R_{12}^{pl,+} < y_{int}^+ \leq 1.5 R_{12}^{pl,+}$ , where  $R_{12}^{pl,+}$  is the peak location of the Reynolds shear stresses.

Since the interface location cannot be fixed for all large-eddy simulations with the two-layer AMD–Bardina model, this location becomes a model parameter. Although this model parameter is obtained in an *ad hoc* manner when seen from a mathematical point of view, its value is defined based on the physics of wall-bounded flows. The two-layer AMD–Bardina model has three model parameters: the interface location and the constants of the AMD and Bardina model parts. The definition of these three model parameters, however, increases the *a priori* effort required to use the two-layer mixed model. Therefore, we reduce the number of model parameters by fixing the AMD and Bardina model constants.

A study of the model constants similar to the one reported for the single-layer AMD–Bardina model (see Sec. IV A 1) is performed for a variety of friction Reynolds numbers, and it is not shown here for the sake of brevity. As a result of this study, we fix the AMD


and Bardina model constants to  $c_{AMD} = 0.5$  in the near-wall region and  $c_B = 0.6$  in the whole flow domain, as we noted that these model constants provide optimal results. It is important to remark that the two-layer AMD–Bardina model is only able to capture the inflection of the mean velocity in the channel center when applying a Bardina model constant of  $c_B = 0.6$  for the whole domain. This behavior is, however, still not fully understood by the authors. Furthermore, the utilization of a Bardina model constant different from unity means that the Galilean invariance of the turbulence description is lost.<sup>30</sup>

### 2. Model predictions

The two-layer AMD–Bardina model is analyzed for turbulent channel flows at  $Re_\tau = 180$ ,  $Re_\tau = 395$ ,  $Re_\tau = 590$ , and  $Re_\tau = 950$ .


The chosen locations of the interfaces are given in Table III, along with the locations of the peaks of the Reynolds shear stresses and the actually obtained friction Reynolds numbers. The first- and second-order statistics of the two-layer approach are compared with the results obtained with the single-layer AMD–Bardina model, as well as with no-model simulations and DNS databases.<sup>38,39</sup> Figures 11–14 illustrate the LES results at  $Re_\tau = 180$ ,  $Re_\tau = 395$ ,  $Re_\tau = 590$ , and  $Re_\tau = 950$ , respectively.

For the turbulent channel flow at  $Re_\tau = 180$  (see Fig. 11), the utilization of both AMD–Bardina models increases the quality of the results in comparison to the no-model simulation. When comparing both mixed models with the no-model simulation, it is notable that the first-order statistics are predicted slightly better in the channel

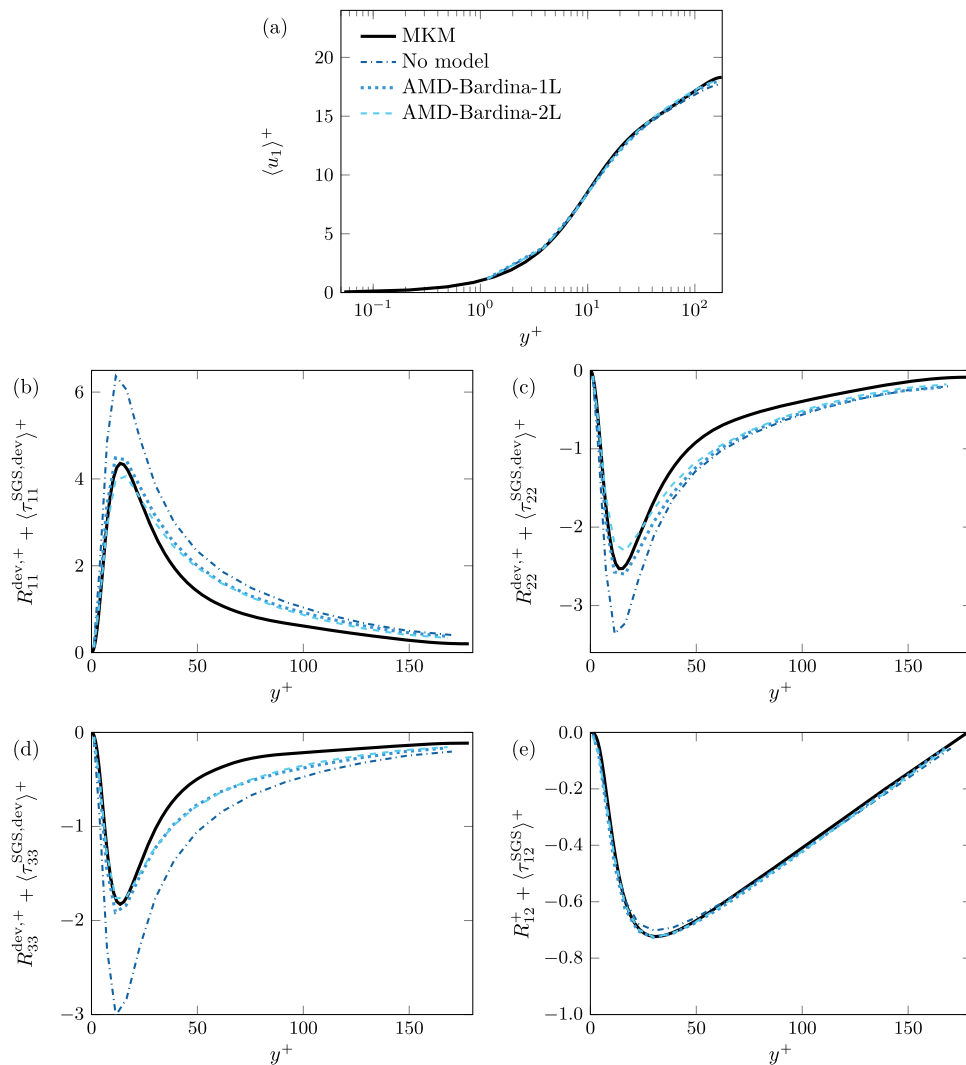

**FIG. 11.** (a) Mean velocity profile and (b) streamwise, (c) wall-normal, (d) spanwise, and (e) Reynolds shear stresses considering the contribution of the model for a turbulent channel flow at  $Re_\tau = 180$ . Results are presented for simulations without a subgrid-scale model (no-model simulation), with the AMD model ( $c_{AMD} = 0.3$ ), with the Bardina model ( $c_B = 1.0$ ), with the single-layer AMD–Bardina model ( $c_{AMD} = 0.2$  and  $c_B = 1.0$ ), and with the two-layer AMD–Bardina model ( $c_{AMD} = 0.5$  in the near-wall region and  $c_B = 0.6$  in the whole domain). DNS results of Moser *et al.*<sup>38</sup> (MKM) are depicted for reference.



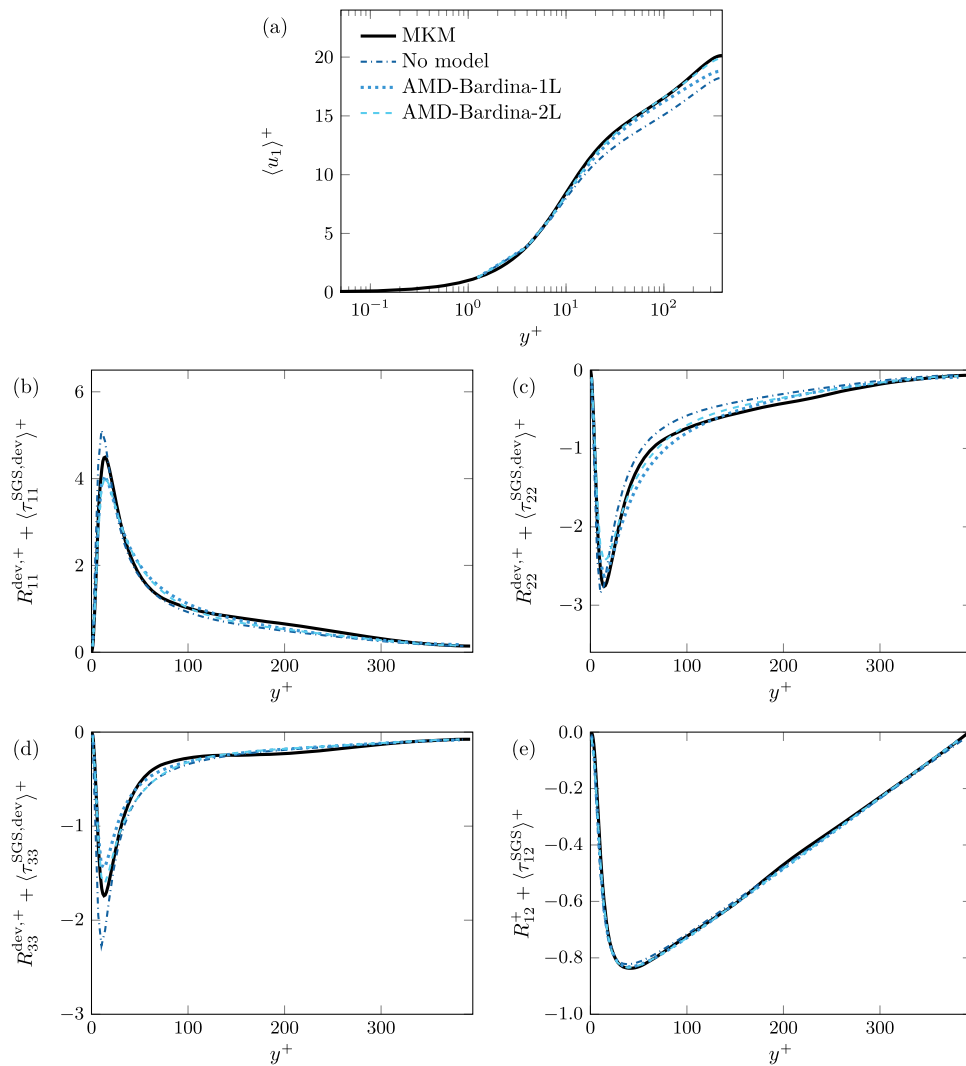


**FIG. 12.** (a) Mean velocity profile and (b) streamwise, (c) wall-normal, (d) spanwise, and (e) Reynolds shear stresses considering the contribution of the model for a turbulent channel flow at  $Re_\tau = 395$ . Results are presented for simulations without a subgrid-scale model (no-model simulation), with the AMD model ( $c_{AMD} = 0.3$ ), with the Bardina model ( $c_B = 1.0$ ), with the single-layer AMD–Bardina model ( $c_{AMD} = 0.2$  and  $c_B = 1.0$ ), and with the two-layer AMD–Bardina model ( $c_{AMD} = 0.5$  in the near-wall region and  $c_B = 0.6$  in the whole domain). DNS results of Moser *et al.*<sup>38</sup> (MKM) are depicted for reference.

center with both AMD–Bardina models, whereas the second-order statistics are predicted much better with the mixed models. The single-layer approach usually captures the normal Reynolds stresses better than the two-layer approach, whereas only slight differences are present in the Reynolds shear stress.

The turbulent channel flow at  $Re_\tau = 395$  (see Fig. 12) shows larger differences between the single-layer and two-layer mixed models. The single-layer AMD–Bardina model is not able to capture the mean velocity profile in the channel center, whereas the two-layer mixed model predicts the mean velocity profile remarkably well. The Reynolds shear stress is well predicted by both mixed models, and no significant differences can be observed. In addition, the

stream-wise Reynolds stress does not present any significant discrepancies. The wall-normal stress is better predicted by the single-layer approach, whereas the two-layer AMD–Bardina model estimates the span-wise Reynolds stress better. In short, the two-layer approach is clearly superior since it is able to approximate the mean velocity profile almost perfectly.

The turbulent channel flow at  $Re_\tau = 590$  is, subsequently, investigated (see Fig. 13). As was the case for  $Re_\tau = 395$ , the mean velocity profile is remarkably well predicted with the two-layer AMD–Bardina model. The normal Reynolds stresses obtained with the mixed models are greatly improved compared to the no-model simulation. Although the differences between both mixed

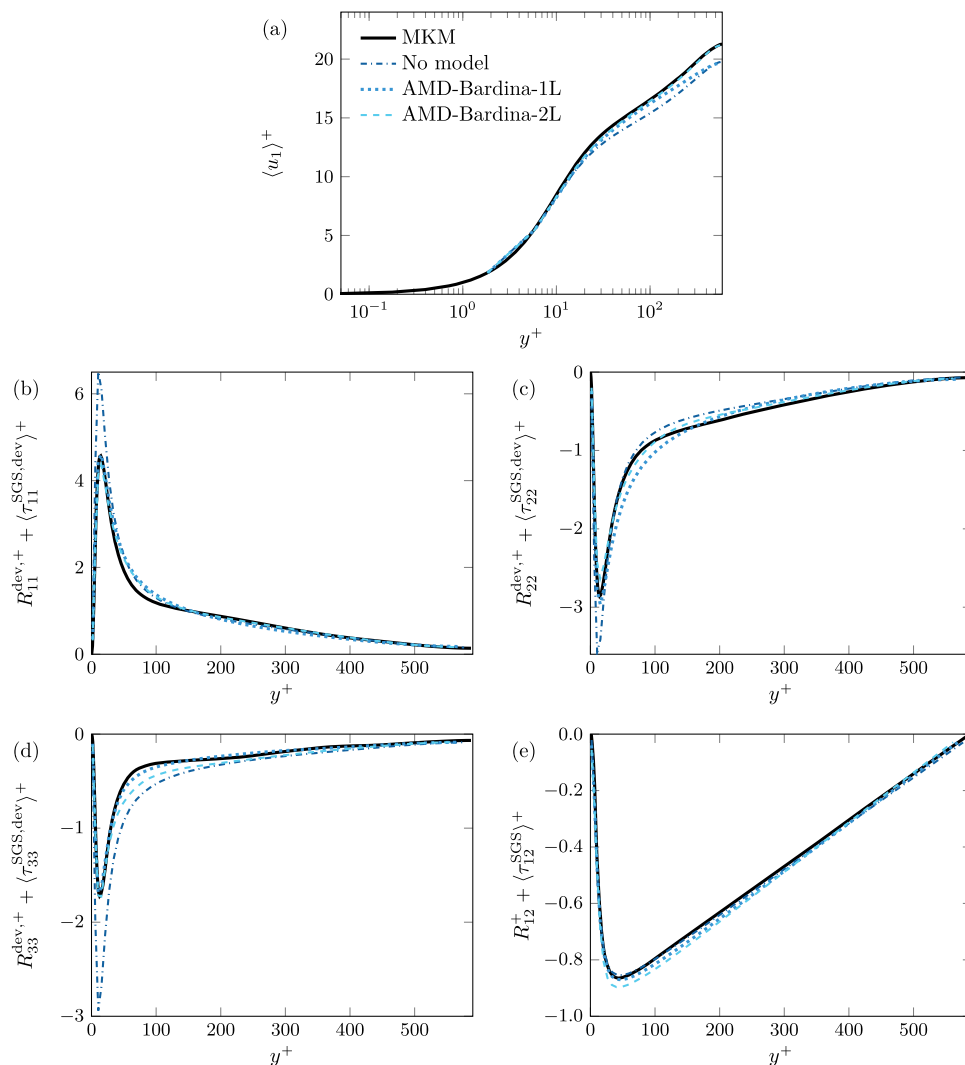


**FIG. 13.** (a) Mean velocity profile and (b) streamwise, (c) wall-normal, (d) spanwise, and (e) Reynolds shear stresses considering the contribution of the model for a turbulent channel flow at  $Re_\tau = 590$ . Results are presented for simulations without a subgrid-scale model (no-model simulation), with the AMD model ( $c_{AMD} = 0.3$ ), with the Bardina model ( $c_B = 1.0$ ), with the single-layer AMD–Bardina model ( $c_{AMD} = 0.2$  and  $c_B = 1.0$ ), and with the two-layer AMD–Bardina model ( $c_{AMD} = 0.5$  in the near-wall region and  $c_B = 0.6$  in the whole domain). DNS results of Moser *et al.*<sup>38</sup> (MKM) are depicted for reference.

models are minor, the single-layer AMD–Bardina model estimates the span-wise stresses better, whereas the wall-normal stresses are slightly better predicted by the two-layer approach, and the stream-wise stresses of both models are essentially of equal quality. The Reynolds shear stress is slightly deteriorated if the two-layer AMD–Bardina model is applied. The reason for this is not clear.

In order to show that the two-layer AMD–Bardina model provides superior predictions for high Reynolds numbers, a turbulent channel flow at  $Re_\tau = 950$  is studied. The computations with the two-layer AMD–Bardina model result in a mean velocity profile that fits the DNS results<sup>39</sup> almost perfectly and second-order statistics that are also remarkably well predicted. In this case, the two-layer

AMD–Bardina model proves to be the best model for both the first- and second-order statistics.

The simultaneous analysis of all channel flows computed here indicates that the full potential of the two-layer AMD–Bardina model is best exploited for wall-bounded flows at moderate to high Reynolds numbers. Particularly for the channel flow at  $Re_\tau = 180$ , the results were not as good as for the channel flows at higher Reynolds numbers, and the differences between the results obtained with both mixed models are smaller. This behavior may be explained by the fact that near solid boundaries, turbulent structures at high Reynolds numbers differ significantly from the turbulent structures present at low Reynolds numbers.<sup>38,42,43</sup> At low Reynolds numbers, fluid from the inner region of one channel wall can, for instance,

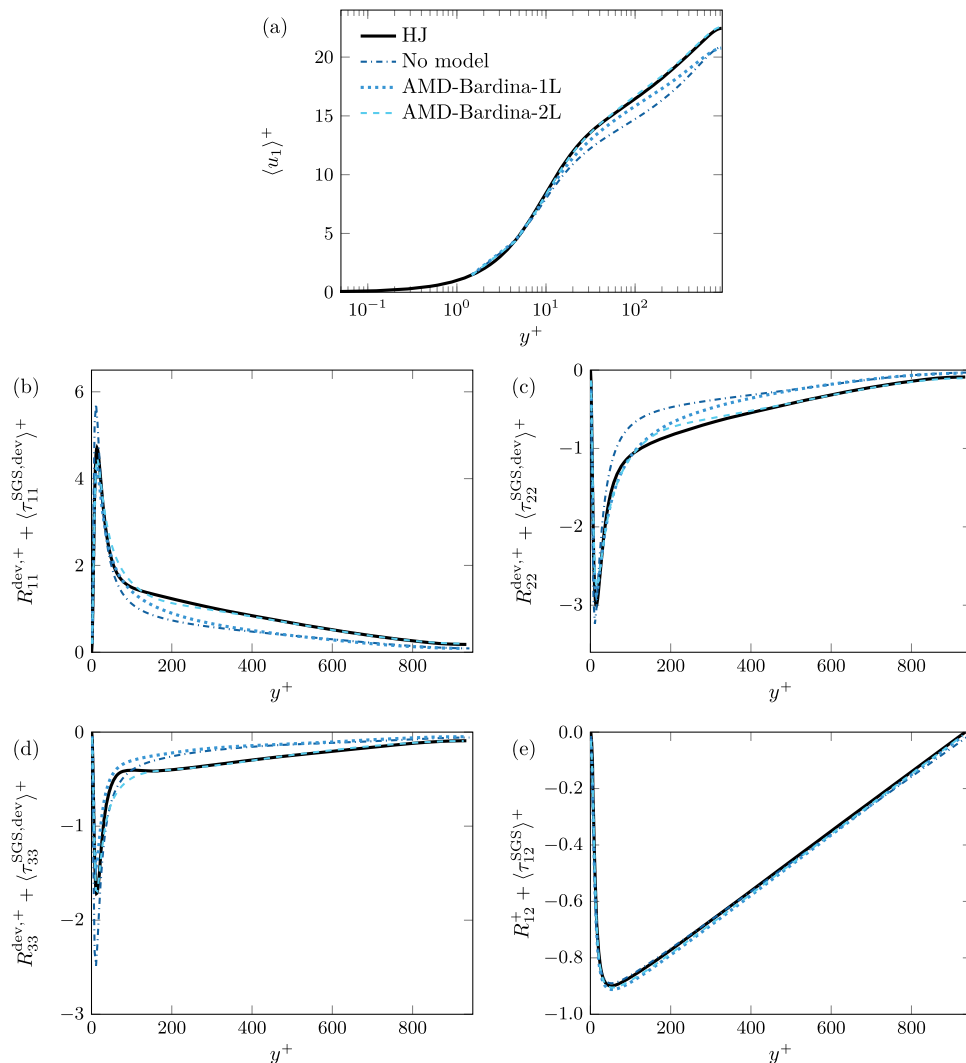

**FIG. 14.** (a) Mean velocity profile and (b) streamwise, (c) wall-normal, (d) spanwise, and (e) Reynolds shear stresses considering the contribution of the model for a turbulent channel flow at  $Re_\tau = 950$ . Results are presented for simulations without a subgrid-scale model (no-model simulation), with the AMD model ( $c_{\text{AMD}} = 0.3$ ), with the Bardina model ( $c_B = 1.0$ ), with the single-layer AMD–Bardina model ( $c_{\text{AMD}} = 0.2$  and  $c_B = 1.0$ ), and with the two-layer AMD–Bardina model ( $c_{\text{AMD}} = 0.5$  in the near-wall region and  $c_B = 0.6$  in the whole domain). DNS results of Hoyas and Jimenez<sup>29</sup> (HJ) are depicted for reference.

penetrate the opposite channel half,<sup>42</sup> generating complex interaction of turbulent structures that the mixed models might not be able to accurately represent.

## V. CONCLUSIONS

We have developed a mathematical basis for mixing eddy-viscosity models with scale-similarity models. The developed methodology has been applied, and the (single-layer) AMD–Bardina model has been obtained. This model combines the dissipative properties of the AMD model<sup>24</sup> with the abilities of the Bardina model<sup>4</sup> to account for the interactions of turbulent structures as well as the backward energy cascade.

In the case of wall-bounded turbulence, we have also introduced a domain division approach in order to obtain a mixed model that respects the physics of boundary layers. With this methodology, we have obtained the two-layer AMD–Bardina model. This two-layer mixed model applies the AMD–Bardina model in the near-wall region since it introduces enough dissipation while accounting for the interaction between turbulent structures and the Bardina model in the outer layer as a relatively little energy is dissipated in this region.

The model parameters for the single-layer and two-layer AMD–Bardina models have been thoroughly investigated, and the optimal values for the model constants have been determined for both approaches:  $c_{\text{AMD}} = 0.2$  and  $c_B = 1.0$  for the single-layer

AMD–Bardina model, and  $c_{AMD} = 0.5$  in the near-wall region and  $c_B = 0.6$  in the whole flow domain for the two-layer AMD–Bardina model. For the two-layer approach, a hyperbolic tangent smoothing function is applied in order to smoothly turn off the AMD model and avoid a jump in the statistics at the matching position. The parameters of the smoothing function have been fixed in relation to the interface location  $y_{int}$ : the smoothing center  $s_c$  is fixed at the interface location ( $s_c = y_{int}$ ), whereas the smoothing factor  $s_f$  is fixed at  $s_f = 0.7y_{int}$ . The interface location of the two-layered approach has been treated as a model parameter, and its optimal range of values has been determined. We have indicated that the matching line must be located in the log-law region of the boundary layer to represent the physical phenomena that govern this region. We have also defined a rule of thumb: the interface must be located in the interval  $R_{12}^{pl,+} < y_{int}^+ \leq 1.5 R_{12}^{pl,+}$  in order to ensure that all peaks of the Reynolds stresses are computed with the AMD–Bardina model. Here,  $R_{12}^{pl,+}$  is the peak location of the Reynolds shear stresses.

The single-layer and two-layer AMD–Bardina models have been tested for turbulent channel flows at various Reynolds numbers. The predictions of the single-layer AMD–Bardina model for a turbulent channel flow at  $Re_\tau = 590$  have been compared with those of the AMD and Bardina models alone as well as with a no-model simulation and the DNS data of Moser *et al.*<sup>38</sup> The single-layer AMD–Bardina model increases the accuracy of the results compared to the non-mixed models. This mixed model is, however, not able to capture the inflection of the mean velocity in the channel center. This deficiency of the single-layer AMD–Bardina model has been solved by the application of the two-layer approach. For moderate to high Reynolds numbers, the mean velocity profiles computed with the two-layer AMD–Bardina model match almost perfectly with the DNS results.<sup>38,39</sup> The two-layer AMD–Bardina model is, then, capable of capturing the inflection of the first-order statistics in the outer region while accurately predicting the second-order statistics. For low Reynolds numbers, however, the two-layer AMD–Bardina model behaves similarly to the single-layer AMD–Bardina model. This might be caused by complex low Reynolds number effects<sup>38,42,43</sup> that are not accounted for by the mixed model. The full potential of the two-layer AMD–Bardina model, thus, is best exploited if it is applied to wall-bounded flows at moderate or high Reynolds numbers. The two-layer AMD–Bardina model is particularly promising compared to other LES models since it predicts the flow remarkably well while having a low complexity level.

A natural progression of this work is the analysis of the effects of mixing the AMD<sup>24</sup> and Bardina<sup>4</sup> models on the prediction of the interaction between subgrid and resolved modes. This evaluation could be performed by comparing the energy spectra near the cutoff wavelength obtained with the mixed models, as well as with the AMD<sup>24</sup> and Bardina<sup>4</sup> models. Further research could also explore the dynamic computation of the model coefficients of the AMD and Bardina model parts. Such future works could provide a better insight into how well the interactions between turbulent structures are approximated and could lead to more optimal model coefficients than provided here. Hence, the model would become more sensitive to the local state of the flow, resulting in more accurate predictions than when the coefficients are specified *a priori*.

## ACKNOWLEDGMENTS

This work was carried out on the Dutch National e-Infrastructure with the support of SURF Cooperative and on the Peregrine cluster. We would like to thank the Center for Information Technology of the University of Groningen for their support and for providing access to the Peregrine high-performance computing cluster.

## DATA AVAILABILITY

The data that support the findings of this study are available from the corresponding author upon reasonable request.

## REFERENCES

- P. Sagaut, *Large Eddy Simulation for Incompressible Flows*, 3rd ed. (Springer, 2006).
- S. B. Pope, *Turbulent Flows* (Cambridge University Press, 2011).
- R. A. Clark, J. H. Ferziger, and W. C. Reynolds, "Evaluation of subgrid-scale models using an accurately simulated turbulent flow," *J. Fluid Mech.* **91**, 1–16 (1979).
- J. Bardina, J. H. Ferziger, and W. C. Reynolds, "Improved turbulence models based on large eddy simulation of homogeneous, incompressible, turbulent flows," Technical Report TF-19, Stanford University, 1983.
- S. Liu, C. Meneveau, and J. Katz, "On the properties of similarity subgrid-scale models as deduced from measurements in a turbulent jet," *J. Fluid Mech.* **275**, 83–119 (1994).
- B. Tao, J. Katz, and C. Meneveau, "Statistical geometry of subgrid-scale stresses determined from holographic particle image velocimetry measurements," *J. Fluid Mech.* **457**, 35–78 (2002).
- K. Horiuti, "Roles of non-aligned eigenvectors of strain-rate and subgrid-scale stress tensors in turbulence generation," *J. Fluid Mech.* **491**, 65–100 (2003).
- J. Bardina, J. Ferziger, and W. Reynolds, "Improved subgrid-scale models for large-eddy simulation," in *13th Fluid and Plasma Dynamics Conference* (AIAA, 1980), p. 1357.
- D. Carati, G. S. Winckelmans, and H. Jeanmart, "On the modelling of the subgrid-scale and filtered-scale stress tensors in large-eddy simulation," *J. Fluid Mech.* **441**, 119–138 (2001).
- G. S. Winckelmans, A. A. Wray, O. V. Vasilyev, and H. Jeanmart, "Explicit-filtering large-eddy simulation using the tensor-diffusivity model supplemented by a dynamic Smagorinsky term," *Phys. Fluids* **13**, 1385–1403 (2001).
- J. Smagorinsky, "General circulation experiments with the primitive equations," *Mon. Weather Rev.* **91**, 99–164 (1963).
- D. Kwak, W. C. Reynolds, and J. H. Ferziger, "Three-dimensional time dependent computation of turbulent flows," Technical Report TF-5, Stanford University, 1975.
- O. J. McMillan and J. H. Ferziger, "Direct testing of subgrid-scale models," *AIAA J.* **17**, 1340–1346 (1979).
- Y. Zang, R. L. Street, and J. R. Koseff, "A dynamic mixed subgrid-scale model and its application to turbulent recirculating flows," *Phys. Fluids A* **5**, 3186–3196 (1993).
- M. Germano, U. Piomelli, P. Moin, and W. H. Cabot, "A dynamic subgrid-scale eddy viscosity model," *Phys. Fluids A* **3**, 1760–1765 (1991).
- M. V. Salvetti and S. Banerjee, "A priori tests of a new dynamic subgrid-scale model for finite-difference large-eddy simulations," *Phys. Fluids* **7**, 2831–2847 (1995).
- K. Lam and S. Banerjee, "On the condition of streak formation in a bounded turbulent flow," *Phys. Fluids A* **4**, 306–320 (1992).
- F. Sarghini, U. Piomelli, and E. Balaras, "Scale-similar models for large-eddy simulations," *Phys. Fluids* **11**, 1596–1607 (1999).
- B. Vreman, B. Geurts, and H. Kuerten, "On the formulation of the dynamic mixed subgrid-scale model," *Phys. Fluids* **6**, 4057–4059 (1994).

- <sup>20</sup>B. Vreman, B. Geurts, and H. Kuerten, "Large-eddy simulation of the temporal mixing layer using the Clark model," *Theor. Comput. Fluid Dyn.* **8**, 309–324 (1996).
- <sup>21</sup>K. Horiuti, "A new dynamic two-parameter mixed model for large-eddy simulation," *Phys. Fluids* **9**, 3443–3464 (1997).
- <sup>22</sup>B. Vreman, B. Geurts, and H. Kuerten, "Large-eddy simulation of the turbulent mixing layer," *J. Fluid Mech.* **339**, 357–390 (1997).
- <sup>23</sup>G. Winckelmans, A. A. Wray, and O. V. Vasilyev, "Testing of a new mixed model for LES: The Leonard model supplemented by a dynamic Smagorinsky term," in *Proceedings of the Summer Program* (Center for Turbulence Research, Stanford University, 1998), pp. 308–329.
- <sup>24</sup>W. Rozema, H. J. Bae, P. Moin, and R. Verstappen, "Minimum-dissipation models for large-eddy simulation," *Phys. Fluids* **27**, 085107 (2015).
- <sup>25</sup>R. Verstappen, "When does eddy viscosity damp subfilter scales sufficiently?," *J. Sci. Comput.* **49**, 94–110 (2011).
- <sup>26</sup>J. M. J. Den Toonder and F. T. M. Nieuwstadt, "Reynolds number effects in a turbulent pipe flow for low to moderate  $Re$ ," *Phys. Fluids* **9**, 3398–3409 (1997).
- <sup>27</sup>P. R. Spalart, W.-H. Jou, M. Strelets, and S. R. Allmaras, "Comments on the feasibility of LES for wings, and on a hybrid RANS/LES approach," in *First AFOSR International Conference on DNS/LES* (Greyden Press, 1997), pp. 137–147.
- <sup>28</sup>U. Schumann, "Subgrid scale model for finite difference simulations flows in plane channels and annuli," *J. Comput. Phys.* **18**, 376–404 (1975).
- <sup>29</sup>G. P. Williams, "Numerical integration of the three-dimensional Navier-Stokes equations for incompressible flow," *J. Fluid Mech.* **37**, 727–750 (1969).
- <sup>30</sup>C. G. Speziale, "Galilean invariance of subgrid-scale stress models in the large-eddy simulation of turbulence," *J. Fluid Mech.* **156**, 55–62 (1985).
- <sup>31</sup>W. Rozema, "Low-dissipation methods and models for the simulation of turbulent subsonic flow: Theory and applications," Ph.D. thesis, University of Groningen, 2015.
- <sup>32</sup>N. V. Nikitin, F. Nicoud, B. Wasistho, K. D. Squires, and P. R. Spalart, "An approach to wall modeling in large-eddy simulations," *Phys. Fluids* **12**, 1629–1632 (2000).
- <sup>33</sup>F. Hamba, "A hybrid RANS/LES simulation of turbulent channel flow," *Theor. Comput. Fluid Dyn.* **16**, 387–403 (2003).
- <sup>34</sup>P. Cifani, J. G. M. Kuerten, and B. J. Geurts, "Highly scalable DNS solver for turbulent bubble-laden channel flow," *Comput. Fluids* **172**, 67–83 (2018).
- <sup>35</sup>R. W. C. P. Verstappen and A. E. P. Veldman, "Symmetry-preserving discretization of turbulent flow," *J. Comput. Phys.* **187**, 343–368 (2003).
- <sup>36</sup>N. J. Georgiadis, D. P. Rizzetta, and C. Fureby, "Large-eddy simulation: Current capabilities, recommended practices, and future research," *AIAA J.* **48**, 1772–1784 (2010).
- <sup>37</sup>H. Choi and P. Moin, "Grid-point requirements for large eddy simulation: Chapman's estimates revisited," *Phys. Fluids* **24**, 011702 (2012).
- <sup>38</sup>R. D. Moser, J. Kim, and N. N. Mansour, "Direct numerical simulation of turbulent channel flow up to  $Re_\tau = 590$ ," *Phys. Fluids* **11**, 943–945 (1999).
- <sup>39</sup>S. Hoyas and J. Jiménez, "Reynolds number effects on the Reynolds-stress budgets in turbulent channels," *Phys. Fluids* **20**, 101511 (2008).
- <sup>40</sup>G. S. Winckelmans, H. Jeanmart, and D. Carati, "On the comparison of turbulence intensities from large-eddy simulation with those from experiment or direct numerical simulation," *Phys. Fluids* **14**, 1809–1811 (2002).
- <sup>41</sup>M. H. Silvis, R. A. Remmerswaal, and R. Verstappen, "Physical consistency of subgrid-scale models for large-eddy simulation of incompressible turbulent flows," *Phys. Fluids* **29**, 015105 (2017).
- <sup>42</sup>R. A. Antonia, M. Teitel, J. Kim, and L. W. B. Browne, "Low-Reynolds-number effects in a fully developed turbulent channel flow," *J. Fluid Mech.* **236**, 579–605 (1992).
- <sup>43</sup>R. A. Antonia and J. Kim, "Low-Reynolds-number effects on near-wall turbulence," *J. Fluid Mech.* **276**, 61–80 (1994).