

HENRY

Hydraulic Engineering Repository

Ein Service der Bundesanstalt für Wasserbau

Conference Paper, Published Version

Hung, Wei-Chia; Chen, Yuan-Kang; Huang, Jyun-Jen; Chen, Fang-Cyong; Kuo, Chun-Ling; Chien, Chao-Chun; Wang, Carl; Chen, Yi-An; Chiu, Huan-Chin; Chun, Chang-Lee

Application of Multiple Sensors in Monitoring Land Subsidence in Central Taiwan

Zur Verfügung gestellt in Kooperation mit/Provided in Cooperation with:
Kuratorium für Forschung im Küsteningenieurwesen (KFKI)

Verfügbar unter/Available at: <https://hdl.handle.net/20.500.11970/108519>

Vorgeschlagene Zitierweise/Suggested citation:

Hung, Wei-Chia; Chen, Yuan-Kang; Huang, Jyun-Jen; Chen, Fang-Cyong; Kuo, Chun-Ling; Chien, Chao-Chun; Wang, Carl; Chen, Yi-An; Chiu, Huan-Chin; Chun, Chang-Lee (2016): Application of Multiple Sensors in Monitoring Land Subsidence in Central Taiwan. In: Yu, Pao-Shan; Lo, Wie-Cheng (Hg.): ICHE 2016. Proceedings of the 12th International Conference on Hydrosience & Engineering, November 6-10, 2016, Tainan, Taiwan. Tainan: NCKU.

Standardnutzungsbedingungen/Terms of Use:

Die Dokumente in HENRY stehen unter der Creative Commons Lizenz CC BY 4.0, sofern keine abweichenden Nutzungsbedingungen getroffen wurden. Damit ist sowohl die kommerzielle Nutzung als auch das Teilen, die Weiterbearbeitung und Speicherung erlaubt. Das Verwenden und das Bearbeiten stehen unter der Bedingung der Namensnennung. Im Einzelfall kann eine restriktivere Lizenz gelten; dann gelten abweichend von den obigen Nutzungsbedingungen die in der dort genannten Lizenz gewährten Nutzungsrechte.

Documents in HENRY are made available under the Creative Commons License CC BY 4.0, if no other license is applicable. Under CC BY 4.0 commercial use and sharing, remixing, transforming, and building upon the material of the work is permitted. In some cases a different, more restrictive license may apply; if applicable the terms of the restrictive license will be binding.

Verwertungsrechte: Alle Rechte vorbehalten

Application of Multiple Sensors in Monitoring Land Subsidence in Central Taiwan

Wei-Chia Hung¹, Yuan-Kang Cheng², Jyun-Jen Huang², Fang-Cyong Chen², Chun-Ling Kuo², Chao-Chun Chien², Carl Wang¹
 Yi-An Chen¹, Huan-Chin Chiu¹, Chun Chang-Lee¹

1. Green Environmental Engineering Consultant Co. LTD.
Hsinchu, Taiwan
2. Water Resources Agency, Ministry of Economic Affairs
Taipei, Taiwan

ABSTRACT

Over pumping of groundwater has resulted in a large-scaled land subsidence in Taiwan. The subsidence has already endangered the operation of Taiwan High Speed Rail (THSR). How to effectively monitor land subsidence become a major issue in Taiwan. In this paper, we would like to introduce the multiple-sensors monitoring system applied to study the extent of subsidence in central Taiwan and its mechanism, including GPS (Global Positioning System), PSI (Persistent Scatterer Interferometry), levelling, multi-layer compaction monitoring well, extensometer and piezometer. These sensors complement each other in spatial and temporal resolutions.

KEY WORDS: Land Subsidence, Global Positioning System, Persistent Scatterer Interferometry, Leveling, Multi-layer Compaction Monitoring Well.

INTRODUCTION

Due to continuous growth of the population and economy, more water resources are needed. The use of the underground water is inevitable when the surface water sources become insufficient. Inappropriate excessive exploitation of the underground water may result in land subsidence, which leads to land sinking and other disasters such as long-term water logging. The ocean water invades the water-bearing stratum and results in soil salinization. The utilization value of the soil may be degraded, and it will be difficult to introduce industries and the vital functions are downgraded. The underground water resources will no longer be utilized. These problems will result in the increase of the social cost. The above cases can be found in Table 1.

Taiwan is located in the subtropical monsoon region, and the climate of Taiwan is oceanic tropical and subtropical. The rainfall is plentiful; the annual rainfall reaches up to 2500 mm, 2.5 times the average world rainfall. However, Taiwan is a country suffering from severe dehydration due to various reasons. Taiwan is also highly populated. On this island, mountains are high and torrents are swift; therefore, most of the rainfall rapidly flows into the ocean. Taiwan strives for high economic development and the total water consumption rises continuously. As a result, underground water has become a major water source. Excessive exploitation of the underground water is common in the country areas. Fig. 1(a) shows that the light blue area is the significant subsidence area in the past. The deep blue area is the

significant subsidence area in 2015. The most serious subsidence area is Choushui River Alluvial Fan(CRAF), the maximum settlement rate is around 7.1 cm per year in 2015. In particular, THSR passes through the subsidence center. Land subsidence will result in a major safety concern about THSR. How to effectively monitor subsidence has become a major issue in Taiwan.

CRAF is the most important agricultural area in western, central Taiwan, with elevations ranging from 0 to 100 m. CRAF covers a total area of 2,000 km² and is bounded by Wu River (north), Pekang Creek (south), Douliu Mound (east) and Taiwan Strait (west). Fig. 1(b) shows the geographical location of CRAF, which is centered at 24°N and 120.5°E. Choshui River is the longest river in Taiwan. The sediments in CRAF originate from rock formations in the upstream watershed of Choshui River, including slate, metamorphic quartzite, shale, sandstone, and mudstone (Fig. 2). Sediment loads composed of weathered rock fragments of different sizes gradually settled on the riverbed, floodplain, and seabed to form CRAF. The head of CRAF contains mainly gravel and coarse sand, and the toe is a delta covered by fine sand. Because the upstream watershed area of Choshui River is wide and infiltrative, surface water in the head of the fan will penetrate the ground to recharge the sub-surface aquifers.

Table 1. A list of world countries experiencing subsidence problems.

Area	Maxima cumulative subsidence (m)	Period	Reference
China	3.0	1921-2006	Gong and Yang (2008)
Mexico	10	2007-2011	Chaussard et al. (2014)
Spain	0.15	1993-2007	Tomás et al. (2010)
Taiwan	0.14	2006-2008	Hung et al. (2011)
CA U.S.	9	1925-1977	Galloway and Sneed (2013)
Australia	0.35	2006-2011	Ng et al. (2015)
Italy	0.5	1897-1937	Tosi et al. (2007)
Japan	0.4	2011-2014	ElGharbawi and Tamura (2014)

Due to the lack of surface water and the flat terrain that prohibits dam construction, the water for civilian and agricultural use in CRAF comes

largely from underground. According to the statistics of Water Resource Agency of Taiwan, the extracted groundwater in Yunlin is 94 metric tons a day, totaling 305 million tons a year. Withdrawing groundwater without recharge here will decrease the water level and consequently reduce the porous pressure and increase the effective stress, inevitably leading to land subsidence. The Taiwan High Speed Rail (THSR) passes through Yunlin, where subsidence poses a serious threat to its operation (Hung et al., 2011)

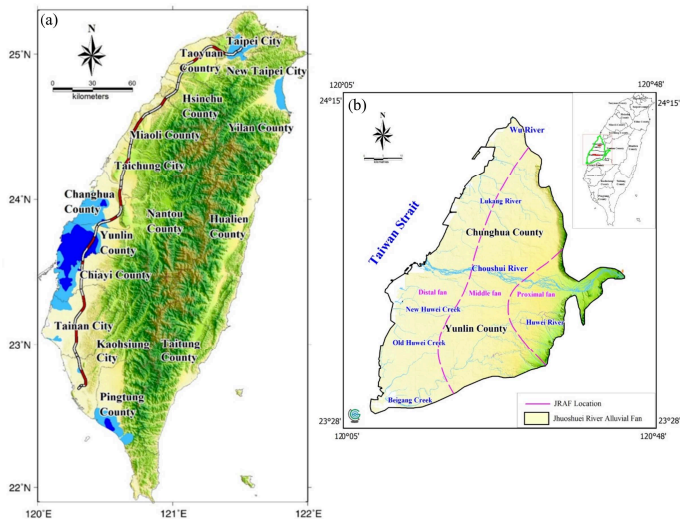


Fig. 1 (a) The land subsidence in Taiwan. (b) Geographical location of Choushui River Alluvial Fan (CRAF).

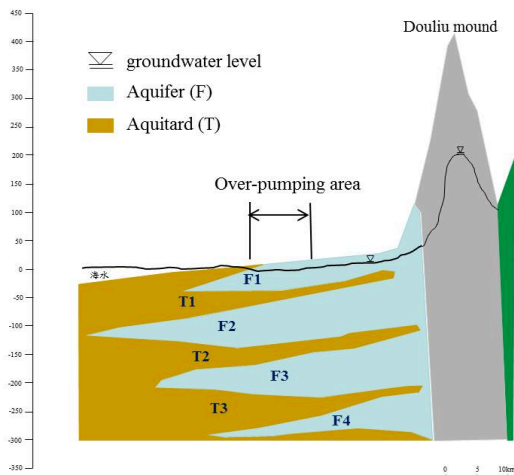


Fig. 2 Geological settings of CRAF (modified from Central Geological Survey (CGS) of Taiwan, <http://www.moeacgs.gov.tw/>).

SYNERGY OF MONITORING SENSOR

In order to further investigate the mechanism of land subsidence, the multi-sensors monitoring system including InSAR, GPS, leveling, multi-layer compaction monitoring well and Piezometer are used to monitor land subsidence in CRAF. Fig. 3 is the sample picture of the multi-sensor monitoring system. Fig. 4 shows the distributions of leveling networks, Continuously Operating Reference Stations (CORS) and multi-layer compaction monitoring well used in this paper.

Table 2 summarizes the resolutions and accuracies of these sensors. With these sensors, we may inter-compare different results and complement each other in the spatial and temporal resolutions. With a good spatial correlation and proper environmental corrections, TCPInSAR with ALOS-PALSAR images will deliver areal displacements accurate to few cm with a 25 m spatial resolution at a time scale equivalent to the satellite repeat period. At a continuous GPS station, the accuracy of vertical changes can be determined to 1 cm on a daily solution. With a precision level and good correction models, leveling can deliver point-wise vertical displacements accurate to few mm along leveling routes. In this study, the leveling and InSAR results used to detect the land subsidence area and calculate land subsidence rate in CRAF. In the subsidence center, the CORS and multi-layer compaction monitoring well are used to analyze the mechanism of land subsidence.

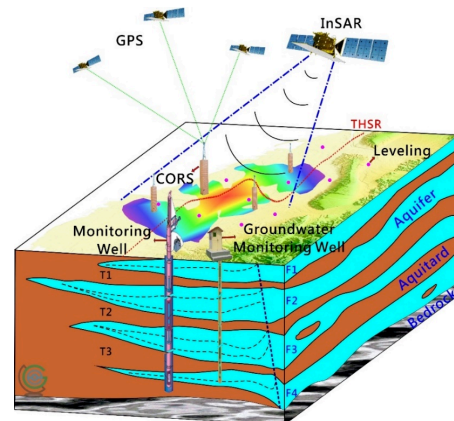


Fig. 3 Sample pictures of Multi-sensor monitoring system.

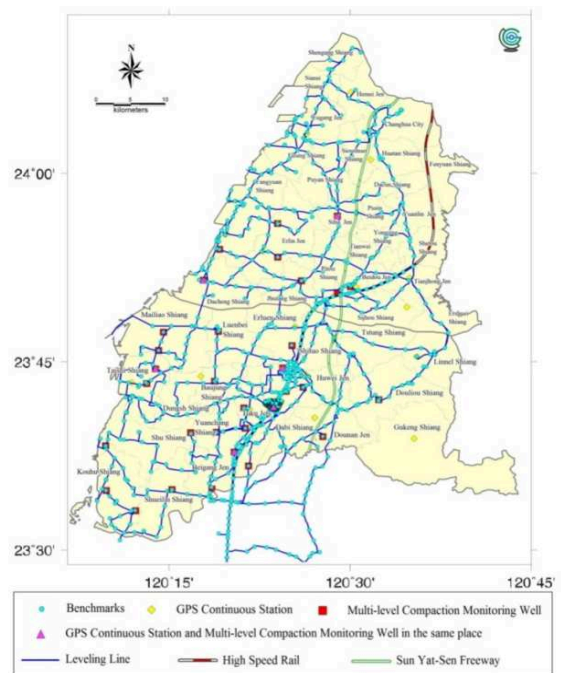


Fig. 4 Distributions of leveling benchmarks, monitoring wells and GPS stations in CRAF, the names of townships in Yunlin County and Changhua County are shown here.

Table 2. Multi-sensor comparison table.

	Leveling	Continuous GPS	Monitoring Well	InSAR
Spatial Resolution	1.5- 2 km	10- 15 km	5 - 10 km	25m
Survey frequency	1 year	1 day	1 month	35day (C band)
Vertical Accuracy	0.5 - 1 cm	0.5 - 1 cm	0.1- 0.5 cm	0.5 - 1cm

MONITORING RESULT OF CRAF

Leveling

In addition to the THSR leveling network, a leveling network west of THSR was established by Water Resource Agency (WRA) of Taiwan to monitor surface subsidence in Yunlin County. The length of the leveling network in CRAF is 830 km. The accuracy requirement for the leveling is a 3 mm misclosure in any double run, where K is the distance between two neighboring benchmarks in km. At each leveling setup, the distances to the foresight and backsight were measured by an electronic distance measurement (EDM) device to ensure the two are identical. Corrections for collimation error, atmospheric refraction and the earth's curvature were applied to the differential heights (Wolf and Ghilani, 2005). Because the cumulative differences between foresight and backsight distances do not exceed 10 m, residual collimation errors, the earth's curvature and atmospheric effects were negligible.

The corrected height differences from leveling were least-squares adjusted to determine the heights. To ensure the quality of least-squares solution, we screen the observables for outliers using Baada's data snooping technique (Koch, 1987; Caspary, 1988). First the standardized residual of an observable is computed as

$$W_i = \frac{V_i}{\delta V_i} \quad (1)$$

where δV_i is the standard error of residual, which is the squared root of a diagonal element of matrix \mathbf{Q}_v as follows

$$\mathbf{Q}_v = \mathbf{P}^{-1} - \mathbf{A}(\mathbf{A}^T \mathbf{P} \mathbf{A})^{-1} \mathbf{A}^T \quad (2)$$

With a significance level of 0.01, the critical value for data snooping in (1) is 3.3. That is, if $W_i > 3.3$, the observable (height difference) associated with is regarded as an outlier and is removed from the input to the adjustment. A second adjustment is then performed without these outliers. Because all misclosures are smaller than 3 mm and all raw data are carefully inspected, we did not find any outliers in the data from the three campaigns.

The cumulate subsidence is defined as change of height in 1992-2015. Contours of subsidence are computed using Kriging and are shown in Fig. 5. In the past two decades, the maximum cumulative subsidence is over 160 cm and shows a basin-like subsidence pattern centering at Huwei, Tuku, and Yuanchang Township. The serious subsidence areas in central Youlin County, i.e. Tuku, Huwei and Yuanchang township. THSR passes through series subsidence area, and land subsidence will result in a major safety concern.

Continuously Operating Reference Stations

The used GPS network, presented in the Fig. 6(a), in this study consists of 36 GPS stations belong to the governmental agencies in Taiwan including WRA, CGS, Ministry of Interior, Central Weather Bureau, and Industry Technology Research Institute. The Bernese V5.0 developed by Bern University was adopted to obtain the change of horizontal and vertical coordinates via the automatic data processing strategy. In addition to the used CORS, the non-continuously campaign GPS surveying with the fixed-centering, fixed-leveling, and fixed-heighting GPS Monumentation (Patent Number: 182781) was also utilized in this investigation on the observation of land surface change. The GPS pillar has been conformed to National Geodetic Survey, which indicate the fixed-centering, fixed-leveling, and fixed-heighting are necessary for the campaign GPS surveying with 2 cm accuracy campaign (Zilkoski et al., 1997).

According to the results from the GPS CORSs observed from April 2010 to April 2015, presented in Fig. 6(b), the region along the THSR runs through the main subsidence area in the Yunlin County, especially around the Huwei Township (GFES GPS station located), Tuku Township (TKJS GPS station located), and Yuanchang Township (KTES GPS station located). The rate of subsidence can reach 6 cm per year. The agreement between the results from GPS CORS and Leveling survey can be obtained. Because the advantage of continually observing from GPS CORS, the deformation of land surface caused by the seasonal variation and the change of groundwater in wet/dry season can be detected via the Principal Component Analysis (PCA) strategy.

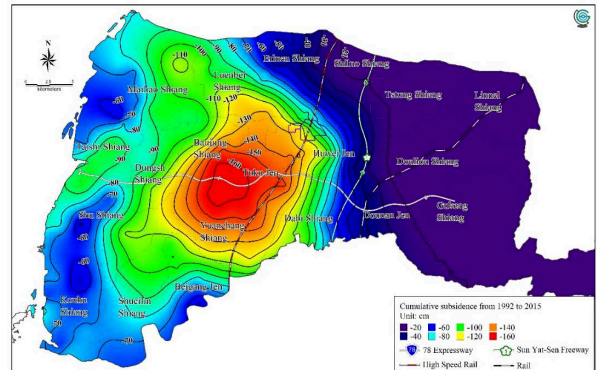


Fig. 5 Cumulative subsidence derive from leveling over 1992-2015

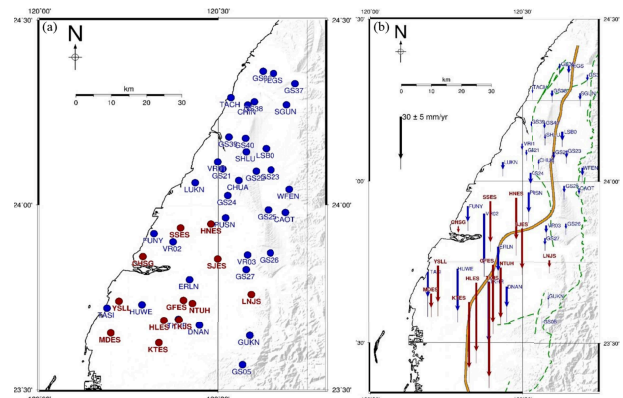


Fig. 6 (a) Distributions of continuous GPS stations in CRAF. (b) Vertical displacement rate from GPS over April 2010- April 2011.

Multi-layer compaction monitoring well

As mentioned previously, the subsurface deposits constituted the aquifer system in CRAF are not only heterogeneous but also with different hydraulic and mechanical properties in each layer. In order to well understand the mechanism of subsidence, the multi-layer compaction monitoring well technique is applied to measure compaction at different stratigraphic intervals within the aquifer system (Fig. 7). The basic principle of multi-layer compaction monitoring well is to measure the depths of magnetic rings precisely and to analyze the depth differences of all the rings. The depth difference of two adjacent rings indicates the deformation of the stratigraphic section between the two rings. Hence the compaction amount of each layer to the total subsidence can be determined. In general, 20 to 26 magnetic rings are anchored in each well based on the different stratigraphic types, and the depths of the rings are measured at a one-month interval. Moreover, the advantage of multi-layer compaction monitoring well is the capability of monitoring multi-layer compaction with high accuracy (about 1 mm) and stability (Hung et. al., 2012). Currently there are 31 multi-layer compaction monitoring wells installed in CRAF (Fig. 4).

Fig. 8 shows the cumulative compactions at the TKJS monitoring well which is located at the most serious subsidence area along the rail of THSR from 2004 to 2015. As the result of the aquifer system which contains highly compressible alternations of sand and clay, the majority and the secondary compaction occur at depths deeper than 200 m and 50 to 200 m, respectively. Moreover, based on the compactions at different strata, the monitoring well result can illuminate the main source of water pumping as well. For example, if the major compaction occurs at a deeper stratum, the municipal and industrial water are the main sources of water use. On the contrary, if the major compaction occurs at a shallow stratum, the agricultural water is the main source of water use. Therefore, the compaction monitoring well is not only to understand the strain source effectively but also to mitigate the land subsidence problem usefully.

Areal subsidence by Multi Temporal InSAR, MT-InSAR

In the past decades, synthetic aperture radar interferometry (InSAR) has been proved to be a powerful and effective geodetic technique, with high spatial resolution, sub-centimeter accuracy and useful observation cadence, for measuring surface deformation. Currently, there are three categories of MT-InSAR approaches used to monitor land subsidence in Taiwan, such as persistent scatterers InSAR (PSI) (Hooper et al., 2004), Stanford method for persistent scatterers/multi-temporal InSAR (StaMPS/MTI) (Hooper, 2008) and temporarily coherence point InSAR (TCPInSAR) (Zhang et al., 2011).

In this study, we utilize TCPInSAR approach to measure the ground deformation in CRAF from 2007 to 2011 and to compare the TCPInSAR result with precise leveling data. From the comparison result, the TCP pixel density over CRAF is 346 pixels/km² which is much higher than the leveling benchmarks (0.2 points/km²). Moreover, the vertical displacements inferred from TCPInSAR show good consistency with the leveling result to 10 mm/year (RMS), and provides a higher spatial resolution of subsidence than the latter. Besides, we also develop a data fusion method that considers the high-precision leveling data as a smoothed correction to the PSI measurement (Hung et al., 2011). Fig. 9 shows the vertical displacement rate after data fusion processing during the period between 2007 and 2011 in CRAF, and the deformation pattern is quite

consistent with the leveling result. The major subsidence areas in CRAF are located in western areas of Sun Yat-Sen Freeway, e.g. middle fan and distal fan areas (see Fig. 2). The combined displacement field is more representative of overall deformation characteristics than the TCPInSAR-only or leveling-only field, and it is better suited for the assessment of the impact of subsidence over CRAF.

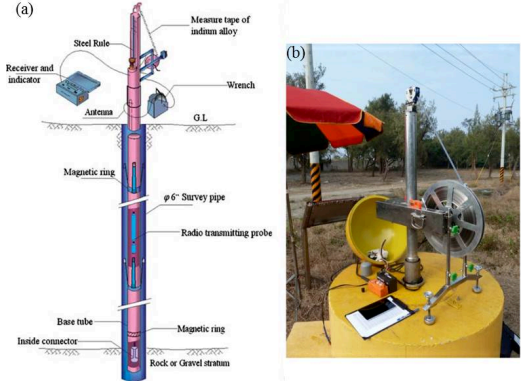


Fig. 7 Sample pictures of multi-layer compaction monitoring well.

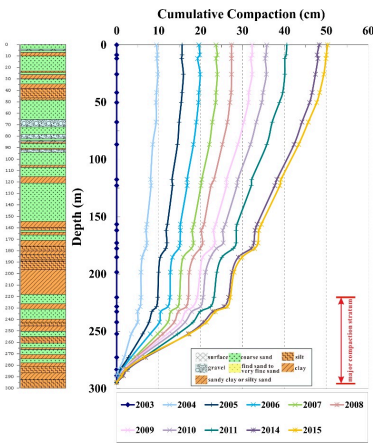


Fig. 8 Layers of sediments and cumulative compactions from 2004 to 2015 at TKJS.

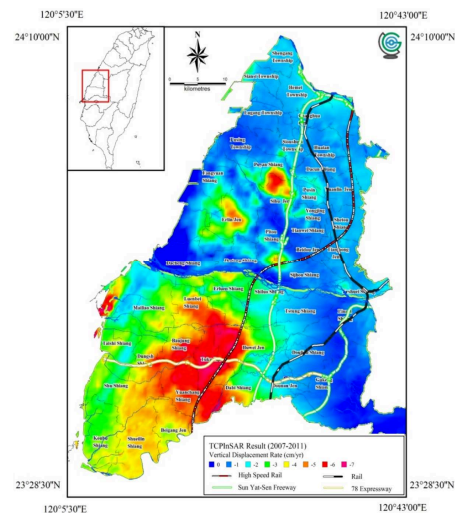


Fig. 9 Vertical displacement rate from TCPInSAR over 2007 - 2011.



CONCLUSIONS

The security of country's territory has been affected by the long term land subsidence. The multi-sensors system developed by Taiwanese government including GPS, PSI, Leveling, monitoring well, and groundwater well can monitor the land subsidence from space, ground, and underground. Not only does it control the deformation of land surface efficiently and understand the magnitude and major source of stress for the shallow and deeper land, but also goes with policy of industry. The rate and area of land subsidence can be reduced efficiently. In the future, monitoring action will be conducted by extending the area and executing automatically. 400 GPS CORSSs around Taiwan will be included for the understanding of the variation of three dimensions. Meanwhile, combining with airborne PSI, GPS, and data fusion technology, the affected range and change of land subsidence can be controlled quickly and precisely.

ACKNOWLEDGEMENTS

This study is supported by Water Resource Agency, Dept of Economics, Taiwan, R.O.C.

REFERENCES

- Caspary, W.F.(1988). Concepts of Network Adjustment and Deformation Analysis. Monograph 11, Scholl of Surveying, University of New South Wales, Kensington, NSW, Australia, 183.
- Chaussard, E., S. Wdowinski, E. Cabral-Cano, and F. Amelung (2014), Land subsidence in central Mexico detected by ALOS InSAR time-series, *Remote Sens. Environ.*, 140, 94-106.
- ElGharbawi, T., and Tamura, M. (2014), Measuring deformations using SAR interferometry and GPS observables with geodetic accuracy: Application to Tokyo, Japan, *ISPRS J. Photogramm. Remote Sens.*, 88, 156-165.
- Galloway, D.L., and M. Sneed (2013), Analysis and simulation of regional subsidence accompanying groundwater abstraction and compaction of susceptible aquifer systems in the USA, *Bol. Soc. Geol. Mex.*, 65, 123-134.
- Gong, S.L., and Yang, S.L. (2008). Effect of land subsidence on urban flood prevention engineering in Shanghai. *The Key Magazine of China Technology*, 39(6), 1-20.
- Koch, K.R.(1987). Parameter Estimation and Hypothesis Testing in Linear Models. Springer, Berlin, 378.
- Hooper, A. (2008). A multi-temporal InSAR method incorporating both persistent scatterer and small baseline approaches. *Geophysical research letters*, 35(16).
- Hooper, A., Zebker, H., Segall, P., & Kampes, B. (2004). A new method for measuring deformation on volcanoes and other natural terrains using InSAR persistent scatterers. *Geophysical research letters*, 31(23).
- Hung, W.C., Hwang, C., Chen, Y.A., Chang, C.-P., Yen, J.-Y., Hooper, A., & Yang, C.-Y. (2011). Surface deformation from persistent scatterers SAR interferometry and fusion with leveling data: A case study over the Choushui River Alluvial Fan, Taiwan. *Remote Sensing of Environment*, 115(4), 957-967.
- Hung, W.-C., Hwang, C., Liou, J.-C., Lin, Y.-S., & Yang, H.-L. (2012). Modeling aquifer-system compaction and predicting land subsidence in central Taiwan. *Engineering Geology*, 147, 78-90.
- Ng, A. H. M., L. Ge, and X. Li (2015), Assessments of land subsidence in the Gippsland Basin of Australia using ALOS PALSAR data, *Remote Sens. Environ.*, 159, 86-101.
- Tosi, L., Teatini, P., Carbognin, L., & Frankenfield, J. (2007). A new project to monitor land subsidence in the northern Venice coastland (Italy). *Environmental geology*, 52(5), 889-898.
- Tomás, R., G. Herrera, J. Delgado, J.M. Lopez-Sanchez, J.J. Mallorquí, J. Mulas (2010), A ground subsidence study based on DInSAR data: Calibration of soil parameters and subsidence prediction in Murcia City (Spain), *Environ. Geol.*, 111, 19-30
- Wolf, P.R., & Ghilani, C.D. (2005). *Elementary surveying: an introduction to geomatics*: Pearson Prentice Hall.
- Zhang, L., Ding, X., & Lu, Z. (2011). Ground settlement monitoring based on temporarily coherent points between two SAR acquisitions. *ISPRS Journal of Photogrammetry and Remote Sensing*, 66(1), 146-152.
- Zilkoski, D.B., D'Onofrio, J.D., & Frakes, S.J. (1997). Guidelines for Establishing GPS-derived Ellipsoid Heights (standards, 2 Cm and 5 Cm), Version 4.3: US Department of Commerce, National Oceanic and Atmospheric Administration, National Ocean Service, National Geodetic Survey.