

## Test of a PANDA Barrel DIRC Prototype in a Particle Beam at CERN\*

A. Gerhardt<sup>1</sup>, K. Götzen<sup>1</sup>, G. Kalicy<sup>†1,2</sup>, D. Lehmann<sup>1</sup>, M. Patsyuk<sup>1,2</sup>, K. Peters<sup>1,2</sup>, G. Schepers<sup>1</sup>,  
C. Schwarz<sup>1</sup>, J. Schwiening<sup>1</sup>, and M. Zühlsdorf<sup>†1,2</sup>

<sup>1</sup>GSI, Darmstadt, Germany; <sup>2</sup>Goethe Universität Frankfurt, Germany

Particle identification (PID) will play a crucial role in reaching the physics goals of the PANDA experiment at FAIR. The charged PID in the barrel region of the target spectrometer (polar angles between 22° and 140°) needs a thin detector operating in a 1 T magnetic field, capable of pion-kaon separation with more than three standard deviations for momenta between 0.5 and 3.5 GeV/c. A Ring Imaging Cherenkov detector using the DIRC (Detection of Internally Reflected Cherenkov light) principle is an excellent candidate to match to those requirements.

The PANDA Barrel DIRC design [1] is based on the successful *BABAR* DIRC [2] detector with several important improvements, such as focusing optics, fast timing, and a compact expansion region. Several key aspects of the current design were implemented in a prototype and tested in the summer of 2012 in a hadronic particle beam at CERN.

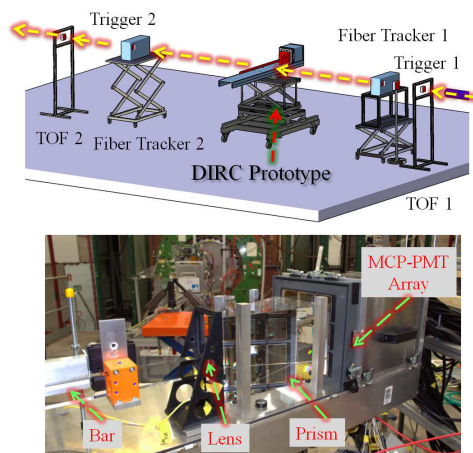


Figure 1: Schematic (top) and photo of the prototype setup.

A schematic of the setup and a photo of the prototype components are shown in Figure 1. Most of the measurements were performed with a synthetic fused silica bar ( $17 \times 35 \times 1225 \text{ mm}^3$ ) with a focusing lens attached to one end and a mirror attached to the other end, placed into a light-tight container. A large synthetic fused silica prism with a depth of 30 cm, located about 2 mm from the lens, served as expansion volume. An array of 9 Photonic XP85112 Micro-Channel Plate Photomultiplier Tubes (MCP-PMTs) was coupled with optical grease to the back surface of the prism. The data acquisition<sup>1</sup> for 896 detec-

\*Work supported by HGS-HiRe, HIC for FAIR, EU FP6 grant #515873, and EU FP7 grant #227431.

<sup>†</sup>G.Kalicy@gsi.de

<sup>1</sup>We would like to thank J. Michel, M. Palka, and M. Traxler for their help with the data acquisition system.

tor channels was performed using the HADES trigger and readout board (TRB) [3] with the TOF add-on, combining the NINO chip and CERN HPTDC to provide timing with a resolution of 98 ps per count and pulse height information from charge-to-width.

The setup was placed into the mixed hadron beam at the T9 area of the CERN PS with momenta adjustable between 1.5 and 10 GeV/c. The trigger was provided by two scintillator counters. Two tracking stations using scintillating fibers measured the beam direction. A time-of-flight system provided pion/proton tagging up to 6 GeV/c momentum. A total of about 220M triggers were recorded in several configurations. Spherical and cylindrical focusing lenses with and without anti-reflective coating were tested in combination with bars produced from different manufacturers, including a bar made of acrylic glass and a 17 cm-wide radiator plate made from synthetic fused silica as a possible alternative to the narrow bar geometry. The polar angle between the particle beam and the bar was varied between 20° and 156° and the interception point between beam and bar was adjusted by some 80 cm along the long bar axis. Figure 2 shows the distribution of hits per MCP-PMT pixel for a 124° polar angle. The overlapping ring segments, corresponding to reflections from the top and bottom surfaces of the prism, are consistent with the expected Cherenkov ring image for 10 GeV/c pions, calculated from simulation (shown as points). Detailed analysis of the data set, including the determination of the Cherenkov angle resolution for each prototype and beam configuration, is ongoing.

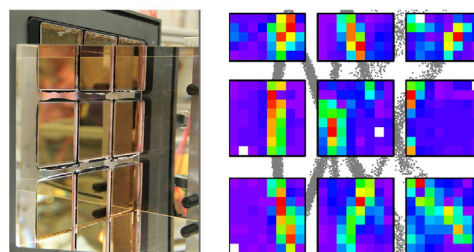


Figure 2: Photo of the prism and MCP-PMT array (left) and example of the observed Cherenkov hit pattern (right).

### References

- [1] J. Schwiening et al., Nucl. Instr. and Meth. Phys. Res. Sect. A 639 (2011) 315.
- [2] I. Adam et al., Nucl. Instr. and Meth. Phys. Res. Sect. A 538 (2005) 281.
- [3] I. Fröhlich, et al., IEEE Trans. Nucl. Sci. 55 59 (2008).