



## GANIL status report

L. Bex

► **To cite this version:**

L. Bex. GANIL status report. EPAC 90 - Second European Particle Accelerator Conference, Jun 1990, Nice, France. pp.428-430, 1990. <in2p3-00664913>

**HAL Id: in2p3-00664913**

**<http://hal.in2p3.fr/in2p3-00664913>**

Submitted on 31 Jan 2012

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

**GANIL STATUS REPORT**  
GANIL GROUP  
(Presented by L. Bex)

GANIL, BP 5027, 14021 Caen Cedex - France

**Abstract :** GANIL commenced operation in 1983 and continuous progress has been made since then in improving its performance. Most recently, the project to increase the maximum energy (O.A.E. - Opération Augmentation d' Energie) was implemented during a shutdown from January to June 1989. The medium-energy beam facility (S.M.E. - Sortie Moyenne Energie) was built at the same time.

The results after a year of operation are presented. Very heavy ions (Pb, U) are now accelerated and the improvement of the injector cyclotron [1] combined with the installation of the new source (ECR3) have resulted in an increase of the beam intensity.

New projects under development are described.

New equipment has been installed in the experimental area and the medium-energy beam facility has been in operation since the end of 1989.

Operation Statistics

From 1983 to the end of 1989

The last GANIL status report was presented at the BERLIN Conference in May 1989 [2]. The distribution of the running time from January 1983 to December 1989 is given in figure 1 ; the total running time of 30600 hours has been shared between :

- Physics and industrial applications 21 300 h (70%)
- Beam setting up 6 000 h (19%)
- Machine studies 3 300 h (11%)

Of the total of 21 300 h devoted to physics and industrial applications, 17 200 h have been effectively used on target, 3 450 h are accounted for by equipment failures and beam re-tuning and 650 h are accounted for by maintenance.

During the six months operation in 1989 considerable time was devoted to machine studies as may be seen in figure 1 ; this was due to the need to establish the new parameters of the machine. The operational efficiency for physics was 90.9% in 1989 (Equipment failures : 5.2% - Beam re-tuning 3.9%), nearly the same as for the previous two years.

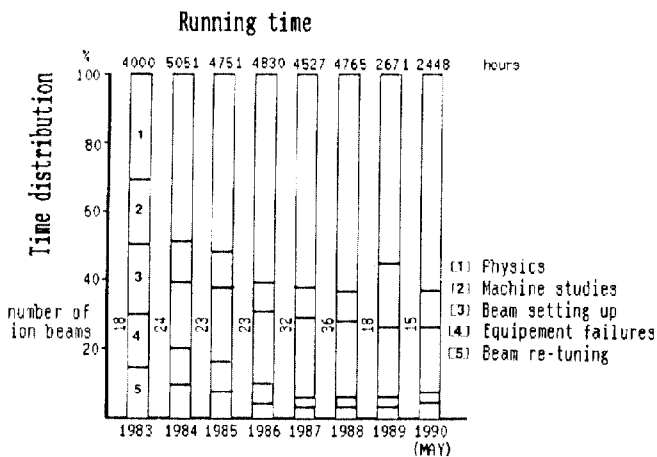


Fig. 1 : Seven years of operation

From July 1989 to June 1990 (after O.A.E. upgrading)

Owing to the ability of the ECR source to produce heavy ion beams of several microamperes with a charge to mass ratio twice as large as that of the PIG

source, the O.A.E. modification became possible and was completed in July 1989. Figure 2 shows the new energy range of the accelerator which has been expanded for ions heavier than Ar.


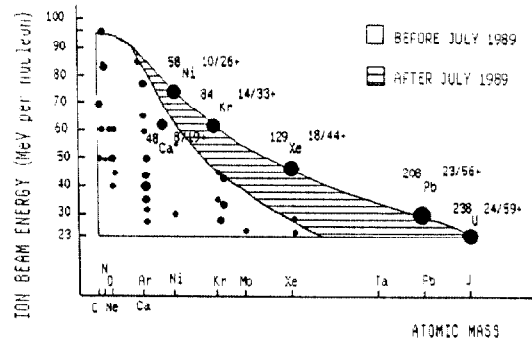


Fig. 2 : New energy range

The list of beams accelerated in the past year is given in table 1 with their characteristics. In addition to the energy increase, an intensity upgrade of a factor of ten is obtained for Kr and Xe. For light ion beams, the intensity is voluntarily reduced according to the radiation level permissible.

The beam time devoted to the heavy elements Kr, Xe and Pb now occupies 63% of the total beam time (figure 3). In the same figure is shown the beam time distributed among physics and the other items.

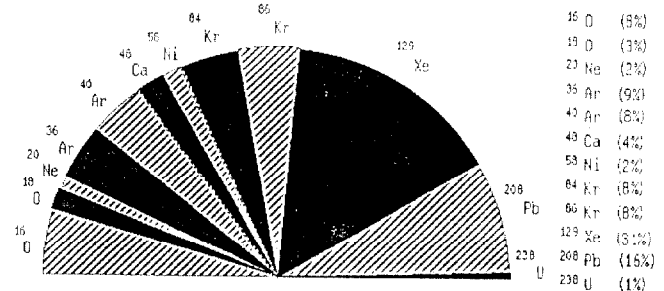

TIME DISTRIBUTION AS A FUNCTION OF THE ACCELERATED ELEMENTS (from July 1989 to June 1990)

TIME DISTRIBUTION OF THE MACHINE OPERATION

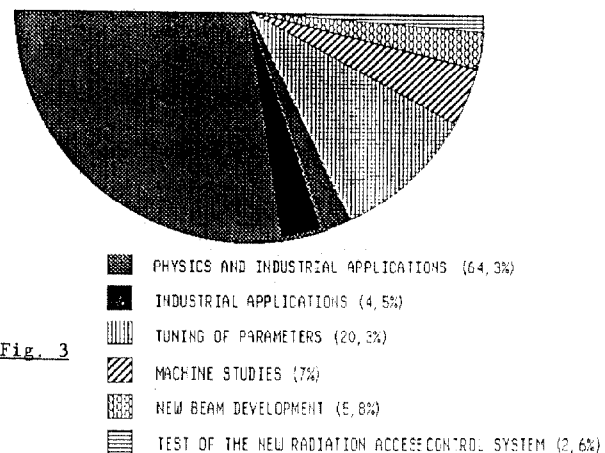


Fig. 3

Table I : ION BEAMS ACCELERATED AFTER THE OAE MODIFICATION (from July 89 to June 90)

ION/M	Charge state Before and after stripping	RF Frequency (MHz)	Maximum energy (MeV per nucleon)	Maximum intensity on target (5) (measured)		Beam characteristics (measured)		
				pps ( $10^{11}$ )	enA	$\pm \Delta W/W$ half height ( $10^{-3}$ )	Bunch timing half height ns	Intensity enA
O 16	3/8	11.76	70	11.7	1500			
O 16	4/8	13.37	95	11.7	1500		0.5	130
(1)O 18	3/8	10.10	50	11.7	1500			
Ne 20	3/10	9.893	48	21.87	3500	0.32		
(1)Ar 36	5/17	9.31	42	3.67	1000	0.50		
Ar 36	9/18	13.45	95	1.39	400		0.26	10
Ar 40	7/17	11.77	70	3.67	1000	0.79	0.5	340
(2)Ca 48	8/19	11.00	60.3	2.78	800		0.3	360
Ni 58	10/26	11.95	72.5	1.68	700			
(3)Kr 84	14/33	11.00	60	2.8	1500	0.59	0.6	900
(1)Kr 86	14/34	11.00	60	1.10	600			
Xe 129	14/37	7.55	27	0.42	250			
Xe 129	20/44	9.40	42.8	0.99	700			
(2)Xe 129	18/44	9.52	44	1.13	800	0.90	0.2	18
(4)Pb 208	23/56	7.82	29	0.050	45	0.61	< 1.9	30
(4)U 238	24/59	7.13	24	0.0068	6.4		< 1.7	5

(1) enriched 99%; (2) enriched 70%; (3) enriched 90%; (4) natural

(5) for light ion beams, the intensity is voluntarily reduced according to the radiation level

#### Medium-Energy Beam Facility (S.M.E.) [3]

Since the end of 1989, an unused charge state of the stripped beam can be diverted down a new beam line and into a new experiment room dedicated to atomic and solid state physics. Ions from carbon to uranium are now available in an energy range from 13.8 down to 3.7 MeV/nucleon with a beam emittance of  $10 \pi$  mm.mrad. From December 1989 to May 1990 approximately 800 hours of beam have been delivered consisting of  $O^{7+}$ ,  $Ar^{16+}$ ,  $^{48}Ca^{18+}$ ,  $Kr^{32+}$ ,  $Xe^{42+}$  and  $Pb^{53+}$ .

#### Improvements

##### New Radiation Safety Control System

The old system proved too rigid to take into account new operational modes of the accelerator (for instance : S.M.E.). Hence a new control system named UGSII (Unité de Gestion des Sécurités), which is more flexible and evolutive has been installed and has been working satisfactorily since February 1990.

##### Computer Control System Renewal [4]

This control system is being renewed to meet the increasing demands of the accelerator operation. The new system is planned to be operational by the end of 1992. It is composed of distributed powerful processors (VAX6410, microVAX 3800) federated through Ethernet and flexible network-wide database access, 68K, VME standard front-end microprocessors, enhanced color graphic tools and workstation based operator interface.

##### Computerised System for the Survey of Cryogenic Pumps in the SSC2 (Separated Sector Cyclotron N°2) Vacuum Chamber

In order to determine the nature of the residual gas, the different partial pressures are measured with a mass spectrometer in the range of 1 to 200 AMU. This spectrometer has been interfaced with a computer located in the control room and is used to detect leaks or pumping malfunction.

##### Beam Pulse Suppressor

A bunch of ions corresponding to a single RF period can be selected by pulsing the voltage on two

pairs of parallel plates between the injector cyclotron and SSC1. To feed these electrodes a double 2500 V pulse amplifier has been designed with a rise time of 50 ns, a duty cycle of 10% and a repetition rate up to 1.4 MHz. The previous duty cycle was 1.4% and it was possible to select only one bunch in 70 ; the new maximum rate is now one in 10.

##### Pepperpot for Beam Intensity Reduction with the Same Emittance

Two carbon plates with a transparency respectively of 5% and 25% have been placed in the beam line between the first two cyclotrons.

##### Beam Profile Monitor Protection

These monitors are made with two gold-plated tungsten multiwire planes. The main problem is that the wires are fragile and are often destroyed by melting if the beam power is too high and by sputtering. When a profile monitor is introduced in the beam, the beam intensity modulator automatically reduces the beam intensity down to the permissible level.

##### New ECR Ion Source

The accelerator resumed operation in June 1989 with the new source ECR3-CAPRICE. Initially developed by B. Jacquot and R. Geller at GRENOBLE, this source has been built at GANIL. CAPRICE is a compact 10 GHz source with an electrical consumption of 40 kW for coils placed in an iron yoke and can produce metallic and gaseous ions with less electric power consumption, better emittances and higher beam intensities than the previous one (ECR1).

##### Machine Studies

##### Charge State Distribution after Stripping

A stripping carbon foil is placed in the beam line between the two SSC. The energy spread  $\Delta W/W$  generated by a carbon foil is a function of the thickness ; it should not be excessive, otherwise a part of the beam would be lost in the SSC2 injection. Therefore, the thickness used to obtain the maximum yield is less than the "equilibrium thickness". The charge state distribution of Ni, Kr, Xe [5], Pb and U with different carbon foil thicknesses have been measured.

