



Bowen, L. L., Celik, A., Zhou, B., Westin, M. F., & Azarpeyvand, M. (2022). The effect of leading edge porosity on airfoil turbulence interaction noise. *Journal of the Acoustical Society of America*, 152(3), 1437-1448. <https://doi.org/10.1121/10.0013703>

Peer reviewed version

Link to published version (if available):  
[10.1121/10.0013703](https://doi.org/10.1121/10.0013703)

[Link to publication record in Explore Bristol Research](#)  
PDF-document

This is the final published version of the article (version of record). It first appeared online via ASA at <https://doi.org/10.1121/10.0013703>. Please refer to any applicable terms of use of the publisher.

## University of Bristol - Explore Bristol Research

### General rights

This document is made available in accordance with publisher policies. Please cite only the published version using the reference above. Full terms of use are available: <http://www.bristol.ac.uk/red/research-policy/pure/user-guides/ebr-terms/>

## The effect of leading edge porosity on airfoil turbulence interaction noise

Luke Bowen,<sup>1, a)</sup> Alper Celik,<sup>2</sup> Beckett Zhou,<sup>1</sup> Michelle Fernandino Westin,<sup>3</sup> and Mahdi Azarpeyvand<sup>1</sup>

<sup>1</sup>*Faculty of Engineering, University of Bristol, Bristol, BS8 1TR,  
United Kingdom*

<sup>2</sup>*Aerospace Engineering, Swansea University, Swansea SA1 8EN,  
United Kingdom*

<sup>3</sup>*Embraer S.A., São José Dos Campos, SP 12227-901,  
Brazil*

(Dated: 6 September 2022)

1 Airfoil-turbulence interaction noise and the flow-field up to and over the porous lead-  
2 ing edge is experimentally studied. The porous leading edges were of the same base  
3 Triply Periodic Minimal Surface structure with varying porosity to understand how  
4 the porosity, permeability and pore size affect the generated turbulence interaction  
5 noise. The turbulent flow was generated by the means of a passive turbulence grid  
6 which does not affect the normal background noise of the wind tunnel. Far-field  
7 noise results were obtained from a polar microphone array to assess the directivity  
8 of the sound as well as the narrowband frequency contributions. Far-field noise re-  
9 sults demonstrate that increasing porosity reduces the turbulence interaction noise  
10 over low-to-mid frequencies, with a penalty of a high-frequency noise increase. Flow  
11 measurement results indicate hydrodynamic penetration of the flow into the porous  
12 structure at the leading edge. Furthermore, the two-point correlation analysis of the  
13 velocity fluctuations approaching the leading edge, show that the turbulent structures  
14 approaching the solid leading edge appear to deform into more two-dimensional struc-  
15 tures. Whereas, in the case of the porous leading edge the turbulent structures appear  
16 to retain a strong spanwise coherence up to the point of hydrodynamic penetration.

---

<sup>a)</sup>[luke.bowen@bristol.ac.uk](mailto:luke.bowen@bristol.ac.uk)

## 17 I. INTRODUCTION

18 As noise becomes an ever-increasing environmental concern, turbulence interaction noise  
19 is an important phenomenon to be addressed in the drive towards quieter propulsion. Highly  
20 rotational, turbulent flows generated by fan blades interact with stator vanes for the purpose  
21 of flow straightening. Turbulent structures in the wake of the fan, interact with the leading  
22 edge of the stator and subsequent pressure fluctuations on the surface of the airfoil generate  
23 noise. The efficiency of noise generation in airfoil turbulence interaction is dictated by the  
24 ratio of the size of the turbulent structures, to the leading edge radius of the airfoil.

25 Turbulence interaction noise is a subject that has been of large social interest since the  
26 fundamental study by Amiet<sup>1</sup>. Amiet proposed a model<sup>1</sup> which can predict the interaction  
27 noise by implementing linearized airfoil theory to calculate the aerodynamic response of the  
28 incident gust on the airfoil; then calculating the unsteady lift propagation to the acoustic far-  
29 field accounting for scattering and mean flow effects. Paterson and Amiet<sup>2</sup> showed turbulence  
30 impingement as low frequency dominating noise radiation, considering the scale of turbulence  
31 is large. Angle of attack effects were studied by Moreau and Roger<sup>3</sup> showing that for  
32 noise generation in turbulent flow there is almost no dependency to angle of attack. More  
33 commercial type airfoils were studied by Devenport *et al.*<sup>4</sup>, where thickness and camber  
34 effects of real airfoils were studied for a turbulent flow. Devenport *et al.*<sup>4</sup> concluded that  
35 although angle of attack has a strong effect on the airfoil response function, it only has  
36 a small effect on noise generation. Varying the turbulent flow has been shown to be just  
37 as important as varying the airfoil and this was extensively studied by Hutcheson *et al.*<sup>5</sup>.

38 Their tests consisting of a host of different inflow conditions and geometries, finding that as  
39 length scale and intensity increased this uniformly increased the spectral levels. Both airfoil  
40 geometry and the turbulent inflow are important factors in the noise generation and there  
41 have been a host of research on the topic<sup>3,4,6-8</sup>, all concluding that the airfoil geometry does  
42 in fact alter the noise generation in turbulent flow.

43 Passive noise control techniques have shown to be effective in airfoil noise reduction when  
44 implemented to trailing edge configurations<sup>9-15</sup>. Further works have showed the potential  
45 of porous materials for noise reduction<sup>9,16-19</sup>, but a common conclusion is found that better  
46 understanding of the mechanisms and flow interaction is needed to optimize the implemen-  
47 tation of porous materials for the noise abatement. As with previous studies<sup>9,10</sup> they found  
48 that the porous material will decrease the low frequency noise contribution and increase it at  
49 high frequency, suggesting the influence due to surface roughness<sup>20</sup>. Furthermore, turbulence  
50 interaction noise has been shown to be reduced by using passive leading edge treatments  
51 and in recent years serrated leading edge configurations have gathered much interest<sup>21-25</sup>.

52 The reduction of turbulence interaction noise with the use of a porous leading edge has  
53 been the subject of much interest<sup>17,26-30</sup>. Sarradj and Geyer were the first to rekindle the  
54 interest in porous airfoils and carried out the first study on the effect of a fully porous airfoil<sup>29</sup>.  
55 The study focused on changing porous properties of airfoils to assess the acoustic benefit,  
56 a reduction in noise in most cases was found at the detriment to the overall hydrodynamic  
57 performance of the airfoil. Geyer *et al.*<sup>27</sup> studied leading edge noise reduction using fully  
58 porous airfoils finding that a reduction in air flow resistivity increases the noise reduction.  
59 Geyer *et al.*<sup>16</sup> further developed the porous leading edge idea by adding perforations at the

60 leading edge of the airfoil, with the remaining chord of the airfoil solid. A noise reduction  
61 of up to 8dB was observed and a reduction in the aerodynamic losses compared to the fully  
62 porous airfoils. Roger and Moreau<sup>31</sup> used grid generated turbulence to measure the effect  
63 that a steel-wool filled NACA 0012 had on noise radiation and showed a maximum of 5dB of  
64 noise reduction is achievable from a suboptimal approach. Sinnige *et al.*<sup>19</sup> studied the effect  
65 of a flow-permeable perforated leading edge for the reduction of the noise generated on a  
66 pylon in the slip-stream of a propeller, in which a measured reduction of the far-field tonal  
67 noise was observed. A further step in the characterization of leading edge noise reduction  
68 was achieved by Zamponi *et al.*<sup>32</sup> who studied the effect of a porous airfoil on the rapid-  
69 distortion of turbulent structures near the leading edge. This experimental and numerical  
70 study indicated a reduction in the upwash component of the root-mean-square (rms) of the  
71 velocity fluctuation as one of the contributing factors to the reduction of the far-field noise.  
72 Chaitanya *et al.*<sup>33</sup> experimentally demonstrated that perforations downstream of the leading  
73 edge of a flat plate can reduce the turbulence interaction noise, and used a simple analytic  
74 model to show the reduction of noise spectra collapses when plotted against non-dimensional  
75 frequency. Ocker *et al.*<sup>34,35</sup> demonstrated the noise reduction of a partially porous fan blade,  
76 and showed that preserving the solid structure at the leading edge, followed by a porous section  
77 immediately downstream can improve both the aerodynamic and aeroacoustic performance.  
78 This paper seeks to assess the reduction of airfoil-turbulence interaction noise with porous  
79 leading edges of varying porosity. Furthermore, the study considers how the flow approaching  
80 and over the leading edge is affected by the introduction of the porous leading edge to offer  
81 insight to the noise reduction. The paper is organized as follows: Section II describes the

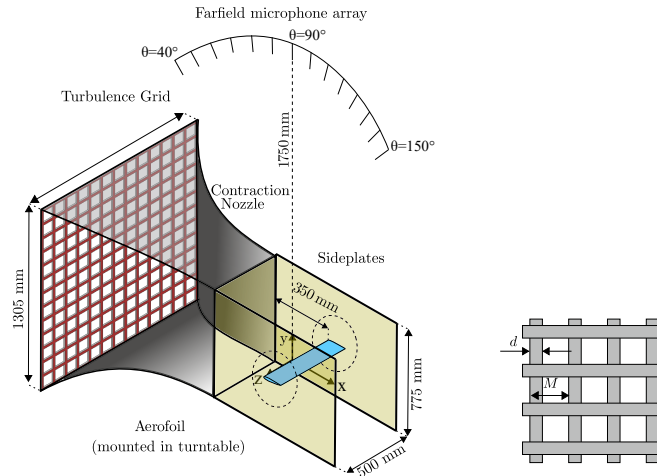


FIG. 1. Schematic of airfoil set-up with turbulence grid and far-field array in the Aeroacoustic Wind tunnel.

82 wind tunnel, measurement set up porous structure and airfoil. Section III presents the  
 83 results and discussions of the far-field noise and the velocity field analysis and Section IV  
 84 concludes this manuscript.

## 85 II. MEASUREMENT SETUP

### 86 A. Wind tunnel and model

87 The airfoil turbulence interaction noise experiments were performed in the University of  
 88 Bristol Aeroacoustic Facility, which is a closed-circuit, open-jet anechoic wind tunnel. The  
 89 chamber has physical dimensions of  $6.7 \text{ m} \times 4.0 \text{ m} \times 3.3 \text{ m}$  and is anechoic down to 160  
 90 Hz<sup>36</sup>. Figure 1 displays a schematic of the wind tunnel contraction with the turbulence  
 91 grid mounted in the contraction nozzle and the airfoil mounted within sideplates, 350 mm  
 92 downstream of the contraction nozzle outlet. The contraction nozzle outlet has physical

93 dimensions of 500 mm in width and 775 mm in height, which allows for a steady operation  
94 from 5 m/s to 45 m/s and a normal turbulence intensity level below 0.2%<sup>36</sup>.

95 This study was conducted with a NACA 0012 profile airfoil that features an interchange-  
96 able leading edge which had a span of 600 mm and chord of 200 mm. The airfoil was  
97 manufactured in one piece using the additive manufacturing technique of Selective Laser  
98 Sintering (SLS) from polyamide. The airfoil was designed to be highly instrumented for  
99 the measurement of both aerodynamic and aeroacoustic phenomena in the form of static  
100 pressure and unsteady surface pressure. Instrumentation was achieved by the use of brass  
101 tubes which were installed with 2 part epoxy resin and smoothed to the surface of the  
102 airfoil. In total there were 48 static pressure taps and 88 unsteady surface pressure taps  
103 which were drilled with a 0.4 mm bit to avoid pressure attenuation at high frequencies.  
104 The surface pressure taps were connected in a remote sensing configuration using Panasonic  
105 WM-61A microphones, more information regarding this measurement technique is in the  
106 literature<sup>37,38</sup>. All microphones were calibrated in both magnitude and phase referenced to  
107 a single GRAS 40PL microphone, which was calibrated using a GRAS 42AA pistonphone  
108 calibrator. Unsteady surface pressure measurements made via remote sensing were sam-  
109 pled at  $2^{15}$  Hz for 32 seconds. Static pressure measurements were obtained from two Chell  
110 MicroDaq-32 pressure acquisition systems and were sampled for 32 seconds at 1000 Hz.

## 112 B. far-field measurement

113 The turbulence interaction noise was measured using the facilities far-field microphone  
114 array, see Fig. 1. The array consists of 23 microphones arranged at  $5^\circ$  increments between



TABLE I. Properties of the porous structures used in the leading edge

Porosity, $\varphi$ (%)	Minimum pore diameter, $d_{pore}$ (mm)	Permeability, $\kappa$
40	0.58	$2.78 \times 10^{-9}$
50	1.48	$3.78 \times 10^{-9}$
60	2.29	$4.98 \times 10^{-9}$

115 polar angles of  $\theta = 35^\circ$  and  $150^\circ$  to allow for directivity measurements. The arc was located  
 116 1.75 m above the airfoil and the microphone at  $90^\circ$  was located directly above the leading  
 117 edge of the airfoil. The microphones on the arc were 1/4 inch GRAS 40PL microphones,  
 118 which exhibit a flat frequency response for a large dynamic range of 10 Hz and 20,000 Hz.  
 119 All microphones were calibrated using a GRAS 42AA pistonphone calibrator prior to the  
 120 experiments.

### 121 C. Turbulence grids

122 To generate the incoming turbulence, a grid was placed within the contraction nozzle  
 123 of the wind tunnel, as shown in Fig. 1. The position of the grid within the tunnel was  
 124 shown to not affect the normal background jet noise of the wind tunnel<sup>39</sup>, thus allowing for  
 125 direct noise measurement of the interaction noise between the turbulent flow and NACA

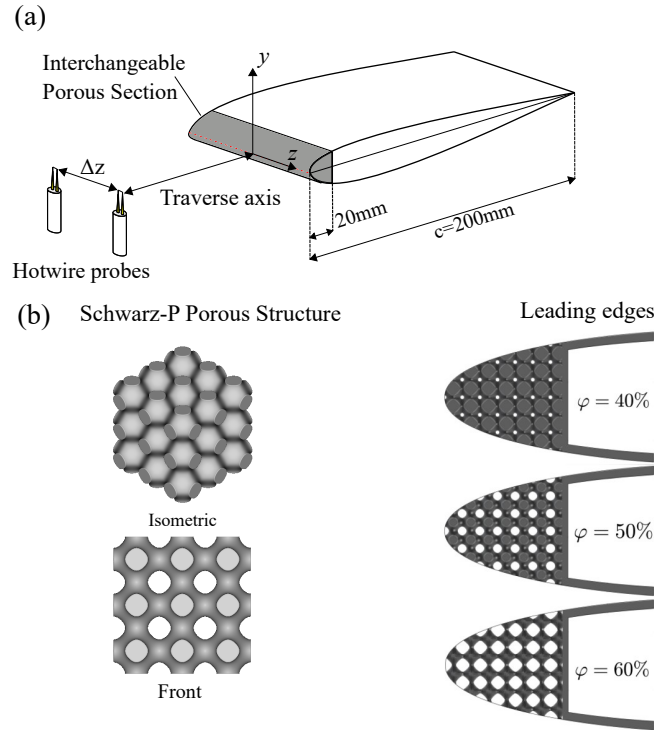


FIG. 2. NACA 0012 airfoil with interchangeable leading edge for both solid and porous leading edges, schematic of tandem hot-wires and a schematic of the Schwarz-P porous structure.

126 0012 airfoil with various porous leading edges. The geometric properties and generated flow  
 127 properties of the grid are outlined in Table II.

#### 128 D. Porous leading edges

129 Figure 2(a) illustrates a schematic of the airfoil. The first 20% of the leading edge was  
 130 interchangeable, between a solid, instrumented leading edge and the 3D printed porous  
 131 leading edges. Three different porous leading edges, with porosity of  $\varphi = 40\%$ , 50% and  
 132 60% were selected to study the effect of porosity on the reduction of leading interaction  
 133 noise. The porous structure is based on the Triply periodic minimal Schwarz-P surface

TABLE II. The geometric properties of the grid, and the flow properties at the position of contraction nozzle exit,  $x = 0$ , at a freestream velocity  $U_\infty = 20$  m/s. The definitions of  $d$  and  $M$  can be found on Fig. 1.

Diameter, $d$ (mm)	Mesh, $M$ (mm)	$\sigma$	Turbulence intensity (%)	Integral length scale (mm)
45	233	0.35	10.1	10.8

134 which occupied the first 10% of the airfoil chord, see Fig. 2(b). The porous leading edge  
 135 was printed using a FormLabs Form3 stereolithography (SLA) printer. The tested structures  
 136 were characterized prior to the tests for both porosity and permeability, and are provided  
 137 in Table I. The porosity of each sample is predefined in CAD software and verified by the  
 138 mass of the 3D printed structure. The airflow permeability of the structure was defined  
 139 by measuring the pressure drop across each sample in a permeability rig, a more detailed  
 140 procedure of this test is previously presented<sup>40</sup>.

#### 141 E. Hot-wire anemometry setup

142 The flow field upstream of and around the leading edge was characterized by Constant  
 143 Temperature Anemometry (CTA) measurements. Two Dantec 55P16 single-wire probes  
 144 were used in tandem configuration to obtain two-point correlations in front of the leading

145 edge of the airfoil, as shown in Fig. 2. A Dantec 55P61 miniature x-wire probe was utilized  
146 to measure the flow field near to the surface of the airfoil leading edge. All probes were  
147 operated using a Dantec Streamline Pro system with a CTA91C10 module with a low-  
148 pass filter of 30 kHz. The data were acquired using a National Instruments PXIe-4499  
149 module mounted in a National Instruments PXIe-1026Q chassis. All hot-wire measurements  
150 were sampled at a rate of  $2^{15}$  Hz for a duration of 16 seconds. The data from two-point  
151 correlation measurements using tandem hot-wire probes was sampled simultaneously. All  
152 hot-wire probes were calibrated daily using a Dantec 54H10 calibrator. Furthermore, the  
153 x-wire probe was calibrated for yaw angles between  $-40^\circ$  and  $40^\circ$ . The uncertainty of  
154 the velocity measurement was estimated as 2.72% for a free-stream velocity of 20 m/s.  
155 The tandem hot-wire probes, used for spanwise coherence studies, were traversed using a  
156 ThorLabs LTS300 300 mm Translation Stage with stepper motor along the x-axis with a  
157 positioning accuracy of  $\pm 5 \mu\text{m}$ . The tandem probes were arranged along the z-axis directly  
158 upstream of the airfoil leading edge, see Fig. 2b. The probes were traversed upstream of the  
159 airfoil leading edge to acquire measurements at 35 streamwise locations covering the region  
160  $-100 \text{ mm} < x < -0.03 \text{ mm}$ , corresponding to  $-31.51 < x/r < -0.01$ , where  $r$  is the leading  
161 edge radius of the airfoil. Two-point correlations for a broad range of separation distances  
162 were obtained with repeated traverse measurements with the separation distance ranging  
163 between  $5.3 \text{ mm} < z < 27 \text{ mm}$ , corresponding to  $1.67 < \Delta z/r < 6.40$ . The x-wire probe  
164 was traversed using two connected ThorLabs LTS300 for movement in both the x-axis and  
165 y-axis.

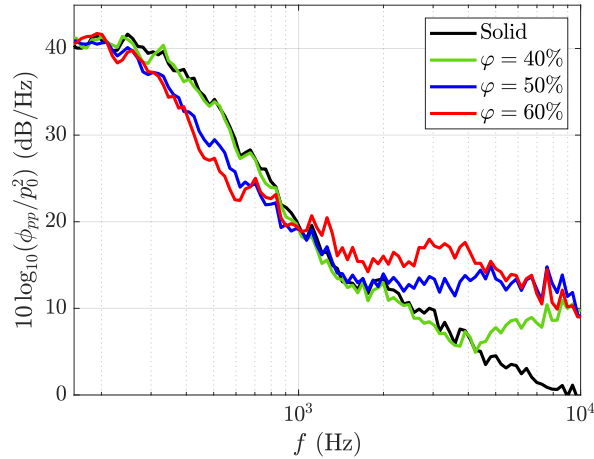


FIG. 3. Far-field noise generated by the NACA 0012 airfoil with a solid and porous leading edge immersed in the turbulent flow generated by the grid and measured by the microphone at  $\theta = 90^\circ$  directly above the leading edge.

166 **III. RESULTS**

167 **A. Far-field noise analyses**

168 The far-field noise of the NACA0012 airfoil with solid and porous leading edges in the  
 169 flow generated by a turbulence grid are presented in this section. The presented results are  
 170 for a single flow velocity of  $U_\infty = 20$  m/s, with a turbulence intensity of 10.1% and integral  
 171 length scale of  $\Lambda = 10.8$  mm. The section considers the power spectral density level (PSD)  
 172 of the far-field noise observed at different polar angles, see Fig. 1, over the frequencies  
 173  $160 \text{ Hz} < f < 10,000 \text{ Hz}$ . This is calculated using  $10 \cdot \log_{10}(\phi_{pp}/p_0^2)$ , where  $\phi_{pp}$  is the power  
 174 spectral density of the measured acoustic pressure and  $p_0$  is the reference pressure of  $20 \mu\text{Pa}$ .  
 175 Secondly, the overall sound pressure level is presented and the directivity of the radiated

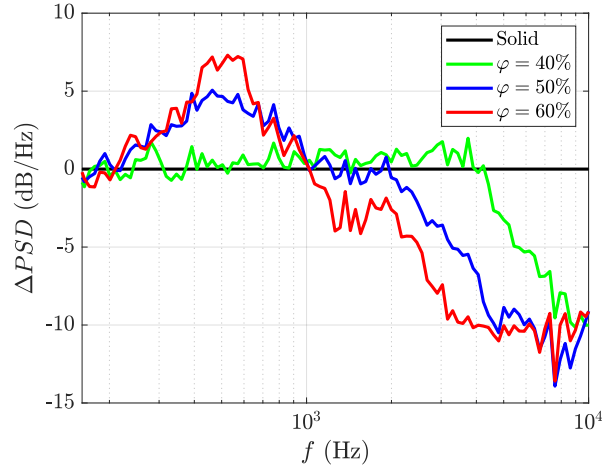


FIG. 4. Comparison of the Far-field noise reduction obtained by each porous leading edge compared to the solid leading edge immersed in the turbulent flow generated by the grid and measured by the microphone at  $\theta = 90^\circ$  directly above the leading edge.

176 noise is considered. The overall sound pressure level is calculated as,

$$OASPL = 10 \cdot \log_{10} \left[ \frac{\int \phi_{pp}(f) df}{p_0^2} \right], \quad (1)$$

177 integrating the energy spectrum with respect to frequency, between  $160 \text{ Hz} < f < 20,000$   
 178  $\text{Hz}$ . It should be noted that the turbulence interaction noise of the airfoil is significantly  
 179 higher than the normal background noise of the wind tunnel jet between the frequencies  $160$   
 180  $\text{Hz} < f < 1000 \text{ Hz}$ . For frequencies between  $1000 \text{ Hz} < f < 10,000 \text{ Hz}$  interaction noise is  
 181 not observed, and the airfoil noise generated by the NACA0012 airfoil is comparable to the  
 182 background noise of the facility. Both observations are previously demonstrated<sup>39</sup>.

183 First, we consider the airfoil turbulence interaction noise measured by the microphone  
 184 on the array at polar  $\theta = 90^\circ$ , positioned directly above the leading edge. Figure 3 shows  
 185 the comparison between the noise spectra of the NACA0012 airfoil with a solid and porous

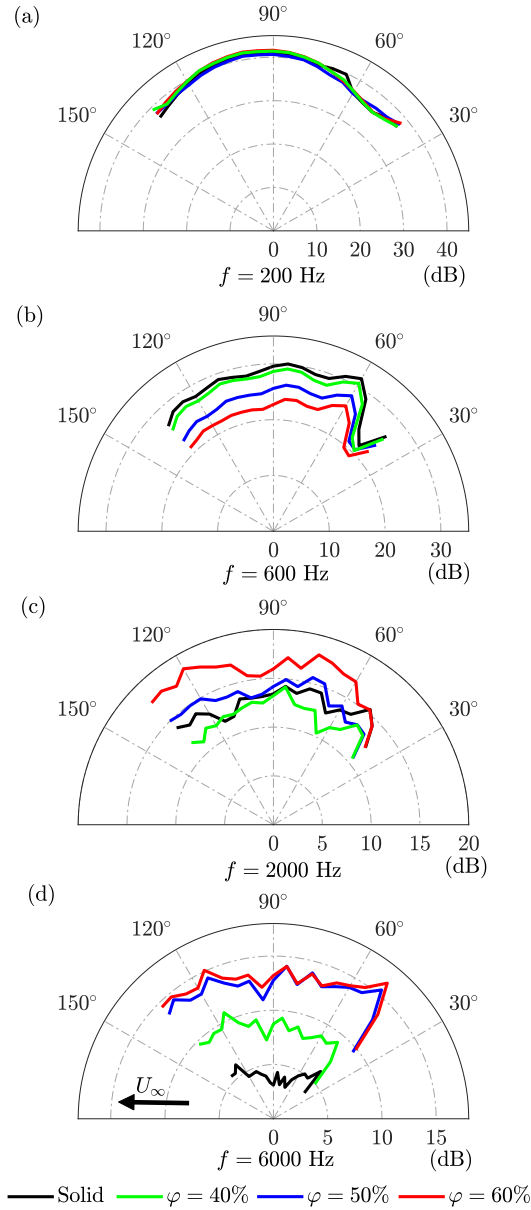


FIG. 5. Directivity of PSD level of the noise for the solid and porous leading edge cases measured by the microphone array and presented for frequencies (a)  $f = 200$  Hz, (b)  $f = 600$  Hz, (c)  $f = 2000$  Hz and (d)  $f = 6000$  Hz.

186 leading edges, plotted against narrowband frequency. When comparing the results of the  
 187 porous leading edges to those of the solid leading edge, it can be seen that porosity plays

188 an important role on the level of noise reduction that is achieved. Considering the results of  
 189 the leading edge of porosity  $\varphi = 40\%$ , there is little-to-no noise reduction over the frequency  
 190 range where turbulence interaction noise is observed, i.e.  $160 \text{ Hz} < f < 1000 \text{ Hz}$ . An  
 191 increase in the porosity of the leading edge results in a reduction of the observed turbulence  
 192 interaction noise, where the greatest reduction is for the  $\varphi = 60\%$  leading edge. The  
 193 results show that increasing the porosity of the leading edge structure can further reduce  
 194 the turbulence interaction noise. However, it is clear from Fig. 3 that the porous leading  
 195 edge results also demonstrate a noise increase at higher frequencies i.e.  $f > 1000 \text{ Hz}$ . An  
 196 increase in the porosity of the leading edge structure enhances the high frequency noise  
 197 generation. This high frequency noise generation is previously shown to be caused by the  
 198 flow interacting with the rough porous structure<sup>20</sup> and can be reduced with the introduction  
 199 of a cover over the porous material<sup>41</sup>. Although the high frequency noise increase in the  
 200 case of the porous leading edge results is significant compared to the results of the solid  
 201 airfoil leading edge, the noise increase is observed at a much lower PSD level than the noise  
 202 reduction.

203 A clearer performance of the noise reduction achieved by each porous leading edge is  
 204 provided by Fig. 4, where the far-field noise data is presented as  $\Delta PSD = PSD_{solid} -$   
 205  $PSD_{porous}$  and a positive value denotes noise reduction. As can be seen in Fig. 4, the use  
 206 of a  $\varphi = 60\%$  porous treatment can lead to a noise reduction of up to 7 dB over 400 Hz  
 207  $< f < 700 \text{ Hz}$ . Observed noise reduction for the leading edge with a porous treatment of  
 208  $\varphi = 50\%$  peaks at 5 dB for the frequency range  $400 \text{ Hz} < f < 600 \text{ Hz}$ . Furthermore, both  
 209 leading edges of porosity  $\varphi = 60\%$  and  $\varphi = 50\%$  demonstrate noise reduction between 160



210 Hz  $< f < 1000$  Hz. Interestingly, the porous leading edge of porosity  $\varphi = 40\%$  shows no  
211 significant noise reduction over  $160 \text{ Hz} < f < 4000$  Hz. High frequency noise increase is  
212 evident in the results of each porous leading edge, however the frequency of where the noise  
213 increase is evident varies with porosity.

214 To assess the potential changes to the mechanism that causes the turbulence interaction  
215 noise as a result of employing porous leading edges, the directivity of the sound at multiple  
216 frequencies has been considered. A significant change to the directivity patterns between  
217 the solid and porous cases may signify a change to the noise generation mechanism. Figure  
218 5 presents the results of the directivity of the PSD level for the solid and porous leading  
219 edge cases at four chosen frequencies, namely  $f = 200$  Hz,  $600$  Hz,  $2000$  Hz and  $6000$   
220 Hz, at a freestream velocity of  $U = 20$  m/s. The frequencies were chosen to cover the low  
221 frequencies ( $160 \text{ Hz} < f < 1000$  Hz), where turbulence interaction is dominant, the cross-over  
222 frequency ( $f = 2000$  Hz), where little or no noise change was observed, and high frequencies  
223 ( $2000 \text{ Hz} < f < 10,000$  Hz), where the significant noise increase due to surface roughness is  
224 observed. The results of directivity of the radiated noise for  $f = 200$  Hz are presented in  
225 Fig. 5(a) and demonstrate no change in the directivity pattern between the solid and porous  
226 leading edge cases. At the frequency  $f = 600$  Hz, the results show a reduction of up to 7 dB  
227 in the radiated noise from the airfoils fitted with a porous leading edge. Between the polar  
228 angles  $60^\circ < \theta < 135^\circ$ , the reduction of the PSD becomes more substantial as the porosity  
229 increases, although there is little change to the pattern of the radiated noise. Furthermore,  
230 Between polar angles  $40^\circ < \theta < 60^\circ$  there is less significant reduction of the PSD between  
231 the results of the solid and porous leading edges. At the crossover frequency ( $f = 2000$  Hz),

232 the directivity pattern of the solid and porous cases exhibit some differences, despite the  
233 comparable levels of PSD exhibited in Figs. 3 and 4. At high frequencies, i.e.  $f = 6000$   
234 Hz, where the roughness noise is believed to be the dominant noise source in the case of the  
235 porous leading edges, the directivity patterns are significantly different to that of the solid  
236 leading edge, signifying the changes to the noise generation mechanism.

237 The overall sound pressure level (OASPL) results assesses the directivity pattern of the  
238 noise generated by the solid and porous leading edge cases. As the OASPL calculation  
239 integrates the PSD level across the narrowband spectrum, the OASPL results include each  
240 porous leading edge's contribution to the low frequency noise reduction and the subse-  
241 quent noise increase at higher frequencies too. Figure 6 presents the OASPL results of the  
242 NACA0012 airfoil turbulence interaction noise with solid and porous leading edges at a  
243 freestream velocity of  $U = 20$  m/s. The directivity results of the solid and porous leading  
244 edges are comparable across the polar angles presented. The maximum level of OASPL noise  
245 reduction is approximately 3 dB and is achieved by the leading edge of porosity  $\varphi = 60\%$ ,  
246 between the polar angles of  $65^\circ < \theta < 100^\circ$ . It is clear that when considering the full  
247 noise spectrum, the reduction of the turbulence interaction noise achieved using the porous  
248 leading edge far outweighs the roughness noise increase observed at high frequency, see Fig.  
249 4. Considering the OASPL results of the solid case compared to the porous cases, it is clear  
250 that the leading edge with porosity  $\varphi = 40\%$  shows little noise reduction. Interestingly, both  
251 the result of  $\varphi = 50\%$  and  $\varphi = 60\%$  demonstrate comparable results for OASPL. Aside from  
252 the reduction in the porous cases, there is no significant change to the directivity pattern  
253 between the cases.

254 It is understood from the assessment of the far-field noise that the introduction of a  
 255 porous leading edge reduces the turbulence interaction noise generated by the airfoil. To  
 256 understand the physical mechanism responsible for the reduction of the far-field noise, the  
 257 flow field upstream of and around the airfoil must be examined.

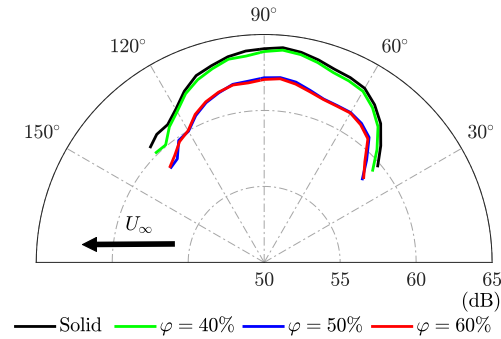


FIG. 6. Directivity of the OASPL for the NACA 0012 airfoil with both solid and porous leading edges.

## 258 B. Flow field analyses

259 Detailed flow measurements of the region in front of and around the leading edge of the  
 260 airfoil were carried out to quantify flow field differences between the solid and porous leading  
 261 edges, using single-wire and two-component x-wire hotwire probes. Flow field analyses are  
 262 presented for a grid flow with a turbulence intensity of 10.1% and integral length scale of  
 263  $\Lambda = 10.8$  mm, at the free-stream velocity of  $U_\infty = 20$  m/s. Figure 7 presents the vectors  
 264 of velocity results for the solid and porous leading edge cases for a freestream velocity of  
 265  $U_\infty = 20$  m/s. Each arrow is representative of the resultant velocity vector, measured

266 by the x-wire probe at each location. The results of the solid case demonstrate the flow  
267 deflection caused by the airfoil near the leading edge (i.e.  $-0.01 < x/c < 0.05$ ) and the  
268 velocity vectors following the airfoil shape further downstream of the leading edge (i.e.  
269  $0.05 < x/c < 0.25$ ). The velocity results in the vicinity of the surface of the airfoil shows  
270 no significant difference to the magnitude of the arrows further from the airfoil surface,  
271 signifying that the measurements for the solid case are taken outside the boundary layer.  
272 The results of the porous leading edge cases show that the flow penetrates into the porous  
273 leading edge region, represented as the arrows near the leading edge with a lower vertical  
274 velocity component (i.e. more horizontal). The flow penetration into the porous leading edge  
275 is more evident in the region  $-0.01 < x/c < 0.1$ . The main differences between the flows  
276 of each case are evident in the vectors closest to the surface of the airfoil, where increased  
277 porosity generates a larger velocity deficit close to the surface. This result helps to highlight  
278 the flow penetration into the porous leading edges which a single-wire probe is unable to  
279 capture.

280 As previously shown<sup>32,42</sup>, the flow structures undergo significant changes in close proxim-  
281 ity of the stagnation point, before impinging on the airfoil. Given the spatial constraint, and  
282 also need for resolving high frequencies, such flow measurements can only be achieved using  
283 single-wire probes. Detailed flow measurements upstream of the airfoil leading edge, ob-  
284 tained with the use of a single-wire hotwire probe, reveal interesting behavior for the porous  
285 leading edge cases in the vicinity of the leading edge (i.e.  $-1.5 < x/r < -0.01$ ). Figure  
286 8 presents the results of velocity measurements upstream of the leading edge of the solid  
287 and porous airfoil leading edges over a wide spacial range, i.e.  $-5 < x/r < -0.01$ . Figure

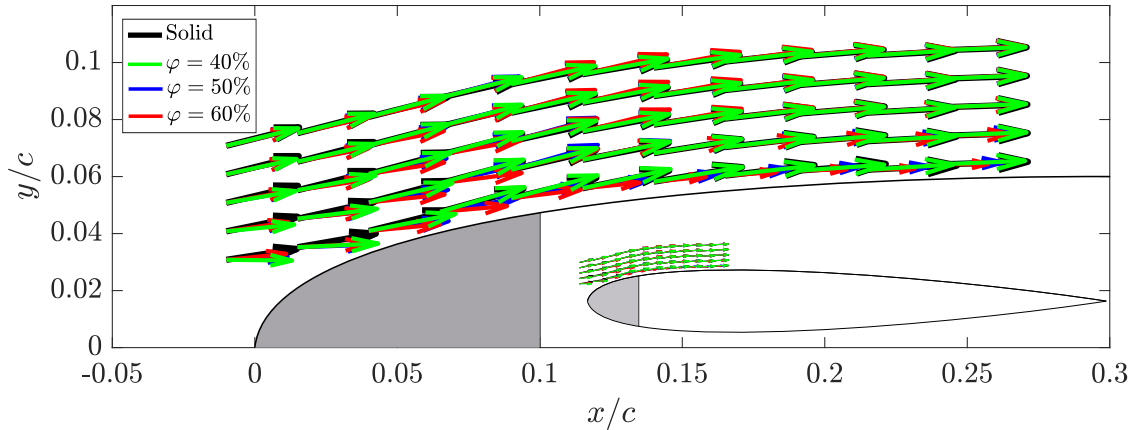


FIG. 7. Vectors of velocity magnitude over the leading edge region of the airfoil for both the solid and porous leading edge case measured by CTA cross-wire probe.

288 8(a) presents the mean-flow velocity normalized by the freestream velocity ( $U/U_\infty$ ) for the  
 289 solid and porous leading edge cases. The mean-flow velocity results of the solid leading edge  
 290 demonstrate a reduction in the velocity approaching the leading edge of the airfoil, caused  
 291 by the velocity stagnation of the solid airfoil leading edge. This result is expected and con-  
 292 sistent with the literature<sup>32</sup>. When comparing the solid and porous leading edges results,  
 293 all results demonstrate comparable behavior for the region  $-5 < x/r < -1.5$ . In the case  
 294 of solid leading edge, the stagnation effect is evident by a sharp decay in the total velocity  
 295 along the stagnation streamline between  $-1.5 < x/r < -0.01$ . However, the stagnation  
 296 effect for the porous leading edges is dramatically reduced, which signifies the presence of  
 297 flow penetration into the porous volume. It should be noted that unlike the solid leading  
 298 edge results, there is an acceleration of the flow close to the porous leading edges which is  
 299 exacerbated by decreasing porosity.

300 Turbulence interaction with an external body can cause significant changes to the tur-  
301 bulence intensity of the flow in the proximity of the body<sup>32,42</sup>. The presence of a porous  
302 structure and potential flow penetration into the porous volume can further complicate the  
303 evolution of the turbulent structures upstream of the external body. Figure 8(b) presents the  
304 root-mean-square (rms) of the velocity fluctuation normalized by the rms of freestream veloc-  
305 ity fluctuation for both the solid and porous leading edge cases. The results of the solid lead-  
306 ing edge demonstrate a reduction in the rms of velocity fluctuation approaching the leading  
307 edge within  $-5 < x/r < -0.25$ . In proximity to the leading edge, i.e.  $-0.25 < x/r < -0.01$ ,  
308 there is a sudden increase in the velocity fluctuation which is caused by redistribution of  
309 the velocity fluctuation from the streamwise direction to the crosswise, known as upwash<sup>32</sup>.  
310 Comparing the results of the solid and porous cases, again, a comparable behavior is ob-  
311 served for the region  $-5 < x/r < -1.5$ . In the region where the solid leading edge results  
312 experiences a reduction, followed by a sudden recovery of the rms of velocity fluctuation,  
313 the porous leading edges results demonstrate a significant increase in the rms of velocity  
314 fluctuations, inside  $-1.5 < x/r < -0.01$ . As shown in Fig. 8(b), in the case of the solid  
315 leading edge, the rms of velocity fluctuation reaches its minimum at  $x/r = -0.15$ , while  
316 that for the  $\varphi = 60\%$  has moved to the location  $x/r = -0.8$ . The position of the minimum  
317 value of rms of velocity fluctuation moves further upstream from the leading edge as the  
318 porosity decreases. For  $\varphi = 60\%$ ,  $50\%$  and  $40\%$  the location of the rms of velocity increase  
319 is  $x/r \approx -0.8$ ,  $-1$  and  $-1.5$ , respectively. Furthermore, as porosity decreases, the level of  
320 the velocity fluctuation rms at the leading edge significantly increases. This is an interesting  
321 result, and contrasts to the previous observation in the literature<sup>32</sup>.

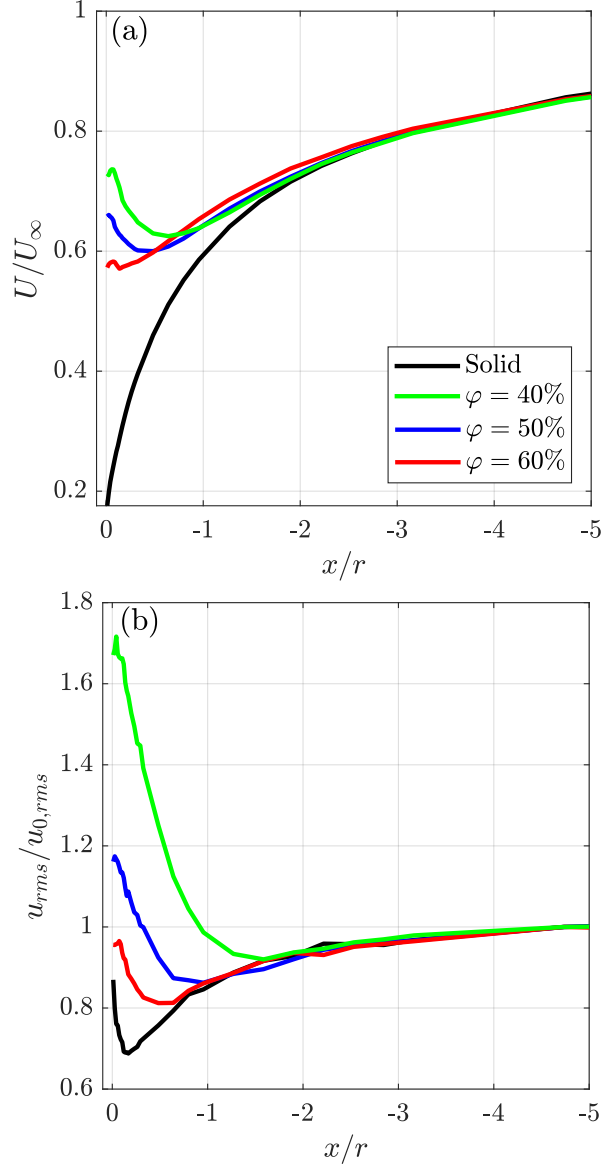


FIG. 8. Stagnation streamline flow properties measured by single-wire probe for (a) normalized flow velocity ( $U/U_\infty$ ) and (b) normalized velocity fluctuation ( $u_{rms}/u_{0,rms}$ ) for the solid and porous leading edge cases.

322 To understand the energy content of the velocity fluctuations along the stagnation stream-  
 323 line, the power spectral density level of the velocity fluctuations has been calculated and  
 324 is presented in two forms. The first, is the standard presentation that is used as an input

325 for noise prediction models i.e. Amiet<sup>1</sup>, which is the PSD level of the velocity fluctuations,  
326 calculated as  $10 \log_{10}(\phi_{uu}/u_{0,rms}^2)$ . The second, is the pre-multiplied energy spectra, where  
327 the pre-multiplied energy spectra is presented and the total area under the curve is rep-  
328 resentative of the total energy at each location. The remaining results presented in this  
329 paper are a comparison between the solid case and the porous leading edge of porosity  
330  $\varphi = 50\%$  for the sake of brevity. Figures 9(a) and 9(c) presents the PSD level of velocity  
331 fluctuations for the solid and porous leading edge cases and figures 9(b) and 9(d) presents  
332 the pre-multiplied energy spectra of velocity fluctuations for the solid and porous leading  
333 edge cases. The PSD level of velocity fluctuations results for the solid case demonstrate an  
334 interesting behavior. At the freestream measurement location, there is a consistent value  
335 of PSD level of velocity fluctuation, a turning point at  $f = 60$  Hz, and a consistent decay  
336 gradient of  $f^{-5/3}$  between  $100 \text{ Hz} < f < 2000 \text{ Hz}$  signifying freely-decaying turbulence of the  
337 inertial subrange. Up to  $x/r = -0.33$ , there is a reduction in the low frequency content in  
338 the PSD of velocity fluctuation (i.e.  $f < 100$  Hz), coupled with a reduction at very high  
339 frequency (i.e.  $f > 2000$  Hz). However, no change to the  $f^{-5/3}$  decay range is observed. In  
340 proximity of the leading edge ( $-0.15 < x/r < -0.01$ ), there is a recovery to the low fre-  
341 quency energy content of the velocity fluctuation, accompanied by a reduction of the velocity  
342 energy content at high frequencies. When comparing the PSD level of velocity fluctuation  
343 along the stagnation streamline for the solid and porous leading edge, see figures 9(a) and  
344 9(c), a more apparent change in both the low and high frequency behavior is evident in  
345 the porous leading edge case. The dissimilarity of the PSD of velocity fluctuations between  
346 the results of the solid and porous leading edge cases are more evident in the region close



347 to the leading edge, i.e.  $-0.96 < x/r < -0.01$ . The low frequency increase in the PSD  
348 of velocity fluctuations, evident within  $-0.33 < x/r < -0.01$ , exceeds the low frequency  
349 levels measured at the freestream, i.e.  $x/r = -33$ . Furthermore, there is an emergence of  
350 a broadband hump which peaks at  $f = 70$  Hz. When considering the high frequency decay  
351 gradients, the results of the solid case show no significant deviation from the  $f^{-5/3}$  decay  
352 gradient between the frequency range  $100 \text{ Hz} < f < 2000 \text{ Hz}$ . However, velocity PSD results  
353 for the porous leading edge case show the high frequency decay gradient increases along  
354 the stagnation streamline approaching the leading edge. The change to the high frequency  
355 decay of the velocity fluctuation is a significant observation as this phenomenon signifies  
356 external contribution to the change of the small scale turbulent structures approaching the  
357 porous leading edge.

358 The pre-multiplied energy spectra accentuates the variations between the cases as the  
359 total area under each curve is representative of total energy and are presented in Figs. 9(b)  
360 and 9(d). The pre-multiplied energy spectra results offer more insight into the nature of  
361 the velocity fluctuation along the stagnation streamline, presented in Fig. 8. The pre-  
362 multiplied energy spectra results for the solid leading edge show the reduction of energy  
363 up to  $x/r = -0.15$  and sudden recovery at  $x/r = -0.01$  is more clear. The pre-multiplied  
364 energy spectra of velocity fluctuation results of the solid leading edge appear to lose more low  
365 frequency energy up to  $x/r = -0.15$ , as the peak of the curve reduces and shifts to a higher  
366 frequency. At the stagnation point,  $x/r = -0.01$ , there is some recovery of the velocity  
367 fluctuation energy level but it remains lower than that of the freestream flow ( $x/r = -33$ ).  
368 As can be seen in Fig. 9(d), the porous leading edge results are dramatically different from

369 those of the solid case. It is clear in the results of the pre-multiplied energy spectra that  
370 the behavior far upstream of the leading edge, i.e.  $x/r = -4.74$  and  $-0.96$ , is comparable  
371 between the solid and porous cases. Closer to the leading edge, at  $x/r = -0.33$ , the energy  
372 level of the velocity fluctuations remain comparable to that of the freestream level, but with  
373 the emergence of a distinct peak at about  $f = 70$  Hz. In the proximity of the leading edge  
374 ( $x/r = -0.01$ ), the energy level is seen to further increase around  $f = 70$  Hz, with the most  
375 energetic turbulent scales concentrated between  $40 \text{ Hz} < f < 300 \text{ Hz}$ .

376 The energy spectra data presented here provides insight to the energy level of the flow  
377 structures for the solid and porous leading edge cases, showing significant dissimilarities  
378 between the cases in close proximity to the leading edge. However, we still need to gain an  
379 understanding of the physical size and changes to the shape of the turbulent structures as  
380 the approaching the airfoil leading edge, this is further explored in the next section with the  
381 analysis of two-point correlation upstream of the leading edge.

### 382 C. Two-point correlation analysis

383 The two-point correlation of the velocity fluctuations along the stagnation streamline,  
384 schematically illustrated in Fig. 2, offers information on the level of coherence of the flow  
385 structures and their physical size in the spanwise direction. By performing several two-probe  
386 coherence studies at different streamwise locations upstream of the leading edge, one can  
387 study the changes to the size of the turbulent flow structures as they approach the airfoil

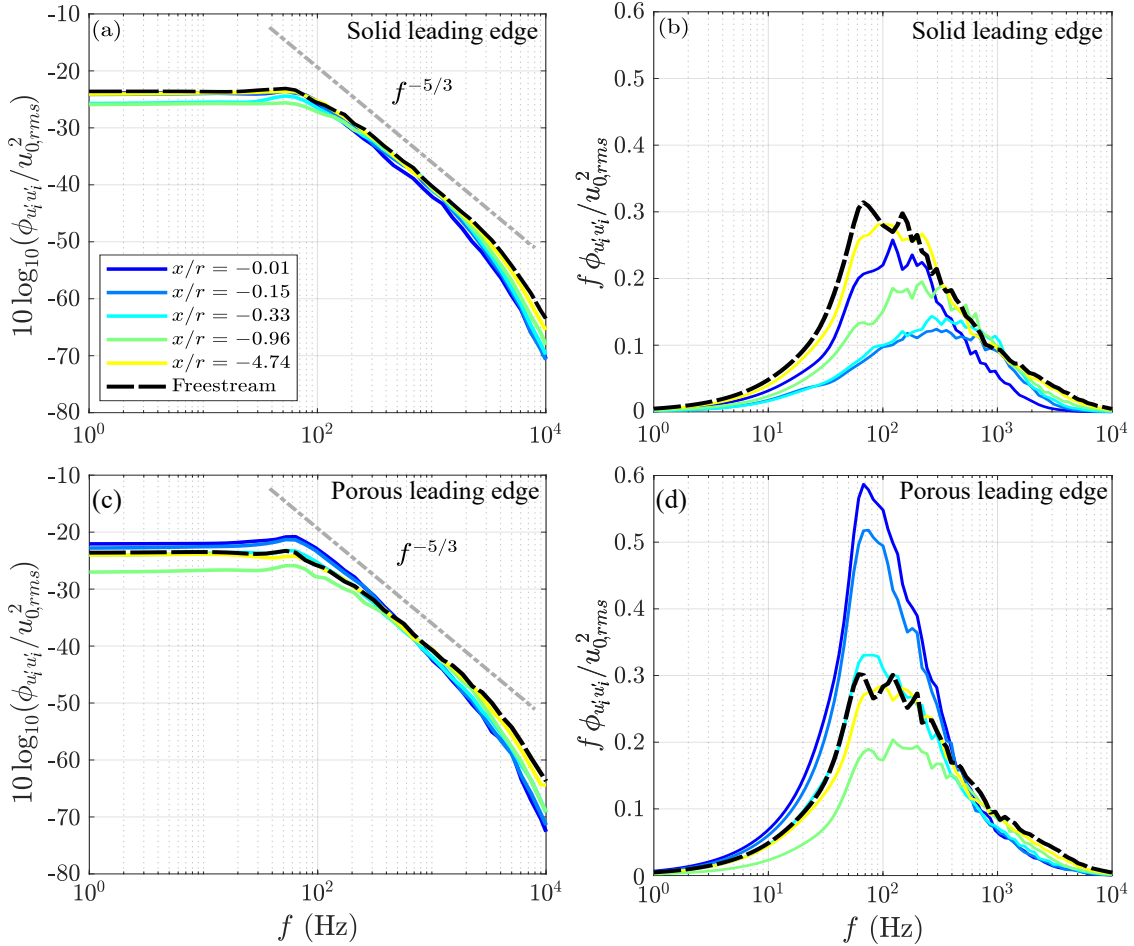


FIG. 9. Energy spectrum analysis of velocity fluctuation along the stagnation streamline upstream of the NACA 0012 aerofoil leading edge between  $-4.74 < x/r < -0.01$  where (a) and (c) are the PSD and pre-multiplied PSD of the solid leading, (b) and (d) are the PSD and pre-multiplied PSD of the porous leading edge ( $\varphi = 50\%$ ).

388 leading edge. The magnitude-squared of the spanwise coherence is calculated as

$$\gamma_{u'_i u'_j}^2(f, \Delta z) = \frac{|\phi_{u'_i u'_j}(f)|^2}{|\phi_{u'_i u'_i}(f)| |\phi_{u'_j u'_j}(f)|}, \quad (2)$$

389 where  $\gamma_{u'_i u'_j}^2(f, \Delta z)$  is the spanwise coherence calculated between two single-wire probes in a  
 390 tandem configuration, separated by  $\Delta z$ , and  $\phi_{u'_i u'_j}$  denotes the cross-power spectral density  
 391 between the two probes  $i$  and  $j$ , respectively. Figure 10 presents the results of the spanwise

392 coherence of the velocity fluctuation for the flow along the stagnation streamline for the case  
 393 with the solid leading edge at different upstream locations (freestream,  $x/r = -4.74$ ,  $-0.96$ ,  
 394  $-0.33$ ,  $-0.15$  and  $-0.01$ ), and for a wide range of probe separations ( $\Delta z/r = 6.40$ ,  $4.16$ ,  
 395  $2.68$ ,  $2.11$ , and  $1.67$ ). Considering the spanwise coherence results for the freestream case  
 396 (Fig. 10(a)), there appears to be a strong level of coherence at frequencies  $10 \text{ Hz} < f < 100$   
 397 Hz, for small spanwise separation distance ( $\Delta z/r = 1.67$ ), which steadily decays up to  
 398  $f = 1000 \text{ Hz}$ . The level of coherence at low frequency (i.e.  $f < 1000 \text{ Hz}$ ) systematically  
 399 decreases as the spanwise separation increases to  $\Delta z/r = 6.40$ . At the far upstream location  
 400 ( $x/r = -4.74$ ), see Fig. 10(b), there is still a high level of spanwise coherence of the  
 401 velocity fluctuation evident, although there is a reduction in the magnitude, particularly at  
 402 the highest spanwise separation ( $\Delta z/r = 6.40$ ). As seen, the results at the far upstream  
 403 locations ( $x/r = -4.74$ ) in Fig. 10(b), are very similar to those observed in the freestream  
 404 cases in Fig. 10(a). In Fig. 10(c), a further reduction in the level of spanwise coherence of  
 405 velocity fluctuation is evident at  $x/r = -0.96$ , however there is still sensitivity to the increase  
 406 of spanwise separation. At locations closer to the leading edge, up to  $x/r = -0.33$ , there is  
 407 an overall reduction in the spanwise coherence of the velocity fluctuations, and the coherence  
 408 becomes less dependent on the spanwise spacing ( $\Delta z$ ), indicating the emergence of more two-  
 409 dimensional flow structures. Approaching the stagnation, at  $x/r = -0.15$ , the coherence  
 410 begins to increase, compared to  $x/r = -0.33$ . The coherence level further increases in the  
 411 imminent upstream region of the leading edge between  $x/r = -0.15$  and  $x/r = -0.01$ .  
 412 Furthermore, there is the emergence of a dominant peak in the spanwise coherence of the  
 413 velocity fluctuation for all separations which is centered at  $f \approx 70 \text{ Hz}$ . As mentioned

414 earlier, the sensitivity of the two-point velocity coherence to spanwise separation distance  
415 ( $\Delta z$ ) is gradually lost moving towards the airfoil leading edge which can be interpreted  
416 as the turbulent structures becoming more two-dimensional. This behavior represents the  
417 turbulent structures distorting and rolling up over the leading edge of the airfoil.

418 Figure 11 presents the results of the spanwise coherence of the velocity fluctuations for  
419 the flow along the stagnation streamline between  $-4.74 < x/r < -0.01$  for the case with the  
420 porous leading edge. As the same turbulent flow is generated in both leading edge cases, the  
421 freestream results for the solid and porous cases are the same. As previously shown in Fig.  
422 8, the results of the velocity and rms of velocity fluctuation for the solid and  $\varphi = 50\%$  porous  
423 leading edges exhibit the same behavior between  $-4.74 < x/r < -0.96$ . This is echoed in  
424 the spanwise coherence results for the same region, as the same results are evident for the  
425 solid case (Figs. 10(b) and (c)) as in the porous case (Figs. 11(b) and (c)), respectively.  
426 For the porous leading edge case there is a reduction in the spanwise coherence approaching  
427  $x/r = -0.96$  which corroborates with the results of the solid leading edge. Moving close to  
428 the leading edge ( $x/r = -0.33$ ), disparities in the coherence results between the solid and  
429 porous leading edge cases appear inside one leading edge radius of the leading edge, i.e. Figs  
430 10(d) and 11(d), as the spanwise coherence of the velocity fluctuations begin to increase.  
431 The level of spanwise coherence of velocity fluctuations is more significant for the porous  
432 than that of the solid case. While the coherence results of the porous case show some  
433 level of spanwise distance dependency, this is weaker than the freestream turbulent flow  
434 further upstream, indicating the emergence of more two-dimensional turbulent structures in  
435 the vicinity of the leading edge. In the proximity of the leading edge, i.e.  $x/r = -0.01$ ,

436 the level of spanwise coherence of the velocity fluctuation further increases to exceed the  
437 freestream level for all separations. In addition, the dominant peak of  $f \approx 70$  Hz, evident  
438 in Figs. 9(c) and 9(d), remains a prominent feature for all spanwise separation distances at  
439  $x/r = -0.01$ . The higher level of coherence coupled with the increased energy level of the  
440 turbulent structures at close proximity to the leading edge demonstrates that the porous  
441 leading edge significantly changes the behavior of the flow close to the leading edge of the  
442 airfoil.

443 The flow field and two-point correlation analyses demonstrate how a turbulent flow up-  
444 stream of the airfoil leading edge can be altered by the introduction of the porous treatment  
445 over the leading edge area. Furthermore, the variation in the leading edge porosity between  
446  $\varphi = 40\%$  and  $\varphi = 60\%$  is shown to result in strong changes to the energy content of the  
447 velocity fluctuations upstream of the leading edge. However, it should be noted that the  
448 presented results only cover a single turbulent inflow condition. The underlying physics of  
449 turbulence interaction noise is believed to be dependent on the turbulent characteristics of  
450 the inflow, specifically the turbulent intensity and integral length scale<sup>2,5,39</sup>. To this end,  
451 the physics of the noise reduction mechanism for a porous leading edge in airfoil turbulence  
452 interaction noise is likely susceptible to the turbulent inflow conditions. Future works will  
453 focus on better understanding of flow distortion around porous leading edges in turbulent  
454 flows with a range of turbulence intensities and integral length scales.

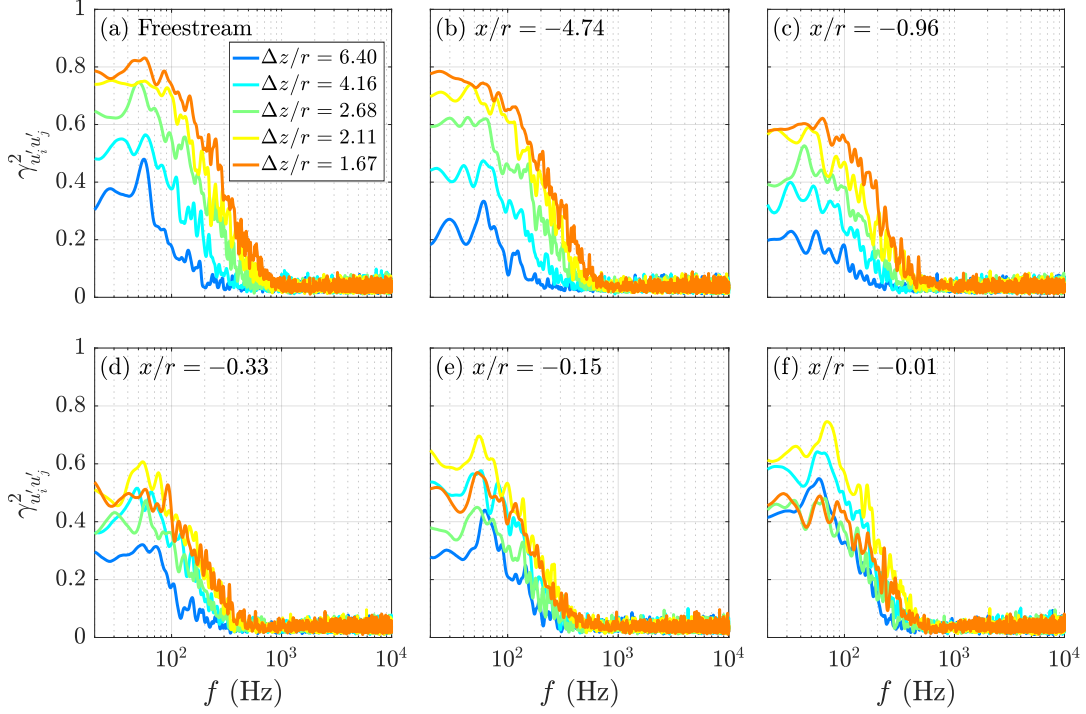


FIG. 10. Spanwise magnitude-square coherence ( $\gamma_{u'_i u'_j}^2$ ) of velocity fluctuation measured by tandem hot-wire probes at multiple spanwise separations ( $\Delta z/r$ ) for solid leading edge along stagnation streamline.

455 **IV. CONCLUSION**

456 This paper presents a study on airfoil turbulence interaction noise reduction using a  
 457 porous treatment at the leading edge. The study implements a NACA 0012 airfoil of chord  
 458  $c = 200$  mm which interacts with a turbulent flow, generated by the means of a passive  
 459 turbulence grid. The leading edge part of the airfoil is interchangeable between a solid  
 460 leading edge and a porous leading edge. The structure utilized at the leading edge is a  
 461 Schwartz-Primitive Triply periodic minimal structure. The porosity of the leading edge is  
 462 varied between three values of porosity  $\varphi = 40\%$ ,  $50\%$  and  $60\%$  to alter the bulk materials'

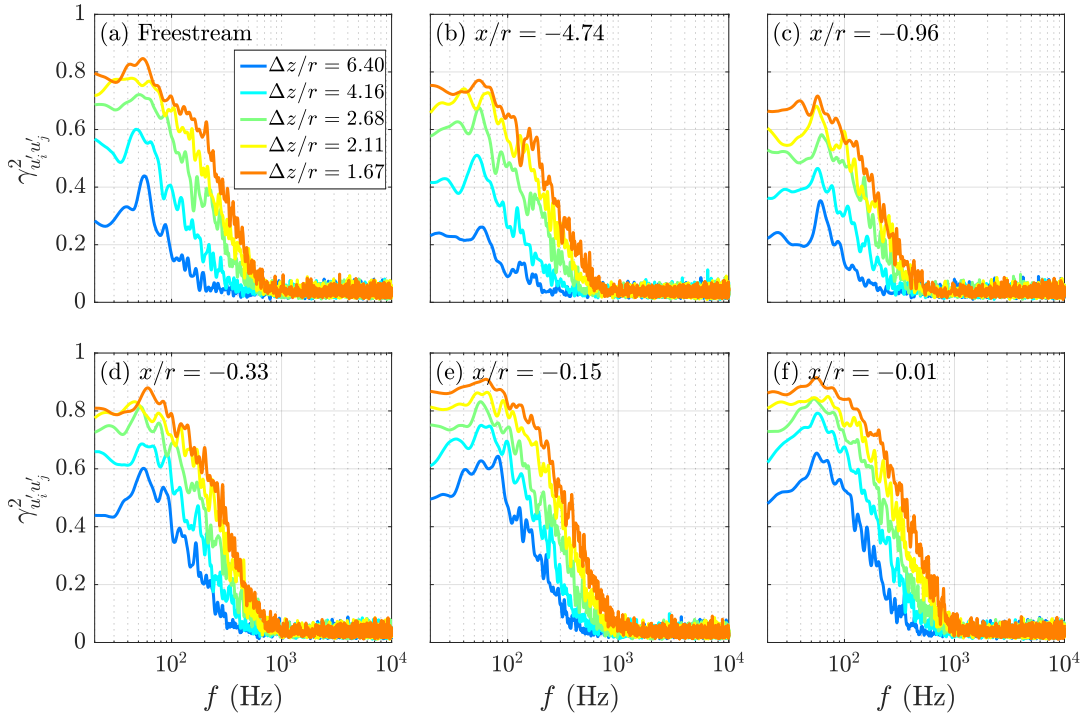


FIG. 11. Spanwise magnitude-square coherence ( $\gamma_{u_i' u_j'}^2$ ) of velocity fluctuation measured by tandem hot-wire probes at multiple spanwise separations ( $\Delta z/r$ ) for porous leading edge ( $\varphi = 50\%$ ) along the stagnation streamline.

463 permeability. Variation of the porosity and permeability of the leading edges was studied  
 464 to understand their effect on turbulence interaction noise. Far-field noise results suggested  
 465 that increasing the porosity results in more effective low-frequency noise reduction, with  
 466 the penalty of high-frequency noise increase. The use of a porous leading edge with a  
 467 porosity of  $\varphi = 40\%$  showed little noise reduction compared to the solid leading edge,  
 468 whereas 50% and 60% demonstrated significant noise reduction at low frequencies. The  
 469 overall sound pressure level results revealed little variation in the directivity of the noise  
 470 between the solid and porous leading edges, and the overall sound pressure level results



471 between the  $\varphi = 50\%$  and  $60\%$  cases offer comparable noise reduction. Analysis of the  
472 flow field by the means of CTA hot-wire measurements revealed flow penetration into the  
473 porous leading edges, with increasing porosity showing a velocity deficit close to the wall  
474 of the airfoil. An interesting behavior is observed for measurements along the stagnation  
475 streamline, when approaching the leading edge of the airfoil a rapid increase in the rms of  
476 velocity fluctuation is evident, contrary to previous experimental observations. The analysis  
477 of the PSD of velocity fluctuations confirmed a significant increase in the energy level close  
478 to the porous leading edge which contradicts the current experimental literature. Further  
479 numerical and experimental investigations are needed to understand whether the increase  
480 in energy is due to the redistribution of energy from streamwise to crosswise, or due to the  
481 nature of the hydrodynamic penetration of the flow in the porous leading edge. Two-point  
482 spanwise velocity fluctuations coherence analysis revealed that approaching the leading edge  
483 of the airfoil the solid case generates a 2D structure due to the loss of separation sensitivity  
484 between the hotwires. For the porous leading edge, it is evident that spanwise coherence of  
485 the velocity fluctuations increases near the porous leading edge and exceeds the freestream  
486 level.

#### 487 **ACKNOWLEDGMENTS**

488 The first author (L.B.) would like to acknowledge the financial support of Embraer  
489 S.A. and an Engineering and Physical Sciences Research Council doctoral training part-  
490 nership (EPSRC DTP). The second author (A.C.) was sponsored by EPSRC via Grant No.

491 EP/S013024/1 at the University of Bristol from 1/6/2020 to 1/12/2022. All authors would  
492 like to acknowledge the financial support of EPSRC via Grant No. EP/S013024/1.

## 493 REFERENCES

494 <sup>1</sup>R. Amiet, “Acoustic radiation from an airfoil in a turbulent stream,” *Journal of Sound*  
495 *and Vibration* **41**(4), 407 – 420 (1975) doi: [https://doi.org/10.1016/S0022-460X\(75\)](https://doi.org/10.1016/S0022-460X(75)80105-2)  
496 [80105-2](https://doi.org/10.1016/S0022-460X(75)80105-2).

497 <sup>2</sup>R. Paterson and R. Amiet, “Acoustic radiation and surface pressure characteristics of an  
498 airfoil due to incident turbulence,” *Proceedings of the 3rd Aeroacoustics Conference*, Palo  
499 Alto, CA, AIAA-76-571 (1976).

500 <sup>3</sup>S. Moreau and M. Roger, “Effect of angle of attack and airfoil shape on turbulence-  
501 interaction noise,” *11th AIAA/CEAS Aeroacoustics Conference*, Monterey, CA, AIAA-  
502 2005-2973 (2005).

503 <sup>4</sup>W. J. Devenport, J. K. Staubs, and S. A. Glegg, “Sound radiation from real airfoils in  
504 turbulence,” *Journal of Sound and Vibration* **329**(17), 3470 – 3483 (2010) doi: <https://doi.org/10.1016/j.jsv.2010.02.022>.

506 <sup>5</sup>F. V. Hutcheson, T. F. Brooks, and D. J. Stead, “Measurement of the noise resulting from  
507 the interaction of turbulence with a lifting surface,” *International Journal of Aeroacoustics*  
508 **11**(5-6), 675–700 (2012) doi: [10.1260/1475-472X.11.5-6.675](https://doi.org/10.1260/1475-472X.11.5-6.675).

509 <sup>6</sup>J. Gill, X. Zhang, and P. Joseph, “Symmetric airfoil geometry effects on leading edge  
510 noise,” *The Journal of the Acoustical Society of America* **134**(4), 2669–2680 (2013) doi:

511 [10.1121/1.4818769](https://doi.org/10.1121/1.4818769).

512 <sup>7</sup>J. R. Gill, X. Zhang, and P. Joseph, “Effects of real airfoil geometry on leading edge gust  
513 interaction noise,” 19th AIAA/CEAS Aeroacoustics Conference, Berlin, Germany AIAA-  
514 2013-2203 (2013), doi: [10.2514/6.2013-2203](https://doi.org/10.2514/6.2013-2203).

515 <sup>8</sup>J. Gershfeld, “Leading edge noise from thick foils in turbulent flows,” The Journal of the  
516 Acoustical Society of America **116**(3), 1416–1426 (2004) doi: [10.1121/1.1780575](https://doi.org/10.1121/1.1780575).

517 <sup>9</sup>S. A. Showkat Ali, M. Azarpeyvand, and C. R. Ilário da Silva, “Trailing-edge flow and  
518 noise control using porous treatments,” Journal of Fluid Mechanics **850**, 83–119 (2018)  
519 doi: [10.1017/jfm.2018.430](https://doi.org/10.1017/jfm.2018.430).

520 <sup>10</sup>S. A. Showkat Ali, M. Azarpeyvand, and C. R. I. da Silva], “Trailing edge bluntness noise  
521 reduction using porous treatments,” Journal of Sound and Vibration **474**, 115257 (2020)  
522 doi: <https://doi.org/10.1016/j.jsv.2020.115257>.

523 <sup>11</sup>X. Liu, H. K. Jawahar, M. Azarpeyvand, and R. Theunissen, “Aerodynamic performance  
524 and wake development of airfoils with serrated trailing-edges,” AIAA Journal **55**(11),  
525 3669–3680 (2017).

526 <sup>12</sup>Y. D. Mayer, B. Lyu, H. K. Jawahar, and M. Azarpeyvand, “A semi-analytical noise  
527 prediction model for airfoils with serrated trailing edges,” Renewable Energy **143**, 679 –  
528 691 (2019) doi: <https://doi.org/10.1016/j.renene.2019.04.132>.

529 <sup>13</sup>H. K. Jawahar, Q. Ai, and M. Azarpeyvand, “Experimental and numerical investigation  
530 of aerodynamic performance for airfoils with morphed trailing edges,” Renewable Energy  
531 **127**, 355 – 367 (2018) doi: <https://doi.org/10.1016/j.renene.2018.04.066>.

532 <sup>14</sup>A. Celik, Y. Mayer, and M. Azarpeyvand, “An experimental aeroacoustic study on serrated  
533 trailing-edge geometries and flow misalignment effects,” AIAA AVIATION 2020 FORUM,  
534 AIAA-2020-2518 (2020).

535 <sup>15</sup>A. Celik, Y. D. Mayer, and M. Azarpeyvand, “On the aeroacoustic characterization of a  
536 robust trailing-edge serration,” *Physics of Fluids* **33**(7), 075120 (2021) doi: [10.1063/5.  
537 0054767](https://doi.org/10.1063/5.0054767).

538 <sup>16</sup>T. F. Geyer, A. Lucius, M. Schrödter, M. Schneider, and E. Sarradj, “Reduction of tur-  
539 bulence interaction noise through airfoils with perforated leading edges,” *Acta Acustica*  
540 united with *Acustica* **105**(1), 109–122 (2019) doi: [doi:10.3813/AAA.919292](https://doi.org/10.3813/AAA.919292).

541 <sup>17</sup>M. Roger, C. Schram, and L. D. Santana, “Reduction of airfoil turbulence-impingement  
542 noise by means of leading-edge serrations and/or porous material,” 19th AIAA/CEAS  
543 Aeroacoustics Conference, Berlin, Germany, AIAA-2013-2108 (2013).

544 <sup>18</sup>A. R. Carpio, F. Avallone, and D. Ragni, “On the role of the flow permeability of metal  
545 foams on trailing edge noise reduction,” 2018 AIAA/CEAS Aeroacoustics Conference,  
546 Atlanta, GA, AIAA-2018-2964 (2018).

547 <sup>19</sup>T. Sinnige, B. D. Corte, R. De Vries, F. Avallone, R. Merino-Martínez, D. Ragni, G. Eitel-  
548 berg, and L. L. M. Veldhuis, “Alleviation of propeller-slipstream-induced unsteady pylon  
549 loading by a flow-permeable leading edge,” *Journal of Aircraft* **56**(3), 1214–1230 (2019)  
550 doi: [10.2514/1.C035250](https://doi.org/10.2514/1.C035250).

551 <sup>20</sup>S. A. Showkat Ali, M. Azarpeyvand, M. Szóke, and C. R. Ilário da Silva, “Boundary  
552 layer flow interaction with a permeable wall,” *Physics of Fluids* **30**(8), 085111 (2018) doi:

553 [10.1063/1.5043276](https://doi.org/10.1063/1.5043276).

554 <sup>21</sup>B. Lyu, M. Azarpeyvand, and S. Sinayoko, “Noise prediction for serrated leading-edges,”  
555 22nd AIAA/CEAS Aeroacoustics Conference, Lyon, France, AIAA-2016-2740 (2016).

556 <sup>22</sup>B. Lyu and M. Azarpeyvand, “On the noise prediction for serrated leading edges,” *Journal*  
557 *of Fluid Mechanics* **826**, 205–234 (2017) doi: [10.1017/jfm.2017.429](https://doi.org/10.1017/jfm.2017.429).

558 <sup>23</sup>J. Kim, S. Haeri, and P. Joseph, “On the reduction of aerofoil-turbulence interaction noise  
559 associated with wavy leading edges,” *Journal of Fluid Mechanics* **792**, 526–552 (2016).

560 <sup>24</sup>S. Narayanan, C. Paruchuri, S. Haeri, P. Joseph, J. W. Kim, and C. Polacsek, “Airfoil  
561 noise reductions through leading edge serrations,” *Physics of Fluids* **27**(2), 025109 (2015)  
562 doi: [10.1063/1.4907798](https://doi.org/10.1063/1.4907798).

563 <sup>25</sup>C. Paruchuri, P. Joseph, S. Narayanan, C. Vanderwel, J. Turner, J. W. Kim, and B. Gana-  
564 pathisubramani, “Performance and mechanism of sinusoidal leading edge serrations for the  
565 reduction of turbulence-aerofoil interaction noise,” *Journal of Fluid Mechanics* **818**, 435–  
566 464 (2017) doi: [10.1017/jfm.2017.141](https://doi.org/10.1017/jfm.2017.141).

567 <sup>26</sup>K. N. Chanaud, R. and R. Sitterding, “Experiments on porous blades as a means of  
568 reducing fan noise,” *Journal of the Acoustical Society of America* **59**, 564–575 (1976).

569 <sup>27</sup>T. Geyer, E. Sarradj, J. Giesler, and M. Hobracht, “Experimental assessment of the noise  
570 generated at the leading edge of porous airfoils using microphone array techniques,” 17th  
571 AIAA/CEAS Aeroacoustics Conference (32nd AIAA Aeroacoustics Conference), Portland,  
572 OR, AIAA-2011-2713 (2011).

573 <sup>28</sup>T. Geyer, E. Sarradj, and J. Giesler, “Application of a beamforming technique to the  
574 measurement of airfoil leading edge noise,” *Advances in Acoustics and Vibration* **2012**,  
575 1–16 (2012) doi: [10.1155/2012/905461](https://doi.org/10.1155/2012/905461).

576 <sup>29</sup>E. Sarradj and T. Geyer, “Noise generation by porous airfoils,” 13th AIAA/CEAS Aeroa-  
577 coustics Conference (28th AIAA Aeroacoustics Conference), AIAA-2007-3719 (2007).

578 <sup>30</sup>R. Zamponi, N. V. de Wyer, and C. F. Schram, “Experimental investigation of air-  
579 foil turbulence-impingement noise reduction using porous treatment,” 25th AIAA/CEAS  
580 Aeroacoustics Conference, Delft, Netherlands, AIAA-2019-2649 (2019).

581 <sup>31</sup>M. Roger and S. Moreau, “Airfoil turbulence-impingement noise reduction by porosity or  
582 wavy leading-edge cut: Experimental investigations,” *INTER-NOISE and NOISE-CON*  
583 *Congress and Conference Proceedings* **253**(2), 6366–6375 (2016).

584 <sup>32</sup>R. Zamponi, S. Satcunanathan, S. Moreau, D. Ragni, M. Meinke, W. Schröder, and  
585 C. Schram, “On the role of turbulence distortion on leading-edge noise reduction by  
586 means of porosity,” *Journal of Sound and Vibration* **485**, 115561 (2020) doi: <https://doi.org/10.1016/j.jsv.2020.115561>.  
587

588 <sup>33</sup>C. Paruchuri, P. Joseph, T. P. Chong, M. Priddin, and L. Ayton, “On the noise reduction  
589 mechanisms of porous aerofoil leading edges,” *Journal of Sound and Vibration* (2020) doi:  
590 [j.jsv.2020.115574](https://doi.org/10.1016/j.jsv.2020.115574).

591 <sup>34</sup>C. Ocker, F. Czwielong, T. F. Geyer, P. Chaitanya, M. Merkel, and S. Becker, “Permeable  
592 structures for leading edge noise reduction,” *AIAA AVIATION 2021 FORUM*, AIAA-2021-  
593 2192 (2021).

594 <sup>35</sup>C. Ocker, T. F. Geyer, F. Czwielong, F. Krömer, W. Pannert, M. Merkel, and S. Becker,  
595 “Permeable Leading Edges for Airfoil and Fan Noise Reduction in Disturbed Inflow,” *AIAA*  
596 *Journal* **59**(12), 4969–4986 (2021) doi: [10.2514/1.J060396](https://doi.org/10.2514/1.J060396).

597 <sup>36</sup>Y. D. Mayer, H. K. Jawahar, M. Szóke, S. A. S. Ali, and M. Azarpeyvand, “Design and  
598 performance of an aeroacoustic wind tunnel facility at the university of bristol,” *Applied*  
599 *Acoustics* **155**, 358 – 370 (2019) doi: [https://doi.org/10.1016/j.apacoust.2019.06.](https://doi.org/10.1016/j.apacoust.2019.06.005)  
600 [005](https://doi.org/10.1016/j.apacoust.2019.06.005).

601 <sup>37</sup>A. P. G. Sagrado, “Boundary layer and trailing edge noise sources,” Ph.D. Thesis, Univer-  
602 sity of Cambridge (2008).

603 <sup>38</sup>Y. Mayer, B. Zang, and M. Azarpeyvand, “Near-field aeroacoustic characteristics of a  
604 stalled naca 0012 aerofoil,” in *Proceedings of the 23rd International Congress on Acoustics,*  
605 *integrating 4th EAA Euroregio 2019*, edited by M. Ochmann, Proceedings of the ICA AND  
606 EAA EUROREGIO, DEGA e.V. (2019), pp. 5421–5428.

607 <sup>39</sup>L. Bowen, A. Celik, M. Azarpeyvand, and C. R. I. da Silva, “Grid generated turbulence for  
608 aeroacoustic facility,” *AIAA Journal* **60**(3), 1833–1847 (2022) doi: [10.2514/1.J060851](https://doi.org/10.2514/1.J060851).

609 <sup>40</sup>L. Bowen, A. Celik, M. Azarpeyvand, and C. R. da Silva, “Porous geometry effects on  
610 the generation of turbulence interaction noise,” in *AIAA AVIATION 2021 FORUM, AIAA*  
611 *2021-2193*, doi: [10.2514/6.2021-2193](https://doi.org/10.2514/6.2021-2193).

612 <sup>41</sup>L. Bowen, A. Celik, M. Azarpeyvand, and C. R. I. da Silva, “On the use of tailored perme-  
613 able surfaces for turbulence interaction noise control,” *AIAA AVIATION 2020 FORUM,*  
614 *AIAA-2020-2530* (2020).

615 <sup>42</sup>L. D. Santana, J. Christophe, C. Schram, and W. Desmet, “A rapid distortion theory  
616 modified turbulence spectra for semi-analytical airfoil noise prediction,” *Journal of Sound  
617 and Vibration* **383**, 349–363 (2016) doi: <https://doi.org/10.1016/j.jsv.2016.07.026>.