


The Society of
Light and Lighting

Evaluating the overall impression of concert lighting: An integrated approach

VWL Lo PhD  and KA Steemers PhD

Department of Architecture, The Martin Centre for Architectural and Urban Studies, University of Cambridge, Cambridge, UK

Received 6 September 2020; Revised 16 January 2021; Accepted 13 April 2021

Using experimental data from four electric lighting scenarios at King's College Chapel in Cambridge, we developed an integrated approach to evaluating the overall impression of concert lighting. First, we performed a group analysis based on the aggregated response from the audience, conductor and musician respondents, followed by an overall analysis accounting for all 624 responses. Ordered logistic regression analysis revealed the absence of statistically significant subjective–objective relationships for perceived visual balance, appropriateness, comfort and the overall impression. There were, however, significant results when the variables were correlated with subjective attributes. This suggests that the perceptual process was bi-level. To gain a more complete understanding of the perceived qualities, it is necessary for an approach to consider not only the intercorrelations between the subjective and objective measures, but also the intracorrelations among the subjective attributes. Further analysis of variance showed that increasing the overall lighting intensity was more likely to lead to a lower level of satisfaction. Nevertheless, providing peripheral and directional lights appeared to be the key to improving the overall impression. This paper confirms that combining detailed and generalised approaches to evaluate subjective responses can yield more meaningful interpretations, enabling relations with measures to be established with greater confidence.

1. Introduction

Lighting researchers have been striving for pragmatic and holistic approaches to assessing the effects of lighting conditions on building occupants. Since the first Commission Internationale de l'Éclairage (CIE) symposium on lighting quality two decades ago,¹ much effort has been devoted to developing predictive models linking the visual system with task performance, visual

comfort and preferences,^{2–4} linking the perceptual system with health and safety (e.g. disability glare and fatigue)^{5,6} and well-being (e.g. mood, motivation and behaviour),^{7,8} as well as linking the circadian system with colour properties, alertness and health.^{9–11}

While lighting standards and guidelines can support architects and designers in creating sufficiently lit spaces that meet recommended light levels for functionality and energy efficiency, the extent to which lighting affects occupants' experience depends also on context- and occupant-specific factors. As highlighted in Table 1, assessment frameworks available from current lighting standards and design guides appear to be over generalised

Address for correspondence: VWL Lo, Department of Architecture, The Martin Centre for Architectural and Urban Studies, University of Cambridge, 1-5 Scroope Terrace, Cambridge CB2 1PX, UK.
E-mail: villianlo@cantab.net

Table 1 Suggested frameworks and protocols given in current standards and guidelines for assessing the visual environments and occupant's responses

Standards and guidelines	References	Standalone lighting assessment	Measures	Context	Visual aspects and criteria										Outcome	
					Acuity	Comfort	Performance	Glare	Flickering	Distribution	Uniformity	Directionality	Modelling	Non-visual		
The office lighting survey Eklund and Centre* – Lighting Research Centre ^{14,15}	Boyce ^{14,15}	Yes	Agreement/ disagreement; a set of statements	Office	•	•	•	•	•	•	•	•	•	•	•	To relate overall comfort to key lighting aspects
Lighting Quality Scale – National Research Council of Canada*	Veitch and Newsham ^{15,16}	Yes	Agreement/ disagreement; acceptability; satisfactory; a set of statements	Office	•	•	•	•	•	•	•	•	•	•	•	Lighting quality ratings; bothersome glare; overall satisfaction
BS EN 15193 Lighting Energy Numeric Indicator	The British Standards Institution ¹⁷	No; +Heating and cooling requirements	Standby energy, luminaire data, lighting availability, occupancy, control, and dependency factors	General	•	•	•	•	•	•	•	•	•	•	•	Assess and evaluate lighting energy consumption
Ergonomic Lighting Indicator ^a	Tralau, Dehoff and Schierz ^{15,16,19}	Yes	Rating scales for five assessment categories: visual performance, vista, visual comfort, vitality, flexibility and individuality	Retail	•	•	•	•	•	•	•	•	•	•	•	Evaluate lighting quality using the five categories and present the result as a radar chart
BS EN 12464-1 Light and Indoor Environmental Quality	The British Standards Institution ^{20,21}	No; + Indoor air quality, thermal and acoustical environments	Sensations; acceptability; expectations; a set of rating scales	General	•	•	•	•	•	•	•	•	•	•	•	Classification of the indoor environment; assess the performance of buildings and building service systems
BS EN ISO 28802:2012 Ergonomics of the physical environment – An Environmental Survey	The British Standards Institution ¹²	No; + Thermal and acoustical environments, air quality and vibration	Preference, acceptability, satisfaction	General	•	•	•	•	•	•	•	•	•	•	•	Assess overall satisfaction and identify environmental problems
Work Space Appraisal ^a	Thorn Lighting ¹⁵	Yes	Yes/No statements; acceptability, preference, sensations	Office	•	•	•	•	•	•	•	•	•	•	•	Evaluate environmental comfort conditions
The WELL Building Standard	International WELL Building Institute ^{13,22}	No; + Air, water, nourishment, fitness, thermal comfort, mind	Illumination levels, light output, controls, window performance and design, colour rendering index	Retail, office, residential, education and restaurant	•	•	•	•	•	•	•	•	•	•	•	Assess the health and wellbeing of building occupants

a Sample surveys were given in CIE 213:2014 Guide to protocols for describing lighting.¹⁵

and limited to office and retail applications despite the proliferation of research into the subjective aspects of light, failing to account for different contexts in which lighting is perceived. An environmental survey published by the British Standards Institution (BSI) and the International Organisation for Standardisation (ISO), for example, sets out broad questions and rating scales concerning visual discomfort, preference, acceptability and satisfaction as a means to assess the occupant's impressions of luminous environments.¹² Such an assessment, however, seems to be rather rudimentary and inadequate due to the generalisation of the questions involved and their non-context-specific nature. More recently, integrating health and well-being into building design has prompted the development of the WELL Building Standard.¹³ Drawing on the wealth of research conducted by the lighting, architectural, medical and neuroscience communities, the WELL Building Standard provides the construction industry and general public with a more comprehensive and structured framework to assess the physical environment including air, water, lighting, thermal comfort and sound. Although the assessment criteria are generally supported by published studies, which can be seen as a small step towards bridging the gap between research and application, it remains unclear how the framework might best be applied in various settings.

The procedures detailed in the standards and guides may mislead practitioners and assessors alike into assuming that the evaluation process is merely a tick-box exercise. The following review of methods and model developments attempts to highlight what might have contributed to the shortcomings of these assessment frameworks. Broadly, (1) previous lighting studies appear to have focused mostly on simple and controlled contexts with limited physical parameters considered; (2) the general nature of the questions and response variables selected

seems unable to fully reflect different contexts and the occupants' luminance requirements; and (3) assessment procedures are often presented in a sequential and orderly manner with relatively little emphasis on their applicability in complex settings.

1.1 Controlled contexts with limited physical parameters

In early developments, empirical models were developed with shared goals to perform assessments and make predictions in a variety of settings and under a variety of lighting conditions. A common approach was to model the effects of light on people's ability to process visual information, and on their speed and accuracy in performing visual tasks. The psychophysical experiments involved, however, have traditionally been over-controlled, leaving the applicability of the models open to challenge, especially when applying them in complex luminous environments. Among the well-established studies, Blackwell's visibility-based approach focused on observers' visual ability to sense minute changes in light levels,^{23,24} while Rea and Ouellette's time-based approach centred on observers' reactions to non-visual tasks under mesopic and photopic conditions.^{25–27} Based on both observed threshold and suprathreshold responses, Rea and Ouellette's visual performance model (RVP) indicates that visual performance improves with increased brightness and contrast, though the trend levels off when the brightness and contrast become relatively high. These findings are consistent with those obtained in other studies.^{28–30} The model was better received because of its explicit attempt to associate visual and task performances with a broader range of threshold values, and because of the relative ease of obtaining the relevant measurements. Despite being highly appealing in the first instance, these approaches seem to have little place in current lighting research, except in road lighting.^{31,32} A plausible

explanation could be that the tightly controlled experimental setting and design might have limited the potential for application in real contexts. The limited number of physical parameters considered, as Rea admitted, might also have contributed to the incompleteness of the model.³³

1.2 General nature of the questions and response variables

Another practical concern with some models is the risk of assuming similar magnitudes of lighting attributes in one context can induce similar impressions in another context. Inspired by the designed appearance method of Waldram^{34,35} that is based on the concept of apparent brightness, Lynes devised the flux distribution procedure as a design guide to good illumination.³⁶ To account for task illumination and illumination hierarchies, the five-step procedure involves calculating of surface reflected flux, average indirect illuminance, surface direct illuminance, surface direct flux and zone lamp wattage. Cuttle similarly integrated the concepts of ambient illumination, illumination colour appearance, illumination hierarchy, colour rendering, flow of light, sharpness of lighting and luminous elements into one framework.^{37,38} He described that a lit appearance would be considered dim at 30 lm/m², whereas it would be perceived as distinctly bright at 1000 lm/m². In addition to linking illuminance levels to the generic descriptions of perceived appearances, the underlying theories often require advanced mathematical knowledge which makes the models of Lynes and Cuttle less intuitive for architects and designers alike to comprehend, and thus less readily applicable.

1.3 Assessment procedures

Through mapping the complex pathways among lighting and visual conditions and behavioural effects, several attempts have been made to develop linked-mechanism

maps to understand the effects of environmental and behavioural factors on the perceptions of luminous conditions and the feelings of competence, health and wellbeing. Guided by a set of concepts, step-by-step procedures and standardised assessment scales and scoring measures, Boyce *et al.* and Veitch *et al.*, for example, executed field experiments to examine the multi-dimensional linkages among the perceptual aspects of light.^{7,8,39} Using Wyon linked mechanisms maps, they observed that spatial attractiveness, mood, health, well-being, satisfaction, work engagement and behaviour could all to some extent be predicted through lighting appraisal. Motivation could be predicated by visual capabilities, and task performance could be predicated by using lighting appraisals combined with visual capabilities.^{7,39} In a separate study, Borisuit *et al.*⁴⁰ found that there are potential relationships between visual comfort, mood, alertness, well-being and lighting conditions, supporting the findings of Boyce *et al.* and Veitch *et al.* The highly robust way of formulating such studies and the thoroughly systematic nature of the relationships might, however, mislead practitioners into thinking lit environments are evaluated by means of behavioural checklists. Any complementary relationships that might exist between multiple subjective aspects of light might get overlooked. Furthermore, the lack of contextual variables might fail to guide researchers and practitioners to examine specific environments – other than real and experimental office conditions.

Clearly, there is no one-size-fits-all framework for lighting evaluation. Likewise, it would be inappropriate to follow recommended light measurements blindly in any application, as they rarely reflect the complex lighting requirements of the built environment. Extending our work that evaluated the perceived qualities of concert lighting at Cambridge King's College Chapel,⁴¹ this paper presents the development of an

integrated approach for evaluating its overall impression. Note that the choice of the context was driven by a need to provide the College with a lighting appraisal for evaluating users' concert experience in the chapel. This study was designed to address the shortcomings discussed above by examining a real and complex luminous environment, developing analytical methods with emphases on occupants' roles and their luminance requirements and adopting a bottom-up approach to evaluating lighting impressions to identify any subtle observations.

2. Methods and procedures

2.1 Previously completed lighting experiments

Lighting experiments were previously performed in the chapel with its performance space of 139 m² transformed into an experimental setting – populated with dummies,⁴² concert stands and seats – in which 78 participants evaluated four different electric lighting conditions for concerts (Figure 1 and Table 2) using a set of structured questionnaires.⁴¹ The participants were students and staff recruited from across the University of Cambridge, with the majority of them (66.67%) from age 21 to 30 (10.26% from under 21; 14.10% from age 31 to 40; 6.41% from age 41 to 50; 2.56% from over 51). With a variety of training backgrounds – architecture, engineering, science, arts, music and others – 56.41% of the participants stated they can play musical instruments and 46.15% of the participants had been a member of a choir, an orchestra or a band. Most of them had previously visited the chapel. Only a few of them (King's College members) had spent more time in the chapel before the experiment than during it. Each participant took part in two experimental sessions. In each session, they were instructed to assess the visual conditions at one of the six viewing positions (spots O and A – audience members; spot B – the conductor; spots C, D and E – musicians (Figure 1)). With rig lighting (i.e. setting IV) being a control

setting, they were asked to compare each of the test settings against the control setting. Depending on the position, the questions were tailored according to the participant's role but broadly focused on four aspects: visual clarity, light distribution, spatiality and overall impression. For the audience participants, for example, they were asked, 'How appropriate is this visual environment for your enjoyment of the concert?'; for the conductor and musician participants, they were asked, 'How appropriate is this visual environment for your performance of the concert?' The difference in the questions asked was to highlight that lighting requirements vary among different types of occupants. To guide the participants through the evaluation process, the questionnaires contained factual and higher level questions along with seven-point semantic differential scales for them to make ratings. Altogether, 624 responses were collected from across the viewing positions.





2.1.1 Subjective attributes

Six subjective attributes were selected in accordance with the attributes commonly used to evaluate concert acoustics and with reference to the classic attributes of lighting: visual acuity, visual balance, visual uniformity, brightness, spatial intimacy, appropriateness/comfort and overall impression. The definitions of these attributes are given in Table 3.

2.1.2 Objective measures

Using high-dynamic-range imaging, we collected luminance data from the six viewing positions. To facilitate data extraction, we created binary masks in relation to the structure of the visual field and spatial hierarchy in order to make sense of the data.⁴¹ Having extracted and synthesised the data, we then derived 22 objective measures and categorised them into four groups – visual acuity, uniformity, brightness and light pattern – to describe the visual scenes in this study. The physical measures were first classified by the unit, magnitude and nature of

Table 2 Four light settings: Setting I: Interim Lighting; Setting II: Interim Plus; Setting III: All Lighting; Setting IV: Rig Lighting (control setting) (Refer to the previous paper for full specification details⁴¹)

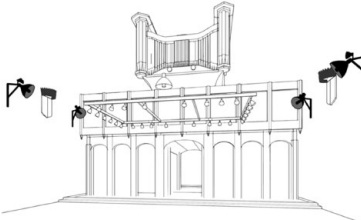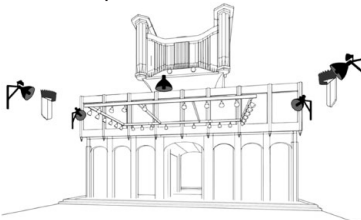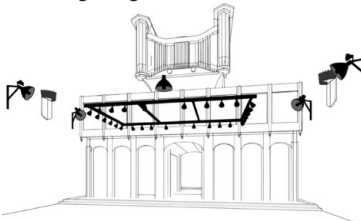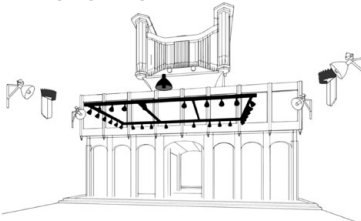Light Setting	Light fittings for the performance space				
	1. Crown uplights (100 w × 4 nos.)	2. Screen lights (100 w × 9 nos.)	3. Peripheral lights (320 w × 4 nos.; 16 w × 4 pairs)	4. Overhead spotlight (320 w × 1 no.)	5. Overhead rig lights (75 w × 28 nos.)
I: Interim lighting 	•	•	•		
II: Interim plus 	•	•	•	•	
III: All lighting 	•	•	•	•	•
IV: Rig lighting 	•	•		•	•

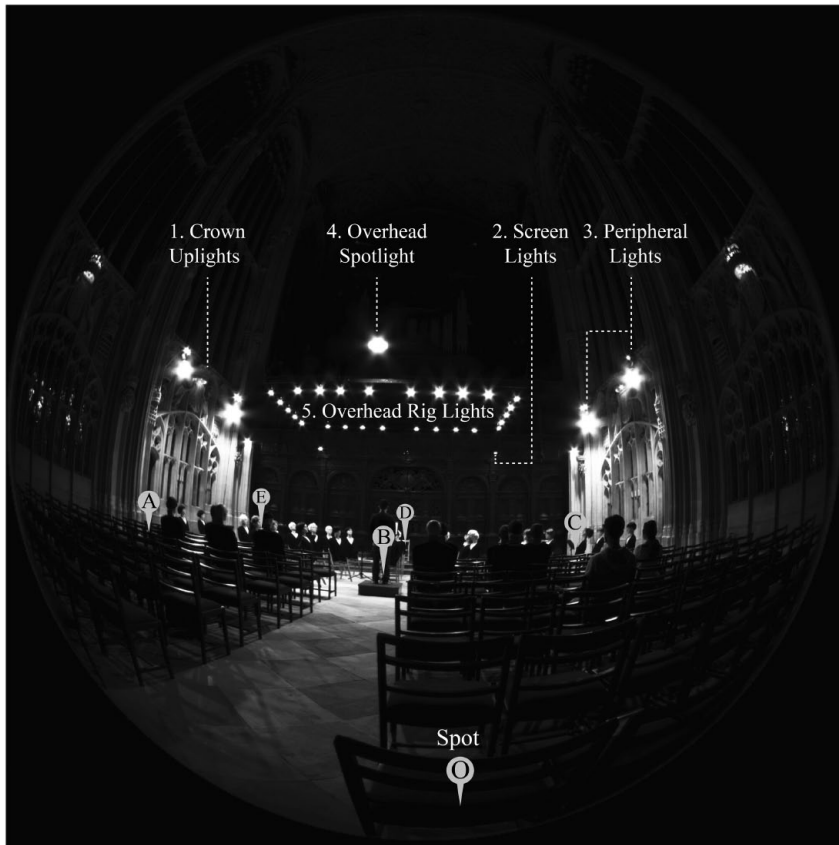


Figure 1 Experimental setting and the six viewing positions: Spot O: Audience member, back row; Spot A: Audience member, front row; Spot B: The conductor, at the centre of the performance space; Spot C: Musician, near to the side of the performance stage; Spot D: Musician, towards the rear of the performance stage; Spot E: Musician, in the far back corner of the performance stage

Table 3 Definitions of the six subjective attributes are selected specifically for the study of concert lighting at the King’s College Chapel (partially published in a previous paper⁴¹)

Attributes	Definitions
Visual clarity	Perceived distinctiveness of visual details ability to see spatial details; ability to see the performers and audience members; ability to read the music sheets and concert programmes
Visual uniformity	Spatial distribution of light patterns to reveal visual details of interest and activities
Visual balance	Balance between dark and light; balance between different parts of the luminous environment
Brightness	Relative intensity of light
Spatial intimacy	Impression of extroverted or introverted activities
Appropriateness/comfort	Subjective appropriateness of a lighting condition and visual comfort in a lighting environment
Overall impression	Overall lighting quality of the chapel

their corresponding numerical expressions. The physical levels of the measures were then examined to determine if there were specific patterns among the light settings. Only then were correlation coefficients calculated for all the measures and similarities among them sought.^{41,43,44} The definitions of these measures and their associated subjective attributes are given in Table 4.

2.2 Analytical methods

The complexity of the luminous environment and the exploratory nature of the study prompted the formulation of a bottom-up approach to analysing the connections between the subjective attributes and

physical-measurement-based objective measures. Our previous study showed that perceptions of visual clarity, visual uniformity, brightness and spatial intimacy were significantly intercorrelated with the objective measures.⁴¹ The perception of a luminous environment never depends on just a single factor. To understand the uniqueness of the measures, we first performed a collinearity test for all the subjective attributes (visual clarity, visual uniformity, visual balance, brightness, spatial intimacy, appropriateness/comfort and overall impression) to ensure their discriminant validity and the reliability of the subsequent regression analysis. As with other building research studies (Table 5), the

Table 4 Definitions of the objective measures selected (Originally published in a previous paper⁴¹)

Group 1: Visual acuity	
TLum _{Sheets avg}	Average target (music sheets or programmes) luminance value
BkLum _{-Sheets avg}	Average background luminance value: Luminance distribution of a full visual field minus that of the music sheets or programmes
TLum _{Stage avg}	Average target luminance value on the stage
BkLum _{-Stage avg}	Average background luminance value: Luminance distribution of a full visual field minus that of the stage
VA _{Sheets}	Visual acuity: Ability to discern fine details of the music sheets or programmes (TLum _{Sheets avg} :BkLum _{-Sheets avg})
VA _{Stage}	Visual acuity: Ability to discern fine details on the stage (TLum _{Stage avg} :BkLum _{-Stage avg})
LC _{Sheets}	Luminance contrast: Luminance difference between the background luminance and the luminance on the music sheets/ programmes
Group 2: Uniformity	
((LLM _{avg} + LRM _{avg})/2):LB _{avg}	A ratio of average luminance seen through the left and right monocular fields to average luminance seen through the binocular field
LLM _{avg} :LRM _{avg}	A ratio of average luminance seen through the left monocular field to that seen through the right monocular field
LLM _{std} :LRM _{std}	A ratio of the standard deviation of luminance seen through the left monocular field to that seen through the right monocular field
Group 3: Brightness	
L _{var}	Variation of luminance of a full visual field
L _{avg}	Average luminance of a full visual field
RL _{avg}	Average of the relative luminance values
RL _{std}	Standard deviation of the relative luminance values
Group 4: Light pattern	
Area _{Light patches}	After binarising a coloured image into a two-level greyscale image based on its mean intensity value, this variable is obtained by counting the total number of white pixels of the two-level greyscale image.
Euler number	Calculated by pixel connectivity, this variable computes the number of regions detected within an image. The higher the Euler number (<i>i.e.</i> light patches), the more scattered is the luminance field.
Light:Dark	Total number of white and black pixels of a two-level greyscale image
Perimeter	Total length of the outer edges around the white areas of a two-level greyscale image

Table 5 Collinearity thresholds applied in published building studies

Threshold	Area of research	Researcher
VIF \leq 5 is acceptable; 5 \leq VIF \leq 10 is moderately acceptable; VIF \geq 10 is unacceptable	Energy consumption and sustainable architecture	Tzikopoulos <i>et al.</i> ⁴⁶
VIF \geq 3 is unacceptable	Thermal comfort and indoor air quality	Cho and Awbi ⁴⁷
VIF \geq 5 is unacceptable	Sustainability, environment and social science	Knight and Rosa ⁴⁸
VIF $>$ 5 is unacceptable	Thermal comfort, indoor air quality, thermal sensation and occupant perceptions	Kim and de Dear ^{49,50}
VIF \geq 10 is unacceptable	Thermal comfort, indoor air quality, thermal sensation and occupant perceptions	Sun <i>et al.</i> ⁵¹
Not specified	Thermal comfort, indoor and outdoor air quality, thermal sensation and occupant perceptions	Schiavon and Lee ⁵²
VIF \geq 10 is unacceptable	Building energy consumption and performance	Valovcin <i>et al.</i> ⁵³

variance inflation factor (VIF) was used to quantify the extent to which independent variables were intercorrelated.⁴⁵

Ranging from 1.00 to infinity, a smaller value of VIF indicates that the variables studied are less prone to collinearity. It was anticipated that there would be strong collinearity between the explanatory variables, especially in the case of the overall analysis where data and responses were pooled regardless of the occupant's role, as the model fit would become more sensitive due to the greater variability among the data. This would make it difficult to optimise the fit between the measured and predicted responses to produce meaningful results. A more lenient threshold of 10 was therefore set for the collinearity tests, followed by an iterative ordered logistic regression analysis to establish relationships between predictors and outcome variables for the development of an integrated approach. The settings were then compared by organising them into three contrast groups based on their similarities, aiming to pinpoint which group exhibited the largest difference in mean responses.

3. Results and discussions

3.1 The presence of collinearity

In the regressions for the audience members and musicians, the explanatory variables

were entered into the models using the order of the four main groups of the physical parameters (Group 1: Visual Acuity; Group 2: Uniformity; Group 3: Brightness; Group 4: Light Patterns), as shown in Table 6. These groups were defined by the characteristic and explanatory role of each measure.⁴⁴ To justify the groupings, the Pearson correlation coefficient of each pair of measures was calculated to determine the similarities and differences among them. The differences in the different occupant' lighting requirements were taken into consideration in the selection process. Some of the measures were rejected because of their weak ability to predict a subjective attribute, and/or because of their lack of relevancy to the occupants' requirements in this particular setting. In the case of the audience members, for example, the variables related to visual acuity, uniformity and brightness were found to account for much of the variation in visual clarity; adding a light pattern-related measure failed to reveal any statistically significant contribution to the variance.

The cases involving more than one variable from the same group were visual uniformity and overall impression for the musicians, and visual clarity, visual balance, visual uniformity, appropriateness/comfort and overall impression for the overall analysis (i.e. all occupants model). As might be expected,

Table 6 Objective measures selected by role for subjective attributes

Subj.	Role	Selected independent variable (Obj.)			
		Group 1: Visual acuity ^b	Group 2: Uniformity	Group 3: Brightness	Group 4: Light pattern
Visual clarity	Am	VA Stage (1 st)	LLM _{avg} :LRM _{avg} (2 nd)	L _{avg} (3 rd)	–
	Co	VA Sheets (2 nd)	–	–	Area _{Light patches} (1 st)
	Mu	VA Stage (1 st)	LLM _{avg} :LRM _{avg} (2 nd)	RL _{std} (3 rd)	Perimeter (4 th)
	All	VA Stage (1 st) VA Sheets (2 nd)	LLM _{avg} :LRM _{avg} (3 rd)	L _{avg} (4 th) RL _{std} (5 th)	Area _{Light patches} (6 th) Perimeter (7 th)
Visual balance	Am	LC Sheets (1 st)	LLM _{avg} :LRM _{avg} (2 nd)	–	Light:Dark (3 rd)
	Co	–	((LLM _{avg} + LRM _{avg})/2): LB _{avg} (2 nd)	–	Light:Dark (1 st)
	Mu	–	LLM _{avg} :LRM _{avg} (1 st)	RL _{avg} (2 nd)	Light:Dark (3 rd)
	All	LC Sheets (1 st)	LLM _{avg} :LRM _{avg} (2 nd) ((LLM _{avg} + LRM _{avg})/2): LB _{avg} (3 rd)	RL _{avg} (4 th)	Light:Dark (5 th)
Visual uniformity	Am	–	–	RL _{avg} (1 st)	Euler Number (2 nd)
	Co	–	((LLM _{avg} + LRM _{avg})/2): LB _{avg} (2 nd)	–	Euler Number (1 st)
	Mu	–	LLM _{avg} :LRM _{avg} (1 st) L _{var} (2 nd)	RL _{avg} (3 rd)	–
	All	–	((LLM _{avg} + LRM _{avg})/2): LB _{avg} (1 st) LLM _{avg} :LRM _{avg} (2 nd) L _{var} (3 rd)	RL _{avg} (4 th)	Euler Number (5 th)
Brightness	Am	–	LLM _{std} :LRM _{std} (1 st)	RL _{std} (2 nd)	–
	Co	–	LLM _{std} :LRM _{std} (2 nd)	–	Light:Dark (1 st)
	Mu	–	LLM _{std} :LRM _{std} (1 st)	RL _{std} (2 nd)	Light:Dark (3 rd)
	All	–	LLM _{std} :LRM _{std} (1 st)	RL _{std} (2 nd)	Light:Dark (3 rd)
Spatial intimacy	Am	–	LLM _{avg} :LRM _{avg} (1 st)	L _{avg} (2 nd)	–
	Co	–	LLM _{avg} :LRM _{avg} (3 rd)	L _{avg} (2 nd)	Light:Dark (1 st)
	Mu	–	LLM _{avg} :LRM _{avg} (1 st)	L _{avg} (2 nd)	Light:Dark (3 rd)
	All	–	LLM _{avg} :LRM _{avg} (1 st)	L _{avg} (2 nd)	Light:Dark (3 rd)
Appropriateness/ Comfort	Am	VA Stage (1 st)	LLM _{std} :LRM _{std} (2 nd)	RL _{std} (3 rd)	–
	Co	–	((LLM _{avg} + LRM _{avg})/2): LB _{avg} (1 st)	RL _{std} (3 rd)	Area _{Light patches} (2 nd)
	Mu	–	LLM _{avg} :LRM _{avg} (1 st)	RL _{std} (2 nd)	–
	All	VA Stage (1 st)	((LLM _{avg} + LRM _{avg})/2): LB _{avg} (2 nd) LLM _{std} :LRM _{std} (3 th) LLM _{avg} :LRM _{avg} (4 th)	RL _{std} (5 th)	Area _{Light patches} (6 th)
Overall Impression	Am	VA Stage (1 st)	LLM _{std} :LRM _{std} (2 nd)	–	Light:Dark (3 rd)
	Co	VA Stage (3 rd)	LLM _{std} :LRM _{std} (1 st)	–	Light:Dark (2 nd)
	Mu	VA Stage (1 st)	((LLM _{std} + LRM _{std})/2):LB _{std} (2 nd)	–	Light:Dark (4 th)
	All	VA Stage (1 st)	LLM _{std} :LRM _{std} (3 rd) ((LLM _{std} + LRM _{std})/2):LB _{std} (2 nd) LLM _{std} :LRM _{std} (3 rd)	–	Light:Dark (4 th)

Am: audience members; Co: conductor; Mu: musicians; All: all occupants; Subj. : subjective attributes; Obj.: objective measures.

^aith: Order of a multiple regression coefficient (see Figure 2).

increasing the number of explanatory variables increased the likelihood of collinearity as a result of the overlapping nature of the variables (Figure 2). The audience members

(VIF_{avg} = 2.52) and the conductor (VIF_{avg} = 2.47) models all had VIFs well below the threshold value; meanwhile, the musicians models had VIFs just below the

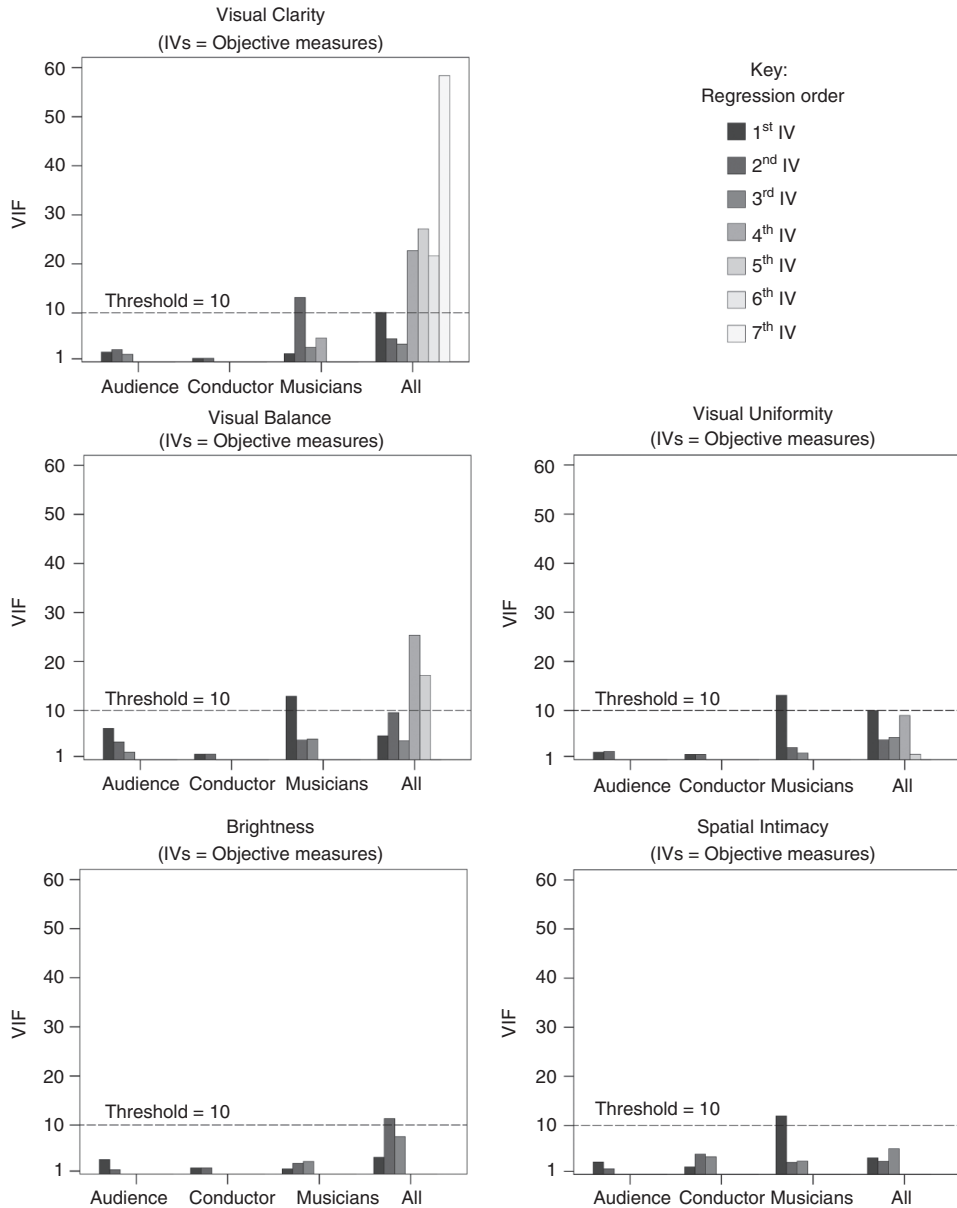


Figure 2 Variance inflation factors of the objective measures by occupant’s role. The regression order of an independent variable is indicated by the greyscale bar. (Refer to Table 6 for the corresponding measures; IV: independent variable)

threshold ($VIF_{avg} = 9.29$). The issue of collinearity was the most severe in the overall analysis (i.e. all occupants) ($VIF_{avg} = 49.90$). The largest VIF was found for

appropriateness/comfort, where the VIFs for the third ($LLM_{std}:LRM_{std}$) and fourth variables ($LLM_{avg}:LRM_{avg}$) were 845.42 and 826.91, respectively, which is unsurprising

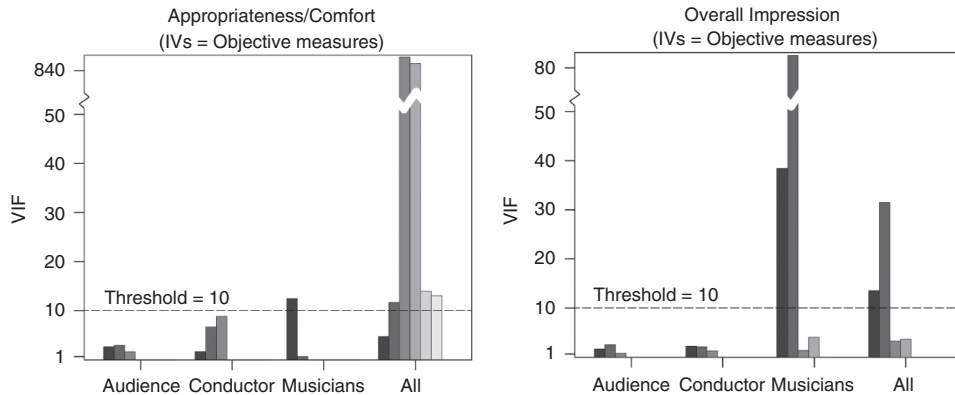


Figure 2 Continued

Table 7 Subjective attributes used as the independent variables predicting visual balance, appropriateness/comfort and overall impression in the supplementary analyses

Dependent variable	Independent variable (subjective attribute)
Visual balance	Visual clarity (1 st), visual uniformity (2 nd), brightness (3 rd), spatial intimacy (4 th)
Appropriateness/comfort	Visual clarity (1 st), visual balance (2 nd), visual uniformity (3 rd), brightness (4 th), spatial intimacy (5 th)
Overall impression	Visual clarity (1 st), visual balance (2 nd), visual uniformity (3 rd), brightness (4 th), spatial intimacy (5 th), appropriateness/comfort (6 th)

given those variables belong to the same group and have similar constructs. The former was calculated from the standard deviation of the luminance levels; the latter was from the average luminance levels. Because lighting requirements vary from role to role, it was determined that none of these variables could be excluded in order to minimise the risk of omitting important explanatory terms.

Using subjective attributes as explanatory variables (Table 7) appeared to alleviate collinearity for the visual balance, appropriateness/comfort and overall impression models, which all had VIFs well below the threshold (Figure 3). For audience members, the conductor and musicians, the overall average VIFs for visual balance, and appropriateness/comfort were reduced by 12% and

24%, respectively. A substantial reduction of 67% was found for overall impression as well. The changes follow similar patterns in the overall analysis, but with a more pronounced decrease in the VIFs. The overall average VIFs for visual balance, appropriateness/comfort and overall impression were reduced significantly by 69%, 99% and 71%, respectively.

3.2 Model validation

The validity of the models was examined by performing model fitting tests and proportional odds assumption tests using the concepts of likelihood-ratios. From the first analysis using the objective measures as independent variables, two fitted models for musicians (visual balance: $\chi^2 = 4.89$, $p > 0.05$; and appropriateness/comfort: $\chi^2 = 3.58$,

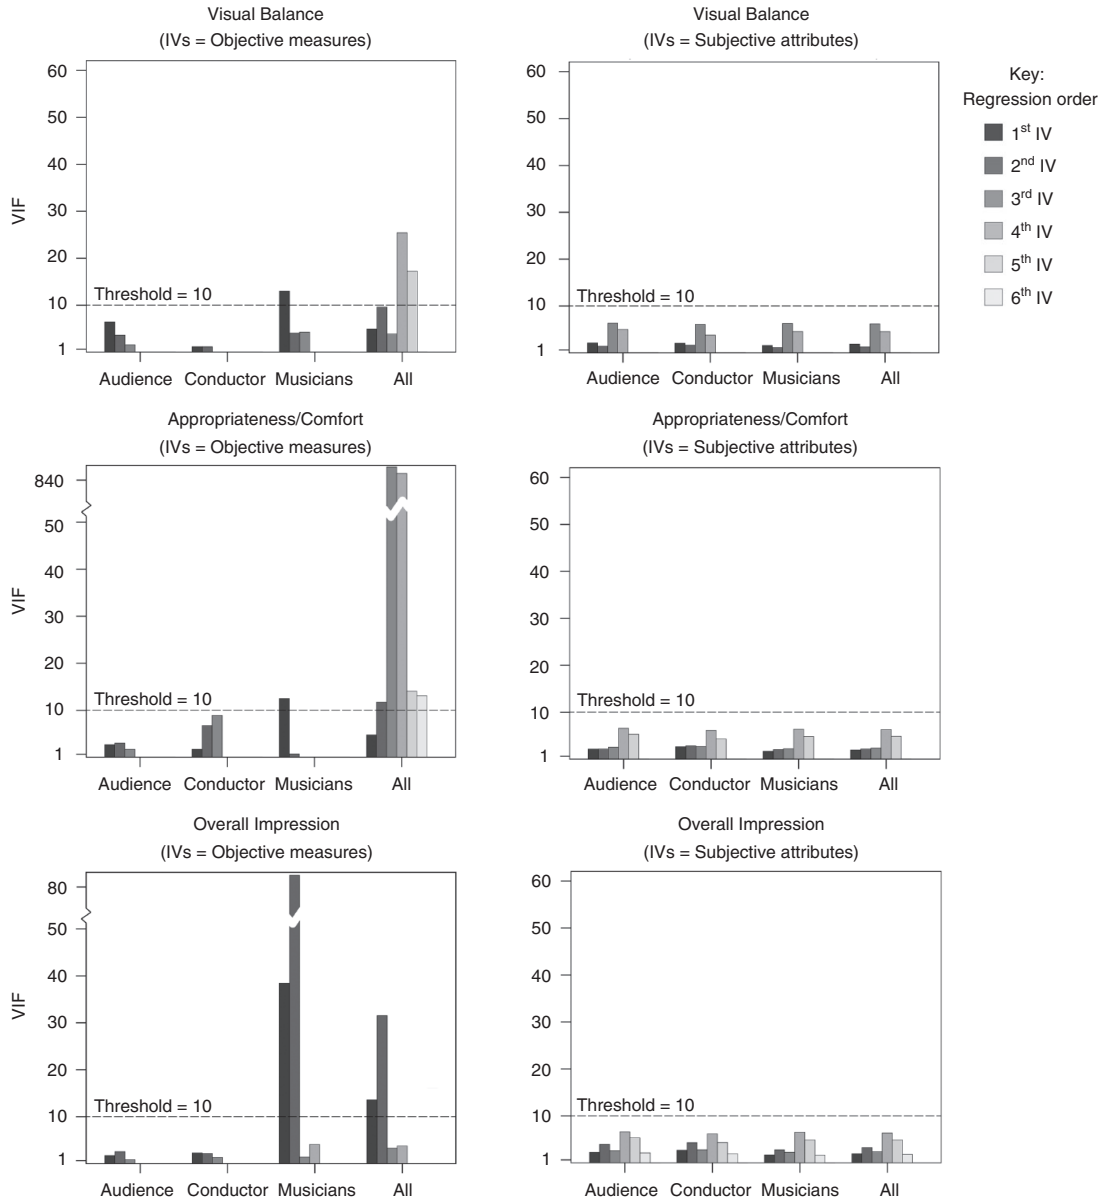


Figure 3 Variance inflation factors for the objective (left) and subjective explanatory variables (right) for visual balance, appropriateness/comfort and overall impression by occupant’s role. Refer to Tables 6 and 7 for the corresponding measures; IV: independent variables

$p > 0.05$) and two other fitted models for audience members (appropriateness/comfort: $\chi^2 = 1.51$, $p > 0.05$; and overall impression: $\chi^2 = 0.90$, $p > 0.05$) fail to display significant

improvement over the general models ($p \leq 0.05$). Using the subjective attributes as independent variables, one immediate observation is that all the model-fitting tests are

Table 8 Comparison of fit statistics for the ordered logistic regressions by role using objective measures (top) (published in a previous paper⁴¹) and using subjective attributes (bottom) as independent variables (IVs)

		Model fitting				Goodness-of-fit			Proportional odds		
		Chi-square ^{a,b}	Degrees of freedom	Sig.	Fit ^c	Chi-square ^{d,b}	Degrees of freedom	Sig.	Chi-square ^{e,f}	Degrees of freedom	Sig.
Subjective attribute (IVs = Objective measures)											
Visual Balance	Am	12.68 ^{**}	4	0.01	✓	51.24 ^{**}	31	0.01	37.78 ^{***}	16	0.00
	Co	10.71^{**}	2	0.01	✓	11.43^{ns}	10	0.33	5.62^{ns}	6	0.47
	Mu	4.89 ^{ns}	5	0.43	×	59.98 [*]	39	0.02	21.41 ^{ns}	15	0.12
	All	20.54 [*]	10	0.03	-	171.6 ^{***}	105	0.00	46.70 ^{ns}	40	0.22
									0.78	25.30 ^{ns}	20
Appropriateness/Comfort	Am	1.51 ^{ns}	4	0.83	×	30.96 ^{ns}	38	0.03	33.02 ^{ns}	20	0.03
	Co	17.68^{***}	3	0.00	✓	17.00^{ns}	12	0.15	20.58^{ns}	12	0.06
	Mu	3.58 ^{ns}	4	0.47	×	85.31 [*]	62	0.07	96.62 ^{***}	55	0
	All	43.51 ^{***}	11	0.00	✓	150.87 ^{ns}	127	0.31	28.25 ^{ns}	20	0.10
Overall Impression	Am	0.90 ^{ns}	4	0.93	×	41.74 ^{ns}	38	0.12	23.13 ^{ns}	12	0.03
	Co	21.67^{***}	3	0.00	✓	17.93^{ns}	12	0.06	11.50^{ns}	25	0.99
	Mu	15.56 ^{**}	5	0.01	✓	78.92 ^{ns}	61	0.01	65.86 ^{ns}	45	0.02
	All	33.17 ^{***}	9	0.00	✓	169.79 ^{**}	129				
Subjective attribute (IVs = Subjective attributes)											
Visual Balance	Am	177.1 ^{***}	5	0.00	✓	2200 ^{***}	1020	0.00	16.67 ^{ns}	20	0.67
	Co	92.65^{***}	4	0.00	✓	347.1^{ns}	400	0.97	11.57^{ns}	12	0.48
	Mu	240.7 ^{***}	6	0.00	✓	1878 ^{***}	1238	0.00	25.97 ^{ns}	18	0.10
	All	177.7 ^{***}	5	0.00	✓	1754	823	0.00	19.37 ^{ns}	15	0.20
Appropriateness/Comfort	Am	171.7 ^{***}	6	0.00	✓	1482	1230	0.00	44.63 ^{ns}	30	0.04
	Co	85.96 ^{***}	5	0.00	✓	567.49	510	0.04	1.36 ^{ns}	20	1.00
	Mu	208.7 ^{***}	7	0.00	✓	1564 ^{ns}	1859	1.00	62.12 ^{**}	35	0.00
	All	456.8 ^{***}	10	0.00	✓	4374 ^{***}	3722	0.00	101.92 [*]	50	0.00
Overall Impression	Am	337.6 ^{***}	7	0.00	✓	2964	1229	0.00	28.80 ^{ns}	35	0.76
	Co	146.1 ^{***}	6	0.00	✓	842.8 ^{***}	509	0.00	192.80 ^{**}	24	0
	Mu	374.2^{***}	8	0.00	✓	1553^{ns}	1858	1.00	42.83^{ns}	40	0.35
	All	858.9 ^{***}	11	0.00	✓	5020 ^{***}	3721	0.00	70.00 ^{ns}	55	0.08

Am: Audience Members; Co: Conductor; Mu: Musicians.

a Difference between the maximised log-likelihood for the fitted model and that for the general model = $(-2(L_0 - L_1))$

b *** $p \leq .001$; ** $p \leq .01$; * $p \leq .05$; ^{ns} $p > .05$; underscore indicates unsatisfactory model fit

c (✓) indicates satisfactory model fit; (-) indicates weak model fit; (×) indicates unsatisfactory model fit

d Pearson's chi-square

e Difference between the maximised log-likelihood for the null model and that for the fitted model = $(-2(L_n - L_f))$

f *** $p \leq .001$; ** $p \leq .01$; ^{ns} $p > .01$; underscore indicates different slope coefficient for each of the odds

Note: Bold text indicates a model which passes the model-fitting ($p \leq .05$) goodness-of-fit ($p > .05$) and proportional odds tests ($p > .01$).

significant ($p \leq 0.05$). Using the subjective attributes as predictors appears to have a more appreciable effect on the models than using the objective measures. Using the subjective attributes, however, fails to remedy the lack of fit for visual balance, appropriateness/comfort and overall impression (Table 8). Even though the models could be considered statistically significant at the $\alpha \leq 0.05$ level – only three of them (visual balance – conductor; appropriateness/comfort – musicians; and overall impression – musicians) passed the goodness-of-fit test where notable

differences between the observed responses and the fitted values could be identified. The more degrees of freedom could have degraded the model fit owing to the greater variability among the data. Meanwhile, the rest of the models ($p > 0.05$) indicate that the responses to the four lighting conditions display similar patterns, providing no useful evidence about the relationships between the selected predictors and the responses. Among the satisfactory models, only the visual balance model for the conductor and the overall impression model for musicians met the proportional

odds assumption, indicating that the odds ratio estimates appear to show homogeneity across the response categories.

Taken together, when considering the responses of the audience members, the conductor and the musicians separately, more models yielded more satisfactory results, highlighting the importance of evaluating lighting impressions by role. By contrast, when considering all the subjective attributes, as in the case of all occupants (i.e. overall analyses), the models appeared to be rather vulnerable to the goodness-of-fit and proportional odds tests. Nevertheless, the overall analyses were considered useful as they provided high-level insight into the relationship between the subjective attributes and the explanatory variables.

3.3 Lighting condition effects

Our previous work has shown that perceptions of visual clarity, visual uniformity, brightness and spatial intimacy are significantly intercorrelated with physical measures.⁴¹ This paper focuses on the findings obtained from the ordered models for visual balance, appropriateness/comfort and overall impression. The separate odds ratios for these three attributes are presented as cumulative proportion plots in Figure 4.

3.3.1 Visual balance

Knowing that the conductor is the only case that satisfies all the assumptions, it should come as no surprise that the plots for audience members, musicians and all occupants fail to exhibit consistent patterns. Rather, the cumulative curves lie close together with some overlapping, especially in the case of the settings without the rig lights (settings I and II) and the overhead spotlight (setting I) for musicians. The close proximity of the curves indicates that the perceived effects of the light settings were all strikingly similar. Changes in the magnitude of the measures did not appear to have any obvious

relationship. This was evident in the responses of musicians and all occupants. Still, higher values of RL_{avg} and Light:Dark were more likely to attract lower ratings. For the conductor, however, the highest probabilities of lower ratings in the setting with the peripheral lights only (setting I is 4.39 times the odds of setting IV [control]) are clearly attributable to the highest level of $((LLM_{avg} + LRM_{avg})/2):LB_{avg}$ and the lowest level of Light:Dark in that setting.

The lack of distinctiveness among the curves shows that the change of light settings has little influence on the perception of appropriateness/comfort. Since the differences among the four light settings were not extreme, it is plausible the subjects might have found it difficult to determine the degree of appropriateness and comfort of the settings. For the conductor, however, the curve for setting I deviates significantly from the others. The odds of this setting with the peripheral lights only are approximately 6.43 times those of the one with the overhead rig lights and overhead spotlight (setting IV [control]). A slight increase in $((LLM_{avg} + LRM_{avg})/2):LB_{avg}$ and a moderate increase in $Area_{Light\ patches}$ and RL_{std} appear to attract lower ratings at the conductor's position. No meaningful relationships were found for audience members, musicians or all occupants.

3.3.3 Overall impression

The curves based on the observed data appear to be peculiar in shape, reflecting the disparity among the responses. Notwithstanding the inconsistency, the models for the conductor and musicians pass all the assumption tests. For the conductor, the setting with the peripheral lights only (setting I) appears to have the highest probabilities of attracting lower ratings. The odds of such setting are 9.23 times those of setting IV (control). It follows that the setting with the overhead rig lights and overhead spotlight (setting IV [control]) was more likely

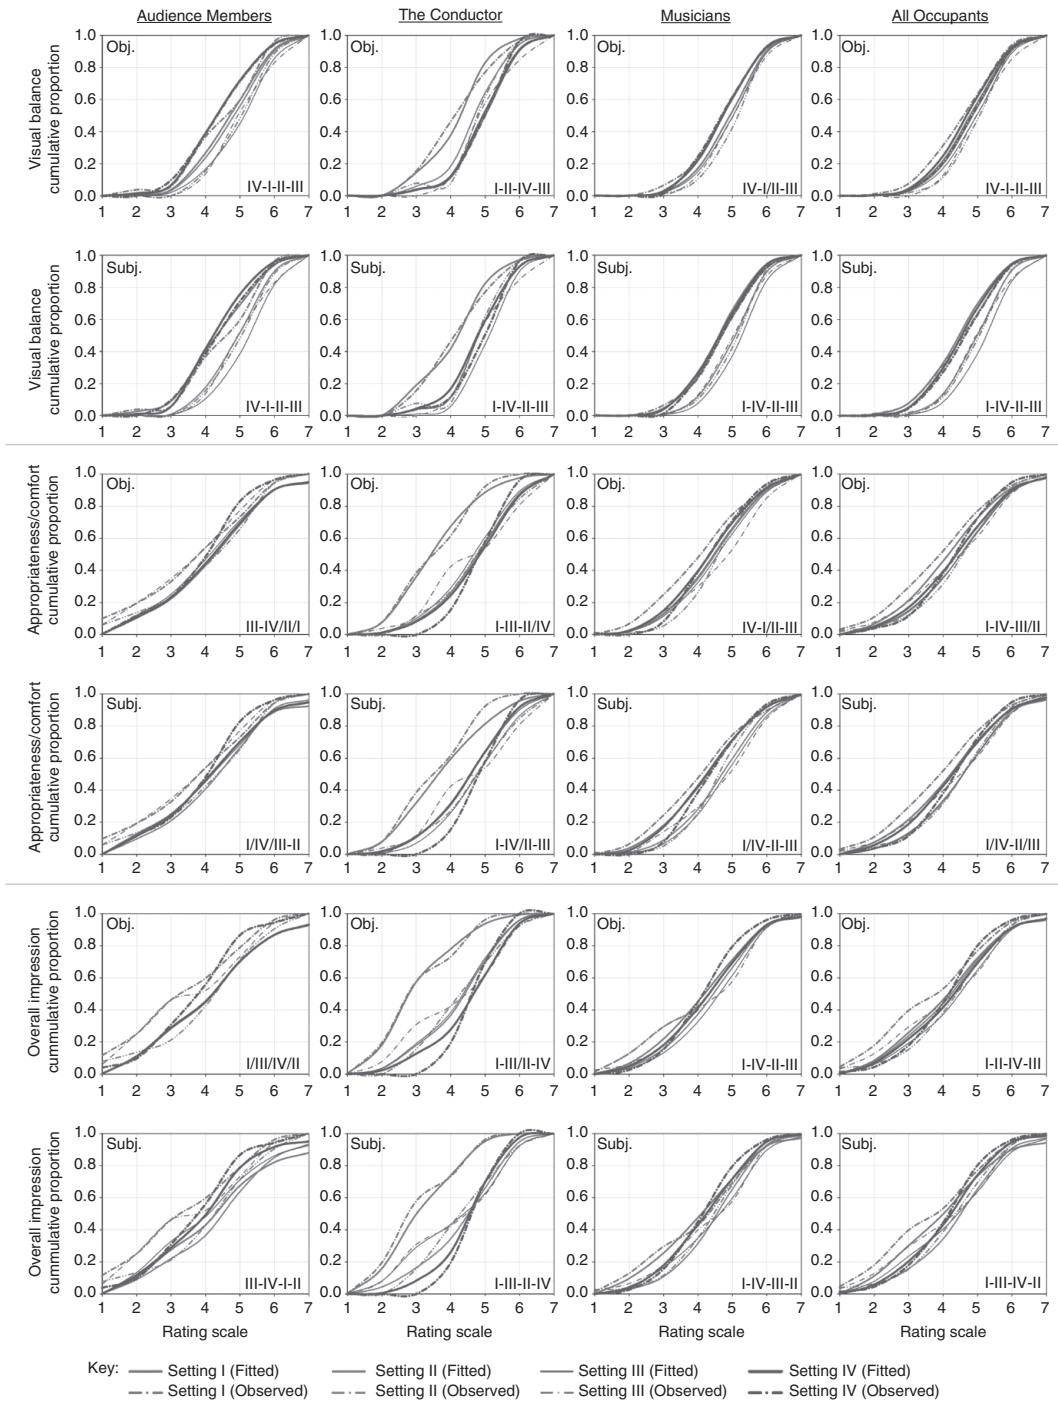


Figure 4 Cumulative proportion plots for visual balance, appropriateness/comfort and overall impression. ‘Obj.’ denotes independent variables are objective measures; ‘Subj.’ denotes independent variables are subjective attributes

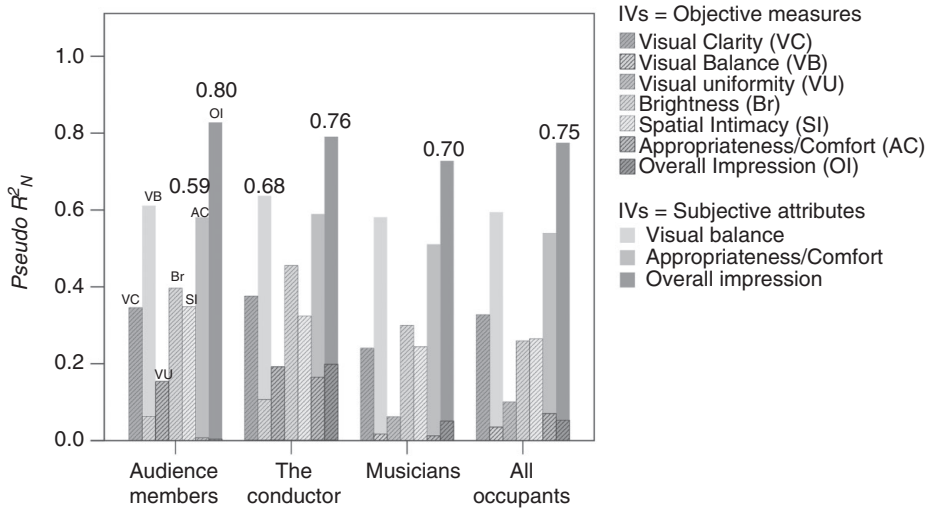


Figure 5 Comparison of the $Pseudo R^2_N$ values for visual balance, appropriateness/comfort and overall impression using the subjective variables by role showing the difference between the objective and subjective approaches (results for visual clarity, visual uniformity, brightness and spatial intimacy were originally published in a previous paper⁴¹)

to attract higher ratings for the overall impression. Yet for musicians and all occupants, the setting with the peripheral lights only (setting I) is more likely to be linked with the lower response categories.

To understand the strength of the relationship between the subjective attributes and the variables, $Pseudo R^2_N$ values were computed for each model (Figure 5). As previously reported, the combination of the predictors has its strongest relationship with perceived brightness, followed by visual clarity, spatial intimacy and visual uniformity.⁴¹ It is unsurprising to find that the regression relationship is quite weak for visual balance (average $R^2_N = 0.05$; standard deviation (S.D.) = 0.03), appropriateness/comfort (average $R^2_N = 0.05$; S.D. = 0.06) and overall impression (average $R^2_N = 0.07$; S.D. = 0.07). Moreover, the results suggest that the strongest relationship is that of the conductor (average $R^2_N = 0.26$; S.D. = 0.12), followed by audience members (average $R^2_N = 0.19$; S.D. = 0.16) and musicians (average $R^2_N = 0.13$; S.D. = 0.11).

Overall, the average strength of the models for all occupants (average $R^2_N = 0.16$; S.D. = 0.11) is just slightly greater than that for musicians.

When the strength of the relationship is measured using the subjective attributes, as opposed to using the objective measures, an increase in strength can be observed with respect to visual balance (11.2 times greater), appropriateness/comfort (9 times) and overall impression (10 times). Similarly, there is a reduction in the variance in all cases, with the most for the conductor (13%) and audience members (48%) the least.

3.4. Higher and lower levels of perception

Together with our significant findings for the subjective attributes of visual clarity, visual uniformity, brightness and spatial intimacy,⁴¹ Figure 6 summarises the overall relationship between the attributes and the explanatory variables found for the chapel.

Two informative observations emerge from the interrelationship diagram. First, some

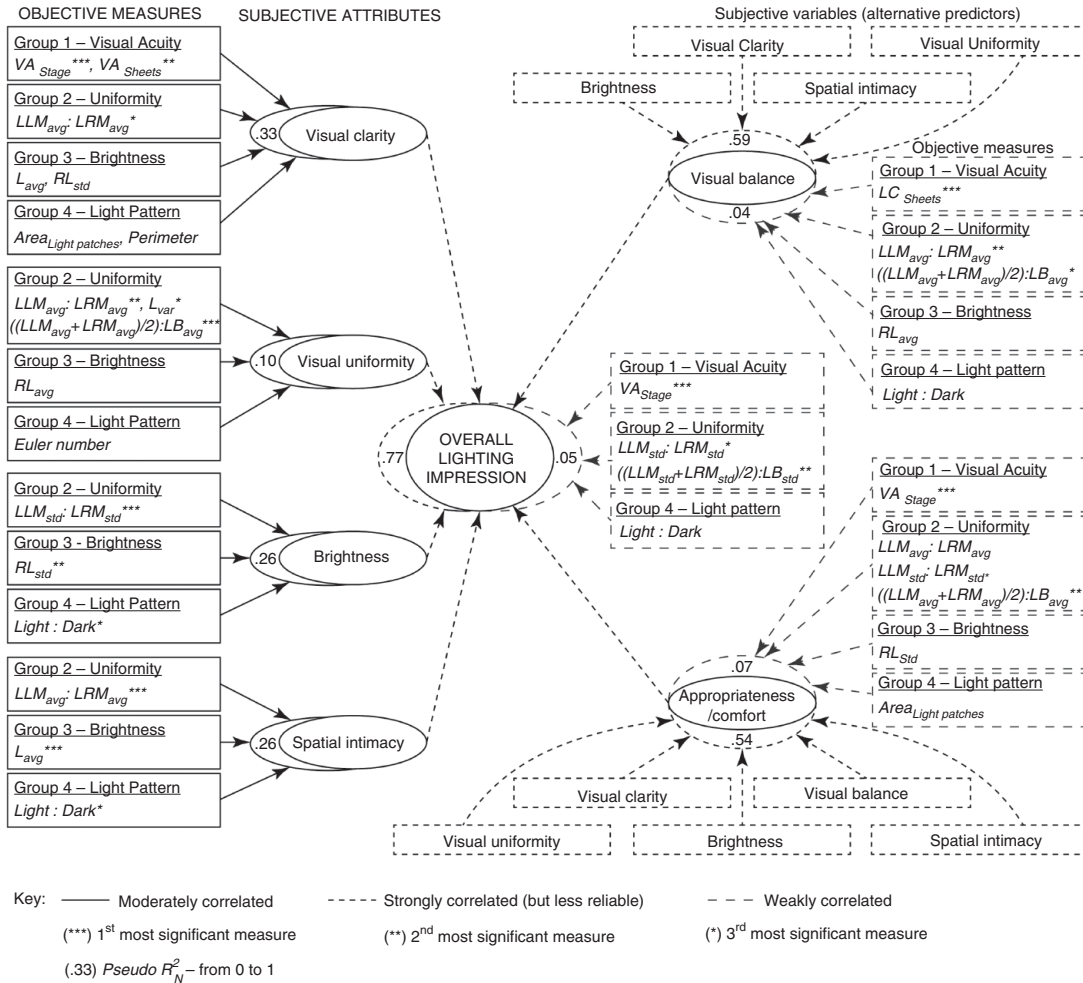


Figure 6 Overall connections between the subjective attributes and the explanatory variables specific to the King’s College Chapel’s performance space

perceived qualities were directly recognised by one’s visual senses depending on the presence and type of visual stimuli, while others were indirectly associated with the visual stimuli. This seems to corroborate Zeki’s theory that vision is an active and creative process through which the brain tries to interpret a visual attribute without accounting fully for any actual differences in luminance.⁵⁴ Second,

the process of lighting perception appears to be bi-level. At the first level of perception, as highlighted by the significant subjective-objective connections, the perceived qualities (visual clarity, brightness, visual uniformity and spatial intimacy) seem to have a more apparent relation between visual sensations and physical measures, focusing on identifying and responding to brightness patterns,

facial characteristics, objects and the wider spatial context. At the second level of perception, as suggested by the non-significant subjective-objective connections but significant subjective-subjective connections, the perceived qualities (visual balance, appropriateness/comfort and overall impression) are associated more with the intricacies of the physical stimuli that are often complicated by the occupants' knowledge and experiences – these are higher order variables as described by Flynn *et al.*⁵⁵ Such higher level qualities are apprehended by attaching meaning to the physical stimuli and context. This observation appears to be well substantiated by Gregory's 'ins-and-outs' theoretical model, which emphasises that top-down knowledge (i.e. conceptual and perceptual) and sideways rules play a more integral part than bottom-up signals do in the process of visual perception.⁵⁶ It is also plausible that the occupants' state of mind plays a part in the process whereby, as Zeki and Bartels hypothesised, a conscious dimension is involved in perceiving and understanding a visual scene, and that different visual stimuli are perceived

consciously at different times using different processing systems that are spatially distributed, functionally specialised and temporally asynchronous, leading to various visual experiences.⁵⁷

3.5 Overall impression

The results of the statistical analyses confirm the potential of the integrated approach, providing useful insight into the subjective-objective connections. How much variation in the overall perceptions was created by the test settings as compared with the control setting? Considering all the responses, the result of the Levene test indicates that the data set violates the assumption of homogeneity of variance (Levene statistic = 11.267, $p \leq 0.005$), which means that the variances of the four settings are significantly different. The results of a Dunnett test show that setting I (peripheral lights only) elicited a significantly lower mean overall impression rating than the control setting (with the rig lights and overhead spotlight) ($p \leq 0.05$). In fact, these findings are consistent with those reported by Loe *et al.* in that combining various types of light



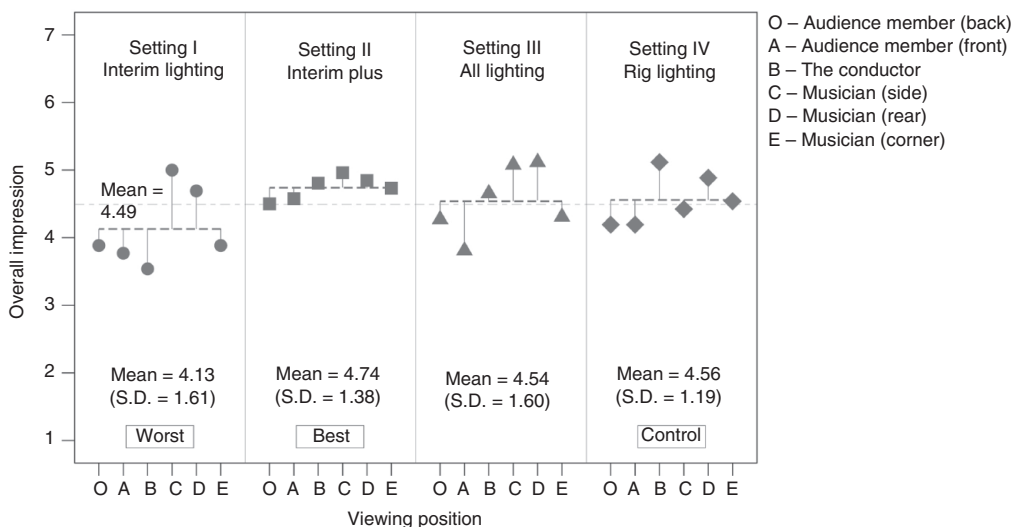


Figure 7 Average overall impression ratings by viewing position

Contrast group 1:

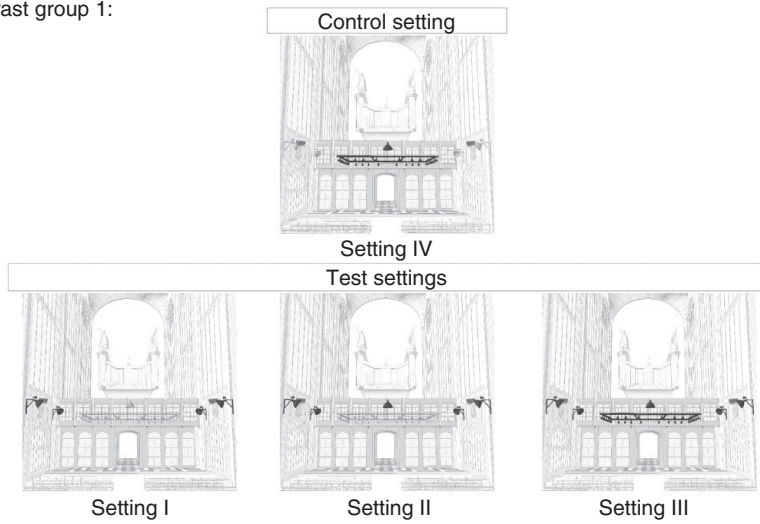

Contrast group 2:

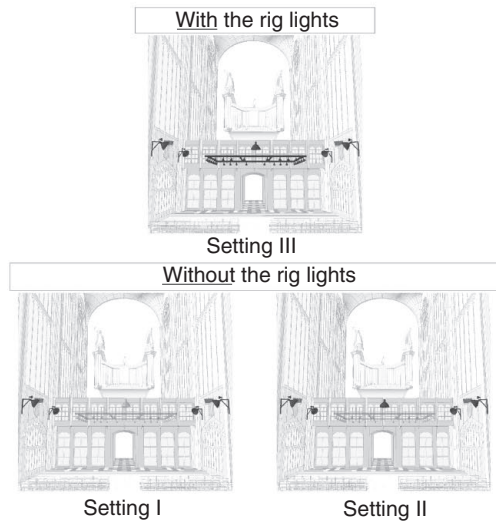

Contrast group 3:

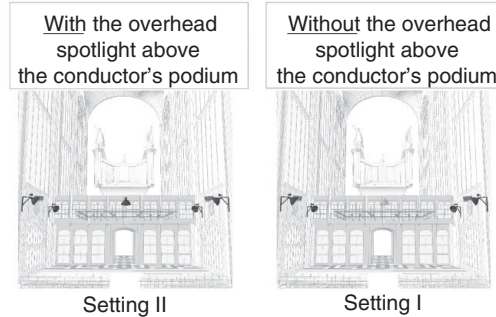


Figure 8 Comparison of the light settings by contrast group

fitting is more likely to create a more pleasant luminous environment.⁵⁸

Having identified the pairs of settings with significant differences, their magnitude was gauged by computing Cohen's d .⁴⁵ The mean overall impression rating for setting II was 0.407 standard deviations better than for setting I. That accounts for 17% of the total variance and is considered to be a moderate to strong effect on the rating. The mean overall impression rating for setting IV was 0.304 standard deviations greater than for setting I. That accounts for 9% of the total variance and is considered a small to moderate effect. As shown in Figure 7, while the difference between settings II (with peripheral lights and an overhead light) and IV (with the rig lights and an overhead spotlight) is not significant, the former appears to have the highest mean rating among all the test settings. This can be attributed to the greater sense of diversity in the lit environment induced by the combination of direct and diffuse light. It is also worth noting that some of the individual mean ratings – for example, at the conductor's viewing position under setting I and at the musician's positions (side and rear) under setting III – appear to be slightly higher than the overall highest mean rating, indicating that the overall mean rating needs to be interpreted with caution.

To obtain a more general understanding of what changes in the lighting arrangements constitute a significant difference, three contrast groups were formulated to compare: (1) the control setting to the test settings; (2) the settings with and without the rig lights; and (3) the settings with and without the overhead lamp above the conductor's podium (Figure 8). One-way analysis of variance was performed to test the significance of the observed differences in the means without assuming equal variances.

For the first contrast group, the mean overall impression rating for the control setting proved not significantly different

from that of the test settings (t [337.878] = 0.755, p = 0.451). For the second contrast group, the mean overall impression rating for the settings without the rig lights (i.e. settings I and II) was again not significantly different from that for setting III with them (t [290.977] = 0.688, p = 0.492). For the third contrast group, however, the mean overall impression rating for the setting without the overhead lamp (setting I) was significantly different from that for setting II with it (t [303.029] = 3.595, p ≤ 0.001).

Taken together, the findings seem to suggest that removing the rig lights completely had a noticeable effect on overall satisfaction with the luminous environment. Contrary to what one might expect, installing additional peripheral lights (spotlights) on the walls did not yield any significant improvement. In fact, their mean ratings were almost equal. Yet, the variation in responses for all lighting was somewhat larger. In particular, the ratings for the audience member (spot A) in the front and the conductor (spot B) appear to be much lower for the setting with all the lights on (Figure 7). Increasing the overall lighting intensity in the chapel did not prove to be an effective way to improve the overall satisfaction. Indeed, considering the lighting effect created by the additional lamps alone (i.e. setting I – interim lighting), there is a much higher likelihood of generating a lower level of satisfaction. Adding the overhead lamp to setting I (i.e. setting II) appears to be an effective way to improve user satisfaction generally, as evidenced by its highest mean rating but small variation. In any case, the subjects were able to detect the differences in overall impression between the settings despite their subtlety.

4. Conclusions

This paper presented the development and applicability of an integrated bottom-up approach for the evaluation of the overall

impression of concert lighting for the King's College Chapel. The approach sought to establish relationships between the subjective attributes and objective measures of light, producing an overall rating for complex settings. The subjective attributes were first scrutinised in detail by occupant's role and then generalised through data aggregation. In this way, unreliable data and variables that might lead to unsatisfactory or simply weak results were identified with greater confidence. The connections were best explained for the conductor and weakest for musicians. The overall analysis is more prone to ill-defined models because it essentially disregards the differences among the roles, leading to much greater variation and uncertainty. The predictive power for the models of visual balance, appropriateness/comfort and overall impression was relatively weak. Choosing the subjective attributes as the predictors, however, led to a substantial increase in strength.

Providing an acceptable level of light is largely an issue of functionality. What can one measure that is useful enough to understand lighting quality? Can that be quantified? The answers to these questions are positive, but there are only a few answers to the first. The intercorrelations among the subjective and objective variables examined here suggest that the perceptual process is bi-level. Higher level perceived qualities (visual balance, appropriateness/comfort and overall impression) are accounted for not by objective measures but by lower level subjective attributes (visual clarity, brightness, visual uniformity and spatial intimacy) which could be satisfactorily explained by the measures.

Given that the selection of attributes and measures plays a part in determining the extent of the correlations, the next question to consider is how the process of selection can be optimised in order to identify the most relevant variables. The measures chosen for this study underwent a rigorous and iterative selection process, from grouping based on the

unit and construct of the measures, identifying possible intercorrelations, to finalising the selection based on lighting requirements as a means of justification. Above all, the consideration of the classic theorems and functions, including the seminal work of Blackwell and Flynn, guided the process.^{23,55} It is recommended that future studies should consider setting out selection criteria based on users' lighting requirements in accordance with the type of lit environment examined as the first step, as well as making references to the measures and attributes used in previous studies of a similar setting, followed by a series of correlation analyses to confirm the selection. These steps are necessary to ensure that the choice of measures is commensurate with specific settings, occupant types and applications. Moreover, the null results found for the subjective-objective relations and the statistically significant results found for the subjective-subjective relations suggest that future studies may identify relevant attributes through a three-way examination starting with the intercorrelations between potential high-level and low-level subjective attributes, and then between low-level attributes and measures, followed by the intercorrelations between high-level attributes and measures. Not only could this better facilitate the selection of predictors, but it could also provide some useful insights into both inter- and intra- relations between the attributes and measures; the latter would likely be neglected otherwise.

Comparing the overall lighting impressions has offered an informative account of the changes brought about by various lighting configurations. Setting I (peripheral lights only) was the worst rated, whereas setting II (peripheral lights with an overhead spotlight) was the best rated. Another key finding is that maximising the luminous intensity in the chapel did not seem to improve the overall impression. However, removing the rig lights and providing directional light at the

conductor's spot appear to be a viable way of achieving a higher level of satisfaction.

Field studies offer a much higher level of realism than laboratory studies that use mock-up rooms, unoccupied spaces, static photographs or rendered images. However, the process of testing methods and developing approaches in a real setting is costly and time consuming, not to mention the various feasibility, technical and logistical issues arising from constructing an experimental scene. As with all research, the integrated approach developed is not without limitations. Using the chapel as a real setting for the methodological developments raises questions about the pragmatism of integrating the approach at early design stages.

The approach, as demonstrated in this study, can be readily applied to evaluate existing and complex lit environments, but may pose a technical challenge on informing lighting design decisions especially for buildings prior to construction. Ideally, if we evaluate every building typology and establish a repository of precedents and data, we can compile a database of recommended measures and magnitudes to serve as benchmarks for design. Not only would this be a mammoth and tedious task, but it would also be burdensome to keep up with the evolving lighting needs and requirements in response to the rapidly changing world. However, the emergence of immersive virtual, augmented and mixed realities brought about by technological innovations presents opportunities to make the assessment of physical measures possible at the concept design stage, facilitating the prediction of perceived impressions and expectations. Several attempts have been made to validate the application of immersive virtual environments to evaluate visual perceptions, although they have been limited to simple settings.^{59–61} The sense of realism and presence in an immersive virtual environment was reported to be closest to a real environment when compared with using

photographic media to simulate it.⁶² Nevertheless, caution must be exercised when interpreting objective data collected from a virtual space. No doubt the evolution of digital technologies and the emergence of virtual worlds will continue to shift the way light measurements are acquired just as the invention of charge-coupled devices did in the 70s.

Every building is unique with its own character. Although it is reassuring that virtual reality would lend itself well to the evaluation of lighting quality, we need to be mindful of the fundamental meaning of space and the emotive qualities of architecture. It is vital to try to combine research methods into a comprehensive protocol through which, as this study has revealed, conclusive results are more likely to be obtained. Tiller argued that such combination is the key to 'bridging the gap between the subjective data and physical measures'.⁶³ He also stressed that predictions of subjective effects should only be made when subjective-objective relationships have been established. Yet more effort needs to be devoted to make lighting assessments more meaningful and widely applicable. The insights and findings of this work may thus make a valuable contribution to lighting research.

Declaration of conflicting interests

The authors declared no potential conflicts of interest with respect to the research, authorship, and/or publication of this article.

Funding

The authors disclosed receipt of the following financial support for the research, authorship, and/or publication of this article: This study was supported by the Cambridge Trust, Emmanuel College and the Cambridge Department of Architecture.

Acknowledgements

The authors would like to thank Cambridge King's College and Dr Tom White for their logistical support and technical assistance throughout this study. The authors would also like to thank all the research participants for their valuable contributions.

ORCID iD

VWL Lo  <https://orcid.org/0000-0001-5537-9319>

References

- 1 Commission Internationale de l'Éclairage. *Proceedings of the First CIE Symposium on Lighting Quality*. Ottawa, Canada: Author, 1998.
- 2 Eklund NH, Boyce PR, Simpson SN. Lighting and sustained performance: modeling data-entry task performance. *Journal of the Illuminating Engineering Society* 2001; 30: 126–141.
- 3 Newsham G, Brand J, Donnelly C, Veitch J, Aries M, Charles K. Linking indoor environment conditions to job satisfaction: a field study. *Building Research & Information* 2009; 37: 129–147.
- 4 Dangol R, Islam MS, Hyvärinen M, Bhushal P, Puolakka M, Halonen L. User acceptance studies for LED office lighting: preference, naturalness and colourfulness. *Lighting Research and Technology* 2015; 47: 36–53.
- 5 Wienold J, Christoffersen J. Evaluation methods and development of a new glare prediction model for daylight environments with the use of CCD cameras. *Energy and Buildings* 2006; 38: 743–757.
- 6 Jakubiec JA, Reinhart CF. A concept for predicting occupants' long-term visual comfort within daylight spaces. *Leukos* 2015; 12: 185–202.
- 7 Boyce PR, Veitch JA, Newsham GR, Jones CC, Heerwagen J, Myer M, et al. Lighting quality and office work: two field simulation experiments. *Lighting Research and Technology* 2006; 38: 191–223.
- 8 Veitch JA, Newsham GR, Boyce PR, Jones CC. Lighting appraisal, well-being and performance in open-plan offices: a linked mechanisms approach. *Lighting Research and Technology* 2008; 40: 133–151.
- 9 Andersen M, Mardaljevic J, Lockley SW. A framework for predicting the non-visual effects of daylight – part I: photobiology-based model. *Lighting Research and Technology* 2012; 44: 37–53.
- 10 Amundadottir ML, Lockley SW, Andersen M. Unified framework to evaluate non-visual spectral effectiveness of light for human health. *Lighting Research and Technology* 2017; 49: 673–696.
- 11 Ye M, Zheng S, Wang M, Ronnier Luo M. The effect of dynamic correlated colour temperature changes on alertness and performance. *Lighting Research and Technology* 2018; 50: 1070–1081.
- 12 British Standards Institution (BSI). *Ergonomics of the Physical Environment – Assessment of Environments By Means of an Environmental Survey: Physical Measurements and Subjective Responses*. [BS EN ISO 28802-2012]. United Kingdom: BSI, 2012.
- 13 International WELL Building Institute. *The WELL Light*. Retrieved 23 April 2021, from <https://v2.wellcertified.com/v/en/light> (accessed 23 August 2019).
- 14 Eklund NH, Boyce PR. The development of a reliable, valid, and simple office lighting survey. *Journal of the Illuminating Engineering Society* 1996; 25: 25–40.
- 15 Commission Internationale de l'Éclairage. *Guide to Protocols for Describing Lighting*. CIE 213:2014. Vienna: Commission Internationale de l'Éclairage, 2014.
- 16 Veitch JA, Newsham GR. Exercised control, lighting choices, and energy use: an office simulation experiment. *Journal of Environmental Psychology* 2000; 20: 219–237.
- 17 British Standards Institution (BSI). *Energy Performance of Buildings: Energy Requirements for Lighting*. [BS EN 15193-1:2017]. United Kingdom: BSI, 2017.
- 18 Tralau B, Dehoff P, Schierz C. *Introduction of the ergonomic lighting indicator as an objective measure for lighting quality*. *Adjunct Proceedings of Experiencing Light 2009*:

- International Conference on the Effects of Lighting on Wellbeing*. Eindhoven, The Netherlands, 2009: 35–36.
- 19 Tralau B. *Evaluation of Lighting Quality with the Ergonomic Lighting Indicator: Implementation of the Evaluation Process and Empirical Study Regarding its Practicability. Lux Junior*. Dörfeld, Germany: 21–23 September 2007: 1–9.
 - 20 British Standards Institution (BSI). *Energy Performance of Buildings: Indoor Environmental Quality*. [BS ISO 17772-1:2017]. United Kingdom: BSI, 2017.
 - 21 British Standards Institution (BSI). *Light and Lighting – Lighting of Work Places – Part 1: Indoor Work Places*. [BS EN 12464-1:2011]. United Kingdom: BSI, 2011.
 - 22 Society of Light Lighting. *The SLL Lighting Handbook*. United Kingdom: CIBSE Publications, 2018: , pp. 455–458.
 - 23 Blackwell HR. Contrast thresholds of the human eye. *Journal of the Optical Society of America* 1946; 36: 624–643.
 - 24 Blackwell HR. Development and use of a quantitative method for specification of interior illumination levels. *Journal of the Illuminating Engineering Society* 1959; 54: 317–353.
 - 25 Rea MS. Toward a model of visual performance: foundations and data. *Journal of the Illuminating Engineering Society* 1986; 15: 41–57.
 - 26 Rea MS. Toward a model of visual performance: a review of methodologies. *Journal of the Illuminating Engineering Society* 1987; 16: 128–142.
 - 27 Rea MS, Ouellette MJ. Relative visual performance: a basis for application. *Lighting Research and Technology* 1991; 23: 135–144.
 - 28 Weston HC. *The Relation Between Illumination and Industrial Efficiency: 1. The Effect of Size of Work*. London: HMSO, 1935.
 - 29 Boyce PR. Age, illuminance, visual performance and preference. *Lighting Research and Technology* 1973; 5: 125–144.
 - 30 Gifford R, Hine DW, Veitch JA. Meta-analysis for environment-behavior research, illuminated with a study of lighting level effects on office task performance. In Moore GT and Robert MW, editors. *Toward the Integration of Theory, Methods, Research, and Utilization*. New York: Springer-Verlag, 1997: 223–253.
 - 31 Fotios SA, Cheal C. Obstacle detection: a pilot study investigating the effects of lamp type, illuminance and age. *Lighting Research and Technology* 2009; 41: 321–342.
 - 32 Fotios SA, Cheal C. Using obstacle detection to identify appropriate illuminances for lighting in residential roads. *Lighting Research and Technology* 2013; 45: 362–376.
 - 33 Rea M. The Trotter Paterson Lecture 2012: whatever happened to visual performance? *Lighting Research and Technology* 2012; 44: 95–108.
 - 34 Waldram JM. Studies in interior lighting. *Transactions of the Illuminating Engineering Society* 1954; 19: 95–133.
 - 35 Waldram JM. The lighting of Gloucester Cathedral by the ‘designed appearance’ method. *Transactions of the Illuminating Engineering Society* 1959; 24: 85–105.
 - 36 Lynes JA. Patterns of light and shade. *Lighting in Australia* 1987; 7: 16–20.
 - 37 Cuttle C. A new direction for general lighting practice. *Lighting Research and Technology* 2013; 45: 22–39.
 - 38 Cuttle C. *Lighting Design: A Perception-based Approach*. Oxon: Routledge, 2015.
 - 39 Veitch JA, Stokkermans MGM, Newsham GR. Linking lighting appraisals to work behaviors. *Environment and Behavior* 2013; 45: 198–214.
 - 40 Borisuit A, Linhart F, Scartezini JL, Münch M. Effects of realistic office daylighting and electric lighting conditions on visual comfort, alertness and mood. *Lighting Research and Technology* 2015; 47: 192–209.
 - 41 Lo VWL, Steemers KA. Methods for assessing the effects of spatial luminance patterns on perceived qualities of concert lighting. *Lighting Research and Technology* 2020; 52: 106–130.
 - 42 Lo VWL, Steemers KA. Measuring light in field experiments using dummies and objects: a study of concert lighting. *Lighting Research and Technology* 2018; 6: 827–841.
 - 43 Lo WL, Steemers K. *A new subjective-objective approach to evaluating lighting quality: a case study of concert lighting for Cambridge King’s College Chapel: Proceedings of the 30th PLEA International Conference 2014: Sustainable Habitat for Developing*

- Societies, Ahmedabad, India, Dec 15–18: 2014: 476–483.
- 44 Lo VWL, Steemers K. *An occupant's role-specific approach to identifying lighting parameters for concert performances in Cambridge King's College Chapel: Proceedings of the 33rd PLEA International Conference: Design to Thrive*, Edinburgh, UK, July 2–5 July: 2017: 3261–3268.
 - 45 Field A. *Discovering Statistics Using SPSS*. 2nd ed., London: SAGE, 2005.
 - 46 Tzikopoulos AF, Karatza MC, Paravantis JA. Modeling energy efficiency of bioclimatic buildings. *Energy and Buildings* 2005; 37: 529–544.
 - 47 Cho Y, Awbi HB. A study of the effect of heat source location in a ventilated room using multiple regression analysis. *Building and Environment* 2007; 42: 2072–2082.
 - 48 Knight KW, Rosa EA. The environmental efficiency of well-being: a cross-national analysis. *Social Science Research* 2011; 40: 931–949.
 - 49 Kim J, de Dear R. Nonlinear relationships between individual IEQ factors and overall workspace satisfaction. *Building and Environment* 2012; 49: 33–40.
 - 50 Kim J, de Dear R. Workspace satisfaction: the privacy-communication trade-off in open-plan offices. *Journal of Environmental Psychology* 2013; 36: 18–26.
 - 51 Sun W, Cheong KWD, Melikov AK. Subjective study of thermal acceptability of novel enhanced displacement ventilation system and implication of occupants' personal control. *Building and Environment* 2012; 57: 49–57.
 - 52 Schiavon S, Lee KH. Dynamic predictive clothing insulation models based on outdoor air and indoor operative temperatures. *Building and Environment* 2013; 59: 250–260.
 - 53 Valovcin S, Hering AS, Polly B, Heaney M. A statistical approach for post-processing residential building energy simulation output. *Energy and Buildings* 2014; 85: 165–179.
 - 54 Zeki S. *Inner Vision: An Exploration of Art and the Brain*. Oxford: Oxford University Press, 1999: 6–7.
 - 55 Flynn JE, Kremers JA, Segil AW, Steffy GR. *Architectural Interior Systems: Lighting, Acoustics, Air Conditioning*. 3rd ed. New York: Van Nostrand Reinhold, 1992: 11–20.
 - 56 Gregory RL. Knowledge in perception and illusion. *Philosophical Transactions: Biological Sciences* 1997; 352: 1121–1127.
 - 57 Zeki S, Bartels A. The asynchrony of consciousness. *Proceedings of the Royal Society of London B Series Biological Sciences* 1998; 265: 1583–1585.
 - 58 Loe DL, Mansfield KP, Rowlands E. Appearance of lit environment and its relevance in lighting design: experimental study. *Lighting Research and Technology* 1994; 26: 119–133.
 - 59 Rockcastle S, Chamilothoni K, Andersen M. *An experiment in virtual reality to measure daylight-driven interest in rendered architectural scenes: The 15th International Building Performance Simulation Association Conference*, San Francisco, USA, Aug 7–9: 2017: 2797–2806.
 - 60 Chamilothoni K, Wienold J, Andersen M. Adequacy of immersive virtual reality for the perception of daylight spaces: comparison of real and virtual environments. *Leukos* 2018; 15: 203–226.
 - 61 Abd-Alhamid F, Kent M, Bennett C, Calautit J, Wu Y. Developing an innovative method for visual perception evaluation in a physical-based virtual environment. *Building and Environment* 2019; 162: 106278.
 - 62 Chen YC, Hao L. Virtual reality in lighting research: comparing physical and virtual lighting environments. *Lighting Research and Technology* 2019; 51: 820–837.
 - 63 Tiller DK. Toward a deeper understanding of psychological aspects of lighting. *Journal of the Illuminating Engineering Society* 1990; 19: 59–65.