ARCHIVIO DELLA RICERCA

University of Parma Research Repository

PREPARATION AND CHARACTERIZATION OF POLYMER-BASED BIOCOMPOSITES FOR AGRI-FOOD PACKAGING APPLICATIONS
This is a pre print version of the following article:
Original PREPARATION AND CHARACTERIZATION OF POLYMER-BASED BIOCOMPOSITES FOR AGRI-FOOD PACKAGING APPLICATIONS / Sciancalepore, Corrado; Togliatti, Elena; Pugliese, Diego; Giubilini, Alberto; Messori, Massimo; Milanese, Daniel (2021). ((Intervento presentato al convegno XVI Convegno Nazionale AIMAT tenutosi a Cagliari, Italy nel 15-18 Settembre 2021.
Availability: This version is available at: 11381/2913919 since: 2022-01-21T07:40:37Z
Publisher: AIMAT (Associazione Italiana Ingegneria dei Materiali)
Published DOI:
Terms of use: openAccess
Anyone can freely access the full text of works made available as "Open Access". Works made available
Publisher copyright

(Article begins on next page)



PREPARATION AND CHARACTERIZATION OF POLYMER-BASED BIOCOMPOSITES FOR AGRI-FOOD PACKAGING APPLICATIONS

CORRADO SCIANCALEPORE^{1,3*}, ELENA TOGLIATTI^{1,3}, DIEGO PUGLIESE^{2,3}, ALBERTO GIUBILINI^{2,3}, MASSIMO MESSORI^{2,3}, DANIEL MILANESE^{1,3}

E-mail corresponding author: corrado.sciancalepore@unipr.it

Abstract

The present work aims at the preparation and subsequent mechanical, morphological and thermal characterization of composites based on poly(butylene adipate terephthalate) (PBAT), loaded with microparticles of inorganic biodegradable phosphate glass (PG)ⁱ at 2, 4, 10, 20 and 40 wt%.

The reinforcement of PBAT has the purpose of modifying and modulating the mechanical and thermomechanical properties of the material to expand its application field especially in the food and agricultural packaging sectorⁱⁱ, thanks to the similarity of PBAT performance with polyethylene (PE)ⁱⁱⁱ.

The PBAT-PG specimens were subjected to uniaxial tensile stress and the collected data were analysed to obtain characteristic parameters such as Young's modulus (E), yield stress (σ_y), stress at break (σ_B), elongation at break (ε_B) and toughness (T) (Fig. 1).

Scanning electron microscopy (SEM) images display homogeneous dispersion and distribution of the filler particles in the polymer matrix with no aggregates or phase separation (Fig. 2).

PBAT is considered as one of the most promising biodegradable polyesters and this work demonstrates the successful realization of a PBAT-based composite material, as valid biodegradable and eco-friendly alternative to traditional thermoplastic polymers, such as PE.

¹ Dipartimento di Ingegneria e Architettura, Università di Parma, Parco Area delle Scienze 181/A, 43124 Parma, Italia

² Dipartimento di Scienza Applicata e Tecnologia, Politecnico di Torino, Corso Duca degli Abruzzi 24, 10129 Torino, Italia

³ INSTM, Consorzio Interuniversitario Nazionale di Scienza e Tecnologia dei Materiali, Via G. Giusti 9, 50121, Firenze, Italia

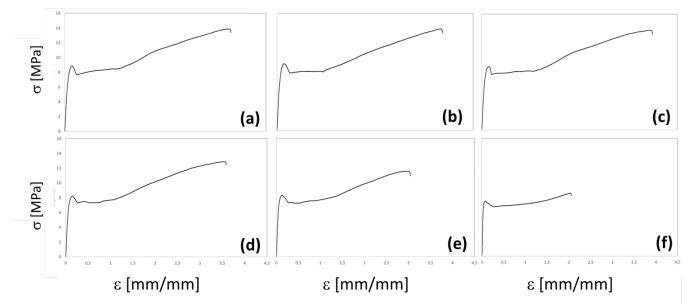


Fig. 1 Tensile curves of PBAT (a), PBAT+2% PG (b) and PBAT+4% PG (c), PBAT+10% PG (d), PBAT+20% PG (e) and PBAT+40% PG (f), respectively.

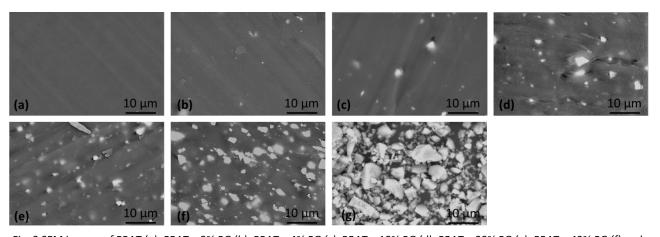


Fig. 2 SEM images of PBAT (a), PBAT + 2% PG (b), PBAT + 4% PG (c), PBAT + 10% PG (d), PBAT + 20% PG (e), PBAT + 40% PG (f) and PG (g), respectively.

ⁱ V. M. Sglavo, D. Pugliese, F. Sartori, N. G. Boetti, E. Ceci-Ginistrelli, G. Franco, D. Milanese, Mechanical properties of resorbable calcium-phosphate glass optical fibers and capillaries, J. Alloys Comp. 778 (2019) 410-417.

ⁱⁱ F. V. Ferreira, L. S. Cividanes, R. F. Gouveia, L. M. F. Lona, An overview on properties and applications of poly(butylene adipate-co-terephthalate)-PBAT based composites, Polym. Eng. Sci. 59 (2019) E7-E15.

iii V. Nagarajan, M. Misra, A. K. Mohanty, New engineered biocomposites from poly(3-hydroxybutyrate-co-3-hydroxyvalerate) (PHBV)/poly(butylene adipate-co-terephthalate) (PBAT) blends and switchgrass: Fabrication and performance evaluation, Ind. Crops Prod. 42 (2013) 461-468.