

VIRTUAL PROTOTYPE-BASED KINEMATIC MODELING AND SIMULATION OF A MULTI-MODE AMPHIBIOUS ROBOT

MOHAMMED RAFEEQ¹, SITI FAUZIAH TOHA^{2*},
SALMIAH AHMAD³, MOHD ASYRAF MOHD RAZIB⁴

^{1,2,4}Dept. of Mechatronics Engineering, International Islamic University, Gombak, Malaysia

³Dept. of Mechanical Engineering, International Islamic University, Gombak, Malaysia

*Corresponding author: tsfauziah@iium.edu.my

(Received: 21st July 2021; Accepted: 13th October 2021; Published on-line: x July 2022)

ABSTRACT: The amphibious robot, which has the capability of multi-mode motion, can maneuver diverse environments with high mobility and adaptability. These are employed in the area of reconnaissance, search and rescue operations, and monitoring. The existing amphibious robots have lower maneuverability over the crawling period on uneven and slope surfaces on the land. In this paper, a kinematic model of the amphibious robot based on virtual prototyping is designed for multi-mode locomotion. ADAMS (Automated dynamic analysis of mechanical systems) is a multi-body dynamic solver adopted to build the simulation model for the robot. The novel amphibious robot employs a Rockerbogies mechanism equipped with wheel paddles. The locomotion analysis on land involves straight-going and obstacle negotiation, which is simulated using ADAMS. The simulation analysis result demonstrates increased maneuverability, achieving a robot's velocity of robot 1.6 m/s. Normal forces on the front and rear wheels show equal load distribution, contributing more to the robot's equilibrium over uneven terrain. The simulation result reflects the accurate kinematic characteristics of the amphibious robot and provides a theoretical basis for developing an algorithm for robot motion control and optimization. Further, this research will concentrate on the kinematic simulation maneuvering in water mode with the wheel paddle.

KEYWORDS: *Amphibious robot, Kinematic modeling, Virtual prototype, ADAMS.*

1. INTRODUCTION

Nature inspires to develop locomotion systems that exhibit functionality and performance close to the locomotion of animals [1]. Amphibians encourage developing locomotion strategies since they have excellent locomotion features in the terrestrial and aquatic environments. They smoothly transit between these mediums by simply alternating body mechanisms to adapt to the environment. The terrestrial and aquatic locomotion environment like near-shore, shallow waters demand high mobility and adaptability because of diverse terrain profiles such as sandy, wetlands, rocky, uneven surfaces, and varying obstacles to overcome for complete maneuvering. Locomotion metrics like mobility and adaptability in these environments are excellent characteristics of amphibious animals [2].

Amphibious robotics has shown advancement in the past two decades; however, the research focuses on developing the propulsive mechanisms of robots to improve mobility performance in the aquatic medium. The research work in the past focused on bio-mimic swimming characteristics to enhance performance in the water. However, these amphibious

robots' practical applications demand more capabilities on the land environment, including high terrain adaptability and speed on land, thrust performances, and heading control in the aquatic environment. Consequently, maneuvering ability in these robots needs to focus on driving mechanisms and control performance on both land and water.

Amphibious locomotion of snakes utilizes the undulation of their bodies for propulsion and motion on water and land [3]. The locomotion strategies developed to achieve amphibious locomotion are legged inspired by legged amphibians like water runner and basilisk lizard [4]. The hybrid mechanism combining leg and wheel is adopted in the whegs robot for terrestrial and underwater locomotion. Whegs series uses propellers for underwater locomotion and wheel-leg for locomotion on irregular terrain. Amphibious spherical robot by Guo. et al. mimic turtle locomotion legged locomotion on ground and waterjet thrusters for generating thrust in underwater environments [5]. The locomotion performance of amphibious robots reported in the literature is suitable for a smooth land environment with lower speed performance in the water. The hybrid mechanisms achieve improved mobility but at the cost of complex control design. An amphibious robot with a single design is proposed with compact control design. The present amphibious robot is suitable for smooth land surfaces, and legged amphibious robots have lower propulsive speed. There is a need for an amphibious robot with higher mobility capable of traversing uneven land.

Traditionally, researchers utilize experimental methods to validate the mechanical design structure. The experimental work is close to the real environment; however, it involves cost and time. The virtual prototyping validates the kinematic characterization of the model to achieve optimal performance before developing the actual prototype [6]. Lin et al. [7] utilizes a virtual prototyping robot to obtain kinematic parameters and validate the model using ADAMS for dynamic analysis of amphibious spherical robot. Zong et al. [8] study the locomotion performance of amphibious robots using a virtual prototype created in ADAMS. The kinematic simulations validate transformable flipper leg performance on complex terrain and underwater environment. Zhuang et al. [9] proposes a hydraulic-driven quadruped amphibious robot leg movement analysis using ADAMS that facilitates in gait selection of quadruped amphibious robots to crawl on uneven terrain. Virtual prototyping of the model aims to achieve optimal performance before developing the actual prototype and facilitates the iterative process to verify the complete model at early stages, reducing the time and cost of development.

Dynamic and kinematic analysis of rocker-bogie based mechanism in ADAMS is performed to study the working principle of an amphibious robot. Cao et al. [10] illustrates the modeling process of simple linkage mechanisms like gear and a cam performed in an ADAMS environment. Virtual prototyping has become a common tool to analyze the performance of models before they are physically developed. The virtual prototype provides a vital steppingstone for the design optimization of the model. The virtual prototype tool gives the kinematical analysis capability of an amphibious robot, dynamic characteristics, structural parametric study, and static analysis. The robot's complete motion performance analysis is possible by virtual prototyping simulations before physical prototype development. The simulation analysis is also the basis for motor selection and other electronics [11].

To achieve amphibious locomotion in complex environmental conditions, mobility (velocity of robot vehicle on ground and trust in water) and adaptability in these environments (obstacle negotiating and climbing capability on uneven terrain) are two important performance metrics analyzed in the literature. Mobility of some amphibious robots is discussed like ACM is a snake-inspired amphibious robot that uses a modular design that can propel at 0.4m/s.

Salamander amphibious robot achieves 0.42 m/s on land 0.28 m/s on water using body undulation and limb design. Turtle robot design uses a spherical body and four legs for motion, achieving a crawling velocity of 22.5 cm/s and surges velocity of 16.5 cm/s. Amphirobot -III uses a modular body design with a wheel propeller fin mechanism giving the speed of 0.59 m/s. Amphihex-I robot uses a flipper leg design that has higher adaptability with a speed performance of 0.2 m/s. The mobility of present amphibious robots is lower and suitable for smooth land surfaces.

Kinematic modeling enables in development and verification of the model. Kinematics modeling implemented is divided into two methods-one related to the geometric approach [12][13] and the other concerning the transformation approach. A general approach to kinematic modelling of articulated robots traversing uneven terrain was developed by Tarokh et al. [14]. In this paper, the kinematics modelling of a six-wheel rocker-bogie mobile robot based on the above literature is deduced. The kinematics model will be helpful and fundamental to subsequent studies on the mobile robot's trajectory tracking and motion control [15].

A novel wheel leg hybrid-based amphibious robot with an integrated rocker-bogie wheel paddle mechanism is introduced in this paper to negotiate obstacles on uneven terrain exploiting the legs of the robot and high-speed mobility using wheels attached to legs. The amphibious robot with a rocker-bogie mechanism can maneuver over uneven terrain on land and achieve efficient propulsive maneuvering on the water with a wheel paddle mechanism. The amphibious robot can locomote a single design on multimodal locomotion multiple terrains on land and water. The unified mechanical design gives the capability to compact control design.

The paper is organized with section 1 detailing the introduction and past work reported in the literature. Section 2 presents the kinematic modeling and modeling environment. In Section 3, results are discussed, and kinematic analysis is performed. Finally, the conclusions are drawn at the end of this paper.

2. KINEMATIC ANALYSIS OF MODEL

Amphibious robots require good propulsive performance on both land and water. In the past literature, amphibious robots were proposed keeping in mind the low demand of terrain complexity on the land environment. However, the real environment is uneven, demanding maneuver on complex terrain profiles. The amphibious robot employs either legged, tracked, wheeled, spherical or hybrid mechanisms for propulsion. A legged robot is suitable and adaptable on complex terrains but at the cost of control and lower speed [16]. Wheeled robots are best suited to flat ground surfaces, maneuvering at high speed[17]. However, they are less flexible as compared to legged over uneven terrain. Wheeled robots with passive suspension mechanisms increase adaptability on complex terrain and achieve higher obstacle negotiation capability. Rocker bogie mechanism with a passive suspension mechanism with a wheel paddle fin is a hybrid mechanism for amphibious operation. The hybrid mechanism on land represents a mobile robot with passive suspension and wheel-driven. The wheel-driven mechanism increases the motion speed, and passive suspension increases the adaptability on uneven terrain, thus increasing overall propulsive performance on land.

The general view of the virtual prototype of the amphibious robot is as shown in Fig. 1. The amphibious robot virtual prototype consists of two major parts, the rocker-bogie mechanism, and the wheel paddle mechanism. The rocker-bogie mechanism has passive suspension [15].

The mechanism has a single rocker attached to the body by a pivot joint. A differential joint appends the rocker and the bogie. The two rockers and bogies are attached on each side of the chassis (main base). The wheel paddle mechanism is a combination wheel design with paddles on the outer surface of the wheel. The wheel's rotation is utilized for locomotion on land, and the same wheel with paddles is used as propulsion in water.

2.1 Kinematic Modeling

The amphibious robot's main body consists of a rocker-bogie mechanism with six wheels driven by individual actuators. The rocker-bogie is a passive suspension mechanism utilized to adapt to uneven terrain and obstacle negotiation. The rocker-bogie mechanism comprises a rocker considered at the front and two bogies attached rocker at the rear end. The wheels are

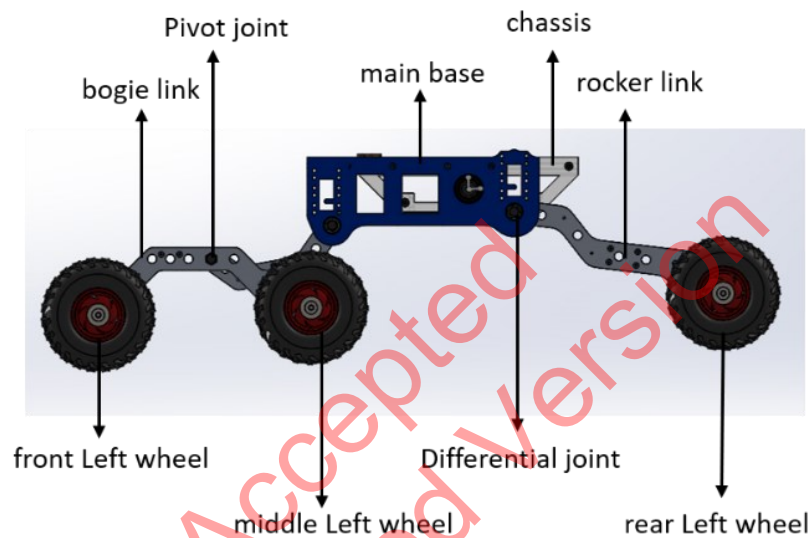


Fig. 1. General view of Amphibious robot

attached to the rocker and bogie with joints. The joints are attached with a bearing. Solidworks software is utilized to accomplish design indices and carry out the assembly process of the robot body, including the rocker-bogie mechanism and wheels. The ADAMS software accepts geometric position relationships in Parasolid format. Solidworks exports the model in the required format. However, the process encounter loses model features like material, mass information, and mechanisms constrained relationship.

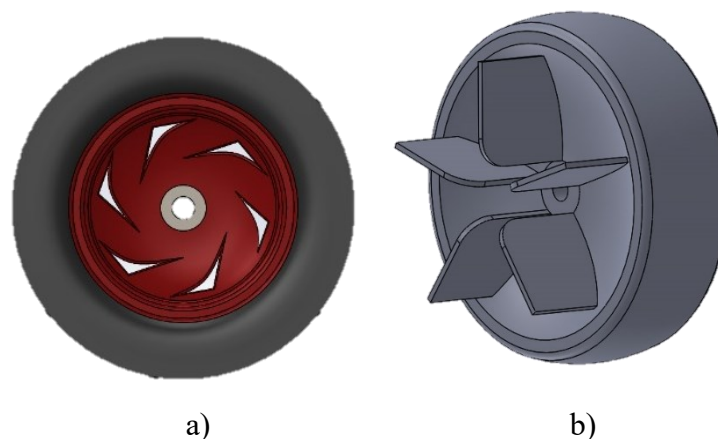


Fig. 2. a) Tire b) Wheel paddle

Additionally, the robot assembly has a large set of parts; the model is highly complex. The model in ADAMS adopts boolean operation that minimizes the independent parts quantity and retains only main parts (geometry, masses information) and joints appended to main parts [16]. Fig. 2 Shows tire used in the kinematic simulation of amphibious robot. The amphibious locomotion on the water is achieved using a wheel paddle design. Table 1 and Table 2 detail amphibious robot model specifications.

Kinematic analysis of an amphibious robot on land is considered for simplicity. According to the kinematic theorem, the velocity relationship of wheel locomotion may be described as follows. Eq. (1) and Eq. (2) represent the linear velocity of the left and right wheel, respectively. The velocity relationship is related to the radius of the wheel r and angular velocity of the wheel w_L . The angular velocity of each wheel is related by revolutions of each wheel n_L or n_R . Eq. (3)- Eq. (5) represents the wheel velocities while turning the wheel, where w is the identical turning angular velocity of the wheel.

$$V_L = r \cdot w_L = r \cdot \frac{2\pi n_L}{360} \quad (1)$$

$$V_R = r \cdot w_R = r \cdot \frac{2\pi n_R}{360} \quad (2)$$

$$V_L = w \cdot \left(R \pm \frac{d}{2} \right) \quad (3)$$

$$V_R = w \cdot \left(R \mp \frac{d}{2} \right) \quad (4)$$

$$n = \frac{n_L}{n_R} = \frac{R - \frac{d}{2}}{R + \frac{d}{2}} \quad (5)$$

Table 1. Amphibious Robot Mechanical Structure Specification

Structural part	Weight	Dimensions
Main base	1.135 kg	240x156x60mm
Rocker link	1.410 kg	267x96x36mm
bogie	2.634 kg	256x87x36mm
Rocker top	1.022kg	255x105x56mm
Tire/Wheel paddle		120x60mm

The study of kinematics modeling and simulation of amphibious robots is the basis of robot development and optimization. The kinematic analysis verifies the motion model of the moving robot by overcoming the obstacles without tipping or flipping over the terrain profile for the simulation period with the given constraints of the mechanism. The rationality of the kinematics model of the moving robot is verified by analysis of displacement and velocity curves. Designers adopted the ADAMS software to build the simulation model of the robot [21]. The robot's kinematics curve was obtained through the kinematics simulation of linear driving and pivot steering performance. This robots' mechanism design verifies the correctness of the kinematic model.

2.2 Modeling Environment

The modeling environment adopted for virtual prototyping is a widely used dynamic modeling and simulation software ADAMS; the environment facilitates the analysis of

dynamic systems. The amphibious robot locomotion speed and drive forces on the wheel-driven mechanism can be obtained using the simulation approach based on ADAMS. However, ADAMS has limitations in modeling complex design structure spatial domain. Therefore, a 3D designing environment like Solidworks is employed with Parasolid as a base to design solid parts and assemblies. The Parasolid design is exported in ADAMS for motion analysis.

Table 2. Robot Model Specifications

Vehicle load	8 Kg(78.4N)
Wheel specification	
- Width	0.06 m
- Radius	0.06 m
- circumference	0.377 m
Motor Torque, M_T	0.7848 Nm

Therefore, by combining the powerful three-dimensional solid modeling functionality Solidworks with the accurate movement simulation performance in ADAMS through a common data exchange interface [19], the kinematic simulation environment can be established. Then the relationship between structural parameters and propulsive speed can be analyzed, aiming to offer some reference for the optimization design of propulsive mechanism and motion control.

The work acts as a reference for the optimal design of motion control and the propulsive mechanism by analyzing the structural parameters are the rocker and bogie link lengths, pivot and differential joint angles, rocker and bogie height to wheel center, angle of inclination with respect to ground and maneuvering speed of the amphibious robot. The analysis is possible by exploiting excellent three-dimensional modeling capability in CAD software like Solidworks and motion simulation and a common data exchange interface [20]-[22].

3. RESULTS AND DISCUSSION OF KINEMATIC SIMULATION BASED ON ADAMS

3.1 Straight Going Path

To verify the robot model, it is required to validate the motion stability of the robot. The simulation of the model on land aimed at robot locomotion over the surface along the planned trajectory and tested for stability and heading to reach the target. The rocker-bogie integrated wheel paddle mechanism is designed considering the uneven terrain profile and obstacle negotiation capability. The robot's stability is studied by observing the variation of the center of mass of the robot structure along the horizontal X-axis direction. Fig. 4 shows the oscillations are smooth on flat terrain profile and encounter sharp changes when the model encounters the obstacle and steady state after the robot passes over the obstacle stabilizing the overall model. Fig. 4 shows center-of-mass variation is lower than the robot head height, confirming the stability of the model. The robot vehicle is stable when it is in a quasi-static state in which it does not tilt over, as the asymmetric suspension system of the passively articulated vehicle has a significant influence on the vehicle's effective stability [23]. The computation of the longitudinal stability of the rover makes use of a statical model as it is not symmetric in the longitudinal direction. In a statical model, the mechanical properties of the suspension system are considered. According to [24], the longitudinal stability of the vehicle is given when all wheels have ground contact, and the condition $N_i > 0$ is satisfied, where N_i

is the normal force at the wheel i . It should be noted that even though this condition is compulsory for the statical model to work, a physical robot vehicle does not necessarily tip if a wheel loses contact with the ground.

The velocity of the robot vehicle, as in Fig. 4 in the longitudinal direction, achieves 1.6 m/s that is higher than similar amphibious robots reported in literature like wheg series [5], RHex and ASGAURD [25, 26], wheel leg propeller [27] and aqua robot [16]. However, it is less than the max speed of the seadog amphibious robot [28] of 2.23 m/s, but mobility on the water of the seadog reduces due to the use of the simple non-holonomic wheel as paddle wheels. The peripheral of the wheel is further encased with adhesive material to reduce the fluctuations affecting other parts and system components. The simulation analysis result demonstrates increased maneuverability, achieving a robot's velocity of 1.6 m/s, verifying the theoretical value obtained from Eq. (1) and Eq. (6).

$$V_L = r \cdot \omega_L = r \cdot \frac{2\pi n_L}{360} = 0.06 \cdot \frac{2\pi}{60} 255 \text{rpm} = 1.6 \text{ m/s} \quad (6)$$

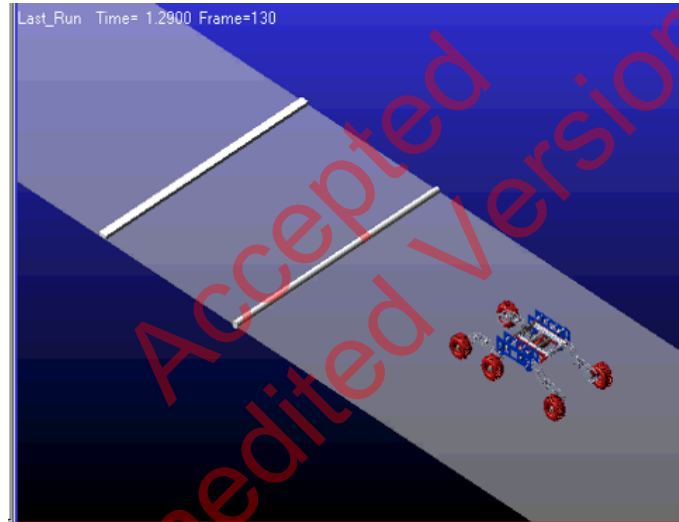


Fig. 3. Terrain Profile

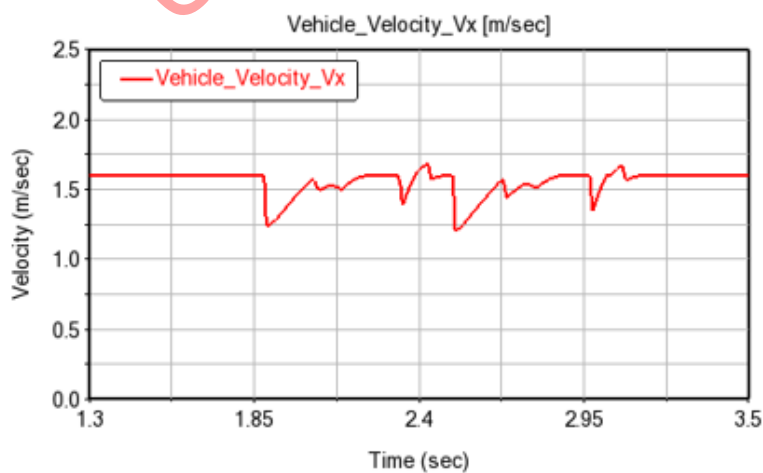


Fig. 4. Velocity of robot in the X direction

3.2 Obstacle Negotiation of amphibious robot

The terrain profile to test the obstacle negotiation capability of the robot is chosen with different shapes and heights. The obstacle's height should be less than the diameter of the wheel for stability or flip over the robot. The obstacle negotiation determines the climbing capacity of the robot. The obstacle shape chosen for simulation is a rigid rectangular block with a height of 20mm and a width of 50 mm, as shown in Fig. 5 The load on each wheel for equilibrium studies using wheel terrain contact forces is discussed in section 3.2. The other obstacle chosen is hemispherical with a radial height of 20 mm; these obstacle negotiations exhibit the slip conditions of the robot. Fig. 4 and Fig. 6 show the velocity and normal forces of all the wheels successfully negotiating at the obstacles of the chosen terrain profile.

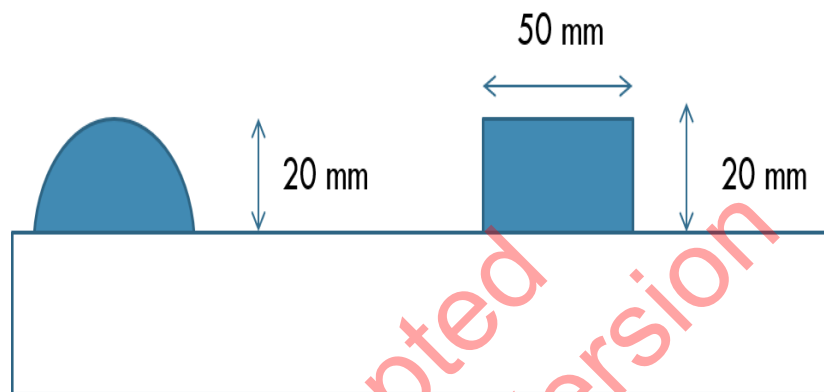


Fig. 5. Obstacle profile

3.2.1. Wheel terrain contact forces

The mobile robot locomotion on uneven terrain profiles requires a closer look to critically understand the capability of the robot overcoming obstacles completing the trajectory. The wheel ground contact forces analysis facilitates the study of locomotion on uneven terrain profiles. Fig. 6 demonstrates the normal forces of left front tire 1 (front wheel), front left tire 2 (middle wheel), and Rear left tire (rear wheel) have equal loading on all wheels till 1.9 sec because of smooth flat surface. At 1.9 sec, as soon as the left front tire 1 (front wheel) touches the hemispherical obstacle, the load is distributed to the middle and rear wheel. The rear wheel is loaded max with a normal force of 29 N at 2.3 sec when both the wheels (bogie) are passed over the hemispherical obstacle. Fig. 6 shows the middle wheel peak of normal force at 2.75

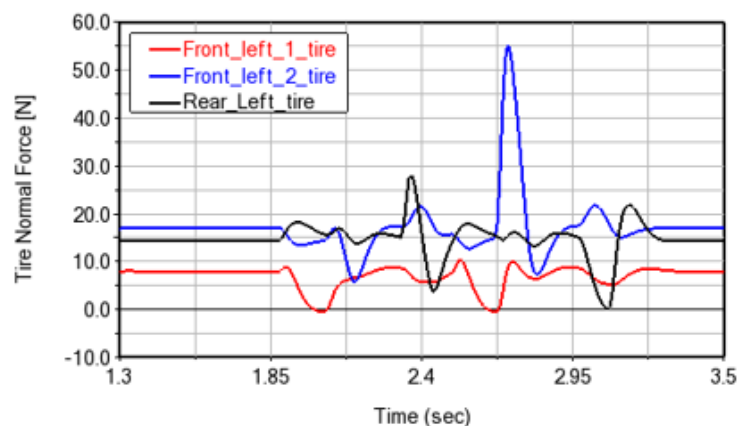


Fig. 6. Normal forces on wheels

sec, indicating the middle wheel is entirely at the top of the 50mm rectangular block. At 2.25 sec, the rear wheel crosses the rectangular block followed by equal forces on all the wheels over the flat smooth surface locomotion at the trajectory completion stage.

4. CONCLUSION

A novel wheel leg hybrid-based amphibious robot with an integrated rocker-bogie wheel paddle mechanism is introduced in this paper to negotiate obstacles on uneven terrain exploiting the legs of the robot and high-speed mobility using wheels. The existing amphibious robots in the literature [2] have minimal suspension suitable only for flat terrain profiles. However, the suspension is achieved through a legged robot with lower speed and mobility performance both on land and water. The analysis proves that the propulsive principle and feature of the wheel paddle mechanism enable efficient locomotion on land and water. The robot is capable of multimodal locomotion on uneven terrain on terrestrial and aquatic mediums. The simulation in the ADAMS environment provides a basis for the kinematic validation of the model. The kinematic simulation in ADAMS of virtual prototype amphibious robot measures the speed, torque angular, and velocities of integrated mechanism.

In this kinematic simulation, the capabilities on a smooth and uneven surface on land are achieved. The capabilities include straight going on a flat surface, and obstacle negotiations over the various height and shape obstacles are selected for performance evaluation of the model.

In the future, the experiment will be carried out on benchmark terrain profiles considering different height obstacle negotiations for the robot to locomote on land. Furthermore, kinematic simulation using wheel paddle on the water will be tested. The control capability for the amphibious robot can be carried out using the co-simulation capability of ADAMS and Matlab/Simulink Environment.

ACKNOWLEDGMENT

The author would like to acknowledge financial assistance from the ministry of education Malaysia under the FRGS Grant FRGS17-031-10597. We would like to thank financial support by IIUM under the KOE post graduate Tuition fee waiver scheme 2019 (TFW-2019).

REFERENCES

- [1] Karakasiliotis K, Thandiackal R, Melo K, Horvat T, Mahabadi NK, Tsitkov S, Ijspeert AJ. (2016) From cineradiography to biorobots: an approach for designing robots to emulate and study animal locomotion. *Journal of The Royal Society Interface*, 13(119), 20151089.
- [2] Rafeeq M, Toha SF, Ahmad S, Razib MA. (2021) Locomotion strategies for amphibious robots-A review. *IEEE Access*, 9: 26323-26342.
- [3] Hopkins JK, Spranklin BW, Gupta SK. (2009) A survey of snake-inspired robot designs. *Bioinspiration & biomimetics*, 4(2), 021001.
- [4] Park HS, Sitti M. (2009) Compliant footpad design analysis for a bio-inspired quadruped amphibious robot. In *Proceedings of IEEE/RSJ International Conference on Intelligent Robots and Systems: October 2009*, pp. 645-651.
- [5] Boxerbaum AS, Werk P, Quinn RD, Vaidyanathan R. (2005) Design of an autonomous amphibious robot for surf zone operation: part I mechanical design for multi-mode mobility. In *Proceedings of IEEE/ASME International Conference on Advanced Intelligent Mechatronics: July 2005*, pp. 1459-1464.

-
- [6] Ding R, Yu J, Yang Q, Tan M. (2009) Kinematics modeling and simulation for an amphibious robot: Design and implementation. In proceedings of IEEE International Conference on Automation and Logistics: July 2009, pp. 35-40.
- [7] Bi L, Guo J, Guo S. (2015) Virtual prototyping technology-based dynamics analysis for an amphibious spherical robot. In proceeding of IEEE International Conference on Information and Automation: August 2015, pp. 2563-2568.
- [8] Zhong B, Zhou Y, Li X, Xu M, Zhang S. (2016) Locomotion performance of the amphibious robot on various terrains and underwater with flexible flipper legs. *Journal of Bionic Engineering*, 13(4), 525-536.
- [9] Zhuang M, Yu ZW, Gong DP, Xu ML, Dai ZD. (2012) Gait planning and simulation of quadruped robot with hydraulic drive based on ADAMS. *Machinery Design & Manufacture*, 7: 100-102.
- [10] Cao X, Cleghorn WL. (2010) Examples and application of ADAMS software in the mechanics of machines teaching. In 5th International Conference on Computer Science & Education: 2010; pp. 1637-1641, doi: 10.1109/ICCSE.2010.5593596.
- [11] Ding R, Yu J, Yang Q, Hu X, Tan M. (2009) Platform-level design for a biomimetic amphibious robot. In proceeding of IEEE International Conference on Robotics and Biomimetics: February 2009, pp. 977-982.
- [12] Cox J, Wilfong GT. (1990) *Autonomous Robot Vehicles*. Springer-Verlag, N.Y.
- [13] Iagnemma K, Genot F, Dubowski S. (1999). Rapid physics-based rough terrain rover planning with sensor and control uncertainty. In proceedings of IEEE International Conference on Robotics and Automation, Detroit, MI; pp. 2286-2291.
- [14] Tarokh M, McDermott G, Hayati S, Hung J. (1999). Kinematic modelling of a high mobility Mars rover. IEEE Conf. on Robotics and Automation, Detroit, MI.
- [15] Kumar P. (2010) Modelling and dynamic analysis of Rocker-Bogie Rover for space exploration. PhD thesis, Indian Institute of Technology Roorkee, India.
- [16] Dudek G, Giguere P, Prahacs C, Saunderson S, Sattar J, Torres MLA, Georgiades C. (2007) Aqua: an amphibious autonomous robot. *Computer*, 40(1), 46-53.
- [17] Baines R, Fish F, Kramer BR. (2021) Amphibious robotic propulsive mechanisms: current technologies and open challenges. *Bioinspired Sensing, Actuation, and Control in Underwater Soft Robotic Systems*, 41-69.
- [18] Tan J, Wang Z, Liu Z. (2006) Stable programmed manifold solver for virtual prototyping motion simulation, *Chinese Journal of Mechanical Engineering (English Edition)*, 19(1), 76-80.
- [19] Liu XP, Zheng JR, Zhu ZG, Gu XL. (2003) Study on graphical data exchange between Adams/View and solidworks. *Mechanical Engineer*, 12.
- [20] Yu, J. C., Liao, J. W., Li, M. Y., & Li, S. H. (2003) Design and motion simulation of the autonomous exploration vehicle. In Proc. of the 7th International Conference on Automation Technology: September 2003; pp.1-6.
- [21] Malik SM, Lin J, Goldenberg AA. (2006) Virtual prototyping for conceptual design of a tracked mobile robot. In proceedings of Canadian Conference on Electrical and Computer Engineering: May 2006; pp. 2349-2352. IEEE.
- [22] Xing H, Guo S, Shi L, Hou X, Liu Y, Liu H. (2020) Design, modeling and experimental evaluation of a legged, multi-vectored water-jet composite driving mechanism for an amphibious spherical robot. *Microsystem Technologies*, 26(2), 475-487.
- [23] Ullrich F, Goktogan AH, Sukkarieh S. (2011) Design optimization of a mars rover's rocker-bogie mechanism using genetic algorithms. In Proceedings from 10th Australian space science conference; pp. 199-210.
- [24] Thuer T, (2009) Mobility Evaluation of Wheeled all-terrain Robots - metrics and application, PhD Thesis, Swiss Federal Institute of Technology Zurich (ETH Zurich).
- [25] U. Saranli, M. Buehler, and D. E. Koditschek. (2001) RHex: A simple and highly mobile hexapod robot, *Int. J. Robot. Res.*, 20(7), 616-631.
-

- [26] Eich M, Grimminger F, Bosse S, Spenneberg D, Kirchner F. (2008) Asguard: A hybrid-wheel security and SAR-robot using bio-inspired locomotion for rough terrain. In Proceedings of . ROBIO; pp.774–779.
- [27] Yu J, Ding R, Yang Q, Tan M, Zhang J. (2013) Amphibious pattern design of a robotic fish with wheel-propeller-fin mechanisms: amphibious pattern design of a Robotic Fish, J. Field Robotics, 30, 702-716.
- [28] Klein MA, Boxerbaum AS, Quinn RD, Harkins R, Vaidyanathan R, (2012) SeaDog: A rugged mobile robot for surf-zone applications. In Proceedings of 4th IEEE RAS EMBS Int. Conf. Biomed. Robot. Biomechatronics (BioRob): June 2012; pp. 1335–1340.

Accepted
Unedited Version