

Reconfigurable Intelligent Surface-Assisted B5G/6G Wireless Communications: Challenges, Solution and Future Opportunities

Zhen Chen, *Member, IEEE*, Gaojie Chen, *Senior Member, IEEE*,
Jie Tang, *Senior Member, IEEE*, Shun Zhang, *Senior Member, IEEE*,
Daniel K. C. So, *Senior Member, IEEE*, Octavia A. Dobre, *Fellow, IEEE*,
Kai-Kit Wong, *Fellow, IEEE* and Jonathon Chambers, *Fellow, IEEE*,

Abstract

The power consumption and hardware cost are two of the main challenges for realizing beyond fifth-generation (B5G) and sixth-generation (6G) wireless communications. Recently, the emerging reconfigurable intelligent surface (RIS) have been recognized as a promising tool for enhancing the propagation environment and improving the spectral efficiency of wireless communications by controlling low-cost passive reflecting elements. However, current cellular communication were designed on the basis of conventional communication theories, significantly restrict the development of RIS-assisted B5G/6G technologies and lead to severe limitations. In this article, we discuss RIS-assisted channel estimation issues involved in B5G/6G communications including channel state information (CSI) acquisition, imperfect cascade CSI for beamforming design and co-channel interference coordination, and develop a few possible solutions or visionary technologies to promote the development of B5G/6G. Finally, potential research opportunities are discussed.

Index Terms

Reconfigurable intelligent surface (RIS), channel estimation, beamforming design, co-channel interference, mmWave communications.

I. INTRODUCTION

Beyond fifth generation (B5G) and sixth generation (6G) communication provide huge improvements in terms of data rates, reliability, high throughput and low latency requirements. However, due to the wide deployment of the millimeter wave and massive MIMO technologies, the required hardware complexity and large power consumption become major implementation challenges [1]. In general, large antenna arrays are accompanied by many radio frequency (RF) chains followed by multiple analog-to-digital converters (ADCs). Therefore, as the power consumption of ADCs grows exponentially with the number of quantization bits, reducing the power consumption has attracted considerable attention.

As a remedy, the reconfigurable intelligent surface (RIS) concept and its various counterparts have emerged as a powerful and cost-effective solution to tackle these challenges [2]. In simple tangible terms, a RIS consists of a large number of abundant reconfigurable reflective elements [3], which can be divided into active- and passive RIS case. The active RIS can adjust the phase shifts and amplify the received signal attenuated but cost is expensive. In light of this, we focus on passive RIS in this article. By adjusting the phase shifters (PSs) of passive RIS reflective elements, the incident signals can be dynamically adjusted to support diverse user requirements, without deploying additional mobile stations (MSs) or in-cell relay stations [4], [5]. As a result, it has ultra-low power consuming and low-cost hardware as compared to that of the amplify-and-forward (AF) relay-assisted systems relying on active transmission devices or base stations (BSs). From the design and implementation perspective, a passive RIS has attractive characteristics such as having a low profile and being flexible, lightweight; as a result, it can be deployed in existing cellular wireless networks without requiring any change existing infrastructure, user terminals as well as operating standards. These significant advantages make RIS a promising research directions for B5G/6G [6]–[9]. However, current cellular communications designed and operated based on previous postulates may not be suitable for future RIS-assisted B5G/6G communication services, since optimal control of the RIS is the acquisition of the channel state information (CSI) required for beamforming and co-channel interference will be inevitable for explosive growth in data-storage capabilities and rapid B5G/6G communication. Thus, it is difficult to directly apply previous technologies to RIS-assisted communication scenarios. To support new demands in future RIS-assisted B5G/6G communication scenarios, the following three challenges should be discussed as follows:

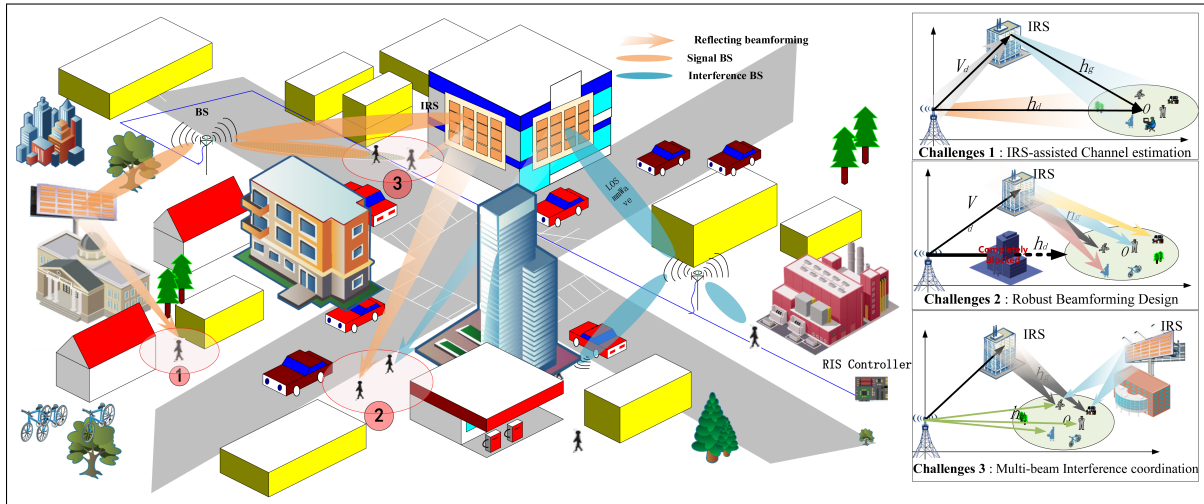


Fig. 1. Typical RIS applications in B5G/6G networks and challenges.

- RIS-assisted channel estimation:** Accurate CSI acquisition is critically dependent on the number of reflecting elements of RIS. Due to the lack of baseband processing capabilities at the RIS, a large dimension of RIS is designed to RIS-assisted system, which is very unfavourable for the deployment of RIS. Therefore, how many reflecting elements of RIS should be satisfied the accurate CSI acquisition, which is the bottleneck of the application of RIS-assisted MIMO system.
- RIS-assisted beamforming design:** A major challenge with RIS-assisted beamforming is the acquisition of the cascade CSI required between transmitter and receiver. However, the locations of users are changing and environmental properties are varying, which may lead to an error existing in the beamforming design. Therefore, the other main issue is to achieve the optimal beamforming design, while keeping the error of cascade channel estimation below a tolerable level.
- RIS-assisted co-channel interference coordination:** To throughput gain of RIS-assisted system, the coordinated CSI is adopted to design their transmit/receive beamforming, where different BSs are enabled to share their CSI. As directional beamforming increase, co-channel interference will become an increasingly challenging issue in B5G/6G ultra-dense networks. Therefore, future B5G/6G communications call for rigorously interference coordination methods to overcome the impact of co-channel interference.

These various challenges of RIS-assisted mmWave MIMO communications motivate the ne-

cessity to perform a comprehensive review of RIS for realizing B5G/6G communications. This review focuses on three aforementioned key challenges and provide the fundamental solution on channel estimation and its implementations, imperfect cascade CSI for beamforming design and RIS-assisted co-channel interference coordination. In the following section, we provide an overview of standard developments of RIS technologies. Following that, we introduce the hybrid multiobjective evolutionary programming for RIS-assisted B5G/6G communication systems. Then, we detail the imperfect cascade CSI for an RIS-assisted hybrid beamforming (HBF) design and highlight the potential benefit of HBF design. We further consider the deep learning based methods to train the shared CSI, which can share the channels to avoid co-channel interference. Finally, we outline future research directions.

II. OVERVIEW OF RIS-ASSISTED FUTURE B5G/6G COMMUNICATIONS

We consider a RIS-assisted B5G/6G mmWave network, which is depicted in Fig. 1. Due to the high path attenuation, mmWaves can be easily blocked by obstacles, which limits their practical implementation. To tackle this issue, RIS-assisted mmWave networks are envisioned and expected to play an important role in future B5G/6G wireless communications.

In terms of the requirements in B5G/6G, we expect to enhance the coverage area and guarantee diverse quality-of-service (QoS) requirements. By leveraging the reconfigurability of RIS, the transmission performance of wireless networks has been verified via realistic simulations and experiments. Therefore, numerous works in the literature have investigated RIS-assisted mmWave communications including the theoretical basis, physical design of metasurfaces, physical architecture as well as the corresponding channel modeling at different operational frequencies. Following on, the analysis of models, algorithms and performance optimization have been provided in RIS-assisted systems. A organization of passive RIS challenge and potential solutions are provided in Fig. 2.

Comparing to these works, our study conducts an investigation of passive RIS for the above-mentioned three potentially disruptive problems, as illustrated Fig. 1. To support new demands in future B5G/6G network scenarios, this article emphasizes plausible solutions to ensure that future wireless networks are practically realizable.

III. RIS-ASSISTED CHANNEL ESTIMATION

In the B5G/6G communications, the throughput gain in RIS-assisted mmWave communications is highly rely on the availability of CSI, the acquisition of which still remains a challenge for RIS

Passive RIS implementation	Challenges	Potential solutions
Channel estimation	<ul style="list-style-type: none"> High channel estimation overhead; Limitations on the number of RF chains; Pilot contamination due to strong LoS paths between the BS and RIS; Deployment under uncertain LoS and NLoS connections in 3D space; 	<ul style="list-style-type: none"> Overhead reduction by exploiting the sparsity property of mmWave and CS; Passive RIS-assisted channel estimation protocol design tailored for B5G/6G; Multi-objective evolutionary approach (MOEA for LoS and NLoS propagation paths estimation);
Robust beamforming design	<ul style="list-style-type: none"> Increased overhead for RIS elements; The impact of UAV wobbling on accurate CSI acquisition; Computation complexity of solution algorithm; 	<ul style="list-style-type: none"> Robust beamforming design with CSI error models; Overhead reduction by grouping adjacent reflecting elements forming sub-surfaces; Multi-objective evolutionary, or deep learning methods for multi-user passive beamforming;
Co-channel interference coordination	<ul style="list-style-type: none"> Random distributions of RISs and ground users; Coordination design under complicated mathematical model; Co-channel interference modeling and analysis; Average- and the ergodic rate modeling and analysis to capture the large-scale fading component; 	<ul style="list-style-type: none"> Probability density function (PDF) or cumulative distribution function (CDF) design for relaxing co-channel interference; Multi-objective evolutionary strategy for solving interference co-channel model; Edge computing approach for obtaining a sub-optimal passive RIS;

Fig. 2. Design challenges and potential solutions for passive RIS.

Technology Metric	Two- timescale	Codebook- based	Deep learning- based	Rank-based	Sparsity-based	MOP
Reliability	Good	Good	Poor	Moderate	Moderate	Good
Complexity	Depend on RIS elements	Depend on the size of codebook	Depend on trained dataset	Depend on propagation paths	Depend on propagation paths	Depend on population size
Accuracy	High	Depend on designed codebook	Depend on trained dataset	Moderate	Moderate	High
Delay	Good	Depend on the size of codebook	Good	Poor	Moderate	Good
Scenario	Quasi-static	N/A	N/A	mmWave or THz	mmWave or THz	Highly dynamic

Fig. 3. Comparison of related channel estimation approaches.

with a large number of passive elements. In particular, to reduce the hardware requirements, the reflecting coefficient of RIS has usually no transmission/processing capability. Therefore, the passive feature of RIS makes it rather difficult to estimate RIS-UE and RIS-BS channels. Specifically, when a BS with M antennas is considered to serve K UEs with the help of the N reflecting elements of RIS, it is observed from [10] that the number of channel coefficients involved for designing the RIS reflection coefficients is $KMN + KM$. Most existing schemes require the individual computational cost about both the BS-RIS channel and the RIS-UE

channel, which involves both quasi-static and dynamic movable RIS scenarios. For typical RIS-assisted communication, the cascaded BS-RIS-UE channel can be established based on the transmitting/receiving pilot signals, and the corresponding cascaded channel can be extremely high-dimensional. Fortunately, this overhead can be reduced by the two-scale channel estimation in [11]. Authors ingeniously propose a two-timescale channel estimation framework to reduce pilot overhead, when quasi-static RIS scenario is considered between BS and RIS. The pilot overhead relied only on the number of reflecting elements, is very useful for quasi-static RIS scenario. In light of this, the codebook-based scheme is developed that the performance is dependent upon the codebook being designed. It is worth mentioning that location-based RIS configurations do not need the CSI to be acquired per channel coherence time but much slower [12]. However, for highly dynamic scenario, such as aerial RIS, RIS is mounted on unmanned aerial vehicles (UAV) to enable three-dimensional signal reflection. The UAV mobility-induced variation of the angles of arrival/departure (AoA/AoDs) prompts BS-RIS channel to be estimated frequently. More importantly, the pilot overhead for the highly dimensional mobile RIS is prohibitively high. To reduce the pilot overhead in highly dynamic scenario, deep learning is introduced to combat the large size of BS-RIS channel. Another solution to reduce the pilot overhead is to utilize the sparse and low-rank property of mmWave channel when the cascaded channel is established. Fig. 3 compares related RIS-assist channel estimation approaches. These solutions have their respective strengths and shortcomings. Therefore, how to accurately estimate the passive RIS-assisted channel with a large number of reflecting elements is still an open problem in B5G/6G.

A. Problem Formulation

We consider a RIS-aided downlink communications in *challenge 1* of Fig. 1, where K single-antenna UEs are randomly distributed throughout the cell, where a RIS with M reflective elements are arranged in a uniform planar array (UPA) structure for enhancing the performance. The phase shifts of the RIS is designed to adjust the propagation directions of the incident signals. To fully realize a substantial training overhead reduction, the inherent sparsity of mmWave channel is exploited to formulate the cascade channel construction by exploiting the compressed sensing (CS) [13]. Under the proposed framework, the cascaded channel estimation problem is formulated as a CS-based sparse reconstruction problem, which includes three conflicting objectives: the measurement error, the number of reflecting elements and the sparse constraint. Particularly, the

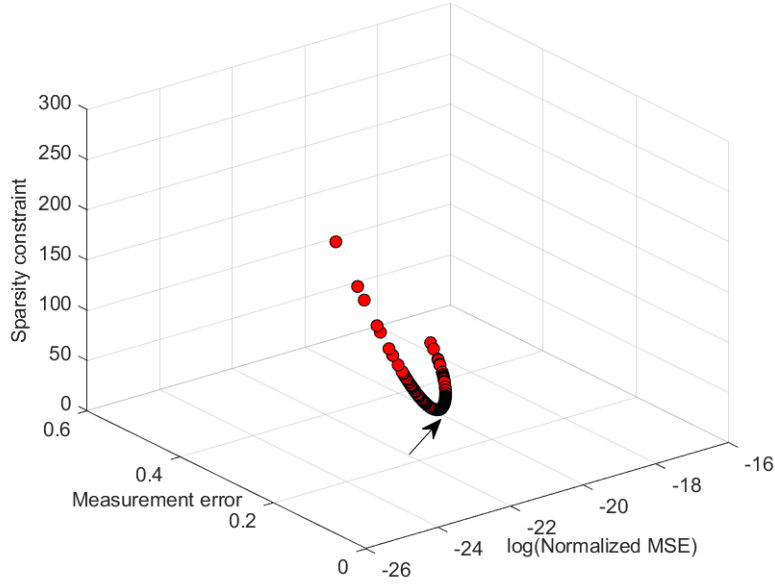


Fig. 4. Relationship between reconstruction error, normalized MSE and the sparsity of the solutions

reflecting elements of RIS design is a major bottleneck for accurate CSI acquisition. The reason is that a large number of RIS units is integrated into B5G/6G communication, which can lead to an increase in the pilot requirements.

Since the three objectives of the optimization problem are conflicting with each other, many potential technologies are developed to solve the channel estimation. However, there are restrictions and limitations among these technologies, e.g., deep learning-based scheme can obtain receivable CSI, but lots of samples were used in training the network model which leads to high hardware cost. In addition, the alternating optimization scheme is also other potential technology, but three variable strongly coupled together, which result in difficult to solve it.

To support new demands, we formulate a new potential technology, multi-objective optimization problem (MOPs) to overcome this challenge. Then, the corresponding hybrid multiobjective evolutionary algorithm (MOEA) based on differential evolution (DE) is developed to solve the MOPs. To reduce significantly the computational cost of the selection process, we firstly develop a local search to generate new promising solutions by exploiting the iterative hard-thresholding scheme. Next, an angle-based selection operator is used to determine the best Pareto Front (PF) in the knee areas, which is crucial for diversifying the search. According to the proposed hybrid MOEA, the estimated solution of channel is determined in the PF set, which have a good

Method	Model	Computational Complexity	Additional comments
Two-time scale-based scheme [11]	General channel model	$\mathcal{O}((M+N)^3 + (N+M)^2K)$	
Codebook-based scheme [12]	End-to-end model	$\mathcal{O}(T_{cbook}N_pN_{sym}K)$	
Deep learning-based scheme [5]	Under-determined linear signal model	$\mathcal{O}\left(E\left(K\mathcal{T} + \sum_{l=1}^L F_l U_l U_{l-1}\right)\right)$	E has no upper bound
Proposed	Multi-objective evolutionary model	$\mathcal{O}(sCKN_pM_{path} + NMK)$	

Notation: T_{coh} = the channel coherence time; M = the number of RIS elements; M_{path} = the number of paths in the RIS-user link; M_{grid} = the number of discrete grid points; C = a constant that depends on the adopted compressed sensing; T_{cbook} = codebook size, N_p = pilot symbols of length N_{sym} are sent; T_{loc} = the value in general depends on the adopted localization; E = number of epochs; \mathcal{T} = complexity of tentative estimation (linear system, including matrix multiplications and inversions) [5]; L = number of hidden layers; U_l = number of neurons (or kernels, in the case of CNNs) in the l -th layer, F_l = kernel size of the l -th convolutional layer; N = number of BS antennas; K = number of users; s = the size of the population.

Fig. 5. A computational complexity comparison between existing methods and proposed channel estimator.

tradeoff among the sparsity constraint, the number of reflecting elements and the measurement error whilst providing encouragement to its performance.

B. Simulation Results

In Fig. 4, the normalized mean square error (NMSE) performance comparison of the proposed scheme is described to achieve the tradeoff among measurement error, the number of reflecting elements and the sparsity constraint. We assume that an RIS consists of $M = 256$ reflecting elements. The UE is close to the RIS and far from the BS. The hybrid MOEA exploits the hybrid evolutionary-based strategy for diversifying the search along the weakly PF set, which can achieve effective performance improvement. Furthermore, Fig. 4 shows the best solutions obtained by the hybrid evolutionary algorithm that lies on the Pareto-optimal front. It is very clear that the solution is determined in the knee region of Pareto-optimal front. Therefore, the pilot sequences can be reflected between the BS and the UEs such that the RIS-assisted CSI can accurately be estimated by using multiobjective evolutionary scheme. Fig. 5 summarizes the computational complexity of existing methods. Note that the proposed approach results in a much simpler model that is suitable for passive RIS scenario.

C. Discussion

As discussed above, acquiring accurate CSI for B5G/6G mmWave MIMO systems is very time-consuming and expensive. CS provides a promising tool for reducing the pilot overhead, with the potential of MOEA to estimate accurately the channel in the RIS-assisted MIMO systems. The approach can achieve a superior performance and low complexity. Therefore, we conclude that the RIS-assisted channel estimation is effective by using CS and a multi-objective optimization method; we anticipate that this framework will be very appealing in the future B5G/6G wireless networks.

IV. RIS-ASSISTED IMPERFECT CASCADE CSI ACQUISITION FOR BEAMFORMING DESIGN

As described in the introduction, RIS-assisted mmWave communications can effectively enhance the coverage. However, most prior studies mainly focus on the design of beamforming under the perfect knowledge of CSI, which is often relies on over-idealistic assumption in practical scenarios, such as time-selective fading environments or channel offset in block-fading and other uncertain factors. In fact, design of beamforming suffered from substantial performance degradation if an error exists in the estimation of CSI [14]. As a result, considering the imperfect cascade CSI for the RIS-assisted mmWave MIMO system via robust beamforming design is crucial from a practical perspective.

A. Problem Formulation

We investigate robust beamforming design for an RIS-aided mmWave MIMO system based on imperfect cascade CSI, as illustrated in the *challenge 2* of Fig. 1. RIS reflecting elements are deployed to assist information transmission. The reflection beamforming and active beamforming are jointly designed to achieve a better transmission performance. The single UE (SU) and multi-UE (MU) reception modes of an RIS-assisted mmWave MIMO system are considered, respectively. For the SU scenario, existing mechanisms consider joint design of an active beamforming and a reflecting beamforming to minimize the transmit power of the system, while ensuring the achievable rate of each UE satisfies the QoS requirement under the error estimation of CSI case. The formulated problem is non-convex, and usually considered a challenging problem to be solved due to the multi-variable constraints.

To address this issue, a convex-concave procedure (CCP) with the first-order Taylor expansion is generally used in the optimization problem that the inequalities of matrix is transformed

with linearize the rate approximately. However, this approximation transformation give rise to extremely weak solutions. What is more, the RIS deployment may influence the system performance due to regarding the large-scale path loss. If RIS is close to the BS/UE, the line-of-sight (LoS) path loss is minimized, but the excessive path loss originated from non-line-of-sight (NLoS) connections becomes obvious. On the other hand, if RIS is far from the BS/UE, the probability of NLoS connections reduces, but this leads to an improved signal attenuation due to the longer communication distance. Therefore, it is urgent to establish an appropriate solution for high-reliability capacity B5G/6G communication.

By taking advantages of multi-objective optimization techniques, it is possible that the communication system can provide a trade-off points among active beamforming, a passive beamforming and uncertainty CSI error. The decision-makers can select an appropriate solution according to the B5G/6G communication requirement. It is worth mentioning that Pareto optimal solution can be obtained by exploring the evolutionary algorithms, which still remain largely unknown and unexplored. The hybrid evolutionary algorithm is developed in this paper, it is hoped that this scheme would provide a favorable guide for the future research. Finally, these optimization techniques are subsequently extended to the MU case where a robust hybrid beamforming design is achieved. The sum received power of the MU can be maximized through jointly designing active and passive beamforming scheme.

B. Simulation Results

For simulation, we consider that the MUs are distributed in a cluster uniformly and randomly, and the locations of the BS keep away from the users, and RIS is used to assist the link. The path loss factor is considered. To verify the uncertainty CSI error, the error bound of the CSI is defined with the cascade CSI uncertainty factor to control the measurement error.

As indicated by Fig. 6, the hybrid evolutionary algorithm obtains a set of Pareto solutions for beamforming design, which is tradeoff including passive beamforming, active beamforming and uncertainty CSI error. Optimal Pareto front is determined at direction of arrow. Due to the uncertainty movement of the users, the transmission between the RIS and users may exist uncertainty channel interference. To verify this issue, imperfect user position (or the corresponding AoA/AoD) is considered to replace the imperfect channel coefficients. In simulation, 16- and 64-quadrature amplitude modulation (QAM) are considered to modulate mmWave 5G NR waveform signals. The received signal at the phased-array AoD is down converted and demodulated using

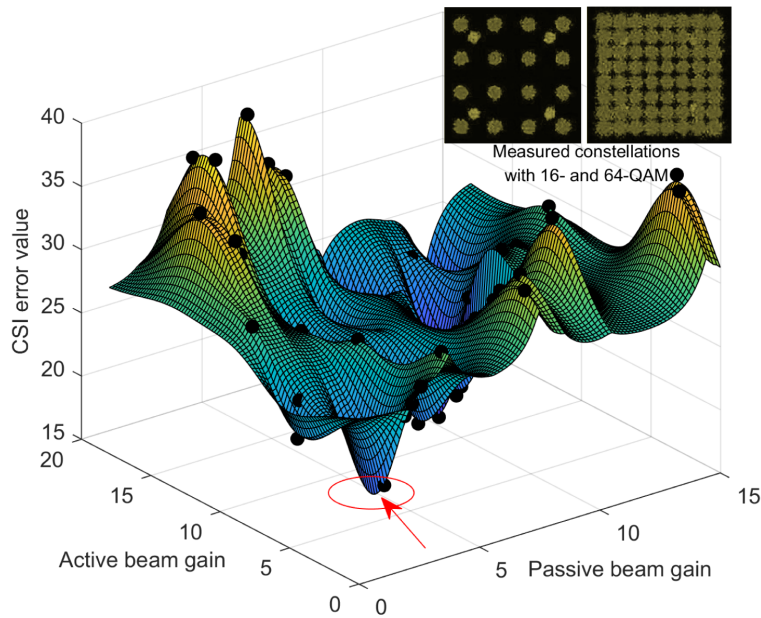


Fig. 6. Pareto front obtained as the multi-objective framework. The top right: Measured constellation plots for 16-QAM and 64-QAM data.

a signal analyzer running the analysis software. The simulated beamforming gain with imperfect user position is very close to the calculated measured beamforming gain. The corresponding constellation diagrams with 16- and 64-QAM modulated waveforms are provided in the top right of Fig. 6, which satisfies 5G modulation requirement defined by 3GPP. This indicates that the hybrid evolutionary is beneficial for RIS-assisted system to design robust hybrid beamforming. Therefore, decision makers may incline towards a large value of uncertainty CSI error. The approach claims that it can realize more practical and flexible beamforming design and tradeoff performance based on B5G/6G requirements. Simulation results verify that hybrid evolutionary algorithm has superior tradeoff performance.

C. Discussion

In B5G/6G systems, directional beamforming is designed to overcome strong attenuations. However, the imperfect cascade CSI inevitably causes the RIS-assisted beam misalignment. From this perspective, the imperfect cascade CSI need to be developed for robust beamforming design. From above theoretical analysis and simulation results, we argue that incorporating multi-objective optimization techniques into the combination of imperfect CSI and beamforming design strategy is an effective and reliable strategy for future RIS-assisted B5G/6G communications.

V. RIS-ASSISTED SHARED CSI FOR CO-CHANNEL INTERFERENCE COORDINATION

For ultra-dense B5G/6G networks, co-channel interference is inevitable in practical communication scenarios, e.g., in offices, commercial towers and shopping mall. It is thus critical to take into account the shared CSI of different BSs to avoid co-channel interference in future ultra-dense B5G/6G networks. Therefore, in this section, we will investigate how to design a co-channel interference coordination scheme with the help of shared CSI for ultra-dense interference networks. The theoretical results offer important insights for RIS-assisted ultra-dense B5G/6G networks.

A. Problem Formulation

Let us consider an RIS-assisted mmWave network with intercell interference scenario, as illustrated in *challenge 3* of Fig. 1, where the multi-antenna BS simultaneously serve K independent UEs with the help of the RIS. The RIS consists of M reflecting elements that is mounted on the wall of buildings. There are two BSs with multi-antennas, which are referred to as the BS and BS_I . We assume that the signal BS serves the intended UE and another BS_I , which serves its own UE_I , causes interference to the intended UE. To address the co-channel interference issue, the BS_I -UE channel, the BS-UE channel and the interference BS- UE_I channel are considered in this scenarios.

According to the structural properties of an passive RIS, we develop two tractable optimization problems that exploit the average rate and the ergodic rate under the shared CSI. However, the corresponding optimization problems are non-convex and a challenging problem to be solved. To tackle this issue, we divide the optimization problem into multiple training modules by exploiting the offset learning based channel estimation techniques. Inspired by the powerful learning capability of multi-objective optimization techniques, Double multi-objective evolutionary algorithm with local search strategy is developed to build shared channel between the BS and BS_I . It is noted that applying the local search-based evolutionary strategy to co-channel interference coordination problem that can generate a series of independent Pareto solutions in the objective space, which can be appropriately combined to provide a between throughput gain of system and interference coordination. Moreover, combined with the results of the interference coordination analysis, it is interesting to observe that incorporating local search-based evolutionary strategy into co-channel interference coordination problem, which can handle the shared channel in ultra-dense RIS-assisted mmWave system.

B. Simulation Results

To make the performance comparison of the local search-based evolutionary strategy with the DLA-based scheme [15] and full precoding without RIS. We assume that the BS, the BS_I, UE and the RIS are located at (0, 0), (550 m, 0), ($d_{SU}, 0$), (d_R, d_{RU}), respectively. Due to extensive obstacles and scatterers, the distance-dependent path loss exponents are $\alpha_{SU} = 2.1$, $\alpha_{IU} = 3$ and $\alpha_{RU} = 2.3$. On the other hand, the location of the RIS is deployed between the BSs and the RIS, where the corresponding the path loss is $\alpha_{SR} = \alpha_{IR} = 2$.

Simulations are performed without any array calibration and equalization. The BS is equipped with $N = 256$ transmitting antennas and the number of channel paths $L = 8$. The results expectedly confirm the superiority of our design. In the following, the design of hybrid beamforming under shared CSI is provided. We compared the proposed method with the scheme in [3] as well as a fully digital decoder without RIS. Result indicates that the proposed evolutionary scheme can strike a balance between the lowest consumption and the minimum channel interference.

C. Discussion

In future B5G/6G, the multi-beam interference will inevitably increase with the increase of terminal equipments. Therefore, it is crucial to explore the shared channel for interference coordination scheme. Inspired by the stability of the multi-objective evolutionary techniques, it is shown that the multi-objective evolutionary-based co-channel interference coordination is capable of fully leveraging the reflective elements of RIS and improving the system performance. Therefore, we conclude that the co-channel interference coordination with multi-objective evolutionary technique is an option for future communication systems.

VI. OPEN RESEARCH ISSUES AND OPPORTUNITIES

1) *RIS-assisted Multi-tier computing*: Multi-tier computing is a novel communication architecture for RIS-assisted mmWave networks. Their integration with RIS can significantly promote rapid development of the B5G/6G wireless communications through offloading the computationally intensive tasks to the edge server. However, RIS-assisted multi-tier computing causes a large channel pilot overhead and affects the free mobility of UEs in the RIS-assisted system. Therefore, the RIS-assisted multi-tier computing problem should be studied by considering the limitations of CSI.

2) *RIS-assisted carrier frequency offsets (CFO) estimation*: The achievable performance is very sensitive to the CFO induced by the mismatch between transceiver oscillators. However, the introduction of RIS further aggravates multiple-access channel interference, which may significantly degrade the system performance. Therefore, reliable CFO need to be estimated to mitigate multiple-access channel interference. Therefore, establishing an RIS-assisted CFO modeling and developing corresponding algorithm is crucial to the accomplishment of future B5G/6G communications.

3) *Sensing RIS-assisted communication*: the active RISs equipped with sensing elements has attracted extensive attention recently, which is one of the most popular topics. Compared with passive RISs, sensing RISs offer remarkable improvement in communications performance. However, active amplifier elements introduce additional noise, referred to as RIS noise, into the system, and should be accounted for while designing systems with active RISs.

4) *RIS-assisted unmanned Integrated Sensing and Communication (ISAC)*: Since competing sensing links are prone to severe deterioration in cell-edge areas, RIS can provide an ondemand flexible platform for deploying ISAC to improve the throughput of wireless networks. Thus, the joint channel estimation of competing sensing and passive beamforming design of RIS should be further investigated to provide numerous wireless services for the next generation of wireless communications.

VII. CONCLUSION

In this article, the RIS-assisted mmWave MIMO communication framework has been established to achieve a smart and reconfigurable wireless environments. To address three key challenges, the channel estimation scheme has been investigated first to reduce the training overhead in RIS-assisted mmWave MIMO system. Then, the imperfect cascade CSI has been established for robust beamforming design. Furthermore, RIS-assisted co-channel interference coordination is established to improve the average rate and ergodic rate of the system. Finally, major potential research directions and challenges are also discussed. Furthermore, it must be admitted that RIS-assisted mmWave MIMO communications are in their infancy with numerous open research issues, and a long road ahead to solve these questions.

REFERENCES

- [1] Q. Wu and R. Zhang, "Towards smart and reconfigurable environment: Intelligent reflecting surface aided wireless network," *IEEE Communications Magazine*, vol. 58, no. 1, pp. 106–112, Jan 2020.

- [2] C. Huang, S. Hu, G. C. Alexandropoulos, A. Zappone, C. Yuen, R. Zhang, M. D. Renzo, and M. Debbah, "Holographic MIMO surfaces for 6G wireless networks: Opportunities, challenges, and trends," *IEEE Wireless Communications*, vol. 27, no. 5, pp. 118–125, 2020.
- [3] Q. Wu and R. Zhang, "Beamforming optimization for wireless network aided by intelligent reflecting surface with discrete phase shifts," *IEEE Transactions on Communications*, vol. 68, no. 3, pp. 1838–1851, 2020.
- [4] W. Tang, M. Z. Chen, X. Chen, J. Y. Dai, Y. Han, M. Di Renzo, Y. Zeng, S. Jin, Q. Cheng, and T. J. Cui, "Wireless communications with reconfigurable intelligent surface: Path loss modeling and experimental measurement," *IEEE Transactions on Wireless Communications*, vol. 20, no. 1, pp. 421–439, Jan 2021.
- [5] Z. Chen, J. Tang, X. Y. Zhang, Q. Wu, Y. Wang, D. K. C. So, S. Jin, and K.-K. Wong, "Offset learning based channel estimation for intelligent reflecting surface-assisted indoor communication," *IEEE Journal of Selected Topics in Signal Processing*, vol. 16, no. 1, pp. 41–55, 2022.
- [6] B. Yang, X. Cao, C. Huang, C. Yuen, L. Qian, and M. D. Renzo, "Intelligent spectrum learning for wireless networks with reconfigurable intelligent surfaces," *IEEE Transactions on Vehicular Technology*, vol. 70, no. 4, pp. 3920–3925, 2021.
- [7] C. Zhang, W. Chen, C. He, and X. Li, "Throughput maximization for intelligent reflecting surface-aided device-to-device communications system," *Journal of Communications and Information Networks*, vol. 5, no. 4, pp. 403–410, Dec 2020.
- [8] C. Pan, H. Ren, K. Wang, M. ElKashlan, A. Nallanathan, J. Wang, and L. Hanzo, "Intelligent reflecting surface aided MIMO broadcasting for simultaneous wireless information and power transfer," *IEEE Journal on Selected Areas in Communications*, vol. 38, no. 8, pp. 1719–1734, Aug 2020.
- [9] Z. Abdullah, G. Chen, S. Lambotharan, and J. A. Chambers, "A hybrid relay and intelligent reflecting surface network and its ergodic performance analysis," *IEEE Wireless Communications Letters*, vol. 9, no. 10, pp. 1653–1657, Oct 2020.
- [10] S. Zhang and R. Zhang, "Capacity characterization for intelligent reflecting surface aided MIMO communication," *IEEE Journal on Selected Areas in Communications*, vol. 38, no. 8, pp. 1823–1838, Aug 2020.
- [11] C. Hu, L. Dai, S. Han, and X. Wang, "Two-timescale channel estimation for reconfigurable intelligent surface aided wireless communications," *IEEE Transactions on Communications*, vol. 69, no. 11, pp. 7736–7747, 2021.
- [12] V. Jamali, G. C. Alexandropoulos, R. Schober, and H. V. Poor, "Low-to-zero-overhead IRS reconfiguration: Decoupling illumination and channel estimation," *IEEE Communications Letters*, vol. 26, no. 4, pp. 932–936, 2022.
- [13] Z. Chen, J. Tang, H. tang, D. K. C. So, and K. Wong, "Channel estimation of IRS-aided communication systems with hybrid multiobjective optimization," in *Proc IEEE International Conference on Communications (ICC)*, 2021, pp. 1–6.
- [14] P. Ubaidulla and A. Chockalingam, "Robust relay precoder design for MIMO-relay networks," in *Proc IEEE Wireless Communication and Networking Conference*, 2010, pp. 1–6.
- [15] Z. Chen, N. Zhao, D. K. C. So, J. Tang, X. Y. Zhang, and K.-K. Wong, "Joint altitude and hybrid beamspace precoding optimization for uav-enabled multiuser mmwave MIMO system," *IEEE Transactions on Vehicular Technology*, vol. 71, no. 2, pp. 1713–1725, 2022.