

6-21-2022

## Analytical and numerical solutions to describe water table fluctuations due to canal seepage and time-varying recharge

Ashutosh Upadhyaya  
*ICAR Research Complex for NEH Region*

Manisha M. Kankarej  
*Zayed University*

Follow this and additional works at: <https://zuscholars.zu.ac.ae/works>



Part of the [Engineering Commons](#), and the [Mathematics Commons](#)


---

### Recommended Citation

Upadhyaya, Ashutosh and Kankarej, Manisha M., "Analytical and numerical solutions to describe water table fluctuations due to canal seepage and time-varying recharge" (2022). *All Works*. 5262.  
<https://zuscholars.zu.ac.ae/works/5262>

This Article is brought to you for free and open access by ZU Scholars. It has been accepted for inclusion in All Works by an authorized administrator of ZU Scholars. For more information, please contact [scholars@zu.ac.ae](mailto:scholars@zu.ac.ae).

## Analytical and numerical solutions to describe water table fluctuations due to canal seepage and time-varying recharge

Ashutosh Upadhyaya <sup>a,\*</sup> and Manisha M. Kankarej<sup>b</sup>

<sup>a</sup> ICAR Research Complex for Eastern Region, P.O. B V Complex, Patna 800014, India

<sup>b</sup> Department of Mathematics, Zayed University, Dubai, UAE

\*Corresponding author. E-mail: a.upadhyaya@icar.gov.in

 AU, 0000-0002-1049-0803

### ABSTRACT

Hybrid finite analytic solution (HFAS), Galerkin's method based finite element solution (FES) and fully implicit finite difference solution (FIFDS) of one dimensional nonlinear Boussinesq equation and Analytical solution of Boussinesq equation linearized by Baumann's transformation (analytical solution I, AS I) as well as linearized by Werner's transformation (analytical solution II, AS II) were employed to obtain water table rise in a horizontal unconfined aquifer lying between two canals located at finite distance having different elevations and subjected to various patterns of recharge, i.e. zero recharge, constant recharge, as well as time varying recharge. Considering HFAS as benchmark solution, water table in mid region as obtained from FES followed by FIFDS was observed quite close to that obtained from HFAS and as per L2 and Tchebycheff norms computation, it was ranked at first and second place, respectively. Both AS I and AS II predicted higher water table at  $t = 5$  days but at  $t = 10$  days, AS I predicted lower and AS II predicted higher water table at all distances due to linearization effect. So, analytical solutions of linearized Boussinesq equation were rated lower than numerical solutions of nonlinear Boussinesq equation.

**Key words:** analytical solutions, canal seepage, linearized and nonlinear Boussinesq equation, numerical solutions, time-varying recharge, unconfined aquifer

### HIGHLIGHTS

- Two analytical solutions of linearized Boussinesq equation and three numerical solutions i.e., fully implicit finite difference solution, finite element solution and hybrid finite analytic solutions (HFAS) of nonlinear Boussinesq equation, were developed.
- L2 and Tchebycheff norms values showed that values from Numerical solutions are quite close to HFAS compared to approximate analytical solutions.

## 1. INTRODUCTION

To improve agricultural production, planners and policymakers consider canal irrigation as one of the effective methods of providing irrigation to crops growing in the command area. But most of the canals and their distribution networks are unlined and act as a source of seepage. Before planning for any intervention to control seepage loss, it is essential to have knowledge of spatial and temporal variations of the water table profile in an unconfined aquifer, which can be achieved by representing physical situation in a mathematical term and solving a problem (consisting of governing equation and initial and boundary conditions) employing analytical and numerical solutions.

Many researchers have attempted to study the effect of recharge due to canal seepage and field irrigation resulting in water table rise in the affected areas. Kraijenhoff van de Leur (1958), Maasland (1959), Hantush (1967) and Marino (1974) have carried out initial pioneering studies on this aspect.

Gill (1984) presented analytical solution of 1D Boussinesq equation linearized using Werner's transformation to describe transient water table profiles in an unconfined horizontal aquifer as a result of seepage occurring from single or more than one canal. Later, Mustafa (1987) incorporated constant replenishment from land surface and developed analytical solution of a linearized Boussinesq equation using Laplace transformation to describe water table variation in a finite aquifer bounded by two recharging canals. Rai & Singh (1992) considered a variable rate of recharge and employing Laplace transformation

This is an Open Access article distributed under the terms of the Creative Commons Attribution Licence (CC BY 4.0), which permits copying, adaptation and redistribution, provided the original work is properly cited (<http://creativecommons.org/licenses/by/4.0/>).

developed analytical solution of the linearized Boussinesq equation. [Ram \*et al.\* \(1994\)](#) also obtained analytical solution of linearized solution of Boussinesq equation by devising unique transformation and showed that water table profiles between two canals were fairly closed with those obtained by [Mustafa \(1987\)](#).

All the above studies either considered no recharge or constant recharge from land surface. [Bear \(1979\)](#) advocated consideration of recharge rate, which is similar to infiltration rate (i.e. decreasing with time in exponential form due to sediment clogging of soil pores beneath the recharge basin). Later, [Abdulrazzak & Morel-Seytoux \(1983\)](#), [Zomorodi \(1991\)](#), [Rai & Singh \(1996\)](#), [Manglik \*et al.\* \(1997\)](#), [Rai & Manglik \(1999\)](#), [Upadhyaya \(1999\)](#), [Upadhyaya & Chauhan \(2001a\)](#) considered time-varying recharge rate.

To describe water table fluctuations in a sloping aquifer, [Singh \*et al.\* \(1991\)](#) obtained analytical solution of the linearized Boussinesq equation incorporating transient recharge function employing an eigenvalue–eigenfunction expansion method. [Rai & Singh \(1995\)](#) developed analytical solution of 1D Boussinesq equation to obtain water table fluctuation in a finite aquifer due to transient recharge from a strip basin. [Ramana \*et al.\* \(1995\)](#) studied water table fluctuations as a result of transient recharge in a sloping two-dimensional (2D) aquifer system. [Upadhyaya & Chauhan \(2002\)](#) obtained analytical solution of the linearized Boussinesq equation and a fully implicit finite difference numerical solution of the nonlinear Boussinesq equation to describe water table rise in unconfined sloping aquifer as a result of seepage from two canals located above the sloping impermeable barrier and constant recharge from land surface. They reported that numerical solution underestimates water table elevations compared to analytical solution, assuming it as the reference solution. [Rai \*et al.\* \(2006\)](#) used Fourier Cosine Transform and presented an analytical solution of a 2D-linearized Boussinesq equation to predict water table variations in a horizontal aquifer induced by time-varying recharge/withdrawal from any number of recharge basins, pumping wells and leakage sites. [Singh & Jaiswal \(2006\)](#) presented a numerical solution of 2D free flow of water subjected to time-varying recharge to aquifer underlain by a slanting impervious base and studied the impact of time-varying recharge and depth-dependent ET on water table profile. [Song \*et al.\* \(2007\)](#) used perturbation solution of the nonlinear Boussinesq equation for 1D tidal groundwater flow in a coastal unconfined aquifer. [Teloglou \*et al.\* \(2008\)](#) presented the analytical solution using Hankel Transform of a linearized Boussinesq equation to describe the water table fluctuation in an unconfined aquifer overlying a semi-impervious layer in response to transient recharge. [Bansal & Das \(2010\)](#) studied the analytical solution of the linearized Boussinesq equation using Laplace and its inverse to characterize transient groundwater flow in a downward sloping unconfined aquifer of semi-infinite extent. [Bansal & Das \(2011\)](#) studied the response of an unconfined sloping aquifer to constant recharge and seepage from the stream of varying water level. [Sontakke & Rokade \(2014\)](#) predicted the water table fluctuations in an unconfined aquifer due to time-varying recharge from the rectangular basin for one canal using the finite difference method. [Moshirpanahi \*et al.\* \(2016\)](#) employed the differential quadrature method (DQM) in the discretization of governing equation and compared water table rise between two canals overlying sloping impermeable barrier with those obtained from the discretization of governing equation employing explicit, implicit and Crank–Nicolson numerical scheme-based finite difference methods. The DQM of discretization was reported to be efficient, and results were exactly same as finite difference method. [Saeedpanah & Azar \(2017\)](#) derived analytical solutions for unsteady flow in a leaky aquifer between two parallel streams employing the Laplace transform method and observed that obtained results agreed very well with the results of MODFLOW. [Kankarej \(2021\)](#) developed analytical solution of Boussinesq equation linearized employing Werner's transformation in order to describe water table rise in a sloping unconfined aquifer as a result of seepage from two canals and constant recharge from land surface. Special case for the horizontal aquifer yielded quite close to water table rise compared to the values obtained from solution of [Mustafa \(1987\)](#). [Doulgeris & Zissis \(2021\)](#) studied the numerical solutions for 1D Boussinesq equation and 2D Richards equation by embedding infinite elements in the finite element analysis to discretize only the key subsurface flow region close to the stream.

In India and other countries, canals generally run on the ridge lines. Many a times situation occurs, where two canals separated apart run parallel for a long distance and seepage from these canals as well as recharge from land surface replenish the aquifer. The spatial and temporal rise of water table between two canals can be very well described by obtaining solution of 1D Boussinesq equation.

Analytical solutions of the linearized Boussinesq equation are always approximate and either over- or underpredict the water table profile due to the linearization of governing equation. Numerical solutions of the nonlinear Boussinesq equation are always better than approximate analytical solutions. So, various solutions like hybrid finite analytic solution (HFAS) presented by [Chen \(1988\)](#) and fully implicit finite difference solution (FIFDS) of 1D nonlinear Boussinesq equation and analytical solution of Boussinesq equation linearized by Baumann's transformation (analytical solution I, AS1) as well as

analytical solution of Boussinesq equation linearized by Werner's transformation (analytical solution II, AS2) were obtained to describe transient water table variation in a horizontal unconfined aquifer lying between two canals located at finite distance having different elevations and subjected to various patterns of recharge, i.e. zero recharge, constant recharge, as well as time-varying recharge. For comparison of water table profiles, decision about bench mark solution is important.

Upadhyaya & Chauhan (2001b) reported that HFAS, where the nonlinear Boussinesq equation is locally linearized and solved analytically after approximating unsteady term by a simple finite difference formula to approximately preserve overall nonlinear effect by the assembly of locally analytic solutions, predicted fall of midpoint water tables between two drains in a horizontal/sloping unconfined aquifer quite close to the existing experimental results. So, HFAS was considered as bench mark solution in this study and water table profiles obtained from all other solutions were compared with it.

## 2. PROBLEM DEFINITION

Figure 1 shows the definition sketch of the problem identified for the study. An unconfined aquifer lying over the horizontal impermeable barrier is receiving seepage from two canals located at different elevations  $h_1$  and  $h_2$  above the impermeable barrier as well as time-varying recharge from land surface.

The recharge rate is considered to be decreasing exponentially from an initial value of  $R_1 + R_0$  to a lower value  $R_0$  and becoming constant thereafter. Due to this, there is a water table rise in an unconfined aquifer. It has been assumed that (i) aquifer is homogeneous, isotropic and incompressible with time invariant hydraulic properties, (ii) the rate of recharge is small compared to hydraulic conductivity and vertically percolated water flows almost horizontally after meeting water table and (iii) flow is characterized by 1D Boussinesq equation derived using Dupuit's assumptions and Darcy's Law.

### 2.1. Governing equation and initial and boundary conditions

The 1D nonlinear Boussinesq equation incorporating the time-varying recharge term is given below.

$$h \frac{\partial^2 h}{\partial x^2} + \left( \frac{\partial h}{\partial x} \right)^2 + \left\{ \frac{R_0 + R_1 e^{-r t}}{K} \right\} = \frac{f}{K} \frac{\partial h}{\partial t} \quad (1)$$

The linearized Boussinesq equation after employing Boumann's transformation, in which  $(\partial h / \partial x)^2$  is neglected and  $h$  associated with  $(\partial^2 h / \partial x^2)$  is replaced by the average depth of flow 'D', is written as follows:

$$\frac{\partial^2 h}{\partial x^2} + \left\{ \frac{R_0 + R_1 e^{-r t}}{KD} \right\} = \frac{f}{KD} \frac{\partial h}{\partial t} \quad (2)$$

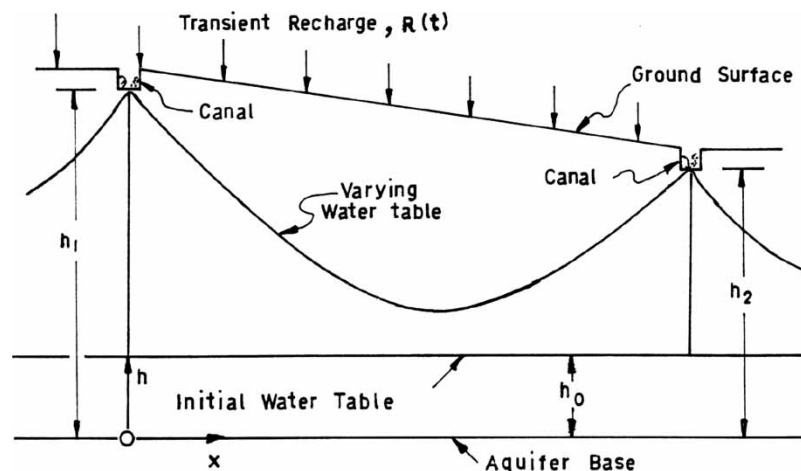


Figure 1 | Water table rise in an unconfined aquifer as a result of seepage from two canals and time-varying recharge from land surface.

The linearized Boussinesq equation after employing Werner's transformation, in which  $(\partial h/\partial x)^2$  is absorbed by putting  $z = h^2 - h_0^2$ , is written as follows:

$$\frac{\partial^2 z}{\partial x^2} + \left\{ \frac{2(R_0 + R_1 e^{-rt})}{K} \right\} = \frac{f}{KD} \frac{\partial z}{\partial t} \quad (3)$$

Initial and boundary conditions corresponding to Equations (1) and (2) are:

$$h(x, 0) = h_0 \quad \text{at } t = 0 \quad \text{for } 0 < x < L \quad (4a)$$

$$h(0, t) = h_1, h(L, t) = h_2 \quad \text{at } t > 0 \quad \text{for } x = 0 \text{ and } x = L \quad (4b)$$

and initial and boundary conditions corresponding to Equation (3) are written as below.

$$z(x, 0) = z_0 = 0 \quad \text{at } t = 0 \quad \text{for } 0 < x < L \quad (5a)$$

$$z(0, t) = z_1 = h_1^2 - h_0^2 \quad \text{at } x = 0 \quad \text{and } t > 0, z(L, t) = z_2 = h_2^2 - h_0^2 \quad \text{at } x = L \quad \text{and } t > 0 \quad (5b)$$

## 2.2. Numerical and analytical solutions

In this section, numerical solutions of the nonlinear Boussinesq equation and analytical solutions of the linearized Boussinesq equation have been presented.

### 2.2.1. Hybrid finite analytic solution

To obtain HFAS of nonlinear 1D Boussinesq equation along with initial and boundary conditions defined by Equations (1), (4a) and (4b), nondimensionalization was performed with the help of a set of variables,  $H = h/h_2$ ,  $X = x/L$  and  $T = Kh_2 t/fL^2$ . Transforming Equation (1) from these nondimensional variables, the nondimensionalized governing equation along with initial and boundary conditions may be written as follows:

$$\frac{1}{2} \frac{\partial^2 H^2}{\partial X^2} + \left[ \frac{R_0 + R_1 e^{-(fL^2 T/Kh_2)}}{K h_2^2} \right] L^2 = \frac{\partial H}{\partial T} \quad (6)$$

$$H(X, 0) = \frac{h_0}{h_2} \quad \text{at } T = 0 \quad \text{for } 0 < X < 1 \quad (7a)$$

$$H(0, T) = \frac{h_1}{h_2} \quad \text{at } T > 0 \quad \text{for } X = 0 \quad (7b)$$

$$H(1, T) = \frac{h_2}{h_2} = 1 \quad \text{at } T > 0 \quad \text{for } X = 1 \quad (7c)$$

To absorb the time-varying recharge in terms of the nondimensionalized equation, the transformation is devised as:

$$H = V + \frac{R_0 L^2 T}{K h_2^2} - \frac{R_1 e^{-(fL^2 T/Kh_2)}}{f r h_2} \quad (8)$$

$$\frac{\partial^2 V}{\partial X^2} + \frac{1}{H_a} \left( \frac{\partial V}{\partial X} \right)^2 = \frac{1}{H_a} \frac{\partial V}{\partial T} \quad (9)$$

Assuming that the terms  $1/H_a (\partial V/\partial X)^2$  and  $1/H_a (\partial V/\partial T)$  equal to constants  $C_1$  and  $E_1$ , respectively, in a small sub-region and performing integration one gets the following equation:

$$\frac{dV}{dX} = (E_1 - C_1)X + F_1 \quad (10)$$

Solution to first-order ordinary differential Equation (10) is as follows:

$$V(X) = \frac{(E_1 - C_1)X^2}{2} + F_1X + I_1 \quad (11)$$

$$\text{At } \Delta X = 0 \quad V_i^{n+1} = I_1 \quad (12)$$

$$V_{i-1}^{n+1} = \frac{(E_1 - C_1)}{2} \Delta X^2 - F_1 \Delta X + I_1 \quad (13)$$

$$V_{i+1}^{n+1} = \frac{(E_1 - C_1)}{2} \Delta X^2 + F_1 \Delta X + I_1 \quad (14)$$

Adding Equations (13) and (14), one gets

$$V_{i-1}^{n+1} + V_{i+1}^{n+1} = (E_1 - C_1) \Delta X^2 + 2V_i^{n+1} \quad (15)$$

The discretization of Equation (15) in space and time and some simplifications yield the solution as:

$$A_i V_{i-1}^{n+1} + B_i V_i^{n+1} + C_i V_{i+1}^{n+1} = D_i V_i^n + E_i \quad (16)$$

In Equation (16), the coefficients  $A_i$ ,  $B_i$ ,  $C_i$ ,  $D_i$  and  $E_i$  are as below.

$$A_i = 1 \quad (17)$$

$$B_i = -\frac{1}{H_a} \left( \frac{(\Delta X)^2}{\Delta T} \right) - 2 \quad (18)$$

$$C_i = 1 \quad (19)$$

$$D_i = -\frac{1}{H_a} \left( \frac{(\Delta X)^2}{\Delta T} \right) \quad (20)$$

$$E_i = -\frac{1}{H_a} (\Delta V)^2 \quad (21)$$

Solving the tridiagonal matrices the values of  $V$  at different nodes are obtained. Again by applying inverse transformation the values of dimensionless height,  $H$ , are obtained. Water table elevation,  $h$ , is computed by multiplying dimensionless heights  $H$  with  $h_2$ .

### 2.2.2. Galerkin's method-based finite element solution

Finite element solution (FES) of the nondimensionalized, nonlinear Boussinesq equation as shown in Equation (6) along with initial and boundary conditions (7a-7c) to describe water table rise in an unconfined aquifer between two canals was obtained using Galerkin's method, the details of which are given in Pinder & Gray (1977). The flow domain is discretized as  $0 = X_1 < X_2 < X_3 < X_4 < \dots < X_{N-1} < X_N = 1$  (here  $N$  represents the number of nodes.  $\Delta X = X_{i+1} - X_i$ , where  $i = 1, 2, 3, \dots, N - 1 = M$ , the number of elements). The solution was approximated by  $H^A(X, T)$  with the help of the basis functions as follows.

$$H^A(X, T) = \sum_{i=1}^N Z_i(T) \times N_i(X) \quad (22)$$

in which  $Z_i(T)$  are unknown coefficients to be determined as a part of the solution and basis function  $N_i(X)$ ,  $N_{i-1}(X)$  and

$N_{i+1}(X)$  as defined by Prenter (1975) are given below.

$$N_i(X) = \frac{(X - X_{i-1})}{(X_i - X_{i-1})} \quad \text{for } X_{i-1} \leq X \leq X_i \quad (23a)$$

$$N_i(X) = \frac{(X_{i+1} - X)}{(X_{i+1} - X_i)} \quad \text{for } X_i \leq X \leq X_{i+1} \quad (23b)$$

$$N_{i-1}(X) = \frac{(X_i - X)}{(X_i - X_{i-1})} \quad \text{for } X_{i-1} \leq X \leq X_i \quad (23c)$$

$$N_{i+1}(X) = \frac{(X - X_i)}{(X_{i+1} - X_i)} \quad \text{for } X_i \leq X \leq X_{i+1} \quad (23d)$$

The values of all other basis functions are zero over the elements  $(X_{i-1}, X_i)$  and  $(X_i, X_{i+1})$ . In Equation (22), the multiplier  $Z_i(T)$  associated with  $N_i(X)$  at node  $i$  is the value of  $H$  at  $i$ . Because there are only two nonzero basis functions over an element  $(X_i, X_{i+1})$ , the summation is performed only over two consecutive indices  $i$  and  $i+1$  in order to approximate the solution  $H^A(X, T)$  over the element.

To carry out finite element analysis, Equation (6) may be written as:

$$L(H) = \frac{1}{2} \frac{\partial^2 H^2}{\partial X^2} + \left[ \frac{R_0 + R_1 e^{-(\tau/L^2 n \Delta T / K h_2)}}{K h_2^2} \right] L^2 - \frac{\partial H}{\partial T} = 0 \quad (24)$$

$H^A(X, T)$  is an approximation for  $H(X, T)$ . Hence, its substitution in Equation (6) leaves a residual  $L(H^A)$ , which is used to determine the coefficients  $Z^i(T)$ . As there are  $N$  unknown coefficients to be determined, therefore  $N$  constraints have to be imposed on the residual  $L(H^A)$  to evaluate these coefficients. In Galerkin's finite element method, the coefficients  $Z_i(T)$  are determined by forcing the residual  $L(H^A)$  to be orthogonal to the basis functions  $N_i(X)$ ,  $i = 1, 2, 3, \dots, N$ . For this, the inner product of  $L(H^A)$  with  $N_i(X)$  has to be zero, i.e.

$$\langle L(H^A) \cdot N_i(X) \rangle = 0 \quad \text{for } i = 1, 2, 3, \dots, N \quad (25)$$

Substitution of Equation (24) in Equation (25) yields:

$$\left\langle \frac{1}{2} \frac{\partial^2 H^2}{\partial X^2}, N_i(X) \right\rangle + \left\langle \left[ \frac{R_0 + R_1 e^{-(\tau/L^2 n \Delta T / K h_2)}}{K h_2^2} \right] L^2, N_i(X) \right\rangle - \left\langle \frac{\partial H}{\partial T}, N_i(X) \right\rangle = 0 \quad (26)$$

for  $i = 1, 2, 3, \dots, N$

Hereafter, for convenience,  $H^A$  is written as  $H$ . Integration of Equation (26) yields:

$$\int_0^1 \frac{1}{2} \frac{\partial^2 H^2}{\partial X^2} \cdot N_i(X) dx + \int_0^1 \left[ \frac{R_0 + R_1 e^{-(\tau/L^2 n \Delta T / K h_2)}}{K h_2^2} \right] L^2 \cdot N_i(X) dx - \int_0^1 \frac{\partial H}{\partial T} \cdot N_i(X) dx = 0 \quad (27)$$

for  $i = 1, 2, 3, \dots, N$

Substituting the value of  $H$  from Equation (22) into Equation (27), a system of  $N$  integral equations is obtained as below.

$$\sum_{j=1}^N \int_0^1 N_i(X) N_j(X) \frac{\partial Z_j}{\partial T} dX + \frac{1}{2} \sum_{j=1}^N \int_0^1 \frac{dN_i(X)}{dX} \cdot \frac{dN_j^2(X)}{dX} Z_j^2 dx = \left\{ H \frac{\partial H}{\partial X} \cdot N_i(X) \right\} \Big|_{X=1} - \left\{ H \frac{\partial H}{\partial X} \cdot N_i(X) \right\} \Big|_{X=0} + \left[ \frac{R_0 + R_1 e^{-(\tau/L^2 n \Delta T / K h_2)}}{K h_2^2} \right] L^2 \int_0^1 N_i(X) dx \quad (28)$$

for  $i = 1, 2, 3, \dots, N$

or

$$\begin{aligned} & \sum_{j=1}^N \sum_{e=1}^M \int_e N_i(X) N_j(X) \frac{\partial Z_j}{\partial T} dX + \frac{1}{2} \sum_{j=1}^N \sum_{e=1}^M \int_e \frac{dN_i(X)}{dX} \cdot \frac{dN_j^2(X)}{dX} Z_j^2 dx \\ & = \left\{ H \frac{\partial H}{\partial X} \cdot N_i(X) \right\} \Big|_{X=1} - \left\{ H \frac{\partial H}{\partial X} \cdot N_i(X) \right\} \Big|_{X=0} + \left[ \frac{R_0 + R_1 e^{-(\eta L^2 n \Delta T / K h_2)}}{K h_2^2} \right] L^2 \sum_{e=1}^M \int_0^1 N_i(X) dx \end{aligned} \quad (29)$$

for  $i = 1, 2, 3, \dots, N$

Equation (29) can be rewritten as follows:

$$[G] \left\{ \frac{dZ}{dT} \right\} + [B] \{Z^2\} = \{F\} \quad (30)$$

where

$$[G] = G_{i,j} = \sum_{j=1}^N \sum_{e=1}^M \int_e N_i(X) N_j(X) dX \quad (31a)$$

$$[B] = B_{i,j} = \frac{1}{2} \sum_{j=1}^N \sum_{e=1}^M \int_e \frac{dN_i(X)}{dX} \cdot \frac{dN_j^2(X)}{dX} dx \quad (31b)$$

$$\{F_i\} = \left[ \frac{R_0 + R_1 e^{-(\eta L^2 n \Delta T / K h_2)}}{K h_2^2} \right] L^2 \sum_{e=1}^M \int_e N_i(X) dx \quad \text{for } i = 2, 3, \dots, N-1 \quad (31c)$$

$$\{F_1\} = \left[ \frac{R_0 + R_1 e^{-(\eta L^2 n \Delta T / K h_2)}}{K h_2^2} \right] L^2 \sum_{e=1}^M \int_e N_1(X) dx - \left( H \frac{\partial H}{\partial X} \right) \Big|_{X=0} \quad (31d)$$

$$\{F_N\} = \left[ \frac{R_0 + R_1 e^{-(\eta L^2 n \Delta T / K h_2)}}{K h_2^2} \right] L^2 \sum_{e=1}^M \int_e N_N(X) dx + \left( H \frac{\partial H}{\partial X} \right) \Big|_{X=1} \quad (31e)$$



The evaluation of coefficient matrix gives:

$$G_{1 \ 1} = \frac{1}{3} (X_2 - X_1) \quad (32a)$$

$$G_{N \ N} = \frac{1}{3} (X_N - X_{N-1}) \quad (32b)$$

$$G_{i \ i} = \frac{1}{3} (X_{i+1} - X_{i-1}) \quad \text{for } i = 2, 3, 4, \dots, N-1 \quad (32c)$$

$$G_{i \ i-1} = \frac{1}{6} (X_i - X_{i-1}) \quad \text{for } i = 2, 3, 4, \dots, N \quad (32d)$$

$$G_{i \ i+1} = \frac{1}{6} (X_{i+1} - X_i) \quad \text{for } i = 1, 2, 3, \dots, N-1 \quad (32e)$$

$$B_{1 \ 1} = \frac{1}{2(X_2 - X_1)} \quad (32f)$$

$$B_{N \ N} = \frac{1}{2(X_N - X_{N-1})} \quad (32g)$$

$$B_{i \ i} = \frac{1}{2(X_i - X_{i-1})} + \frac{1}{2(X_{i+1} - X_i)} \quad \text{for } i = 2, 3, 4, \dots, N-1 \quad (32h)$$

$$B_{1 \ i+1} = -\frac{1}{2(X_{i+1} - X_i)} \quad \text{for } i = 1, 2, 3, \dots, N-1 \quad (32i)$$

$$B_{1 \ i-1} = -\frac{1}{2(X_i - X_{i-1})} \quad \text{for } i = 2, 3, 4, \dots, N \quad (32j)$$

Equation (30) is written in a finite difference form as:

$$[G] \left\{ \frac{Z(T + \Delta T) - Z(T)}{\Delta T} \right\} + [B] \{Z^2(T + \Delta T)\} = \{F(T)\} \quad (33)$$

Let  $Z(T + \Delta T) = Z(T) + V(T)$ . Substituting it in Equation (33), it gives:

$$[G] \left\{ \frac{V(T)}{\Delta T} \right\} + [B] \{Z^2(T) + 2Z(T)V(T) + V^2(T)\} = \{F(T)\} \quad (34)$$

Neglecting the terms of  $O[V^2(T)]$  gives

$$[[G] + 2\Delta T[B]\{Z(T)\}] \{V(T)\} = -\Delta T [B]\{Z^2(T)\} + \Delta T \{F(T)\} \quad (35)$$

The solution of this system of algebraic equations provided the values of  $V(T)$  at different nodes. This  $V(T)$  value at a particular node was added to the value of  $Z(T)$  at that node to get the value of  $Z(T + \Delta T)$  at that particular node for the next time step.

### 2.2.3. Fully implicit finite difference solution

Finite difference solution of nonlinear, nondimensionalized Boussinesq Equation (6) with initial and boundary conditions defined by Equations (7a)–(7c) was obtained by discretizing in a finite difference form as below:

$$\frac{H_m^{n+1} - H_m^n}{\Delta T} = \frac{1}{2(\Delta X)^2} [\theta(H_{m-1}^{n+1})^2 + (1 - \theta)(H_{m-1}^n)^2 - 2\theta(H_m^{n+1})^2 - 2(1 - \theta)(H_m^n)^2 + \theta(H_{m+1}^{n+1})^2 + (1 - \theta)(H_{m+1}^n)^2] + \left[ \frac{R_0 + R_1 e^{-(r f L^2 n \Delta T / Kh_2)}}{Kh_2^2} \right] L^2 \quad (36)$$

where  $\theta$  is the coefficient used to describe the finite difference scheme. The 1, 0.5 and 0 values of  $\theta$  describe fully implicit, Crank–Nicolson and fully explicit finite difference solutions.

Using the procedure described by Jain *et al.* (1994), let  $H_m^{n+1} = H_m^n + V_m^n$  is substituted in the above equation to give

$$V_m^n = \frac{\Delta T}{2(\Delta X)^2} [\theta(H_{m-1}^n + V_{m-1}^n)^2 + (1 - \theta)(H_{m-1}^n)^2 - 2\theta(H_m^n + V_m^n)^2 - 2(1 - \theta)(H_m^n)^2 + \theta(H_{m+1}^n + V_{m+1}^n)^2 + (1 - \theta)(H_{m+1}^n)^2] + \left[ \frac{R_0 + R_1 e^{-(r f L^2 n \Delta T / Kh_2)}}{Kh_2^2} \right] L^2 \frac{\Delta T}{Kh_2^2} \quad (37)$$

Keeping  $(\Delta T / \Delta X) = C$  and  $(\Delta T / (\Delta X)^2) = \lambda$  and neglecting the terms of the order of  $O(V^2)$ , the following equation is obtained.

$$V_{m-1}^n (\lambda \theta H_{m-1}^n) + V_m^n (-2\lambda \theta H_m^n - 1) + V_{m+1}^n (\lambda \theta H_{m+1}^n) = -\frac{\lambda}{2} [(H_{m-1}^n)^2 - 2(H_m^n)^2 + (H_{m+1}^n)^2] - \left[ \frac{R_0 + R_1 e^{-(r f L^2 n \Delta T / Kh_2)}}{Kh_2^2} \right] L^2 \frac{\Delta T}{Kh_2^2} \quad (38)$$

For  $\theta = 1$ , it gives FIFDS and becomes:

$$V_{m-1}^n (\lambda H_{m-1}^n) + V_m^n (-2\lambda H_m^n - 1) + V_{m+1}^n (\lambda H_{m+1}^n) = -\frac{\lambda}{2} [(H_{m-1}^n)^2 - 2(H_m^n)^2 + (H_{m+1}^n)^2] - \left[ \frac{R_0 + R_1 e^{-(r f L^2 n \Delta T / Kh_2)}}{Kh_2^2} \right] L^2 \frac{\Delta T}{Kh_2^2} \quad (39)$$

This system of algebraic equations formed at a given time step is a tridiagonal matrix for which solution can be obtained and  $V_{m-1}^n$ ,  $V_m^n$ ,  $V_{m+1}^n$  can be computed. To get the values at  $n + 1$  time step, i.e. the values of  $H_{m-1}^n$ ,  $H_m^n$ ,  $H_{m+1}^n$  are added into  $V_{m-1}^n$ ,  $V_m^n$ ,  $V_{m+1}^n$ , respectively.

### 2.2.4. Analytical solution I

The analytical solution of Boussinesq equation linearized by Baumann's transformation (2) with initial and boundary conditions (4a) and (4b) was developed by devising a transformation as:

$$h = v + \frac{R_0 t}{f} - \frac{R_1 e^{-rt}}{fr} \quad (40)$$

Using this transformation, Equations (2), (4a) and (4b) are transformed to a standard heat transfer boundary-value problem as:

$$\frac{\partial^2 v}{\partial x^2} = \frac{1}{a} \frac{\partial v}{\partial t} \quad (41)$$

Here  $a = KD/f$

With initial and boundary conditions as:

$$v(x, 0) = \left( h_0 + \frac{R_1}{fr} \right) \quad (42a)$$

$$v(0, t) = \left( h_1 - \frac{R_0 t}{f} + \frac{R_1 e^{-rt}}{fr} \right) \quad (42b)$$

$$v(L, t) = \left( h_2 - \frac{R_0 t}{f} + \frac{R_1 e^{-rt}}{fr} \right) \quad (42c)$$

Employing the solution of heat transfer boundary-value problem given by Ozisik (1980) for the boundary-value problem defined by Equations (41)–(42a), (42b), (42c) and applying the inverse of transformation solution are obtained as:

$$h(x, t) = \frac{4}{L}(h_0 - h_1) \sum_{m=1,3,5,\dots}^{\infty} e^{-a\beta_m^2 t} \frac{\sin \beta_m x}{\beta_m} + \frac{2}{L}(h_2 - h_1) \sum_{m=1}^{\infty} (-1)^m e^{-a\beta_m^2 t} \frac{\sin \beta_m x}{\beta_m} + h_1 + \frac{x}{L}(h_2 - h_1) \\ + \frac{4}{L} \sum_{m=1,3,5,\dots}^{\infty} \frac{\sin \beta_m x}{\beta_m} \left[ \frac{R_1}{f} \left\{ \frac{e^{-rt} - e^{-a\beta_m^2 t}}{a\beta_m^2 - r} \right\} + \frac{R_0}{f} \left\{ \frac{1 - e^{-a\beta_m^2 t}}{a\beta_m^2} \right\} \right] \quad (43)$$

### 2.2.5. Analytical solution II

The analytical solution of Boussinesq equation linearized by Werner's transformation described by Equation (3) and initial as well as boundary conditions described by 5(a) and 5(b) have already been reported by Upadhyaya & Chauhan (2001a) and are reproduced below.

$$z(x, t) = \left( 1 - \frac{x}{L} \right) z_1 + \frac{x}{L} z_2 - \frac{2}{L} \sum_{m=1}^{\infty} \frac{\sin \beta_m x}{\beta_m} (z_1 - (-1)^m z_2) e^{-a\beta_m^2 t} \\ + \frac{8a}{L} \sum_{m=1,3,5,\dots}^{\infty} \frac{\sin \beta_m x}{\beta_m} \left[ \left( \frac{R_1}{K} \right) \left\{ \frac{e^{-rt} - e^{-a\beta_m^2 t}}{a\beta_m^2 - r} \right\} + \left( \frac{R_0}{K} \right) \left\{ \frac{1 - e^{-a\beta_m^2 t}}{a\beta_m^2} \right\} \right] \quad (44)$$

$h(x, t)$  may be determined by adding  $h_0^2$  values and taking square root of these values.

To compare water table profiles obtained from analytical and numerical solutions with water table profile obtained from HFAS, L2 norm giving average difference and Tchebycheff norm giving maximum difference as mentioned by Upadhyaya & Chauhan (2002) were employed and accordingly results were interpreted.

## 3. DISCUSSION OF RESULTS

The analytical and numerical solutions describing water table fluctuations between two canals in a horizontal aquifer subjected to various patterns of recharge, i.e. zero recharge, constant recharge, and time-varying recharge, were studied and analyzed. A numerical example considered to compare the results obtained from various solutions is given below.

### 3.1. Numerical example

The flow of water in an unconfined aquifer with hydraulic conductivity  $K = 450$  m/day and specific yield  $f = 0.30$ , bounded by two canals spaced 1,000 m apart, located at the elevations of  $h_1 = 12$  m and  $h_2 = 10$  m, respectively, above the impermeable barrier was assumed. The aquifer was assumed to be underlain by a horizontal impermeable barrier initially having water table at the impermeable barrier with elevation,  $h_0 = 0$  m. The aquifer was subjected to time-varying recharge,  $R(t) = R_0 + R_1 e^{-rt}$ , where  $R_0 = 0.003$  m/day,  $R_1 = 0.012$  m/day and  $r = 0.5$  per day. Consistency, convergence and stability are important issues in numerical solutions. Many values of the dimensionless time increment,  $\Delta T$  and dimensionless space increment,  $\Delta x$  were considered before arriving at final values of  $\Delta T$  and  $\Delta x$  as 0.00001 and 0.01, respectively. Chen (1988) has presented the effect of range of  $\lambda = (\Delta T / (\Delta x)^2)$  varying from 0.01 to 10 on different finite difference (FD) scheme coefficients and finite analytic (FA) coefficients. From these curves also, it seems that the selection of  $\lambda = 0.1$  is appropriate. The transient water tables

were computed for  $t = 5$  days and  $t = 10$  days at every 100 m distance. The results obtained from various solutions have been presented below.

### 3.2. Dimensionless water table elevations in a horizontal aquifer between two canals as obtained from HFAS

Dimensionless water table elevations in a horizontal aquifer between two canals were computed at  $t = 5$  days and  $t = 10$  days by the hybrid finite analytic method for different patterns of recharge, i.e. zero, constant and time-varying recharge. The variations of water table heights with distance expressed in dimensionless form for  $t = 5$  days and  $t = 10$  days are given in Figure 2.

It may be observed from Figure 2 that in a horizontal aquifer, the water table profiles, even with higher seepage from upper canal, tend to be symmetrical around the midpoint. Due to continuing seepage from canals and continuing recharge from soil surface, water table in a horizontal aquifer rises with increase in time. For any pattern of recharge, dimensionless water tables at all the space coordinates are higher for  $t = 10$  days than for  $t = 5$  days. The effect of various patterns of recharge for the horizontal aquifer as observed from Figure 2 indicates that the water table elevations at  $t = 5$  days and at  $t = 10$  days are the highest for constant recharge of 0.015 m/day followed in a decreasing order for time-varying recharge (with constant recharge component,  $R_0 = 0.003$  m/day, and exponentially decreasing recharge component,  $R_1 = 0.012$  m/day) and for no recharge, respectively.

### 3.3. Dimensionless water table elevations in a horizontal aquifer between two canals as obtained from FES

Dimensionless water table elevations in a horizontal aquifer between two canals were computed at  $t = 5$  days and  $t = 10$  days by the finite element method for different patterns of recharge, i.e. zero, constant and time-varying recharge. The variations of water table heights with distance expressed in a dimensionless form for  $t = 5$  days and  $t = 10$  days are given in Figure 3.

It may be observed from Figure 3 that the water table profiles, even with higher seepage from the upper canal, tend to be symmetrical around the midpoint and rise with increase with time. For any pattern of recharge, dimensionless water tables at all the space coordinates are higher for  $t = 10$  days than for  $t = 5$  days. The effect of various patterns of recharges indicates that the water table elevations at  $t = 5$  days and at  $t = 10$  days are the highest for constant recharge of 0.015 m/day followed in a decreasing order for time-varying recharge and for no recharge, respectively. Dimensionless water table heights at  $t = 5$  days and  $t = 10$  days as obtained from FES are throughout marginally higher (with very little difference) at all distances between two canals than those obtained from HFAS.

### 3.4. Dimensionless water table elevations in a horizontal aquifer between two canals as obtained from FIFDS

Dimensionless water table elevations in a horizontal aquifer intercepted by two canals were computed at  $t = 5$  days and  $t = 10$  days using the fully implicit finite difference scheme for various patterns of recharge, i.e. zero, constant and time-varying recharge. The variations of water table elevations with distance expressed in a dimensionless form for  $t = 5$  days and  $t = 10$  days are presented in Figure 4.



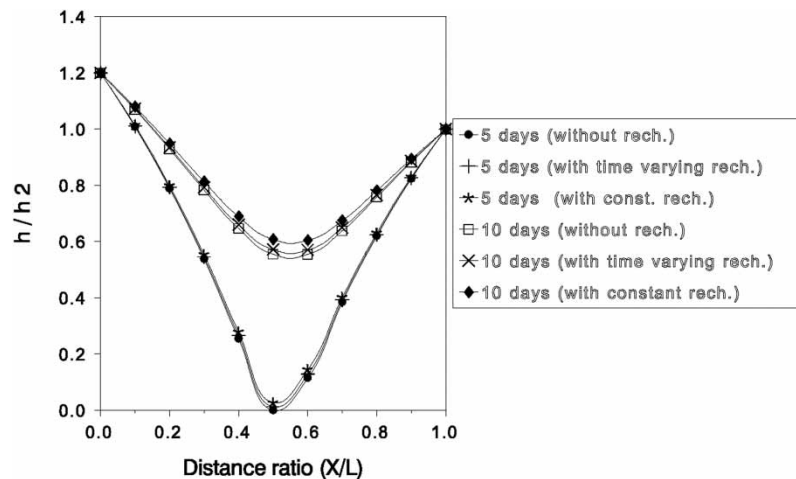


Figure 2 | Dimensionless water table elevations in a horizontal aquifer between two canals for  $t = 5$  and 10 days as obtained from HFAS.

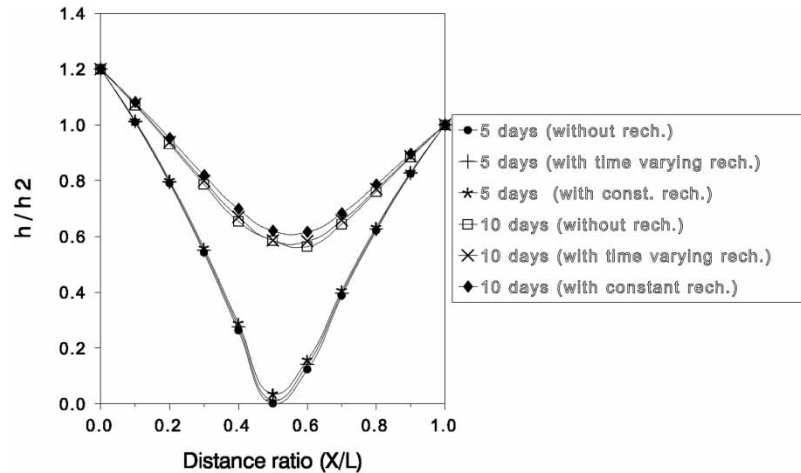

**Figure 3** | Dimensionless water table elevations in a horizontal aquifer between two canals for  $t = 5$  and 10 days as obtained from FES.

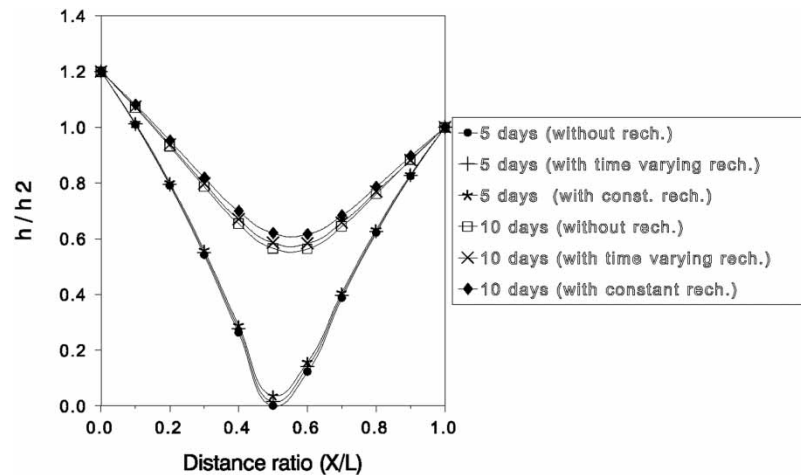


**Figure 4** | Dimensionless water table elevations in a horizontal aquifer between two canals for  $t = 5$  and 10 days as obtained from finite difference solution.

It may be observed from [Figure 4](#) that in a horizontal aquifer, the water table profiles even with higher seepage from the upper canal tend to be symmetrical around the midpoint and are almost similar to [Figures 2](#) and [3](#). Due to continuing seepage from canals and continuing recharge from soil surface, water table in a horizontal aquifer rises with increase in time. The effect of various patterns of recharges is also similar as observed in the case of water table profiles obtained in [Figures 2](#) and [3](#). Water table profiles computed by FIFDS are marginally higher (with a very little difference) at all the distances between two canals than those obtained from HFAS.

### 3.5. Dimensionless water table elevations in a horizontal aquifer between two canals as obtained from ASI based on Baumann's method of linearization

Dimensionless water table elevations in a horizontal aquifer between two canals were computed at  $t = 5$  days and  $t = 10$  days using ASI based on Baumann's method of linearization for various patterns of recharge, i.e. zero, constant and time-varying recharge. The variations of water table heights with distance expressed in a dimensionless form for  $t = 5$  days and  $t = 10$  days are presented in [Figure 5](#).

Water table profiles as obtained by ASI as shown in [Figure 5](#) also follow the same trend as shown in [Figures 2–4](#), but there is difference in values of water table heights. On  $t = 5$  days, water table heights in the midregion are higher and lower in other regions than those obtained from HFAS. But at  $t = 10$  days, water table heights obtained from HFAS are always higher at all distances than those obtained from ASI, and this difference is attributed to the linearization of Boussinesq equation.

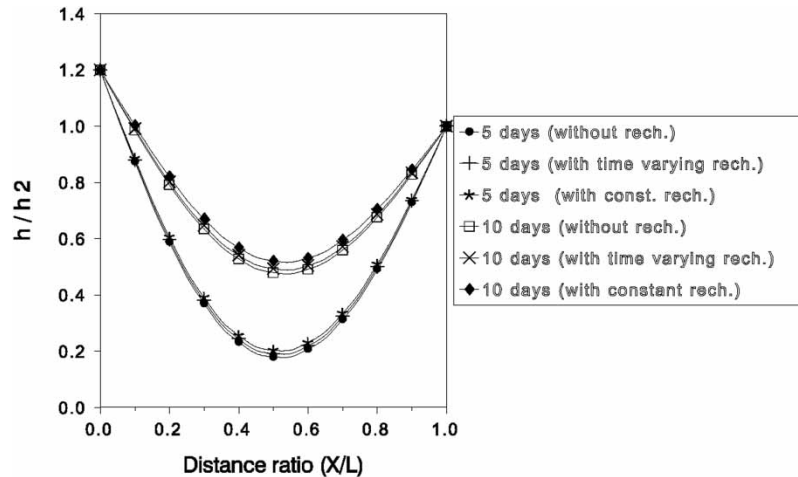

**Figure 5** | Dimensionless water table elevations in a horizontal aquifer between two canals for  $t = 5$  and 10 days as obtained from ASI based on Baumann's linearization method.

### 3.6. Dimensionless water table elevations in a horizontal aquifer between two canals as obtained from ASII based on Werner's method of linearization


Dimensionless water table elevations in a horizontal aquifer between two canals were computed at  $t = 5$  days and  $t = 10$  days using ASII based on Werner's method of linearization for various patterns of recharge, i.e. zero, constant and time-varying recharge. The variations of water table heights with distance expressed in a dimensionless form for  $t = 5$  days and  $t = 10$  days are given in Figure 6.

It may be observed from Figure 6 that in a horizontal aquifer, the water table profiles as obtained by ASII are following the similar trend as shown in Figures 2–5.


### 3.7. Comparison of dimensionless water table elevations as obtained by various solutions with HFAS

#### 3.7.1. Comparison of ASI based on Baumann's method of linearization with HFAS

Dimensionless water table elevations between two canals in the horizontal aquifer and receiving zero or constant recharge computed for 5 and 10 days by HFAS and ASI based on Baumann's method of linearization were compared graphically and are presented in Figure 7.

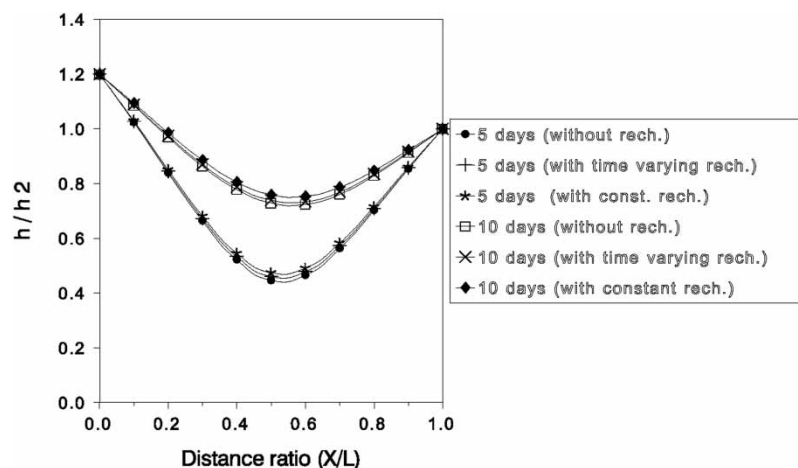

**Figure 6** | Dimensionless water table elevations in a horizontal aquifer between two canals for  $t = 5$  and 10 days as obtained from ASII based on Werner's linearization method.

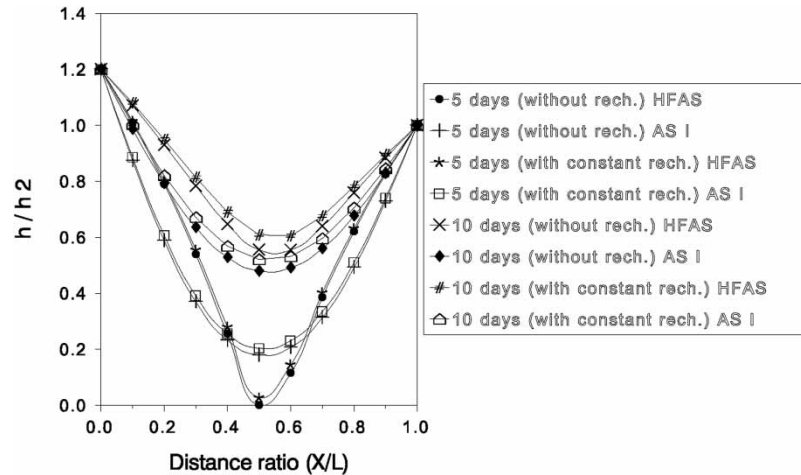

**Figure 7** | Dimensionless water table elevations in a horizontal aquifer between two canals as predicted by HFAS and ASI based on Baumann's linearization method.

It may be seen from [Figure 7](#) that at  $t=5$  days, water table elevations in a horizontal aquifer receiving zero or constant recharge as predicted by ASI are higher in the midregion and lower in other regions than those predicted by HFAS. At  $t=10$  days, water table elevations predicted by HFAS are always higher at all distances than those obtained from ASI.


### 3.7.2. Comparison of ASII based on Werner's method of linearization with HFAS

Dimensionless water table elevations between two canals in a horizontal aquifer receiving zero or constant recharge computed for  $t=5$  days and  $t=10$  days by HFAS and ASII based on Werner's method of linearization were compared graphically as shown in [Figure 8](#).


It may be seen from [Figure 8](#) that at  $t=5$  days and at  $t=10$  days, water table elevations in a horizontal aquifer receiving zero or constant recharge as predicted by ASII are consistently higher at all distances (with more difference in the midregion) than those predicted by HFAS.

### 3.7.3. Comparison of FIFDS with HFAS

Dimensionless water table elevations between two canals in a horizontal aquifer receiving zero and constant recharges computed for  $t=5$  days and  $t=10$  days by HFAS and FIFDS were compared graphically as shown in [Figure 9](#).

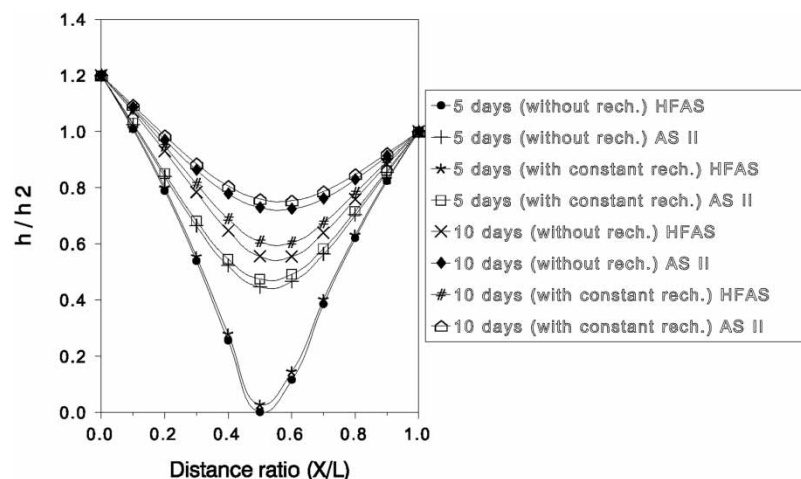

**Figure 8** | Dimensionless water table elevations in a horizontal aquifer between two canals as predicted by HFAS and ASII based on Werner's linearization method.

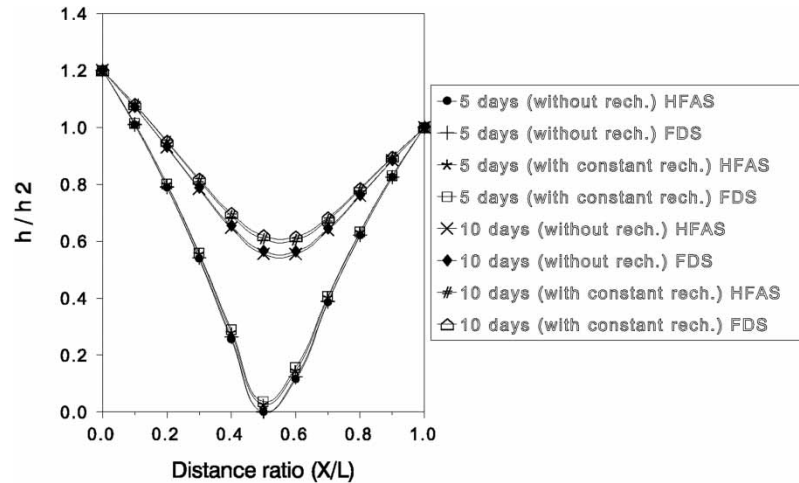

**Figure 9** | Dimensionless water table elevations in a horizontal aquifer between two canals as predicted by HFAS and finite difference solution.

It may be seen from [Figure 9](#) that at  $t = 5$  days and at  $t = 10$  days, water table elevations in a horizontal aquifer receiving zero or constant recharge as predicted by FIFDS are marginally higher (with a very little difference) at all the distances between two canals than those predicted by HFAS.


#### 3.7.4. Comparison of FES with HFAS

Dimensionless water table elevations between two canals in a horizontal aquifer receiving zero and constant recharge computed for  $t = 5$  days and  $t = 10$  days by HFAS and FES were compared graphically as presented in [Figure 10](#).

It may be seen from [Figure 10](#) that at  $t = 5$  days and  $t = 10$  days, dimensionless water table heights in a horizontal aquifer receiving zero or constant recharge as predicted by FES are throughout marginally higher (with a very little difference) at all the distances between two canals than those predicted by HFAS.

#### 3.8. L2 and Tchebycheff norms

[Prenter \(1975\)](#) described about L2 and Tchebycheff norms and [Upadhyaya & Chauhan \(1998\)](#) employed these L2 and Tchebycheff norms to compute average and maximum differences, respectively, between the HFAS (benchmark) and other fully implicit finite difference numerical solution as well as linearized ASI and ASII. Values of L2 and Tchebycheff norms indicating average and maximum differences between two solutions were computed and are given in [Table 1](#).

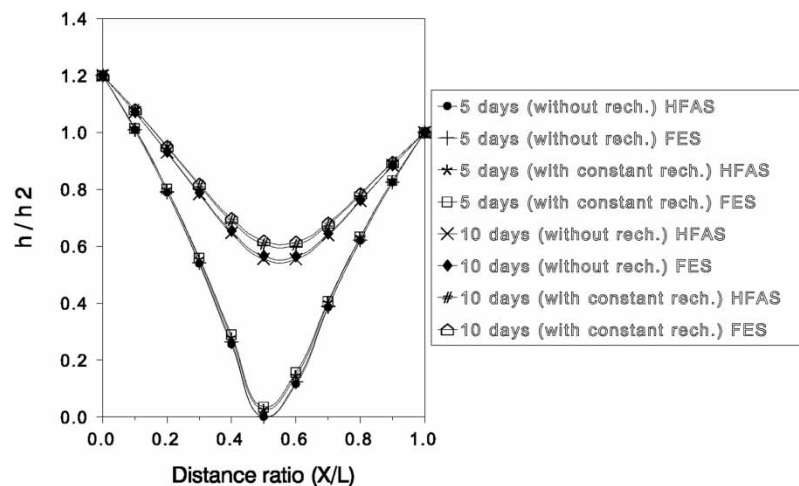

**Figure 10** | Dimensionless water table elevations in a horizontal aquifer between two canals as predicted by HFAS and FES.



**Table 1** | L2 and Tchebycheff norms to compare dimensionless water table heights in a horizontal aquifer between two canals as predicted by various analytical and numerical solutions with those predicted by HFAS

Norms	Day	Condition	ASI	ASII	Finite difference solution	FES
L2	5	Without recharge	0.1257	0.2125	0.0037	0.0036
Tchebycheff	5	Without recharge	0.2001	0.4465	0.0077	0.0074
L2	5	With time-varying recharge	0.1233	0.2134	0.0057	0.0056
Tchebycheff	5	With time-varying recharge	0.1962	0.4481	0.0127	0.0125
L2	5	With constant recharge	0.1209	0.2128	0.0062	0.0061
Tchebycheff	5	With constant recharge	0.1929	0.4478	0.0123	0.0121
L2	10	Without recharge	0.0935	0.1029	0.0056	0.0055
Tchebycheff	10	Without recharge	0.1483	0.1743	0.0104	0.0102
L2	10	With time-varying recharge	0.0924	0.0998	0.0075	0.0074
Tchebycheff	10	With time-varying recharge	0.1456	0.1678	0.0135	0.0134
L2	10	With constant recharge	0.0922	0.0933	0.0069	0.0068
Tchebycheff	10	With constant recharge	0.1427	0.1518	0.0013	0.0012

It may be observed from Table 1 that for both  $t = 5$  days and  $t = 10$  days, L2 and Tchebycheff norms were minimum for FES followed by FIFDS, ASI based on Baumann's method of linearization and maximum for ASII based on Werner's method of linearization. It indicates that the theoretical performance of various solutions with respect to HFAS in a decreasing order may be ranked as FES, FIFDS, ASI and ASII, respectively.

#### 4. CONCLUSIONS

Water table rise in an unconfined horizontal aquifer lying between two parallel canals due to time-varying recharge from land surface and seepage from canals was studied by obtaining analytical and numerical solutions of 1D Boussinesq equation incorporating time-varying recharge term. Analytical solutions of Boussinesq equation linearized by Baumann's transformation (AS I) as well as Werner's transformation (AS II). FES and FIFDS of nonlinear Boussinesq equation were developed and compared with HFAS of nonlinear Boussinesq equation (considering it as benchmark solution). Comparison of water table profiles as well as L2 and Tchebycheff norm values showed that water table profiles at  $t = 1$  day and  $t = 5$  days as obtained by FES were quite close to the water table profiles obtained from HFAS, FIFDS followed by FES. Therefore, FES was ranked at the first place and FIFDS at the second place. As far as analytical solutions are concerned, at  $t = 5$  days, both AS I and AS II predicted higher water table values, but at  $t = 10$  days, AS I predicted lower and AS II predicted higher water table values at all distances due to the linearization effect. According to L2 and Tchebycheff norm values, AS I was ranked at the third place and AS II at the fourth place.

#### ACKNOWLEDGEMENTS

The authors thankfully acknowledge help and support provided directly or indirectly by individuals and respective institutions in carrying out this study.

#### DATA AVAILABILITY STATEMENT

All relevant data are included in the paper or its Supplementary Information.

#### CONFLICT OF INTEREST

The authors declare there is no conflict.

#### REFERENCES

- Abdulrazzak, M. J. & Morel-Seytoux, H. J. 1983 Recharge from an ephemeral stream following wetting front arrival to water-table. *Water Resour. Res.* **19**, 194–200.

- Bansal, R. K. & Das, S. K. 2010 Analytical study of water table fluctuation in unconfined aquifers due to varying bed slopes and spatial location of the Recharge basin. *J. Hydrol. Eng.* **15** (11), 909–917.
- Bansal, R. K. & Das, S. K. 2011 Response of an unconfined sloping aquifer to constant recharge and seepage from the stream of varying water level. *Water Resour. Manage.* **25** (3), 893–911. doi:10.1007/s11269-010-9732-7.
- Bear, J. 1979 *Hydraulics of Groundwater*. McGraw-Hill, New York, p. 569.
- Chen, C. J. 1988 Finite analytic method. In: *Handbook of Numerical Heat Transfer* (Minkowycz, W. J., Sparrow, E. M., Schneider, G. E. & Pletcher, R. H., eds). John Wiley & sons Inc, New York, pp. 723–746.
- Doulgeris, C. & Zissis, S. T. 2021 Finite-infinite analysis for flow simulation in a phreatic aquifer. *Comput. Geosci.* **155**, 104874.
- Gill, M. A. 1984 Water table rise due to infiltration from canals. *J. Hydrol.* **70**, 337–352.
- Hantush, M. S. 1967 Growth and decay of ground water mounds in response to uniform percolation. *Water Resour. Res.* **3** (1), 227–234.
- Jain, M. K., Iyenger, S. R. K. & Jain, R. K. 1994 *Computational Methods for Partial Differential Equations*. Wiley Eastern Ltd, New Delhi.
- Kankarej, M. M. 2021 Water table rise in sloping aquifer due to canal seepage. *Turk. Online J. Qual. Inq.* **12** (6), 6451–6465.
- Kraijenhoff van de Leur, D. A. 1958 A study of non-steady ground water flow with special reference to a reservoir coefficient. *De Ing.* **70**, 87–94.
- Maasland, M. 1959 Water table fluctuations induced by intermittent recharge. *J. Geophys. Res.* **64**, 549–559.
- Manglik, A., Rai, S. N. & Singh, R. N. 1997 Response of an unconfined aquifer induced by time varying recharge from a rectangular basin. *Water Resour. Manage.* **11**, 185–196.
- Marino, M. 1974 Water table fluctuation in response to recharge. *J. Irrig. Drain. Div.* **100** (2), 117–125.
- Moshirpanahi, D., Meraji, S. H. & Ghaheri, A. 2016 Modeling water table rise between two canal in aquifer with differential quadrature method. *Iran. J. Soil Water Res.* **47** (2), 307–317. doi:10.22059/IJSWR.2016.58336.
- Mustafa, S. 1987 Water table rise in a semi-confined aquifer due to surface infiltration and canal recharge. *J. Hydrol.* **95**, 269–276.
- Ozisk, M. N. 1980 *Heat Conduction 71/72*. Wiley, New York, pp. 201–203.
- Pinder, G. F. & Gray, W. G. 1977 *Finite Element Simulation in Surface and Subsurface Hydrology*. Academic Press, New York, p. 295.
- Prenter, P. M. 1975 *Spline and Variational Methods*. John Wiley & Sons, New York, pp. 6–11.
- Rai, S. N. & Manglik, A. 1999 Modelling of water table variation in response to time-varying recharge from multiple basins using the linearized Boussinesq equation. *J. Hydrol.* **220**, 141–148.
- Rai, S. N. & Singh, R. N. 1992 Water table fluctuations in an aquifer system owing to time-varying surface infiltration and canal recharge. *J. Hydrol.* **136**, 381–387.
- Rai, S. N. & Singh, R. N. 1995 An analytical solution for water table fluctuation in a finite aquifer due to transient recharge from a strip basin. *Water Resour. Manage.* **9**, 27–37.
- Rai, S. N. & Singh, R. N. 1996 Analytical modeling of unconfined flow induced by time varying recharge. *Proc. Indian Natl. Sci. Acad.* **62A** (4), 253–292.
- Rai, S. N., Mangalik, A. & Singh, V. S. 2006 Water table fluctuation owing to time varying recharge, pumping and leakage. *J. Hydrol.* **324**, 350–358.
- Ram, S., Jaiswal, C. S. & Chauhan, H. S. 1994 Transient water table rise with canal seepage and recharge. *J. Hydrol.* **163**, 197–202.
- Ramana, D. V., Rai, S. N. & Singh, R. N. 1995 Water table fluctuation due to transient recharge in a 2-D aquifer system with inclined base. *Water Resour. Manage.* **9**, 127–138.
- Saeedpanah, I. & Azar, R. G. 2017 New analytical solutions for unsteady flow in a leaky aquifer between two parallel streams. *Water Resour. Manage.* **31**, 2315–2332. doi:10.1007/s11269-017-1651-4.
- Singh, S. & Jaiswal, C. S. 2006 Numerical solution of 2D free surface to ditch drains in presence of transient recharge and depth dependent ET in sloping aquifers. *Water Resour. Manage.* **20** (5), 779–793.
- Singh, R. N., Rai, S. N. & Ramana, D. V. 1991 Water table fluctuation in a sloping aquifer with transient recharge. *J. Hydrol.* **126**, 315–326.
- Song, Z., Li, L., Kong, J. & Zhang, H. 2007 A new analytical solution of tidal water table fluctuations in a coastal unconfined aquifer. *J. Hydrol.* **340** (3–4), 256–260.
- Sontakke, B. R. & Rokade, G. L. 2014 Water table fluctuations due to time varying recharge in a 1-D flow system from recharge basin. *Int. J. Differ. Equations Appl.* **13** (2), 51–59.
- Teloglou, S. I., Zissis, S. T. & Panagopoulos, C. A. 2008 Water table fluctuation in aquifers overlying a semi-impervious layer due to transient recharge from a circular basin. *J. Hydrol.* **348** (1–2), 215–223.
- Upadhyaya, A. 1999 *Mathematical Modelling of Water Table Fluctuations in Slopping Aquifers*. PhD Thesis, G. B. Pant University of Agriculture and Technology, Pantnagar, India.
- Upadhyaya, A. & Chauhan, H. S. 1998 Solutions of Boussinesq equation in semi-infinite flow region. *J. Irrig. Drain. Eng. ASCE* **124** (5), 265–270.
- Upadhyaya, A. & Chauhan, H. S. 2001a Water table fluctuations due to canal seepage and time varying recharge. *J. Hydrol.* **244**, 1–8.
- Upadhyaya, A. & Chauhan, H. S. 2001b Falling water tables in a horizontal/sloping aquifer. *J. Irrig. Drain. Eng. ASCE* **127** (6), 376–384.
- Upadhyaya, A. & Chauhan, H. S. 2002 Water table rise in sloping aquifer due to canal seepage and constant recharge. *J. Irrig. Drain. Eng.* **128** (3), 160–167.
- Zomorodi, K. 1991 Evaluation of the response of a water-table to a variable recharge rate. *Hydrol. Sci. J.* **36**, 67–78.