



Hill Climbing Artificial Electric Field Algorithm for Maximum Power Point Tracking of Photovoltaics

Mohana Alanazi¹, Abdulaziz Alanazi², Zulfiqar Ali Memon³, Mako Csaba⁴ and Amir Mosavi^{5,6,7*}

¹Department of Electrical Engineering, College of Engineering, Jouf University, Sakaka, Saudi Arabia, ²Department of Electrical Engineering, College of Engineering, Northern Border University, Ar'Ar, Saudi Arabia, ³Department of Electrical and Computer Engineering, College of Engineering and Information Technology, Ajman University, Ajman, United Arab Emirates, ⁴Institute of the Information Society, University of Public Service, Budapest, Hungary, ⁵Faculty of Civil Engineering, Technical University of Dresden, Dresden, Germany, ⁶Institute of Information Engineering, Automation and Mathematics, Slovak University of Technology in Bratislava, Bratislava, Slovakia, ⁷John von Neumann Faculty of Informatics, Obuda University, Budapest, Hungary

OPEN ACCESS

Edited by:

Muhammad Zubair,
Majmaah University, Saudi Arabia

Reviewed by:

Daniel Tudor Coffas,
Transilvania University of Braşov,
Romania
Nishant Kumar,
National University of Singapore,
Singapore

*Correspondence:

Amir Mosavi
amir.mosavi@kvk.uni-obuda.hu

Specialty section:

This article was submitted to
Solar Energy,
a section of the journal
Frontiers in Energy Research

Received: 26 March 2022

Accepted: 17 June 2022

Published: 22 July 2022

Citation:

Alanazi M, Alanazi A, Memon ZA,
Csaba M and Mosavi A (2022) Hill
Climbing Artificial Electric Field
Algorithm for Maximum Power Point
Tracking of Photovoltaics.
Front. Energy Res. 10:905310.
doi: 10.3389/fenrg.2022.905310

In this paper, maximum power point tracking (MPPT) of a photovoltaic (PV) system is performed under partial shading conditions (PSCs) using a hill climbing (HC)–artificial electric field algorithm (AEFA) considering a DC/DC buck converter. The AEFA is inspired by Coulomb's law of electrostatic force and has a high speed and optimization accuracy. Because the traditional HC method cannot perform global search tracking and instead performs local search tracking, the AEFA is used for a global search in the proposed HC-AEFA. The critical advantage of the HC-AEFA is that it is desirable performing local and global searches. The proposed hybrid method is implemented to derive an MPP by tuning the converter duty cycle, considering the objective function for maximizing the PV system extracted power. Its capability is evaluated and compared with well-known particle swarm optimization (PSO), considering standards, PSCs, and radiation changes conditions. The tracking efficiency for the most challenging shading pattern (third pattern) using the HC-AEFA, HC, AEFA and PSO is obtained at 99.93, 90.35, 98.85, 99.80%, respectively. The analysis of the population-based optimization process for different algorithms proved the HC-AEFA faster convergence at lower iterations than the other methods. So, the superiority of the proposed HC-AEFA subjected to different patterns is confirmed with higher tracking efficiency and global power peak, fewer fluctuations, higher convergence speed, and higher dynamic and Static-efficiency compared to the other methods.

Keywords: PV system, global power tracking, partial shading, hill climbing-artificial electric field algorithm, artificial intelligence, machine learning

1 INTRODUCTION

Maximum power point tracking (MPPT) has attracted the attention of many studies as an effective technique to maximize the extracted power of photovoltaic (PV) systems (Al-Smadi et al., 2021). The MPPT aims to improve and optimize PV systems and maximize the efficiency of the PV plate to ensure the maximum electrical power generation with obtaining global Maximum power point (GMPP) tracking (Arabi Nowdeh et al., 2020; Nowdeh et al., 2019a). The PV plate has a nonlinear curve due to the continuous environmental conditions variations. The power-voltage characteristic has one MPP subjected to uniform radiation. Also, the power–voltage characteristic has a multi-peak

TABLE 1 | State of the art of MPPT solutions.

References	Controller	Contribution
Roy Chowdhury and Saha, (2010)	Microcontroller and Matlab simulation	Using particle swarm optimization for MPPT solution in PSCs
Messai et al. (2011)	Field programmable gate array (FPGA) and Matlab simulation	Presentation of a hybrid genetic algorithm integrated with the fuzzy logic controller
Miyatake et al. (2011)	Experimental and Matlab simulation	Application of particle swarm optimization in PSCs
Charin et al. (2021)	Experimental and Matlab simulation	Applying particle swarm optimization to extract PV maximum power
Kulaksız and Akkaya, (2012)	Digital signal processing (DSP) and Matlab simulation	Using an artificial neural network integrated with a genetic algorithm in PSCs
Jiang et al. (2013)	Matlab simulation	MPPT solution using ant colony optimization
Sundareswaran et al. (2014)	Peripheral interface controller (PIC) microcontroller and Matlab simulation	Extraction of MPP via artificial bee colony algorithm in PSCs
Mohanty et al. (2015)	DSP and Matlab simulation	Proposing the grey wolf optimizer method to solve the MPPT.
Benyoucef et al. (2015)	DSP and Matlab, and Pspice simulation	Studying the capability of an artificial bee colony for MPPT solution
Teshome et al. (2016)	DSP and Matlab simulation	Modified firefly algorithm for tracking the MPPT of PV system
Raman et al. (2016)	Matlab simulation	Using of dragonfly algorithm for MPPT solving
Fathy and Rezk, (2016)	Matlab simulation	Evaluation of Mine blast algorithm performance to obtain the MPP.
Rezk and Fathy, (2017)	Matlab simulation	Teaching learning-based optimization for MPPT solution in PSCs
Hu et al. (2019)	DSP and Matlab simulation	Study the effect of improved particle swarm optimization to track the PV MPP.
Kaced et al. (2017)	FPGA and Matlab simulation	Bat algorithm for MPP tracking in partial shading condition
Re zk et al. (2017)	Matlab simulation	The cuckoo search algorithm for optimal tracking of the PV MPP in PSCs
Li et al. (2018)	Matlab simulation	Improvement of the gravitational search algorithm for increasing the MPP tracking accuracy
Premkumar and Sowmya (2019)	Matlab simulation	Investigation of whale optimization algorithm application for solving the MPPT in PSCs
Bhukya and Nandiraju (2020)	voltage sensor and current sensor	Grasshopper optimized fuzzy logic control to enhance the MPPT.
Sukanya Satapathy and Kumar (2020)	Microcontroller and Matlab simulation	Weight of SetPoint Similarity (WSPS) to track the PV MPP accurately in PSCs
Davoodkhani et al. (2020)	Matlab simulation	Designing of grey wolf optimizer-crow search algorithm to extract the MPP in PSCs

PV configuration subjected to partial shading conditions (PSCs). The conventional methods such as open-circuit voltage (Fares et al., 2021), perturb and observe (Kavya and Jayalalitha, 2021), and hill-climbing (HC) (Alajmi et al., 2010), owing to their simplicity, may not be able to track the global maximum power point (GMPP). Despite their good performance regarding the global peak, the unconventional methods (Table 1) are challenging to implement, as they require more software and hardware equipment than the conventional algorithms (Arabi Nowdeh et al., 2020). Thus, several unconventional algorithms have been proposed to enhance simplicity and increase efficiency. Therefore, the traditional algorithms cannot identify the GMPP, and their tracking efficiency is low. The conventional and unconventional methods (or even a combination of them) are applied to improve the ability to track the GMPP. Many researchers have investigated the unconventional methods based on swarm intelligence-based algorithms due to their appropriate convergence towards the GMPP (Nowdeh et al., 2019b; Nasri et al., 2021). Therefore, swarm intelligence is more effective than the conventional methods for achieving the GMPP of the PV systems subjected to the PSCs.

Intelligent optimization algorithms are developed in MPPT tracking. In (Roy Chowdhury and Saha, 2010), a comparative PSO algorithm was proposed for finding the GMPP. In (Messai et al., 2011), a genetic algorithm integrated with fuzzy logic is developed for tracking the MPP of PV system. In (Miyatake et al.,

2011), a new technique for GMPP tracking based on PSO was presented. The proposed method provides better results considering different PSCs; however, it is limited to multi-converter PV production systems. The particle swarm optimization (PSO) algorithm was implemented for tracking the global MPP (GMPP) considering the PSCs (Charin et al., 2021). The applicatins of the evolutionary algorithms in improving the performance of MPPT had been significantly increasing (Ahmed et al., 2022; Fan and Ma, 2022; Lousuwankun and Jantharamin, 2022; Rajesh et al., 2022; Wasim et al., 2022). In (Kulaksız and Akkaya, 2012), a genetic algorithm was proposed for determining the number of neurons in a multilayer artificial neural network for MPPT in a PV system. In (Jiang et al., 2013), the ant colony algorithm was applied for the MPPT solution of a PV system, and the method had an optimal performance for achieving the maximum power. In (Sundareswaran et al., 2014), the artificial bee colony (ABC) method was evaluated for MPPT in a PV system subjected to various shading patterns. It had a good performance and achieved the optimal global point. In (Mohanty et al., 2015), the grey wolf optimizer (GWO) algorithm was applied to track the MPP in a PV. In this study, the effectiveness of the GWO in achieving the maximum power with optimal efficiency was confirmed. In (Benyoucef et al., 2015), the ABC was applied for solving the MPPT subjected to shading pattern conditions. In (Teshome et al., 2016), the firefly algorithm (FA) was developed to design the MPPT for considering PSCs. In (Raman et al., 2016), the

dragonfly algorithm (DA) was applied for tracking the MPP for a PV system in PSC. In (Fathy and Rezk, 2016), the mine blast algorithm (MBA) and teaching-learning-based optimization (TLBO) were applied to achieve the GMPP for PV considering PSC. In (Rezk and Fathy, 2017), the TLBO was applied to extract the maximum power of a PV system with PSCs. In (Hu et al., 2019), the improved PSO algorithm was evaluated to achieve the GMPP in a PV system with PSCs. In (Kaced et al., 2017), the bat algorithm was developed for MPPT subjected to different PSC patterns. The bat algorithm is effective for achieving the GMPP of PV systems. In (Rezk et al., 2017), the MPPT of a PV system was performed with different shading patterns based on the cuckoo search algorithm (CSA) method. In (Li et al., 2018), the improved gravitational search algorithm (IGSA) was applied to track the MPP for a PV system considering shading pattern conditions. In (Premkumar and Sowmya, 2019), the MPPT solution of the PV system is developed using the whale optimization algorithm (WOA) in PSCs. In (Bhukya and Nandiraju, 2020), for the MPPT solution a new hybrid algorithm named grasshopper optimized fuzzy logic control (FLC) method is applied. In (Sukanya Satapathy and Kumar, 2020), weight of set point similarity is applied for the MPPT solution. In (Davoodkhani et al., 2020), designing of grey wolf optimizer-crow search algorithm (GWOCSA) to extract the MPP of PV system is developed in PSCs. In (Kumar et al., 2017a), a battery charging scheme from a solar photovoltaic is presented using a single sensor-based MPPT using Cauchy and Gaussian sine cosine optimization algorithm. In (Kumar et al., 2018), a novel reduced sensor strategy is presented for two-stage single-phase grid connected solar photovoltaic system with a battery using power normalized kernel least mean square algorithm. In (Kumar et al., 2019), damped fifth-order generalized integrator based control algorithm for grid-integrated PV system is studied via Human Psychology optimisation algorithm. In (Kumar et al., 2017b), an intelligent monkey king evolution algorithm for MPP detection under partially shaded condition in a PV system is presented. In (Kumar et al., 2017c), a whale optimization with differential evolution (WODE) method is used for MPPT solving in the dynamic and the steady-state conditions of a partial shading for PV system. The summarize of some studies with controller parameter, controller type, contribution and research gap is presented in **Table 1**.

So far, according to the literature review, various methods have been investigated to solve the problem of MPPT. This is because the optimization algorithms may work well in solving some of the photovoltaic system configurations in shading conditions to track the MPP. In addition, with the complexity of the problem, they cannot trace the global optimal point. So, today there is still a good incentive to use new optimization methods in the MPPT problem solution. Tracking the MPP in shading conditions due to the presence of multiple peaks in the photovoltaic characteristic, traditional algorithms such as the hill climbing (HC) method cannot detect the global MPP through the local point, which reduces the local the efficiency and overall effectiveness of the photovoltaic system. Therefore, combined methods can be developed to enhance the global MPP. This paper suggests a new MPPT

method called hill climbing-artificial electric field algorithm (HC-AEFA) for MPPT of PV system solution with PSCs. The technique is efficient and straightforward. The AEFA is modeled based on Coulomb's law related to electrostatic force (Anita Yadav, 2019). HC is one of the traditional MPPT methods for PV systems. In the HC-AEFA method, HC is first applied to determine the nearest local answer, and then the AEFA method is evaluated to determine the GMPP. The converter duty cycle is optimized by the combined method to achieve the MPP. The simulation results of the proposed HC-AEFA method were analyzed with different models, including the standard conditions, PSCs, and radiation changes, and compared with those of the HC, AEFA, and PSO methods. The results were evaluated according to the efficiency and convergence time of the algorithms and by comparing the values for the PV, and maximum extracted power among the different methods.

Highlights of this study are listed as follows:

- Global maximum power point tracking of a PV system under partial shading conditions
- Hill climbing (HC)-artificial electric field algorithm to solve the MPPT of PV system
- The superiority of the proposed MPPT method compared with HC, AEFA and PSO
- High tracking speed and efficiency of the proposed MPPT method to obtain the GMPP
- Better performance of the proposed MPPT algorithm compared with last studies

The rest of the paper is organized as follows. The modeling of the PV system is presented in **Section 2**. The standard and PSC patterns for PV are developed in **Section 3**. The proposed MPPT algorithm is described in **Section 4**. The simulation results of different patterns for MPPT solution are presented in **Section 5**. The results and findings of the paper are outlined in the conclusion section in **Section 6**.

2 PV MODULE UNDER PSCS

The PSC creates multiple power peaks (local and global) in the power-voltage characteristic of the PV. Therefore, it is vital to achieving the MPP subjected to PSCs to maximize PV efficiency. The selected PV module is considered ASMS-167P. The 2S PV parameters applied in this study include GMPP = 167 W, the voltage of the open circuit is 41.7 V, the voltage corresponds to maximum power is 33.4 V, the current of a short circuit is 5.18 A, the current corresponds to maximum power is 5 A, the voltage temperature coefficient is assumed at $-0.13 \text{ V}/^\circ\text{C}$, and the current's temperature coefficient is $0.0025 \text{ A}/^\circ\text{C}$ (Shannan et al., 2013).

In this section, four different models are presented for evaluating the performance of the proposed MPPT method. The patterns are characterized by the 2S configuration (two modules with a series connection). The uniform radiation was $1000 \text{ W}/\text{m}^2$. The first, second, and third patterns correspond to

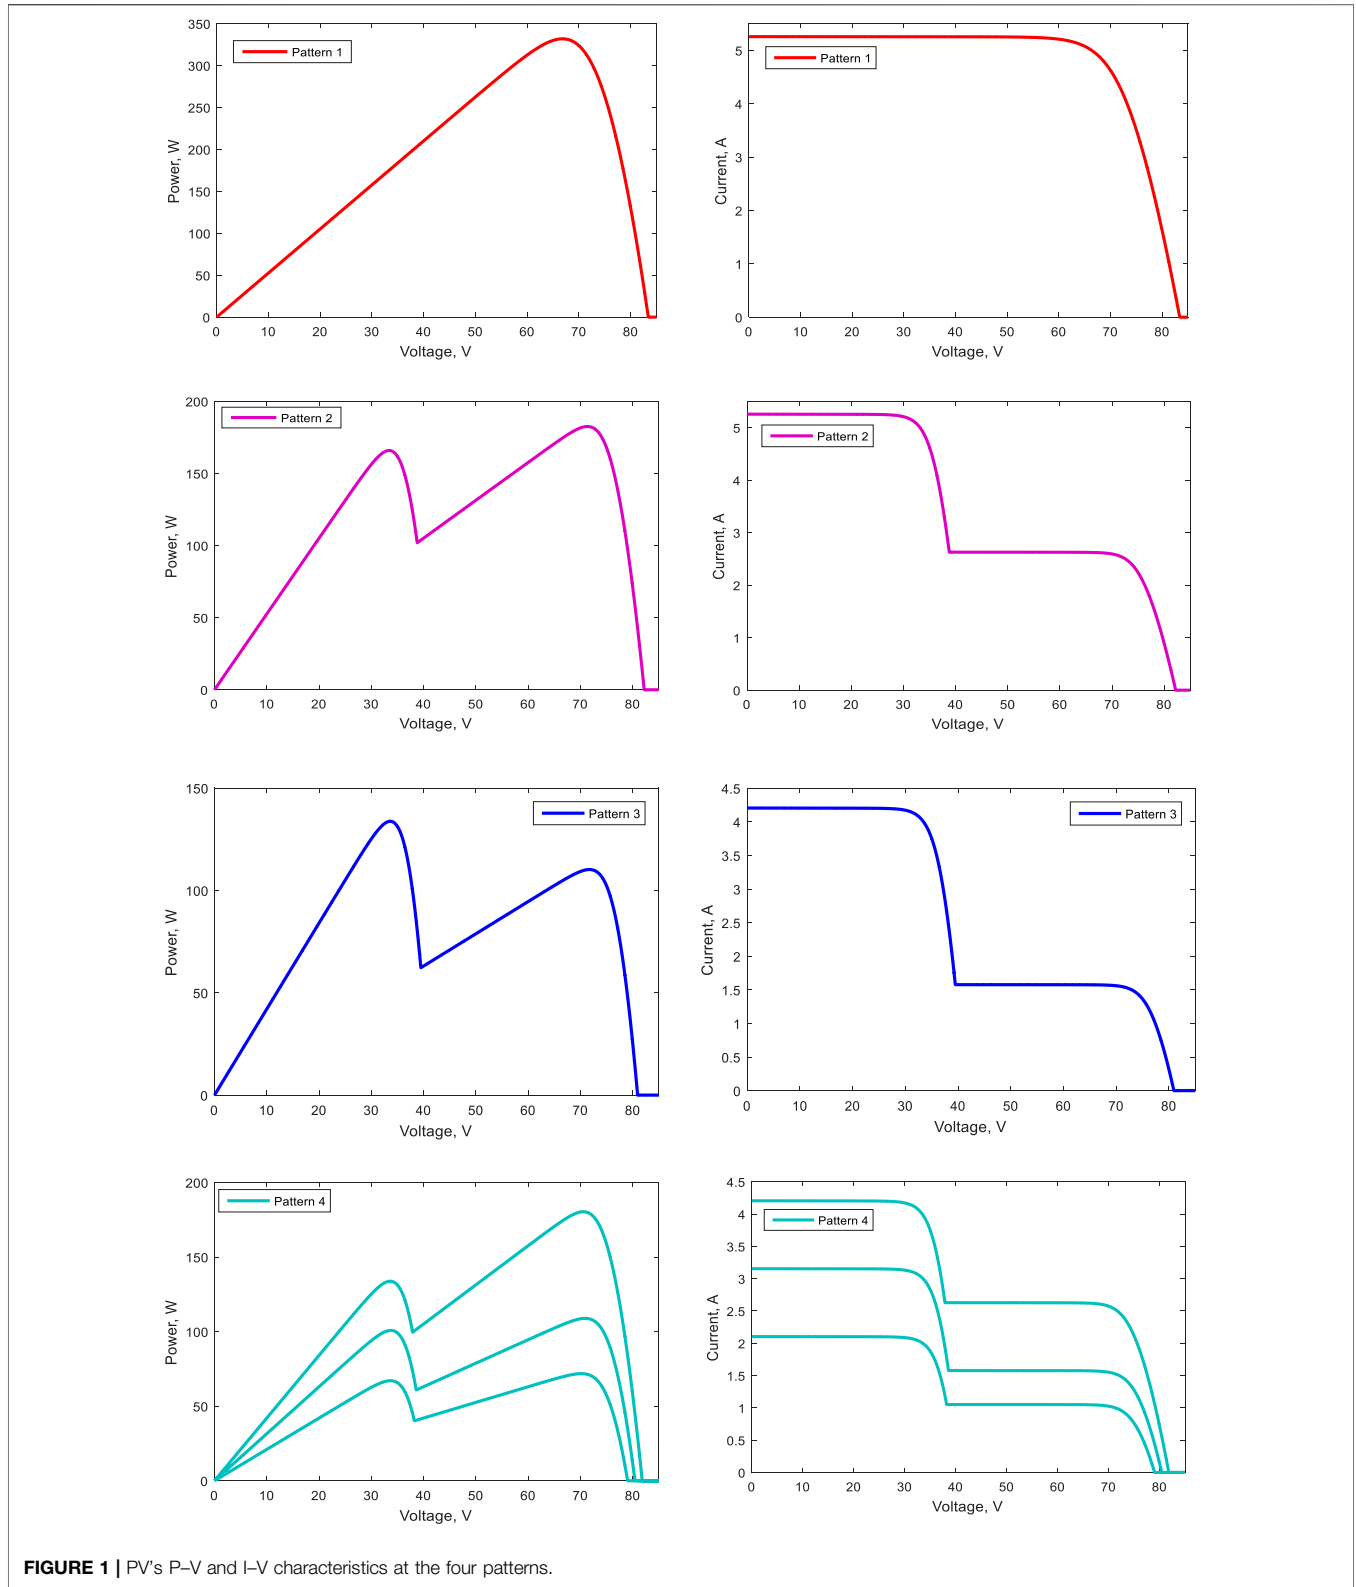


FIGURE 1 | PV's P-V and I-V characteristics at the four patterns.

the standard test condition (STC) with GMPP of 331.8 W, PSC with 1,000- and 500-W/m² radiation with GMPP of 182.54 W, and PSC with 300- and 800-W/m² radiation with GMPP of

133.75 W. In the fourth pattern, the conditions for radiation changes are as follows: the modules' radiation is 800 and 500 W/m² in the first temporal step with MPP of 180.20 W,

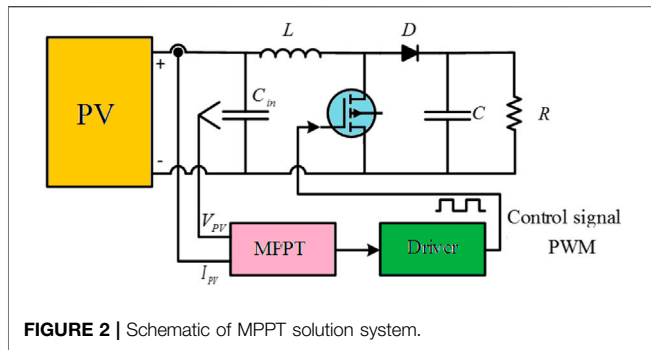


FIGURE 2 | Schematic of MPPT solution system.

600 and 300 W/m² in the second temporal step with GMPP of 108.20 W, and 400 and 200 W/m² in the third temporal step with GMPP of 70.62 W, respectively. Figure 1, show the power-voltage (P-V) and current-voltage (I-V) characteristics for the different patterns.

3 PROPOSED MPPT METHOD

The proposed HC-AEFA for optimal tracking of the MPP is presented in various templates. In this method, the HC method is first applied to find the nearest local point, and then the charged particle search method is used to determine the GMPP. Subsequently, the HC-AEFA is described to solve the MPPT. The under-study system includes a PV configuration, a DC/DC buck converter, and load, as depicted in Figure 2. The power of PV is computed using multiplying the calculated voltage and current of the PV, and then the calculated PV power is entered into the MPPT system. Fitness is defined as maximizing the PV system’s power, which is implemented by sampling the voltage and current and determining the best duty cycle of the converter via the proposed method.

3.1 Hill Climbing

The hill climbing (HC) method is like the well-known traditional method of perturb and observation method. The photovoltaic voltage is adjusted to track the maximum voltage regulation point (VMPP) in this method. The photovoltaic output voltage is disturbed by creating a slight increase that changes the power in ΔP. The optimum point corresponding to the maximum power is continuously tracked and updated until the maximum power point is given as dP_{PV}/dV = 0. The current value of photovoltaic power (P_{PV}(k)) is continuously compared with the previously calculated value of photovoltaic power (P_{PV}(k-1)). When the two values are the same, the controller recalculates the voltage and current of the photovoltaic and looks for a point to extract more power for it. Suppose the photovoltaic power fluctuates at the MPP and the duty cycle of the converter changes (Anita Yadav, 2019). Therefore, based on this method, the optimal point to achieve the maximum power of the photovoltaic can be obtained by applying a slight voltage disturbance.

3.2 Artificial Electric Field Algorithm

The artificial electric field algorithm (AEFA) is modeled based on Coulomb’s law in electrostatic force. This law describes the electrostatic reactions between the electrical charges. The

magnitude of the electrostatic force is directly related to the magnitude of the charges and is inversely associated with the distance square among them. In the AEFA, the charged particles are selected as agents, and each agent’s resistance is evaluated based on their charges. The AEFA algorithm is modeled based on electrostatic attraction force. In this way, the charged particle with the highest amount of electric charge, with higher power of attraction force, pulls the particles towards it and moves in search spaces. The first law of Coulomb describes that the particles repel each other, and otherwise, the particles pull each other. The second law of Coulomb also states that there is an attractive force among opposing charges and a repulsive force between exact name charges, which is directly related to the multiplication of the charges and inversely related to the distance between them. Moreover, the motion law states that the velocity of each particle is defined as the sum of the last velocities to the velocity changes, or the acceleration of each particle is defined as inserted force divided by its mass.

Suppose the *i*th particle position considering *d*-dimension searching as $(x_i = (x_i^1, x_i^2, \dots, x_i^d), i = 1, 2, \dots, N)$. The best position with the best fitness obtained from particles is determined. The best value position of the fitness achieved by any particle *i* is defined by (Anita Yadav, 2019) as follows.

$$p_i^d(t+1) = \begin{cases} p_i^d(t); & \text{if } f(p_i(t)) < f(x_i(t+1)) \\ x_i^d(t+1); & \text{if } f(x_i(t+1)) \leq f(p_i(t)) \end{cases} \quad (1)$$

Note that the optimal fitness is defined as $P_{best} = X_{best}$. The force of the charge *i* inserted by the charge *j* is calculated by (Anita Yadav, 2019) as follows.

$$F_{ij}^d(t) = K(t) \frac{Q_i(t)Q_j(t)(p_j^d(t) - x_i^d(t))}{R_{ij}(t) + \epsilon} \quad (2)$$

Where $Q_i(t)$ and $Q_j(t)$ refer to the charged particles of *i* and *j*, $K(t)$ indicates the constant of Coulomb, ϵ is a small constant, and $R_{ij}(t)$ is defined as Euclidean distance among two charged particles of *i* and *j* is calculated by (Anita Yadav, 2019) as follows.

$$R_{ij}(t) = \|X_i(t), X_j(t)\|_2 \quad (3)$$

The $K(t)$ is based on the iteration number and maximum iteration (max_iter), which is defined by (Anita Yadav, 2019) as expressed as follows.

$$K(t) = K_0 \exp\left(\frac{-\alpha \cdot iter}{max_iter}\right) \quad (4)$$

Where α refers to the parameter and K_0 is the initial value. To explore the AEFA, first, the Coulomb constant value is considered a significant value. Then this value has a decreasing trend to control the accuracy of the AEFA by increasing the iteration. The inserted electric force on particle *i* via the other particles is defined in *d* search space at time *t* as follows adapted from (Anita Yadav, 2019).

$$F_i^d(t) = \sum_{j=1, j \neq i}^N rand()F_{ij}^d(t) \quad (5)$$

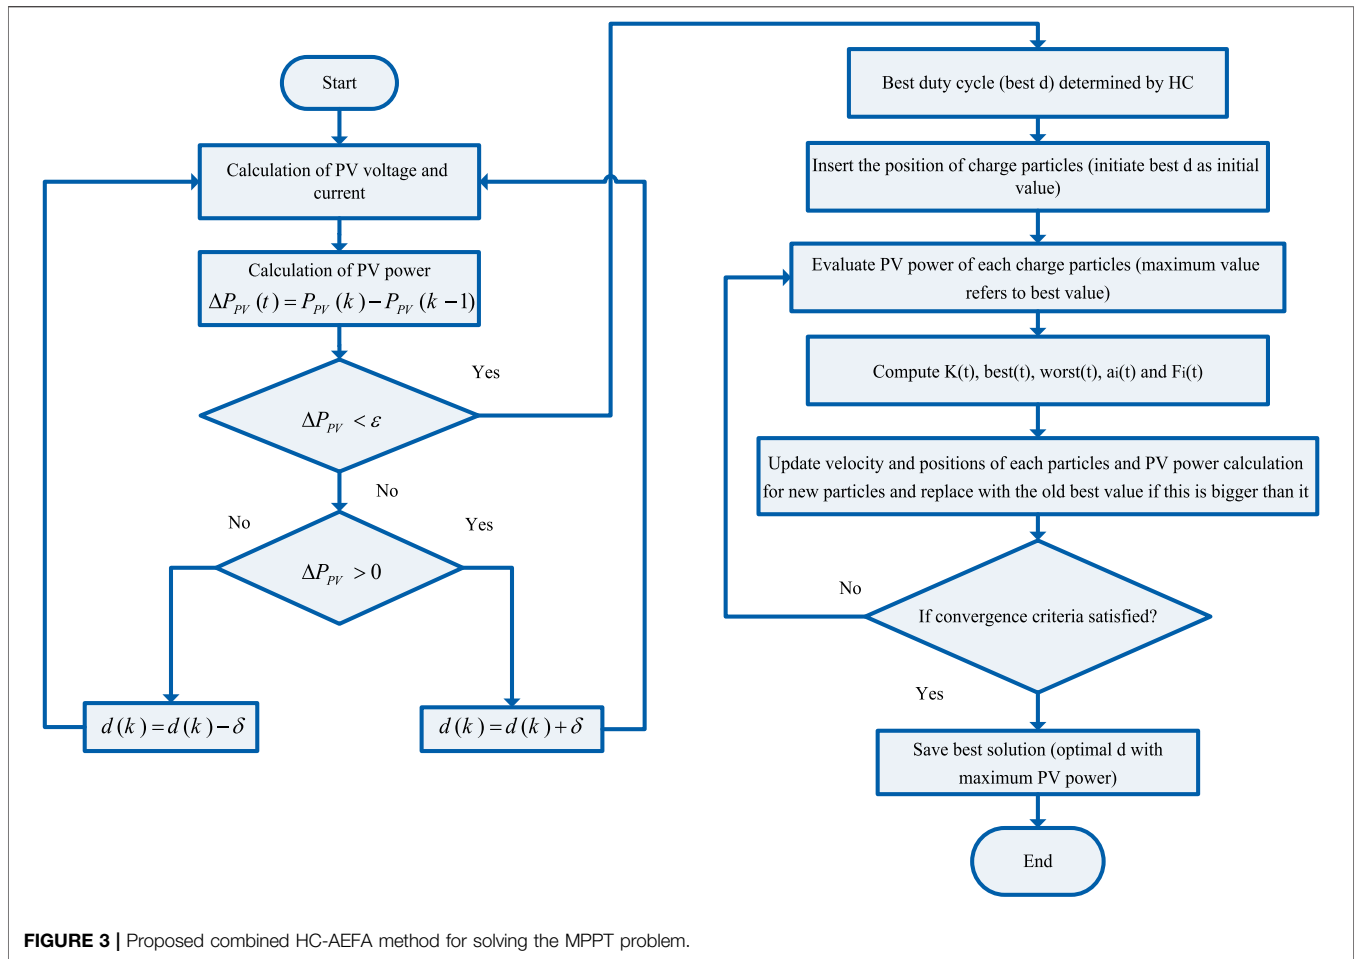


FIGURE 3 | Proposed combined HC-AEFA method for solving the MPPT problem.

Where $rand()$ refers to a uniform number randomly in $[0, 1]$, and this value is applied to provide a nature randomly to the AEFA. N indicates the number of the particles, and F_i refers to the force inserted on the charged particle i . Adapted from Anita Yadav (2019). The particle i electrical force in d th dimension search space is defined by

$$E_i^d(t) = \frac{F_i^d(t)}{Q_i(t)} \tag{6}$$

So, applying the 2nd Newton law named motion law, the particle i acceleration is defined by

$$a_i^d(t) = \frac{Q_i(t)E_i^d(t)}{M_i(t)} \tag{7}$$

$M_i(t)$ refers to the particle i mass at iteration t . The velocity of the charged particle and its position are updated by (Anita Yadav, 2019).

$$V_i^d(t+1) = rand() * V_i^d(t) + a_i^d(t), \tag{8}$$

$$X_i^d(t+1) = X_i^d(t) + V_i^d(t+1). \tag{9}$$

The fitness should have a downward or upward trend for the minimization or maximization problem, respectively [40s].

$$Q_i(t) = Q_i(t); \forall i, j = 1, 2, \dots, N, \tag{10}$$

$$Q_i(t) = \frac{q_i(t)}{\sum_{i=1}^N q_i(t)}, \tag{11}$$

$$q_i(t) = \exp\left(\frac{Fit_i(t) - Worst(t)}{Best(t) - Worst(t)}\right), \tag{12}$$

Where Fit_i refers to the fitness of particle i . The $Best(t)$ and $Worst(t)$ values of fitness for the fitness maximization are formulated by

$$Best(t) = \max(Fit_j(t)); \forall j = 1, 2, \dots, N, \tag{13}$$

$$Worst(t) = \min(Fit_j(t)); \forall j = 1, 2, \dots, N. \tag{14}$$

For the problem with the minimization approach, the best (t) and worst (t) values of fitness are presented by

$$Best(t) = \min(Fit_j(t)); \forall j = 1, 2, \dots, N, \tag{15}$$

$$Worst(t) = \max(Fit_j(t)); \forall j = 1, 2, \dots, N. \tag{16}$$

3.3 Hybrid HC-AEFA

Every day new algorithms are presented to solve optimization problems with advantages and disadvantages. No algorithm performs well in most optimization problems and may no


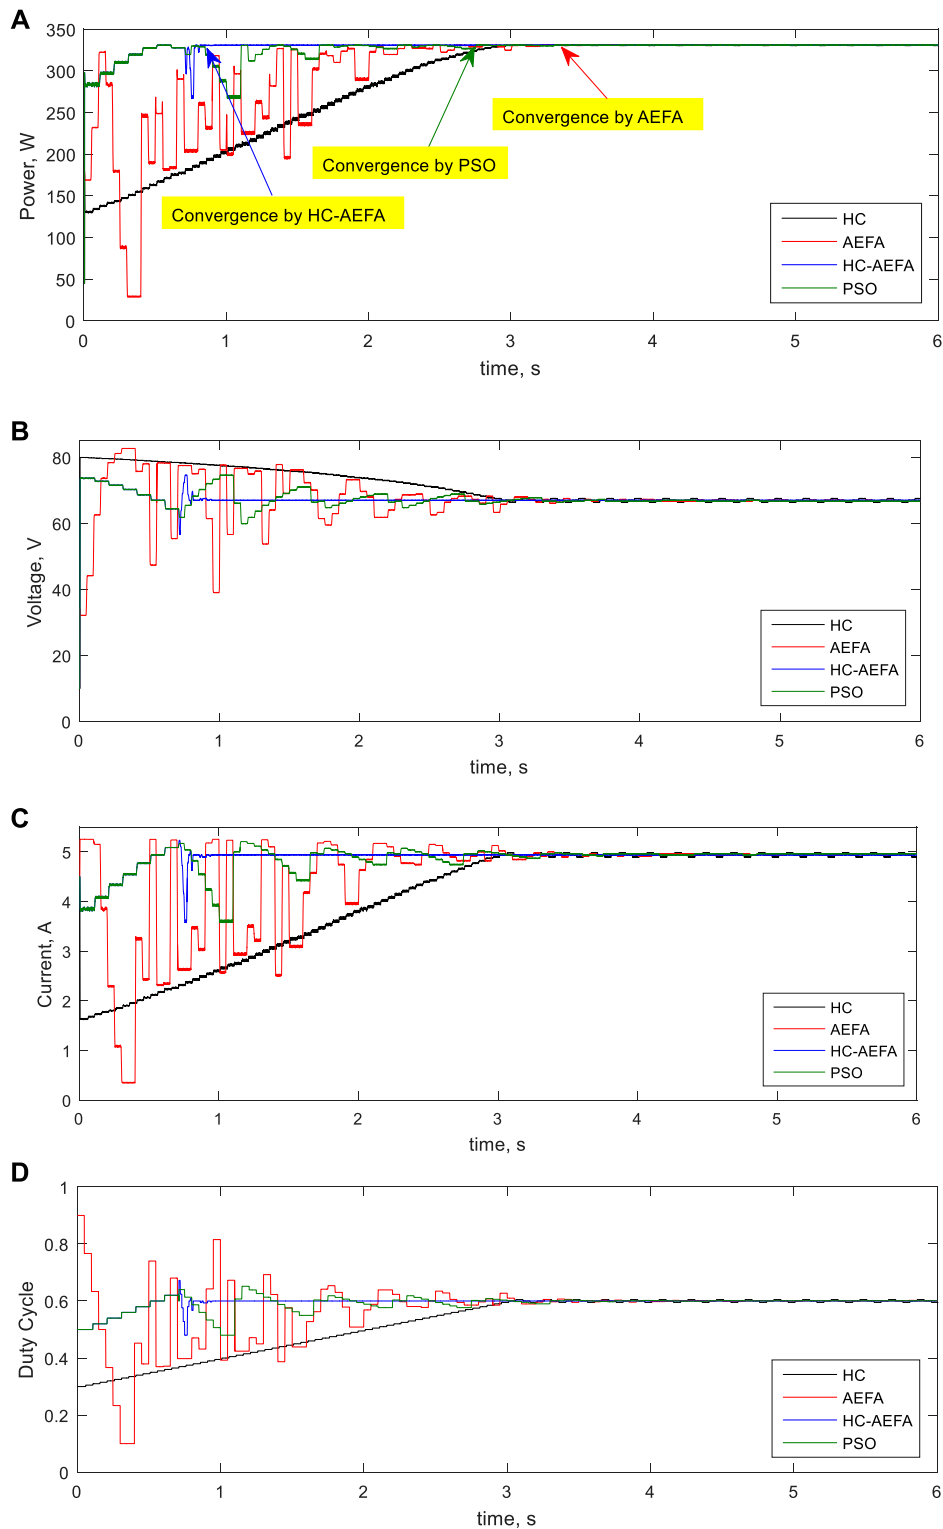


FIGURE 4 | Simulation waveforms at the first pattern obtained using the HC-AEFA, HC, AEFA, and PSO methods; **(A)** PV output power, **(B)** PV output voltage, **(C)** PV output current, and **(D)** converter duty-cycle curves.

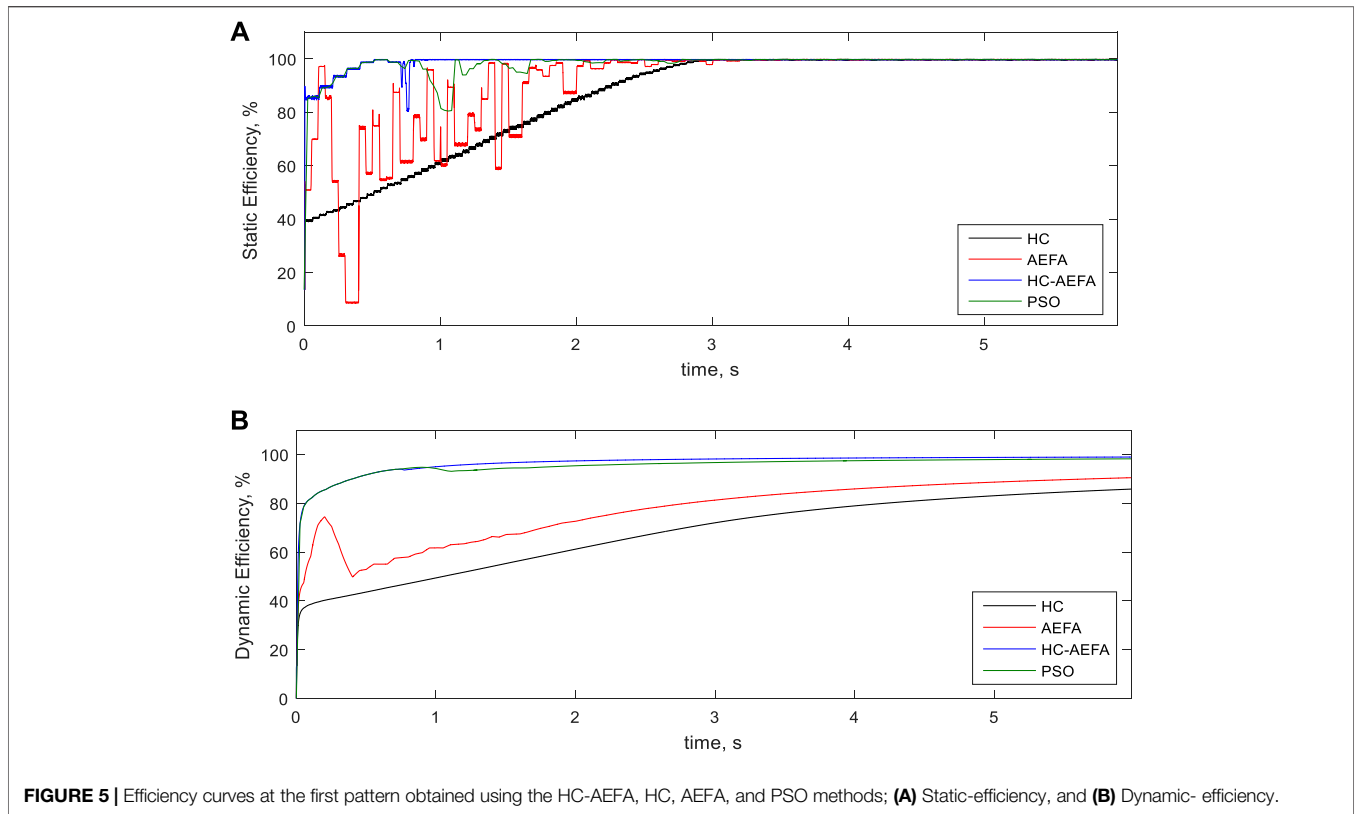

longer perform well in solving optimization problems. Therefore, in solving the MPPT problem, the presented algorithms can have different functions. This paper uses a hybrid method based on the AEFA to improve the HC method in optimal global search. The MPPT algorithm based on HC-proposed AEFA seeks to adjust the duty cycle d to extract the MPP optimally. In **Figure 3**, the flowchart of the hybrid HC-AEFA is depicted for the MPPT solution. The HC method is one of the traditional MPPT methods for PV systems. In the hybrid HC-AEFA, the HC method is first applied to obtain the nearest local solution, and then the AEFA method is implemented to determine the GMPP. The converter duty cycle (d) is optimally defined *via* the combined method to achieve the MPP. The objective function of the problem involves maximizing the PV system’s power, which is implemented by sampling the voltage and current and determining the best duty cycle of the converter for the proposed method. If disturbance (δ) is minimal, a late convergence may happen before the state is changed to the combined approach. If δ is too big, the closest peak (local peak, LP) can be rejected. Most HC methods cannot achieve the global peak. So, the hybrid method is applied to search for an LP, and the duty cycle determined optimally *via* this method is considered the primary value for the AEFA. The steps involving the HC-AEFA in MPPT solution are presented as follows:

- Step 1) The HC is operated to track the PV’s MPP. The PV output voltage is disturbed by creating a slight increase that changes the power in ΔP (power change). The optimum point corresponding to maximum power is continuously

tracked and updated until the maximum power point is given as $dP_{pv}/dV = 0$.

- Step 2) The present value of PV power ($P_{pv}(k)$) is continuously compared with the previously calculated value of photovoltaic power ($P_{pv}(k-1)$). When the two values are the same, the MPPT controller looks for a point to extract more power.
- Step 3) If $\Delta P_{pv} > 0$, d is tuned with the step size increase of the voltage disturbance and if $\Delta P_{pv} < 0$, d is adjusted by decreasing the step size in the HC.
- Step 4) Initialize the AEFA parameters as K_0 , α , D , pop size and iteration number.
- Step 5) In this step, the d determined using the HC is considered the initial value for the AEFA operation.
- Step 6) Calculate the PV power (P_{pv}) for each charged particle.
- Step 7) Determine the optimal member of the charged particles. In this step, the optimal charged particle is considered the best particle corresponding to the maximum PV power (P_{pv}).
- Step 8) Generate new positions. In this step, the charged particles create a new position in the search space if they are pursued. The duty cycle d is tuned with the step size increasing/decreasing (voltage disturbance) as follows (Inspired by **Eq. 7** in AEFA):

$$d(k) = d(k) + \delta; \text{ if } P_{pv}(k) > P_{pv}(k-1) \quad (17)$$

$$d(k) = d(k) - \delta; \text{ if } P_{pv}(k) < P_{pv}(k-1) \quad (18)$$

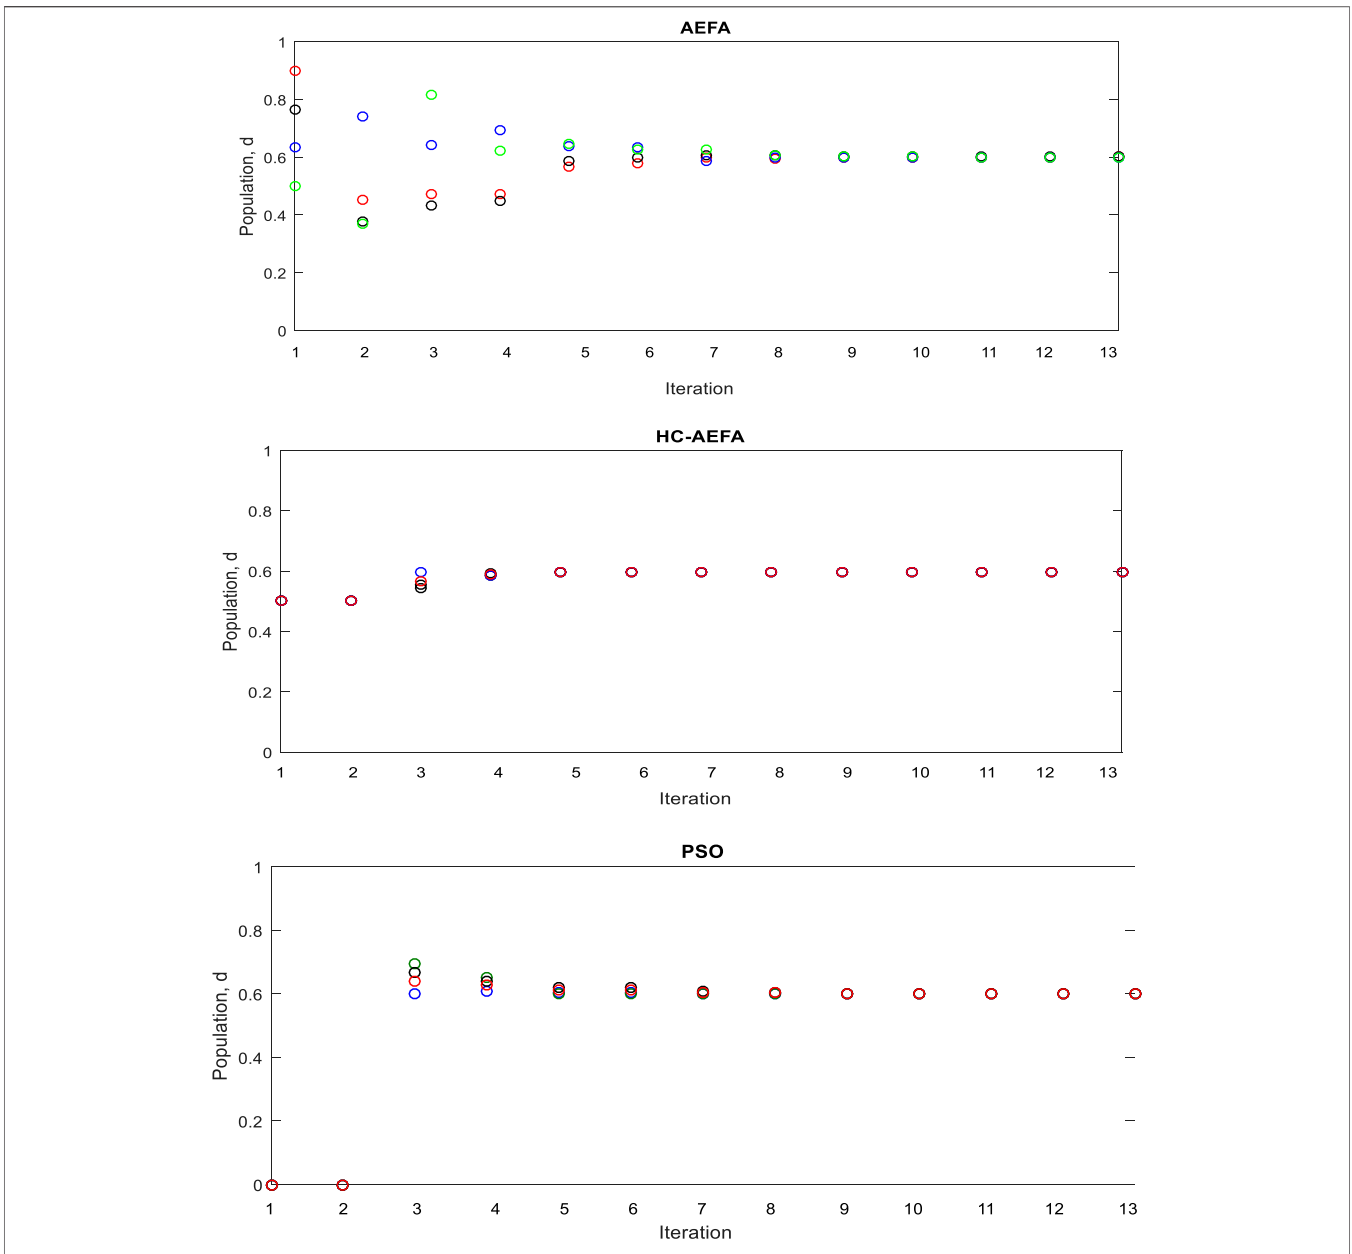


FIGURE 6 | Particles' positions in each iteration for the HC-AEFA, HC, AEFA, and PSO methods in the case of the first pattern.

TABLE 2 | Results for the different MPPT methods in first pattern.

Method	Global power (w)	Power (w)	Convergence iteration	Convergence time (s)	Tracking efficiency (%)
HC-AEFA	331.82	331.73	5	0.81	99.97
HC	331.82	331.24	—	—	99.82
AEFA	331.82	331.38	9	3.44	99.86
PSO	331.82	331.54	8	2.85	99.91


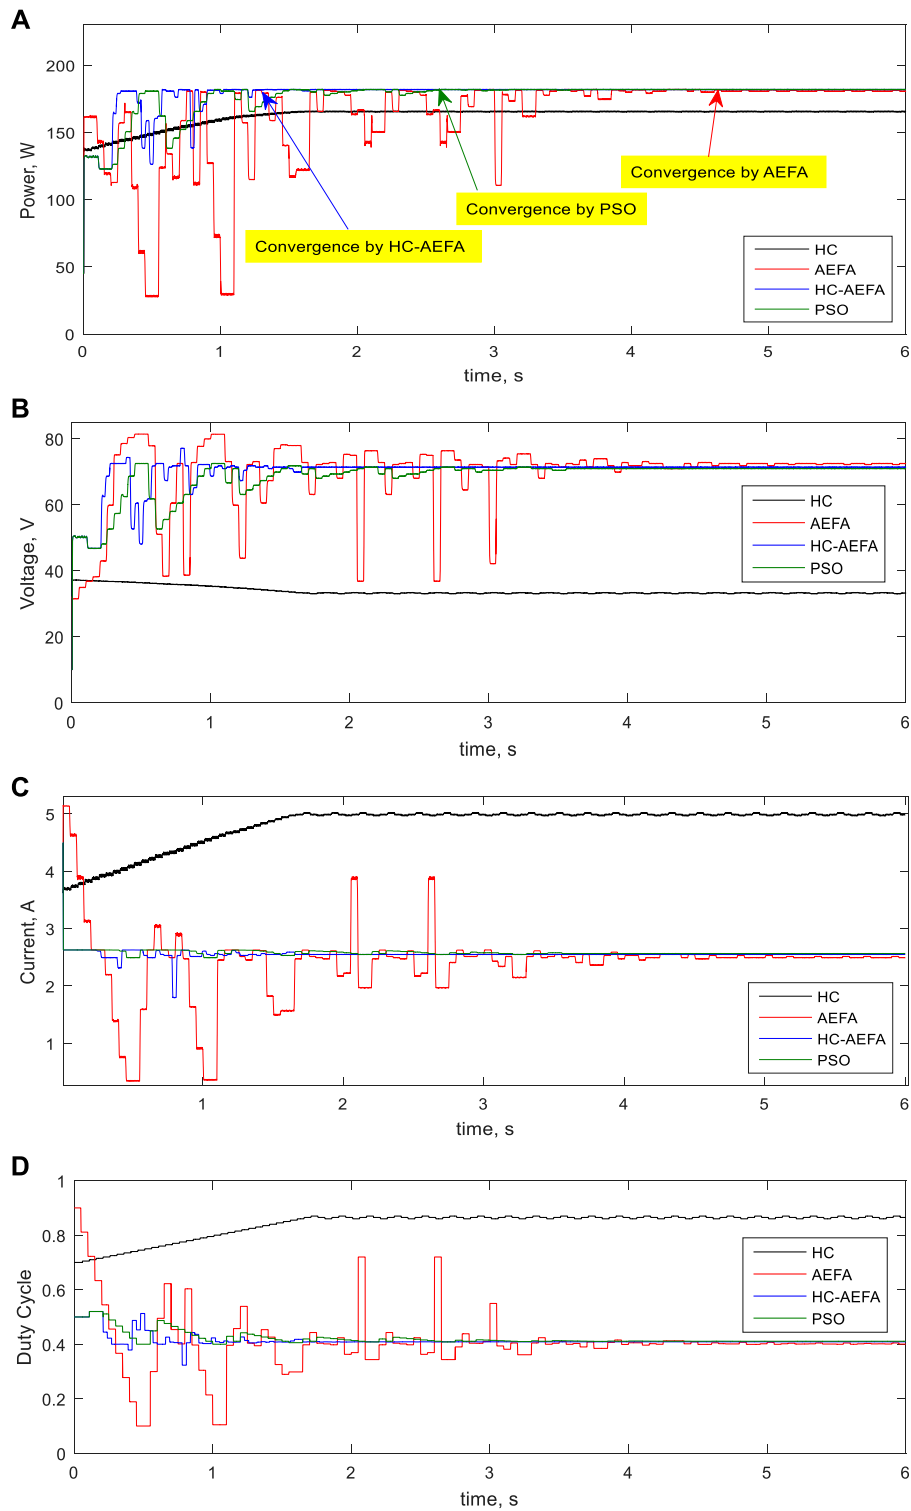


FIGURE 7 | Simulation waveforms at the second pattern obtained using the HC-AEFA, HC, AEFA, and PSO methods; **(A)** PV output power, **(B)** PV output voltage, **(C)** PV output current, and **(D)** converter duty-cycle curves.

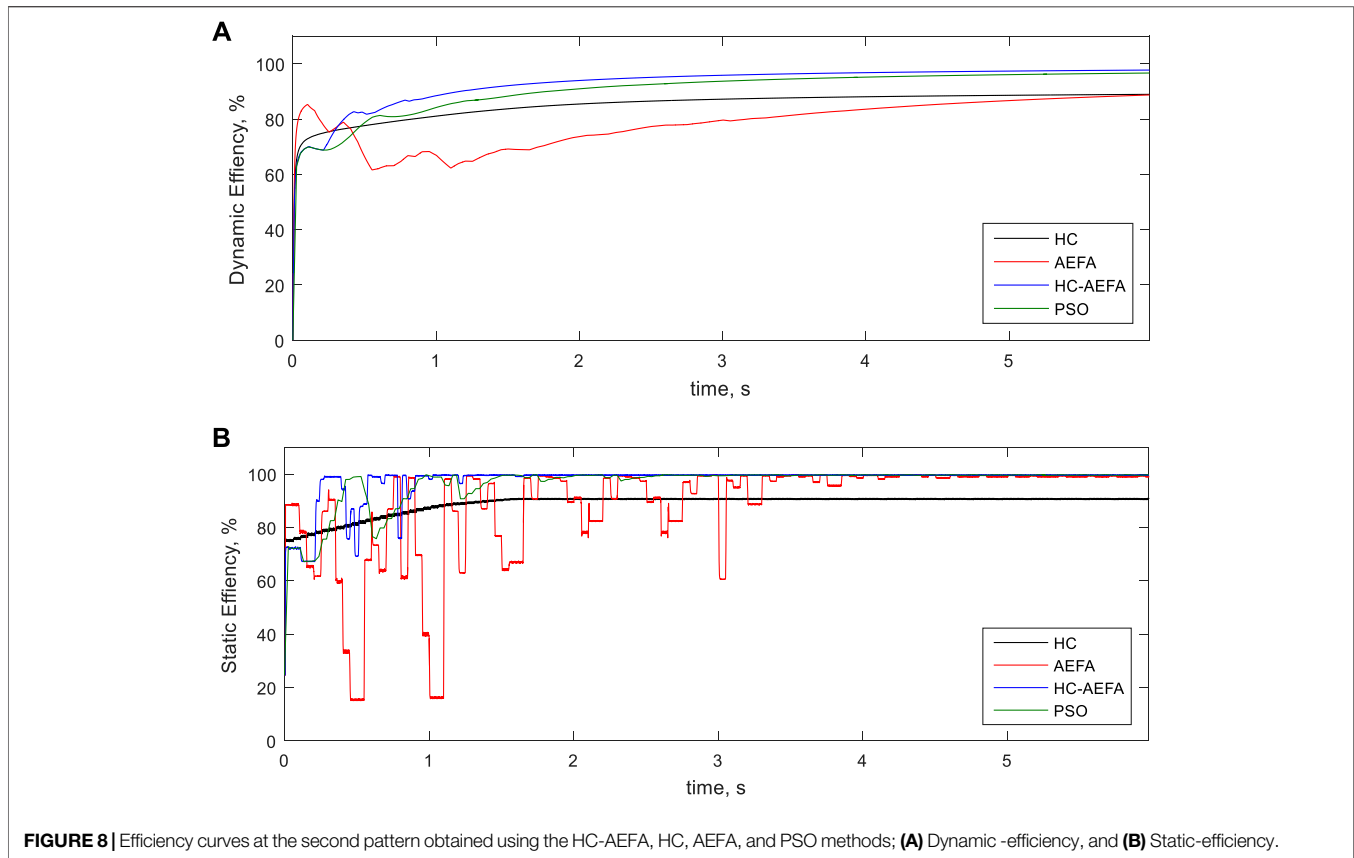

Here, $d(k)$ refers to the duty cycle at iteration k , and δ represents the size of the disturbance step at the present position selected after an additional simulation, P_{PV} is PV power, and δ refers to the disturbance.

- Step 9) Examine the feasibility of the new position for each charged particle. If the particle's new position is possible, the charged particle updates its position; otherwise, it remains in the current position and does not move towards the newly created position.
- Step 10) Calculate the PV power for the new charged particle positions. In this step, the merit value (P_{PV}) is calculated for each member of the newly updated population.
- Step 11) Determine the best solution. Evaluating and comparing the PV power in steps 5–8 indicate that the solution is replaced with a better new solution than the one obtained in step 7.
- Step 12) If the convergence conditions are satisfied (achieving maximum PV power and max iterations of the AEFA), the d with higher PV power is determined to be the optimal solution, and the AEFA is stopped. Otherwise, returning to the AEFA in step 5.

In this paper, the superiority of the HC-AEFA is compared with HC, AEFA and well-known particle swarm optimization methods in MPPT solution. The parameters K_0 and α are

assumed equal to 500 and 30 for the AEFA algorithm. c_1, c_2, w_{min} , and w_{max} are set at 2, 2, 0.1, and 0.9 for PSO algorithm. The similar population size of 6 and maximum number of iterations of 30 are considered in both algorithms. The parameters of the AEFA and PSO Algorithms are selected based on the reference paper and the trial and error method to achieve the best results for each algorithm. Also, the population size and iteration are considered equal based on the trial and error method to achieve the best results for each algorithm.

4 RESULTS AND FINDINGS

The results for tracking the MPP in PV system in different conditions such as STC, PSC, and radiation changes (**Section 3**) obtained using the combined HC-AEFA method with the buck converter are presented. The capability of the HC-AEFA is evaluated using various models. The converter parameters are as follows: $f_s = 50$ kHz, $C = 470$ μ F, $L = 6.8$ mH, and $R = 80$ Ω (Shannan et al., 2013).

4.1 Results for the First Pattern (Standard Conditions)

This section investigates the HC-AEFA-based MPCT problem for MPPT solution considering the standard conditions with uniform radiation (1000 W/m² and 25° C). To validate the HC-

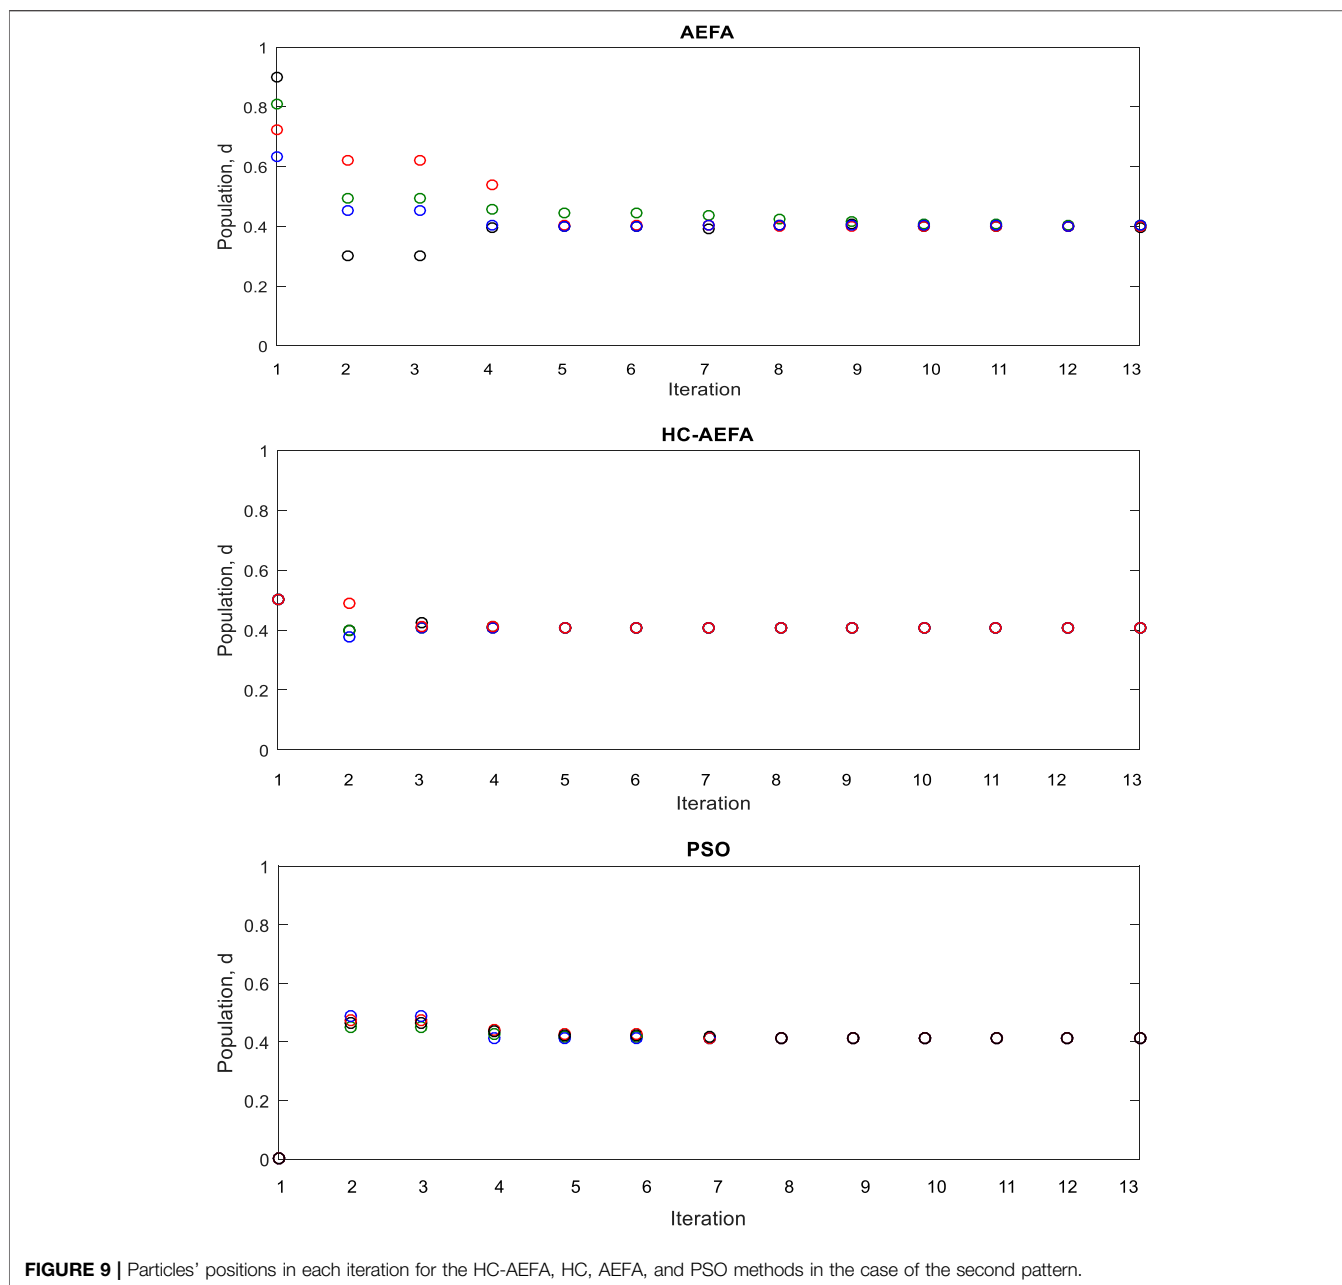


FIGURE 9 | Particles' positions in each iteration for the HC-AEFA, HC, AEFA, and PSO methods in the case of the second pattern.

TABLE 3 | Results for the different MPPT methods in second pattern.

Method	Global power (w)	Power (w)	Convergence iteration	Convergence time (s)	Tracking efficiency (%)
HC-AEFA	182.54	182.45	5	1.24	99.95
HC	182.54	166.04	—	—	88.95
AEFA	182.54	182.16	11	4.62	99.79
PSO	182.54	182.28	8	2.69	99.85

AEFA method, this problem was also solved using the AEFA, HC, and PSO methods, and the results were compared. Figure 4 show the simulation results, e.g., the power,

voltage, current, and the converter duty-cycle curves. The results indicated that the HC-AEFA method reached the global peak value with fewer oscillations and higher

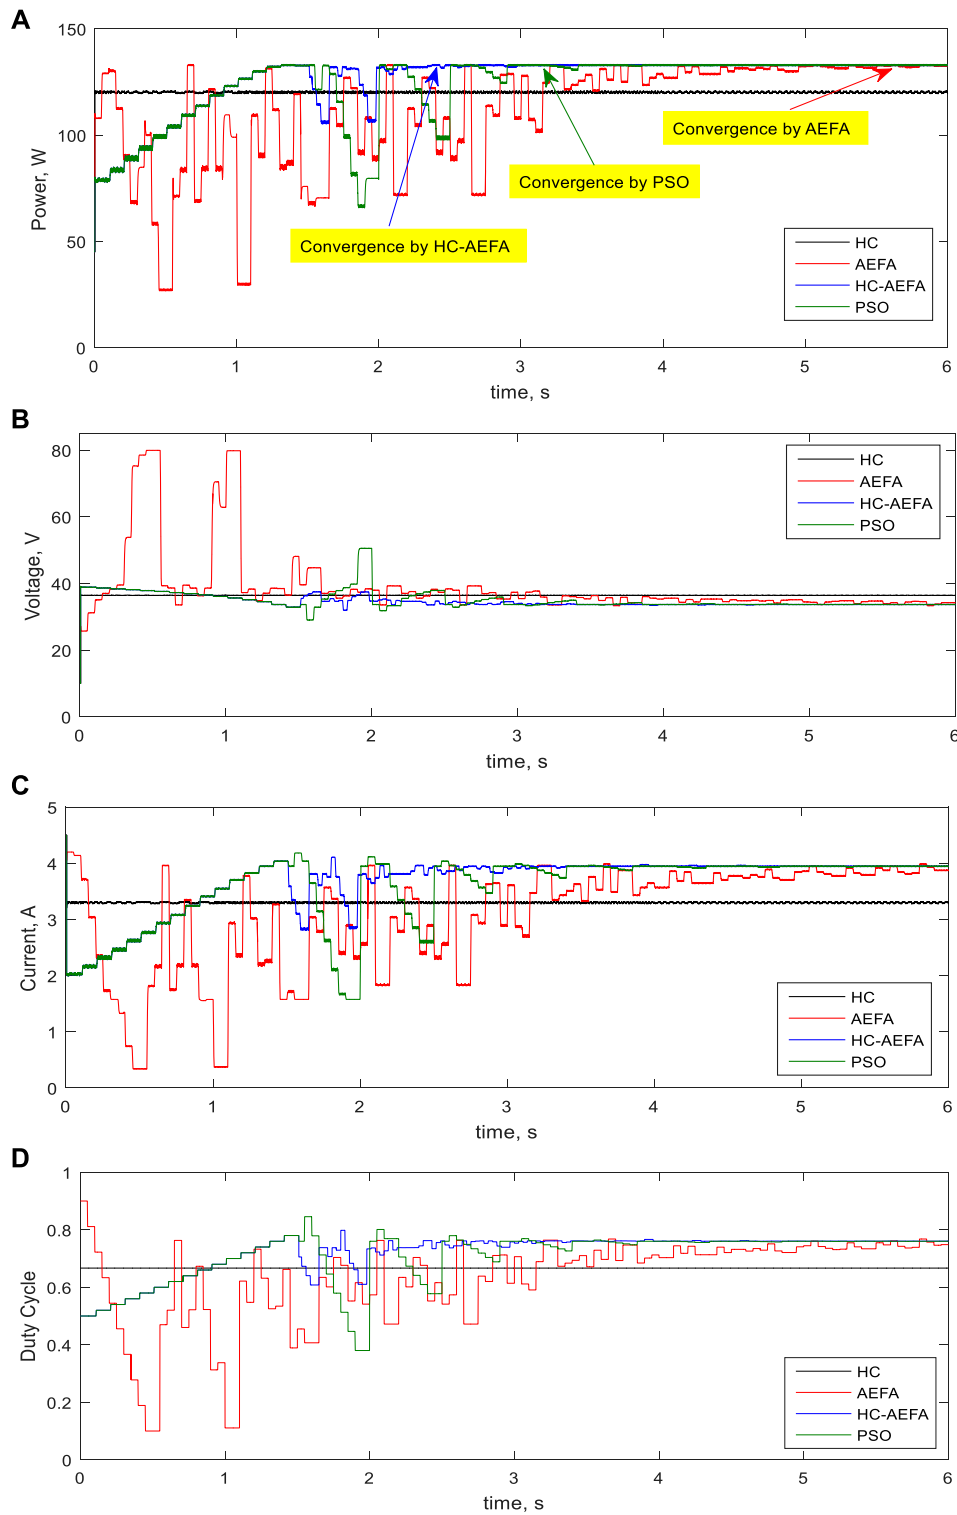


FIGURE 10 | Simulation waveforms at the third pattern obtained using the HC-AEFA, HC, AEFA, and PSO methods; **(A)** PV output power, **(B)** PV output voltage, **(C)** PV output current, and **(D)** converter duty-cycle curves.

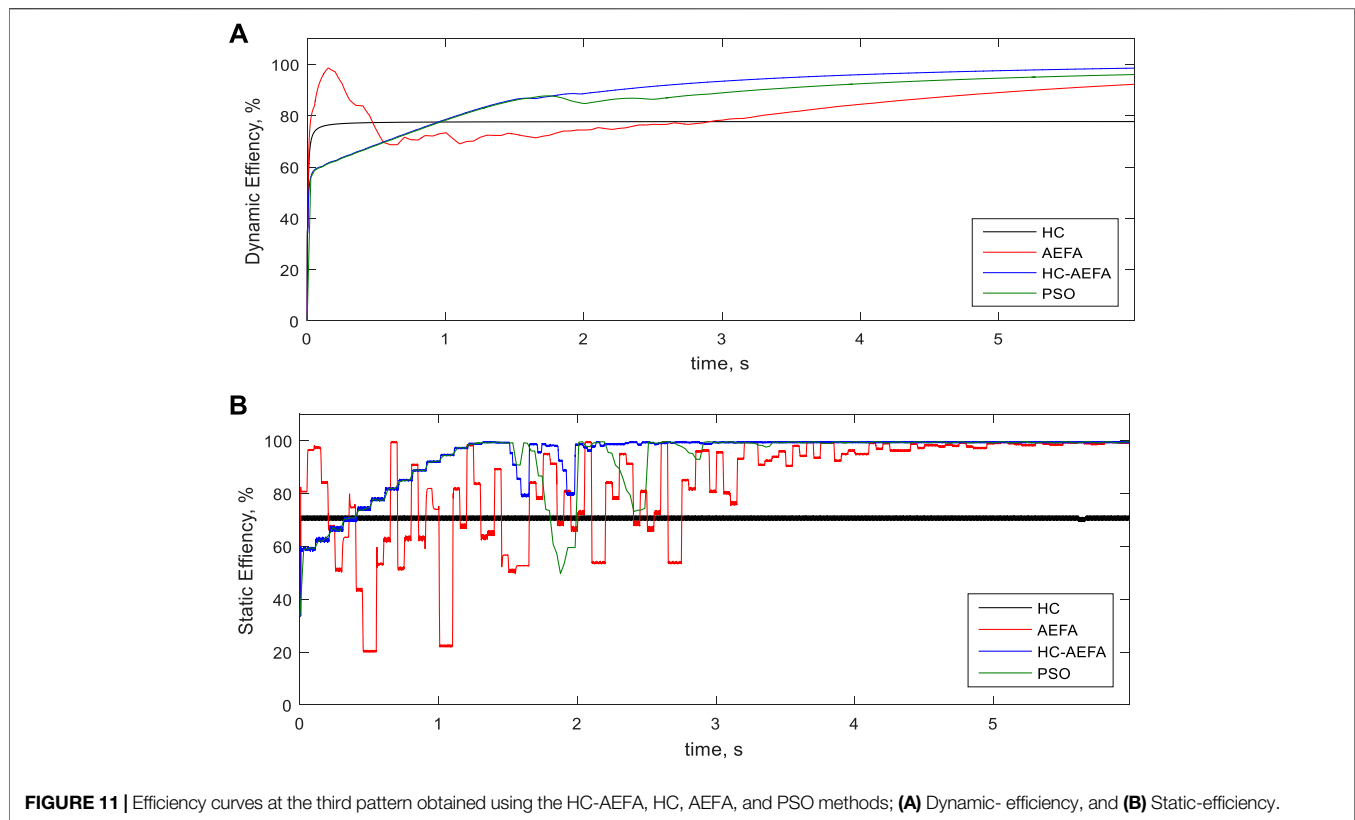


FIGURE 11 | Efficiency curves at the third pattern obtained using the HC-AEFA, HC, AEFA, and PSO methods; **(A)** Dynamic- efficiency, and **(B)** Static-efficiency.

velocities than the HC, AEFA, and PSO methods. Furthermore, while the HC method was unable to track the GMPP, the AEFA and PSO methods reached the global peak along with the proposed method. Therefore, the proposed method performed better than the HC method in the MPPT.

Figure 5 presents the static and dynamic-efficiency curves of the MPPT for the first pattern obtained using the HC-AEFA, HC, AEFA, and PSO methods, respectively. As shown, the proposed method had higher efficiency than the other methods. The results proved the more static- and dynamic efficiency of the proposed HC-AEFA than the HC, AEFA, and PSO methods. So, the improvement of the HC performance based on the AEFA in problem-solving is confirmed.

Figure 6 shows the population optimization process in different ways. The proposed method converged to the optimal global value in iteration 5. The AEFA and PSO methods converged to the optimal values in iterations 9 and 8, respectively. The results showed the better performance of the HC-AEFA in achieving GMPP with a fast convergence rate in comparison with the AEFA and PSO methods. Therefore, the convergence rate of the proposed method was higher than those of the other methods.

Table 2 presents the numerical results for the performance of the different methods in the case of the first pattern (standard conditions). The HC-AEFA, AEFA, and PSO-based MPPTs obtained the maximum power, and HC cannot be able to track the GMPP. The tracking efficiencies using HC-AEFA, HC, AEFA, and PSO is obtained at 99.97, 99.82, 99.86 and

99.91%, respectively. Also, the HC-AEFA is converged to the best solution in 0.81 s, and AEFA and PSO have achieved the best solutions in 3.44 and 2.85 s, respectively. However, the results indicated that the proposed HC-AEFA method had the fewest convergence iterations and the highest convergence speed.

4.2 Results for the Second Pattern (Under PSCs)

The effectiveness of the HC-AEFA for MPPT solution with PSCs was investigated for the second pattern. In this pattern, the radiation of the modules was 1,000 and 500 W/m². The global peak value was 182.54 W. The capability of the HC-AEFA was compared with that of the HC, AEFA, and PSO methods. The results are shown in **Figure 7**. The HC method was unable to track the global peak power. Compared with the AEFA and PSO methods, The proposed HC-AEFA method had fewer oscillations and achieved stability and faster global peak power.

Figure 8 show the simulation's dynamic and static efficiencies for the second pattern obtained using the HC-AEFA, HC, AEFA, and PSO methods. The HC-AEFA method had higher dynamic and static efficiencies than the other methods, considering the shading conditions. The results proved the more static- and dynamic efficiency of the proposed HC-AEFA than the HC, AEFA, and PSO methods. So, the improvement of the HC performance based on the AEFA in problem-solving is confirmed.

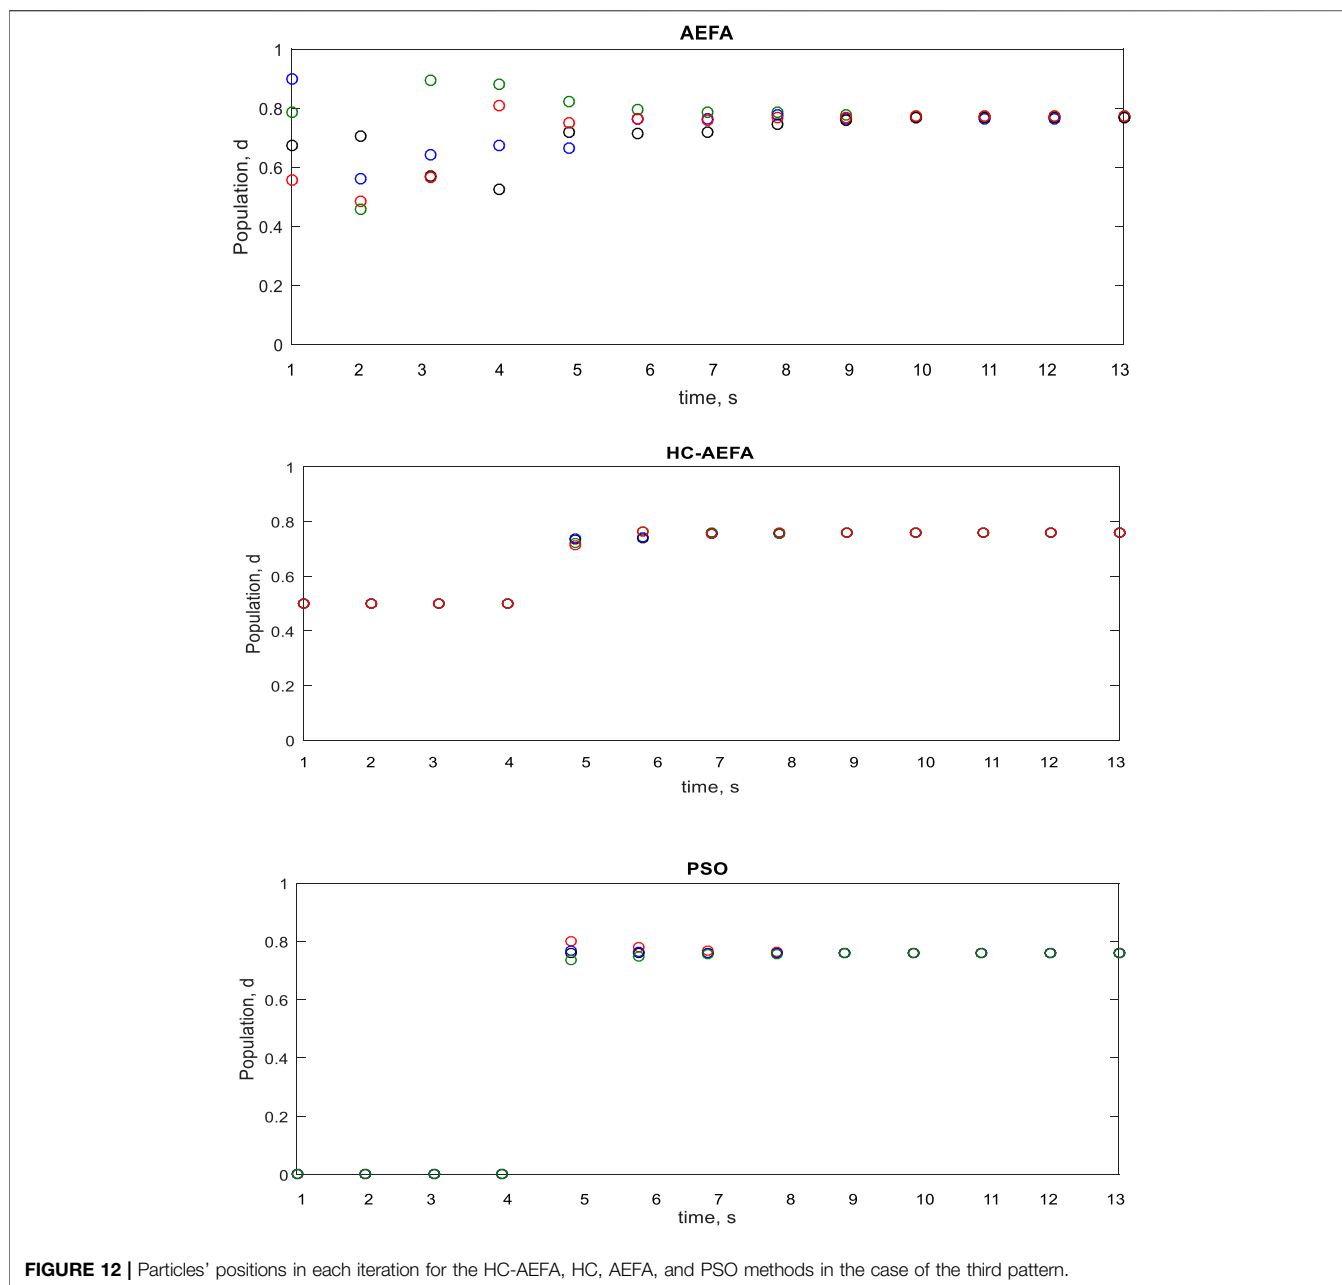


TABLE 4 | Results for the different MPPT methods in third pattern.

Method	Global power (w)	Power (w)	Convergence iteration	Convergence time (s)	Tracking efficiency (%)
HC-AEFA	133.75	133.66	8	2.13	99.93
HC	133.75	120.85	—	—	90.35
AEFA	133.75	132.22	13	5.28	98.85
PSO	133.75	133.49	9	3.48	99.80

Figure 9 shows the algorithm-based population optimization process for the various MPPT methods in the case of the second pattern. For the AEFA, PSO, and proposed

HC-AEFA methods, the population converged to the global peak value in iterations 12, 8, and 5, respectively, indicating that the HC-AEFA method had the highest tracking speed. The

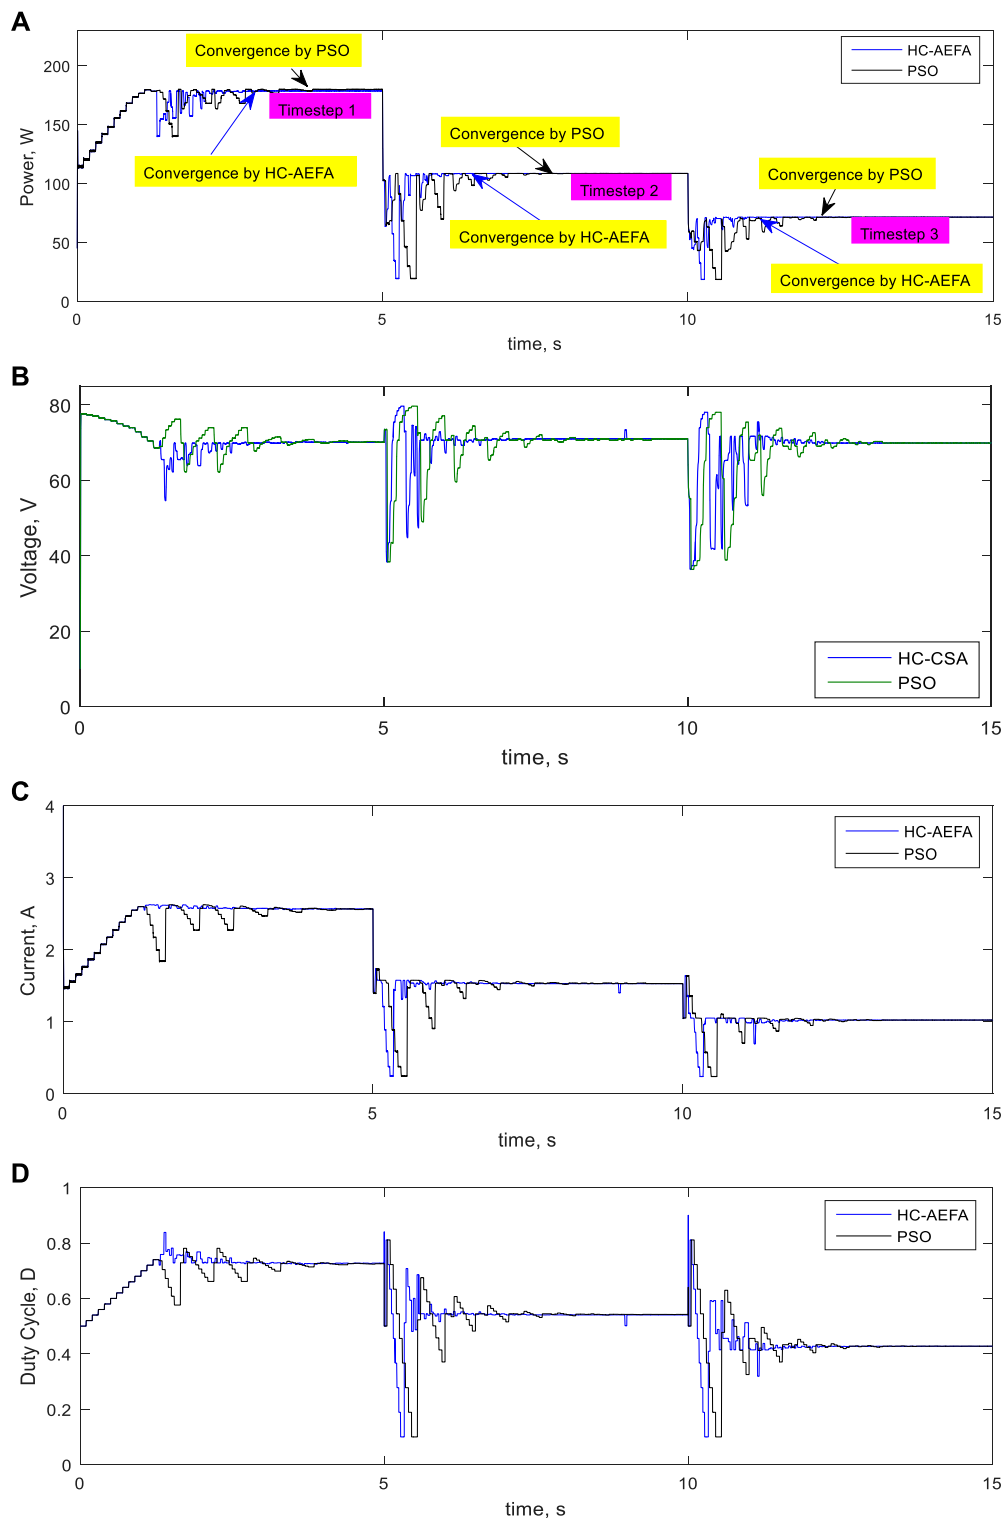


FIGURE 13 | Simulation waveforms at the fourth pattern obtained using the HC-AEFA, and PSO methods; **(A)** PV output power, **(B)** PV output voltage, **(C)** PV output current, and **(D)** converter duty-cycle curves.

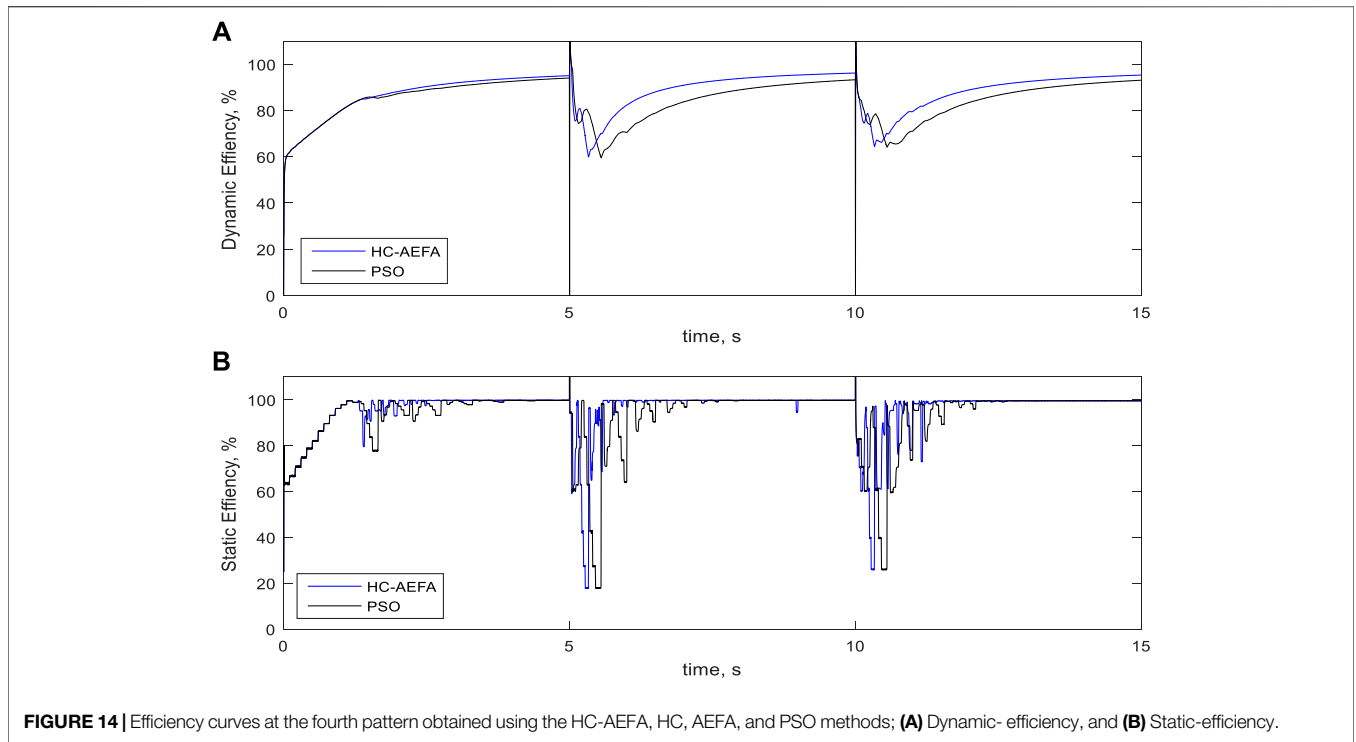


FIGURE 14 | Efficiency curves at the fourth pattern obtained using the HC-AEFA, HC, AEFA, and PSO methods; **(A)** Dynamic- efficiency, and **(B)** Static-efficiency.

TABLE 5 | Numerical results for the performance of the HC-AEFA and PSO methods in the fourth pattern.

Method	Timestep	Global power	Power	Convergence iteration	Convergence time (s)	Efficiency (%)
HC-AEFA	1	180.2	180.13	4	2.37	99.96
	2	108.2	108.16	3	1.62	99.96
	3	70.62	70.60	4	1.28	99.97
PSO	1	180.2	180.07	6	3.85	99.92
	2	108.2	108.10	5	2.06	99.90
	3	70.62	70.58	6	2.13	99.94

TABLE 6 | Comparison of tracking efficiency for HC-AEFA in MPPT solution and previous studies.

Method	Tracking efficiency (%)
Proposed HC-AEFA	99.96
CS (Hu et al., 2019)	99.94
ABC (Benyoucef et al., 2015)	99.83
IPSO (Chaieb and Sakly, 2018)	99.90
WOA (Premkumar and Sowmya, 2019)	99.70
HGWO (Premkumar and Sowmya, 2019)	99.70
GO-FLC (Bhukya and Nandiraju, 2020)	99.79

results showed the better performance of the HC-AEFA in achieving GMPP with a fast convergence rate compared to the AEFA and PSO methods.

Table 3 presents the numerical results for different methods for the second pattern. The percentage of tracking efficiency using HC-AEFA, HC, AEFA, and PSO is obtained at 99.95,

88.95, 99.79 and 99.85, respectively. Also, the HC-AEFA converges to GMPP in 1.24 s, and AEFA and PSO have achieved the global power in 4.62 and 2.69 s, respectively. The HC-AEFA-based MPPT method had a higher tracking speed than the other methods with higher tracking efficiency in the MPPT solution.

4.3 Results for Third Pattern (Under PSCs)

The capability of the HC-AEFA in MPPT solution with PSCs was investigated for the third pattern. In this pattern, the radiation of the modules was 300 and 800 W/m², and the global peak value was 133.75 W. The capability of the HC-AEFA method was compared with that of the HC, AEFA, and PSO methods. The results are presented in **Figure 10**. As shown, the HC method could not track the global peak power. The proposed HC-AEFA method had fewer oscillations than the AEFA and PSO methods and achieved stability and the global peak power faster.

TABLE 7 | Comparison of the HC-AEFA performance in MPPT solution with previous studies.

Item	CS (Rezk and Fathy, 2017)	WOA (Premkumar and Sowmya, 2019)	GWO (Premkumar and Sowmya, 2019)	FLC (Bhukya and Nandiraju, 2020)	PSO (Dileep and Singh, 2017)	Proposed HC-AEFA
Tracking speed	High	High	High	Moderate	Moderate	High
Steady-state oscillation	Zero	Zero	Zero	Moderate	Zero	Zero
Complexity	Moderate	Moderate	Moderate	Low	Moderate	Low
Convergence to a local peak	Less	Less	Less	Less	Less	Very Less
Tracking efficiency	Medium	Medium	Medium	Medium	Medium	High

Figure 11 present the results for the dynamic and static efficiencies of the simulation for the third pattern obtained using the HC-AEFA, HC, AEFA, and PSO methods. The HC-AEFA method had higher dynamic and static efficiencies than the other methods considering the PSCs. The results proved the more static- and dynamic efficiency of the proposed HC-AEFA compared with the HC, AEFA, and PSO methods. So, the improvement of the HC performance based on the AEFA in problem-solving is confirmed.

Figure 12 shows the algorithm population-based optimization process for different MPPT methods in the case of the third pattern. For the AEFA, PSO, and proposed HC-AEFA methods, the population converged to the global peak value in iterations 13, 9, and 8, respectively, indicating that the HC-AEFA method had the highest tracking speed. The results showed the better performance of the HC-AEFA in achieving GMPP with a fast convergence rate compared to the AEFA and PSO methods.

Table 4 presents the numerical results for the performance of the different methods in the case of the third pattern. The percentage of tracking efficiency using HC-AEFA, HC, AEFA, and PSO is obtained at 99.93, 88.35, 99.85 and 99.80, respectively. Also, the HC-AEFA converges to GMPP in 2.13 s, and also, AEFA and PSO have achieved the global power in 5.28 and 3.48 s, respectively. The results showed that the HC-AEFA-based MPPT obtained higher tracking speed and efficiency than the HC, AEFA, and PSO for the MPPT solution.

4.4 Results for the Fourth Pattern (Under Radiation Changes)

The performance of the HC-AEFA in the MPPT problem in the case of the fourth pattern (under radiation changes) was evaluated. The radiation of the modules was 800 and 500 W/m², 600 and 300 W/m², and 400 and 200 W/m² in the first-, second-, and third-time steps, respectively. The simulation time was 6 s. **Figure 13** present the simulation results, e.g., the power, voltage, current, and converter duty-cycle curves. As shown, the HC-AEFA method had fewer oscillations than the PSO method. It achieved the peak power faster in all three-time steps, indicating that the performance of the HC-AEFA method for solving the MPPT problem was better than that of the PSO method.

Figure 14 present the simulation's dynamic- and static-efficiency curves for the fourth pattern obtained using the HC-

AEFA and PSO methods. The HC-AEFA method had higher dynamic and static efficiencies and fewer oscillations in the radiation conditions at different timesteps compared with the other methods.

Table 5 presents the numerical results for the performance of the different methods for the fourth pattern at different timesteps. The percentage of tracking efficiency using HC-AEFA and PSO for timestep one is obtained at 99.96 and 99.92. For timestep two is achieved at 99.96 and 99.90, and for timestep three, this value is computed at 99.97 and 99.94, respectively. Among the methods, the HC-AEFA-based method had the highest tracking speed in the MPPT solution. The convergence rate (s) using HC-AEFA and PSO for time step 1 is obtained at 4 and 6 s, for time step 2 is achieved at 3 and 5 s, and for time step 3, this value is computed at 4 and 6 s, respectively. Among the methods, the HC-AEFA-based method had the highest convergence rate in the MPPT solution.

4.5 Results Comparison

In this paper, the proposed HC-AEFA method is applied to solve the MPPT problem of the photovoltaic system in STC and PSCs. The results indicated the proposed method's effectiveness compared to HC, AEFA and PSO methods with higher tracking efficiency and tracking speed. The performance of the HC-AEFA given tracking efficiency is compared with previous studies in MPPT solution of photovoltaic systems in **Tables 6** and **7**. As in **Table 6**, the tracking efficiency of the HC-AEFA is obtained higher than in the previous studies. Also, the capability of the proposed method is compared given tracking speed, steady-state oscillation, complexity, convergence to local peak and tracking efficiency with previous studies in **Table 7**. As shown in **Table 6**, the proposed HC-AEFA is a reliable and perfect method to solve the MPPT solution of the photovoltaic system.

5 CONCLUSION

This paper developed a combined HC-AEFA algorithm for PV MPPT solution under different conditions as standard patterns, PSCs, and radiation changes integrated with a buck converter. The effectiveness of the HC-AEFA in MPPT solution was evaluated compared to the HC, AEFA, and well-known PSO methods for different patterns.

Additionally, for different patterns, the HC, AEFA, HC-AEF, and PSO methods were applied to solve the MPPT problem. The simulation results, e.g., the power, voltage, current, and converter duty-cycle curves, for each method were evaluated. Implementing the MPPT methods for different patterns in the standard and shading conditions indicated that the HC-AEFA method reached the global peak value with fewer oscillations and a higher speed than the HC, AEFA, and PSO methods. The HC method could not track the global power peak, whereas the other techniques achieved the global power peak. Therefore, the HC-AEFA method outperformed the HC method in the MPPT. The optimization process results indicated that among the methods tested, the proposed HC-AEFA had the fewest convergence iterations and the highest convergence speed in the MPPT solution. The simulation results of the MPPT problem for the radiation-change pattern confirmed the superiority of the proposed method (fewer tracking fluctuations and higher convergence speed). Furthermore, the HC-AEFA method outperformed the PSO method in the MPPT solution for the fourth pattern at different timesteps of the radiation changes. The tracking efficiency for the first pattern using the HC-AEFA, HC, AEFA and PSO was obtained at 99.97, 90.82, 98.86 and 99.91%. For the second pattern, these values were achieved at 99.95, 88.95, 99.79 and 99.85%, and for the third pattern, these values were committed at 99.93, 90.35, 98.85 and 99.80%, respectively. The percentage of tracking efficiency for the fourth pattern, using HC-AEFA and PSO for time step 1, was obtained at 99.96 and 99.92, for time step 2 was achieved at 99.96 and 99.90 and for time step 3, this value was computed at 99.97 and 99.94, respectively. The results showed that the HS was not able to achieve global power. Also, the results make clear that improving the HC method based on The AEFA has significantly increased the efficiency of tracking and gaining optimal global power. The results comparison showed the tracking efficiency of the HC-AEFA was obtained higher than in the previous studies, and it is a reliable and perfect method to solve the MPPT solution of the photovoltaic system. The limitations of the research are the fluctuations of the radiations and the PSCs that prevent the

achievement of the global peak of the PV power. However, these limitations have been covered using the HC-AEFA. For future work, the MPPT problem solving based on complex series-parallel models of PV configuration in PSCs conditions will be suggested using the combined AEFA-PSO method.

DATA AVAILABILITY STATEMENT

The original contributions presented in the study are included in the article/Supplementary Material, further inquiries can be directed to the corresponding author.

AUTHOR CONTRIBUTIONS

Conceptualization and methodology, MA, and AA; software, ZM, and MC; validation, MA, and ZM; formal analysis and investigation, MA; writing—original draft preparation, MA, AA, and MC; writing—review and editing, MC, AM, and ZM; visualization, AM; supervision, AM. All authors have read and agreed to the published version of the manuscript.

FUNDING

The authors extend their appreciation to the Deputyship for Research and Innovation, Ministry of Education in Saudi Arabia, for funding this research work through project number "IF_2020_NBU_435".

ACKNOWLEDGMENTS

The authors are grateful to Prince Faisal bin Khalid bin Sultan Research Chair in Renewable Energy Studies and Applications (PFCRE) at Northern Border University, for their support and assistance.

REFERENCES

- Ahmed, S., Mekhilef, S., Mubin, M. B., and Tey, K. S. (2022). Performances of the Adaptive Conventional Maximum Power Point Tracking Algorithms for Solar Photovoltaic System. *Sustain. Energy Technol. Assessments* 53, 102390. doi:10.1016/j.seta.2022.102390
- Alajmi, B. N., Ahmed, K. H., Finney, S. J., and Williams, B. W. (2010). Fuzzy-Logic-Control Approach of a Modified Hill-Climbing Method for Maximum Power Point in Microgrid Standalone Photovoltaic System. *IEEE Trans. power Electron.* 26, 1022–1030. doi:10.1109/TPEL.2010.2090903
- Al-Smadi, M. K., Mahmoud, Y., and Xiao, W. (2021). A Fast and Accurate Approach for Power Losses Quantification of Photovoltaic Power Systems under Partial-shading Conditions. *IET Renew. Power Gener.* 15, 939–951.
- Anita, A., and Yadav, A. (2019). AEFA: Artificial Electric Field Algorithm for Global Optimization. *Swarm Evol. Comput.* 48, 93–108. doi:10.1016/j.swevo.2019.03.013
- Arabi Nowdeh, S., Moghaddam, M. J. H., Nasri, S., Abdelaziz, A. Y., Ghanbari, M., and Faraji, I. (2020). "A New Hybrid Moth Flame Optimizer-Perturb and Observe Method for Maximum Power Point Tracking in Photovoltaic Energy System," in *Modern Maximum Power Point Tracking Techniques for Photovoltaic Energy Systems* (Cham: Springer), 401–420. doi:10.1007/978-3-030-05578-3_15
- Benyoucef, A. S., Chouder, A., Kara, K., Silvestre, S., and sahed, O. A. (2015). Artificial Bee Colony Based Algorithm for Maximum Power Point Tracking (MPPT) for PV Systems Operating under Partial Shaded Conditions. *Appl. Soft Comput.* 32, 38–48. doi:10.1016/j.asoc.2015.03.047
- Bhukya, L., and Nandiraju, S. (2020). A Novel Photovoltaic Maximum Power Point Tracking Technique Based on Grasshopper Optimized Fuzzy Logic Approach. *Int. J. Hydrogen Energy* 45, 9416–9427. doi:10.1016/j.ijhydene.2020.01.219
- Chaieb, H., and Sakly, A. (2018). A Novel MPPT Method for Photovoltaic Application under Partial Shaded Conditions. *Sol. Energy* 159, 291–299. doi:10.1016/j.solener.2017.11.001
- Charin, C., Ishak, D., Mohd Zainuri, M. A. A., Ismail, B., and Mohd Jamil, M. K. (2021). A Hybrid of Bio-Inspired Algorithm Based on Levy Flight and

- Particle Swarm Optimizations for Photovoltaic System under Partial Shading Conditions. *Sol. Energy* 217, 1–14. doi:10.1016/j.solener.2021.01.049
- Davoodkhani, F., Arabi Nowdeh, S., Abdelaziz, A. Y., Mansoori, S., Nasri, S., and Alijani, M. (2020). “A New Hybrid Method Based on Gray Wolf Optimizer-Crow Search Algorithm for Maximum Power Point Tracking of Photovoltaic Energy System,” in *Modern Maximum Power Point Tracking Techniques for Photovoltaic Energy Systems* (Cham: Springer), 421–438. doi:10.1007/978-3-030-05578-3_16
- Dileep, G., and Singh, S. N. (2017). An Improved Particle Swarm Optimization Based Maximum Power Point Tracking Algorithm for PV System Operating under Partial Shading Conditions. *Sol. Energy* 158, 1006–1015. doi:10.1016/j.solener.2017.10.027
- Fan, L., and Ma, X. (2022). Maximum Power Point Tracking of PEMFC Based on Hybrid Artificial Bee Colony Algorithm with Fuzzy Control. *Sci. Rep.* 12 (1), 4316. doi:10.1038/s41598-022-08327-5
- Fares, D., Fathi, M., Shams, I., and Mekhilef, S. (2021). A Novel Global MPPT Technique Based on Squirrel Search Algorithm for PV Module under Partial Shading Conditions. *Energy Convers. Manag.* 230, 113773. doi:10.1016/j.enconman.2020.113773
- Fathy, A., and Rezk, H. (2016). A Novel Methodology for Simulating Maximum Power Point Trackers Using Mine Blast Optimization and Teaching Learning Based Optimization Algorithms for Partially Shaded Photovoltaic System. *J. Renew. Sustain. Energy* 8, 23503. doi:10.1063/1.4944971
- Hu, K., Cao, S., Li, W., and Zhu, F. (2019). An Improved Particle Swarm Optimization Algorithm Suitable for Photovoltaic Power Tracking under Partial Shading Conditions. *IEEE Access* 7, 143217–143232. doi:10.1109/access.2019.2944964
- Jiang, L. L., Maskell, D. L., and Patra, J. C. (2013). A Novel Ant Colony Optimization-Based Maximum Power Point Tracking for Photovoltaic Systems under Partially Shaded Conditions. *Energy Build.* 58, 227–236. doi:10.1016/j.enbuild.2012.12.001
- Kaced, K., Larbes, C., Ramzan, N., Bounabi, M., and Dahmane, Z. e. (2017). Bat Algorithm Based Maximum Power Point Tracking for Photovoltaic System under Partial Shading Conditions. *Sol. Energy* 158, 490–503. doi:10.1016/j.solener.2017.09.063
- Kavya, M., and Jayalalitha, S. (2021). Developments in Perturb and Observe Algorithm for Maximum Power Point Tracking in Photo Voltaic Panel: A Review. *Arch. Comput. Methods Eng.* 28, 2447–2457. doi:10.1007/s11831-020-09461-x
- Kulaksız, A. A., and Akkaya, R. (2012). A Genetic Algorithm Optimized ANN-Based MPPT Algorithm for a Stand-Alone PV System with Induction Motor Drive. *Sol. Energy* 86, 2366–2375. doi:10.1016/j.solener.2012.05.006
- Kumar, N., Hussain, I., Singh, B., and Panigrahi, B. K. (2017). Maximum Power Peak Detection of Partially Shaded PV Panel by Using Intelligent Monkey King Evolution Algorithm. *IEEE Trans. Ind. Appl.* 53 (6), 5734–5743. doi:10.1109/tia.2017.2725954
- Kumar, N., Hussain, I., Singh, B., and Panigrahi, B. K. (2017). MPPT in Dynamic Condition of Partially Shaded PV System by Using WODE Technique. *IEEE Trans. Sustain. Energy* 8 (3), 1204–1214. doi:10.1109/tste.2017.2669525
- Kumar, N., Hussain, I., Singh, B., and Panigrahi, B. K. (2018). Normal Harmonic Search Algorithm-Based MPPT for Solar PV System and Integrated with Grid Using Reduced Sensor Approach and PNKLSM Algorithm. *IEEE Trans. Ind. Appl.* 54 (6), 6343–6352. doi:10.1109/tia.2018.2853744
- Kumar, N., Hussain, I., Singh, B., and Panigrahi, B. K. (2017). Single Sensor-Based MPPT of Partially Shaded PV System for Battery Charging by Using Cauchy and Gaussian Sine Cosine Optimization. *IEEE Trans. Energy Convers.* 32 (3), 983–992. doi:10.1109/tec.2017.2669518
- Kumar, N., Singh, B., and Panigrahi, B. K. (2019). Grid Synchronisation Framework for Partially Shaded Solar PV-based Microgrid Using Intelligent Control Strategy. *IET Gener. Transm. & Distrib.* 13 (6), 829–837. doi:10.1049/iet-gtd.2018.6079
- Li, L.-L., Lin, G.-Q., Tseng, M.-L., Tan, K., and Lim, M. K. (2018). A Maximum Power Point Tracking Method for PV System with Improved Gravitational Search Algorithm. *Appl. Soft Comput.* 65, 333–348. doi:10.1016/j.asoc.2018.01.030
- Lousuwankun, P., and Jantharamin, N. (2022). Step-Size Adaptation Based on Power and Current Variation for Photovoltaic Maximum-Power-Point Tracking. *GMSARN Int. J.* 16 (4), 435–441.
- Messai, A., Mellit, A., Guessoum, A., and Kalogirou, S. A. (2011). Maximum Power Point Tracking Using a GA Optimized Fuzzy Logic Controller and its FPGA Implementation. *Sol. Energy* 85, 265–277. doi:10.1016/j.solener.2010.12.004
- Miyatake, M., Veerachary, M., Toriumi, F., Fujii, N., and Ko, H. (2011). Maximum Power Point Tracking of Multiple Photovoltaic Arrays: A PSO Approach. *IEEE Trans. Aerosp. Electron. Syst.* 47, 367–380. doi:10.1109/taes.2011.5705681
- Mohanty, S., Subudhi, B., and Ray, P. K. (2015). A New MPPT Design Using Grey Wolf Optimization Technique for Photovoltaic System under Partial Shading Conditions. *IEEE Trans. Sustain. Energy* 7, 181–188. doi:10.1109/TSTE.2015.2482120
- Nasri, S., Nowdeh, S. A., Davoudkhani, I. F., Moghaddam, M. J., Kalam, A., Shahrokhi, S., et al. (2021). “Maximum Power Point Tracking of Photovoltaic Renewable Energy System Using a New Method Based on Turbulent Flow of Water-Based Optimization (TFWO) under Partial Shading Conditions,” in *Fundamentals and Innovations in Solar Energy* (Singapore: Springer), 285–310.
- Nowdeh, S. A., Moghaddam, M. J. H., Babanezhad, M., Davoodkhani, I. F., Kalam, A., Ahmadi, A., et al. (2019). “A Novel Maximum Power Point Tracking Method for Photovoltaic Application Using Secant Incremental Gradient Based on Newton Raphson,” in *Solar Photovoltaic Power Plants* (Singapore: Springer), 71–96. doi:10.1007/978-981-13-6151-7_4
- Nowdeh, S. A., Moghaddam, M. J. H., Babanezhad, M., Davoodkhani, I. F., Kalam, A., Ahmadi, A., et al. (2019). A Novel Maximum Power Point Tracking Method for Photovoltaic Application Using Secant Incremental Gradient Based on Newton Raphson. *Sol. Photovolt. Power Plants Adv. Control Optim. Tech.* 7, 71–96. doi:10.1007/978-981-13-6151-7_4
- Premkumar, M., and Sowmya, R. (2019). An Effective Maximum Power Point Tracker for Partially Shaded Solar Photovoltaic Systems. *Energy Rep.* 5, 1445–1462. doi:10.1016/j.egy.2019.10.006
- Rajesh, P., Muthubalaji, S., Srinivasan, S., and Shajin, F. H. (2022). Leveraging a Dynamic Differential Annealed Optimization and Recalling Enhanced Recurrent Neural Network for Maximum Power Point Tracking in Wind Energy Conversion System. *Technol. Econ. Smart Grids Sustain. Energy* 7 (1), 19. doi:10.1007/s40866-022-00144-z
- Raman, G., Raman, G., Manickam, C., and Ganesan, S. I. (2016). “Dragonfly Algorithm Based Global Maximum Power Point Tracker for Photovoltaic Systems,” in *Proceedings of the International Conference on Swarm Intelligence* (Cham: Springer), 211–219. doi:10.1007/978-3-319-41000-5_21
- Rezk, H., Fathy, A., and Abdelaziz, A. Y. (2017). A Comparison of Different Global MPPT Techniques Based on Meta-Heuristic Algorithms for Photovoltaic System Subjected to Partial Shading Conditions. *Renew. Sustain. Energy Rev.* 74, 377–386. doi:10.1016/j.rser.2017.02.051
- Rezk, H., and Fathy, A. (2017). Simulation of Global MPPT Based on Teaching-Learning-Based Optimization Technique for Partially Shaded PV System. *Electr. Eng.* 99, 847–859. doi:10.1007/s00202-016-0449-3
- Roy Chowdhury, S., and Saha, H. (2010). Maximum Power Point Tracking of Partially Shaded Solar Photovoltaic Arrays. *Sol. Energy Mater. Sol. Cells* 94, 1441–1447. doi:10.1016/j.solmat.2010.04.011
- Shannan, N. M. A. A., Yahaya, N. Z., and Singh, B. (2013). “Single-Diode Model and Two-Diode Model of PV Modules: A Comparison,” in 2013 IEEE International Conference on Control System, Computing and Engineering, Penang, Malaysia, 29 November 2013 - 01 December 2013, 210–214. doi:10.1109/iccsc.2013.6719960
- Sukanya Satapathy, S., and Kumar, N. (2020). Framework of Maximum Power Point Tracking for Solar PV Panel Using WSPS Technique. *IET Renew. Power Gener.* 14, 1668–1676. doi:10.1049/iet-rpg.2019.1132
- Sundareswaran, K., Sankar, P., Nayak, P. S. R., Simon, S. P., and Palani, S. (2014). Enhanced Energy Output from a PV System under Partial Shaded Conditions through Artificial Bee Colony. *IEEE Trans. Sustain. Energy* 6, 198–209. doi:10.1109/TSTE.2014.2363521

- Teshome, D. F., Lee, C. H., Lin, Y. W., and Lian, K. L. (2016). A Modified Firefly Algorithm for Photovoltaic Maximum Power Point Tracking Control under Partial Shading. *IEEE J. Emerg. Sel. Top. Power Electron.* 5, 661–671. doi:10.1109/JESTPE.2016.2581858
- Wasim, M. S., Amjad, M., Habib, S., Abbasi, M. A., Bhatti, A. R., and Muyeen, S. M. (2022). A Critical Review and Performance Comparisons of Swarm-Based Optimization Algorithms in Maximum Power Point Tracking of Photovoltaic Systems under Partial Shading Conditions. *Energy Rep.* 8, 4871–4898. doi:10.1016/j.egy.2022.03.175

Conflict of Interest: The authors declare that the research was conducted in the absence of any commercial or financial relationships that could be construed as a potential conflict of interest.

Publisher's Note: All claims expressed in this article are solely those of the authors and do not necessarily represent those of their affiliated organizations, or those of the publisher, the editors and the reviewers. Any product that may be evaluated in this article, or claim that may be made by its manufacturer, is not guaranteed or endorsed by the publisher.

Copyright © 2022 Alanazi, Alanazi, Memon, Csaba and Mosavi. This is an open-access article distributed under the terms of the Creative Commons Attribution License (CC BY). The use, distribution or reproduction in other forums is permitted, provided the original author(s) and the copyright owner(s) are credited and that the original publication in this journal is cited, in accordance with accepted academic practice. No use, distribution or reproduction is permitted which does not comply with these terms.