

Research article

Removal of Emergent Pollutants by a Vertical Flow Constructed Wetland with *Vetiveria Zizanioides*: A Case Study for Caffeine

Adelaide Almeida^{1,3}, Júlio Oliveira¹, Flávia Matias¹, Carlos Ribeiro¹, Daniele Silveira², and Jorge Tavares^{1,3*}

¹Department of Technologies and Applied Sciences, School of Agriculture (ESA), Polytechnic Institute of Beja (IPBeja), Beja, Portugal

²Department of Sanitary and Environmental Engineering (ENS), Federal University of Santa Catarina (UFSC), Florianópolis, Brazil

³Fiber Materials and Environmental Technologies (FibEnTech-UBI), University of Beira Interior, R. Marquês de D'Ávila e Bolama, 6201-001 Covilhã, Portugal.

Abstract.

This work evaluated caffeine removal in a vertical flow constructed wetland (VFCW), planted with *Vetiveria zizanioides*. The feeding was continuous (synthetic influent: mineral medium and caffeine) to reduce the concentration variations in the bed. Two influent concentrations ($0.75 \pm 1.0 \text{ mg}\cdot\text{L}^{-1}$ and $1.5 \pm 1.0 \text{ mg}\cdot\text{L}^{-1}$) were used with a constant hydraulic load ($100 \pm 10 \text{ L}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$). Plant growth was monitored weekly, and characterization was carried out to determine the levels of chlorophyll *a* and *b*, pigments and carotenoids, and nutrients (nitrogen, phosphorus, magnesium, calcium, sodium and potassium). HPLC-MS was used to determine the caffeine concentration. The caffeine removal efficiency reached averages of $93 \pm 1\%$ and $87 \pm 1\%$ (retention time: 6.23 ± 0.23 hours). The caffeine contents in the influent did not affect chlorophyll *a*, total chlorophyll or carotenoids, and an increasing trend throughout the tests was observed. Sodium and potassium contents also showed an increase with higher caffeine concentration. This preliminary study showed that removing caffeine from wastewater using a VFCW is promising.

Keywords: wastewater, emergent pollutants, caffeine, vertical flow constructed wetlands, *Vetiveria zizanioides*

1. Introduction

Most pharmaceutical products are not completely metabolized after human ingestion resulting in the metabolites excretion and other similar compounds that reach wastewater treatment plants (WWTPs) [1]. Since these plants are not designed with the specific purpose of removing pharmaceutical compounds, their detection is often found in effluents and surface water [2]. Among the pharmaceuticals, caffeine has been widely studied in wastewater treatment systems. As an alkaloid, a psychoactive substance, legal is one of the most consumed in the world, being present in different drinks, such as coke soft drinks, coffee, tea, and energy drinks. In humans, caffeine acts on the

Corresponding Author: Jorge
Tavares; email:
jorge.tavares@ipbeja.pt

Published 10 August 2022

Publishing services provided by
Knowledge E

© Adelaide Almeida et al. This article is distributed under the terms of the [Creative Commons Attribution License](#), which permits unrestricted use and redistribution provided that the original author and source are credited.

Selection and Peer-review under the responsibility of the FibEnTech21 Conference Committee.

 **OPEN ACCESS**

central nervous system, stimulating the body's alertness and consequently preventing sleepiness. In developed countries, for example, 90% of the adults consume caffeine in a daily basis. Thus, caffeine is present both in domestic wastewater and in some industrial effluents. Due to their high solubility and low volatility, caffeine is quite persistent in water bodies [3]. These characteristics allow caffeine detection in the environment which are essential to correlate the risk it may offer to humans and ecosystems [4-7], and its presence in environmental matrices were confirm in recent studies [8]. Per example, wastewater from two WWTPs in Barbados, a city with about 300,000 inhabitants, were analyzed and it was obtained a range of caffeine concentrations from 0.10 to 6.90 $\mu\text{g L}^{-1}$ [9]; in Italy, 13 WWTPs located in northern, central, and southern (responsible for the collection and treatment of effluents from 50 to 500,000 inhabitants) were evaluated and the results showed caffeine concentrations between 17.6 and 67.6 $\mu\text{g L}^{-1}$ [10].

Constructed wetlands are considered economical compared to other types of wastewater treatment systems like ozonation, chlorination, membrane filtration or the use of activated carbon (high cost, energy demand, and maintenance and therefore only economical for large plants). The complex processes that occur in these systems are conducted through the filter material, plants, and mainly by microorganisms [4]. Treatment wetlands are nature-based technologies with a porous substrate and typically planted with macrophytes. The water passes through the system horizontally or vertically in a certain time, also known as nominal hydraulic retention time [11]. The substrate, as well as the roots of the plants, serve here as a filter and a natural growth body for the microbial community. These engineered wetlands thus mimic natural processes to ultimately improve water quality [12]. In recent years, several studies have deal with the removal of micropollutants through constructed wetlands. A wide range of wetland projects, operational conditions, and influent compositions to efficiently remove micropollutants were examined and intensified wetlands showed a great potential [2; 13-14]. Currently, the use of vertical flow has been increasing to remove both organic matter and nitrogen forms due to the aerobic conditions in this system. [15].

Among a wide range of macrophytes used in these types of projects stands out *Vetiveria Zizanioides*, with specific characteristics such as its high resistance to variations of pH (from 3.0 to 10.5) and temperature of the soil (-10 to 60°C), and to high concentrations of heavy metals (As, Cd, Pb, Hg, Ni, Se and Zn) [16]. Other features that may stand out are its asexual mode of reproduction and its long root system [17]. Studies carried out to assess the removal mechanisms of pharmaceutical compounds in VFCWs have been shown that this kind of compound, as caffeine, is partially accumulated by plants [18]. However, it is necessary to understand the main mechanisms involved in

caffeine removal and its effect of increasing concentrations on plant biomass and system performance in general. This work aimed to evaluate the caffeine removal capacity (under two different concentrations) in vertical flow constructed wetlands planted with *Vetiveria zizanioides* in expanded clay aggregates as filter material to understand the removal of this type of pollutant.

2. Material and methods

The experimental work was carried out in a well-established 8-year-old pilot-scale vertical flow constructed wetland (VFCW) ($0.24 \text{ m}^2 \times 0.70 \text{ m}$), planted with *Vetiveria zizanioides* (plant density higher than $120 \text{ plants m}^{-2}$), filled with light expanded clay aggregates (Filtralite[®] NR 10/20), with a bottom slope of 2%, applied to enable the hydraulic collection of the effluent. A layer of gravel (diameter 10–50 mm) was placed around the outlet valve to prevent clogging by fine particles. The flooding levels were maintained at 14% through a siphon in the outlet. The pilot bed was fed in continuous mode, through network sprinklers, equidistantly located over the whole VFCW using a submersible pump (Eheim- 1250, Deizisan, Germany) in feeding tank (Fig. 1). A synthetic wastewater was prepared with mineral medium composed by $28 \text{ mg}\cdot\text{dm}^{-3} \text{CaCl}_2$, $52 \text{ mg}\cdot\text{dm}^{-3} \text{MgSO}_4\cdot 7\text{H}_2\text{O}$, $17.40 \text{ mg}\cdot\text{dm}^{-3} \text{KH}_2\text{PO}_4$, $11 \text{ mg}\cdot\text{dm}^{-3} \text{K}_2\text{SO}_4$, $0.03 \text{ mg}\cdot\text{dm}^{-3} \text{CuCl}_2\cdot 2\text{H}_2\text{O}$, $0.18 \text{ mg}\cdot\text{dm}^{-3} \text{MnCl}_2\cdot 4\text{H}_2\text{O}$, $0.08 \text{ mg}\cdot\text{dm}^{-3} \text{ZnCl}_2$, $1.7 \text{ mg}\cdot\text{dm}^{-3} \text{FeSO}_4\cdot 7\text{H}_2\text{O}$ diluted in tap water [19], and caffeine to minimize variations in concentration of influent in the batch's reservoirs [Caffeine (>99%) was purchased from Sigma–Aldrich (Germany)].

The VFCW was acclimatized during one month before the beginning of trials by the application of $0.75 \text{ mg}\cdot\text{L}^{-1}$ of caffeine and hydraulic load (C_h) was kept constant at $100 \pm 10 \text{ L}\cdot\text{m}^{-2}\cdot\text{d}^{-1}$. The experiment was designed to rise caffeine concentration at two different concentrations ($0.75 \text{ mg}\cdot\text{L}^{-1}$ and $1.5 \text{ mg}\cdot\text{L}^{-1}$), ignoring any ordinary low levels occurring in wastewater [3]. Each trial occurs approximately during one month for each caffeine concentration (from April till July). Each new trial was initiated by increasing the caffeine concentration. Wastewater samples were collected at the inlet and outlet of the VFCW from Monday to Friday, at 10:00 a.m, wherefore a minimum of ten samples were taken from influent and effluent wastewater in each trial. The electrical conductivity (EC), pH, redox potential (Eh) and dissolved oxygen (DO) were immediately measured *in situ*, using a portable probe multiparameter (HI9829 HANNA). Aliquots were frozen (-20°C) to determine the caffeine. The studied caffeine concentration at the inlet ($0.75 \pm 1 \text{ mg}\cdot\text{L}^{-1}$; $1.5 \pm 1 \text{ mg}\cdot\text{L}^{-1}$) and outlet, as well as in the plant biomass after leaves extraction, was

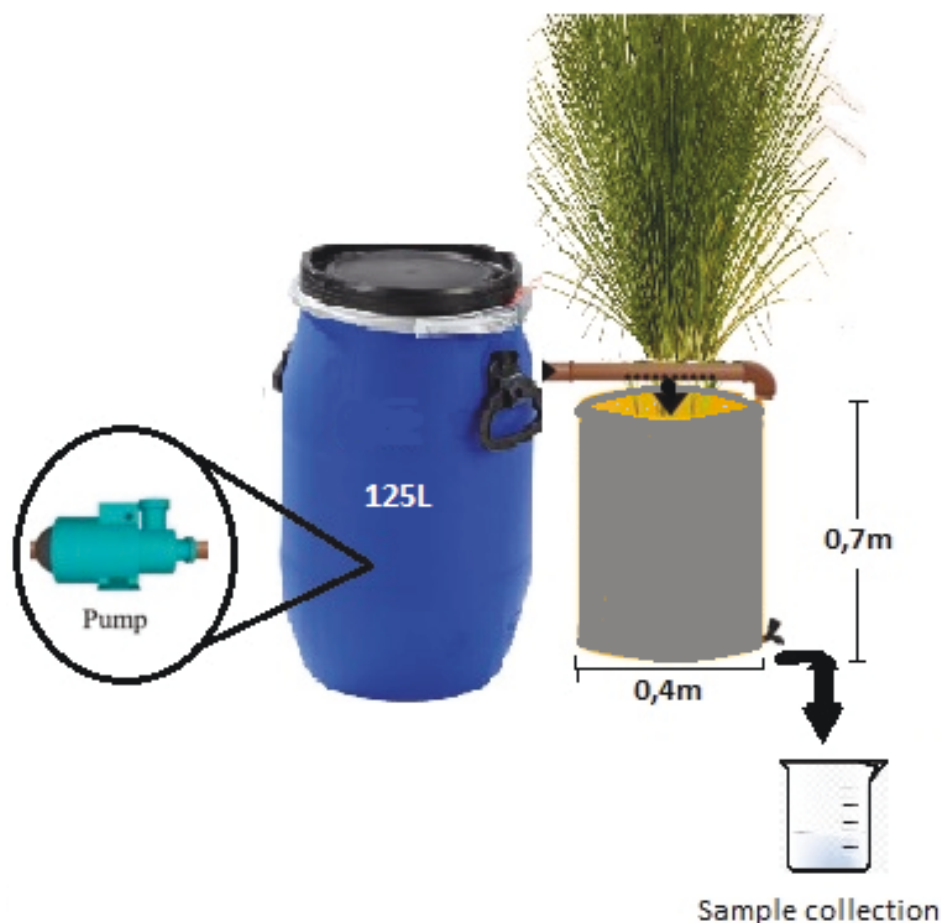


Figure 1: Schematic representation (not at scale) of the VFCW (0.24 m² × 0.70 m).

determined using a HPLC-MS *UltiMate 3000 HPLC series* da *Thermo Scientific* (Thermo Scientific, EUA) with ionization source (ESI), [3; 20]. The reverse phase analytical column used was an Accucore aQ C18 de 100 x 2,1 mm, at 25 °C. Separation was performed in isocratic mode, and the mobile phase used was using a linear composed by 30:70 acetonitrile:water, acidified with 0.1% formic acid (v:v), with a flow of 0.25 mL·min⁻¹ and the injection volume was 25 µL. Three replicate of injections were made for each sample. HPLC-grade acetonitrile, water and formic acid were obtained from Fisher Scientific (USA). All chemicals used were analytical grade.

Vetiveria zizanioides plants were visually inspected on a weekly basis for toxicity signals. The plant biomass growth (leaves) was monitored at beginning and at the end of each trial, with different caffeine concentration, being determined the levels of chlorophyll *a* and *b* (Chl *a* and Chl *b*), carotenoids, the concentrations of nutrients (nitrogen, phosphorus, magnesium, calcium, sodium, and potassium) [21-22].

Results were statistically verified using software “Statistica 12.0” (StatSoft, Inc., USA). Differences in wastewater quality between influent and effluent of the VFCW were

determined using ANOVA at the significance level of $p < 0.05$. Tukey's test was used to determine differences between means of specific variables. The means and the standard deviation (S.D.) were calculated with $n \geq 10$.

3. Results and discussion

The biomass growth was not negatively influenced by the presence of caffeine in the influent. There was an increment in the growth of biomass during the second trial (caffeine concentration: $1.5 \pm 1 \text{ mg} \cdot \text{L}^{-1}$).

The level of Chl *a*, and carotenoids showed an increased tendency due to the feeding of plants with caffeine (Fig. 2a). However, the Chl *b* level showed a very strong tendency to decrease during the trials.

Sodium (Na) and potassium (K) levels showed an increasing trend due to increased caffeine level in the influent of the VFCWs (Fig. 2b).

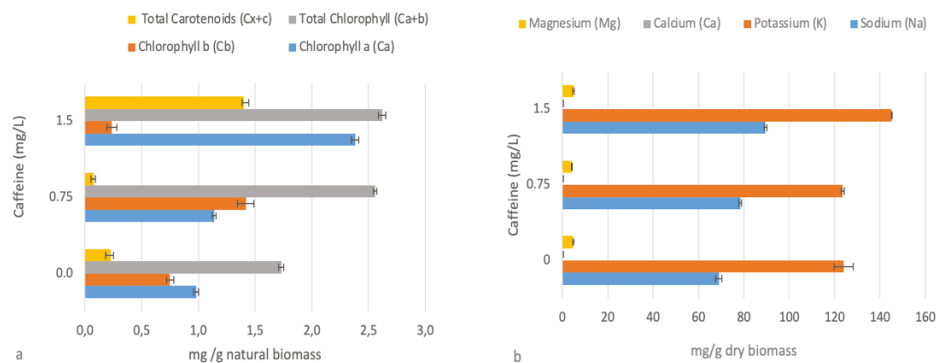


Figure 2: (a) Chlorophyll level [a, b and total], and (b) biomass composition [Mg, Ca, K, and Na] determined at beginning and at the end of each trial.

The results obtained for potential redox, dissolved oxygen and pH are presented at Figure 3.

The potential redox measured in the inlet and outlet of the VFCWs was always positive. There was not significant difference when compared the average values obtained for the influent and effluent ($p > 0.05$) (Fig.3a). The dissolved oxygen of the effluent increased in both trials (Fig.3b), possibly due to the capacity of the plants or the type of flow that allowed the replacement of oxygen consumed by the microbial presented in the beds. The outlet pH decreased, without statistical significance at both trials ($p > 0.05$), when compared with inlet synthetic wastewater (Fig.3c). Additionally, it was not observed significative difference at electrical conductivity between the influent and effluent at the beds monitored ($p > 0.05$). It this sense, it was deduced that TSS

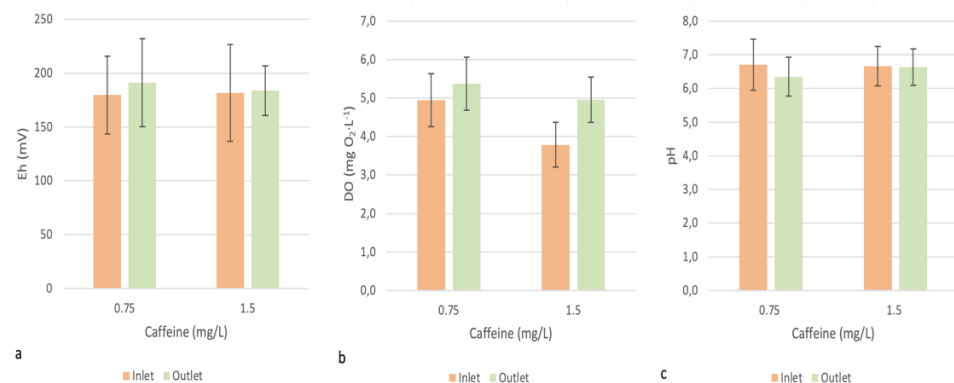


Figure 3: Evolution of potential redox - Eh (a), Dissolved oxygen (b), and pH (c) during experiment.

concentration remained constant over the trials and did not occur precipitation of salts during the experiment.

Regarding efficiency and effective monitoring of beds (HRT=6.23±0.23 hours), it was obtained, considering the different and increasing concentrations of caffeine (0.75±1 mg·L⁻¹; 1.5±1 mg·L⁻¹), an average removal of 93±1% and 87±1%, respectively (Fig. 4).

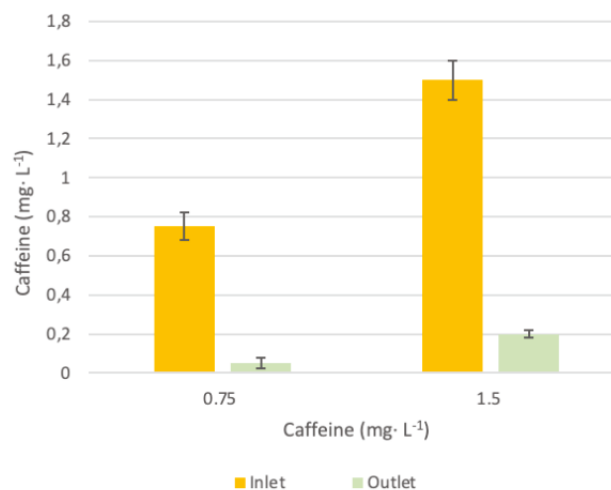


Figure 4: Caffeine concentration at VFCW (inlet and outlet), in each trial.

As mentioned before, although our HRT was 6.23±0.23 hours, the results obtained in our study were like others presented at literature [24]. Performing lab trials with a VFWC with an HRT of 7 days, it was achieved removal efficiencies of 97%. Other authors [3] using a retention time of 21 days obtained a removal efficiency in hydroponic conditions until 99 % [3].

The caffeine content in the leaves of *Vetiveria zizanioides* suggested that the plant assimilated during the experiment about 10 µg·g⁻¹ of natural biomass. Therefore, it was also observed that with the increase in the caffeine concentration, the pollutant

mass load input increased, leading to a reduction in the plant's capacity to remove the emergent pollutant in the system evaluated.

4. Conclusions

The results obtained showed a removal efficiency up to 93% of caffeine using vertical flow constructed wetlands with *Vetiveria zizanioides*, suggesting an assimilation of 10 µg-g⁻¹ by plants. However, given the high caffeine removed content, this was not the main removal mechanism, pointing to the possible formation of metabolites and their assimilation by plants. In this sense, it will be important to consider for future research, the internal sampling and analysis of the microbiota involved in the removal mechanism. This preliminary study showed that removing caffeine from wastewater using VFCW is promising.

5. Acknowledgments

The authors are very grateful for the support given by research unit Fiber Materials and Environmental Technologies (FibEnTech-UBI), on the extent of the project reference UIDB/00195/2020, funded by the Fundação para a Ciência e a Tecnologia.

References

- [1] Zhang D, Luo J, Lee ZM, et al. Characterization of microbial communities in wetland mesocosms receiving caffeine-enriched wastewater. *Environmental Science and Pollution Research*. 2016;23(14):14526-39. <https://doi.org/10.1007/s11356-016-6586-4>
- [2] Hijosa-Valsero M, Reyes-Contreras C, Domínguez C, Bécares E, Bayona JM. Behaviour of pharmaceuticals and personal care products in constructed wetland compartments: Influent, effluent, pore water, substrate, and plant roots. *Chemosphere*. 2016;145:508-517. <https://doi.org/10.1016/j.chemosphere.2015.11.090>
- [3] Zhang DQ, Hua T, Gersberg RM, Zhu J, Ng WJ, Tan SK. Fate of caffeine in mesocosms wetland planted with *Scirpus validus*. *Chemosphere*. 2013;90(4):1568–1572. <https://doi.org/10.1016/j.chemosphere.2012.09.059>
- [4] Montagner CC, Vidal C, Acayaba RD. Contaminantes emergentes em matrizes aquáticas do Brasil: Cenário atual e aspectos analíticos, ecotoxicológicos e regulatórios. *Química Nova*. 2017;40(9):1094-1110. <https://doi.org/10.21577/0100-4042.20170091>

- [5] Wu J, Yue J, Hu R, Yang Z, Zhang L. Use of caffeine and human pharmaceutical compounds to identify sewage contamination. *International Journal of Civil and Environmental Engineering*. 2010;2(2):98-102. <https://doi.org/10.5281/zenodo.1070943>
- [6] Gracia-Lor E, Castiglioni S, Bade R et al. Measuring biomarkers in wastewater as a new source of epidemiological information: Current state and future perspectives. *Environment International*. 2017;99:131-150. <https://doi.org/10.1016/j.envint.2016.12.016>
- [7] Ferreira AP. Caffeine as an environmental indicator for assessing urban aquatic ecosystems. *Cadernos de Saúde Pública*. 2005;21(6):1884-1892. <https://doi.org/10.1590/S0102-311X2005000600038>
- [8] Marasco Júnior CA, Luchiari NC, Gomes PCFL. Occurrence of caffeine in wastewater and sewage and applied techniques for analysis: A review. *Eclética Química Journal*. 2019;44(4):11-26. <https://doi.org/10.26850/1678-4618eqj.v44.4.p11-26>
- [9] Edwards QA, Kulikov SM, Garner-O'neale LD. Caffeine in surface and wastewaters in Barbados. *West Indies Springer Plus*. 2015;4(57):1-12. <https://doi.org/10.1186/s40064-015-0809-x>
- [10] Senta I, Gracia-Lor E, Borsotti A, Zuccato E, Castiglioni S. Wastewater analysis to monitor use of caffeine and nicotine and evaluation of their metabolites as biomarkers for population size assessment. *Water Research*. 2015;74:23-33. <https://doi.org/10.1016/j.watres.2015.02.002>
- [11] Sossalla NA. Characterization, resilience, and optimization of micropollutant and biological effect removal by treatment wetlands treating municipal wastewater [Thesis to obtain the academic degree Doctor of natural sciences]. Germany; 2021.
- [12] Nivala J, Boog J, Headley T et al. Side-by-side comparison of 15 pilot-scale conventional and intensified subsurface flow wetlands for treatment of domestic wastewater. *Science of the Total Environment*. 2019;658:1500–1513. <https://doi.org/10.1016/j.scitotenv.2018.12.165>
- [13] Matamoros V, Arias CA, Brix H, Bayona JM. Removal of pharmaceuticals and personal care products (PPCPs) from urban wastewater in a pilot vertical flow constructed wetland and a sand filter. *Environment Science Technology*. 2007;41:8171–8177. <https://doi.org/10.1021/es071594+>
- [14] Nivala J, Kahl S, Boog J, van Afferden M, Reemtsma T, Müller RA. Dynamics of emerging organic contaminant removal in conventional and intensified subsurface flow treatment wetlands. *Science of the Total Environment*. 2019;649:1144–1156. <https://doi.org/10.1016/j.scitotenv.2018.08.339>

- [15] Vymazal J. Proc. conf. The use of aquatic macrophytes for wastewater treatment in constructed wetlands. Dias V, Vymazal J, editors. Lisboa: ICN e INAG; 2003.
- [16] Truong P, Hart B. Vetiver system for wastewater treatment. Queensland; 2001. Available from: https://www.vetiver.org/PRVN_wastewater_bul.pdf
- [17] The World Bank. Vetiver grass: The hedge against erosion. 4th ed. Washington DC: The World Bank; 1993. Available from: http://www.vetiver.org/PUBLICATIONS/TVN_greenEng.pdf
- [18] Kadlec RH, Wallace S. Treatment wetlands. 2nd ed. Boca Raton: Taylor & Francis; 2008.
- [19] Dordio AV, Belo M, Teixeira DM et al. Evaluation of carbamazepine uptake and metabolization by *Typha* spp., a plant with potential use in phytotreatment. Bioresource Technology. 2011;102(17):7827–7834. <https://doi.org/10.1016/j.biortech.2011.06.050>
- [20] Hunter RG, Combs DL, George DB. Nitrogen, phosphorous and organic carbon removal in simulated wetland treatment systems. Archives of Environmental Contamination and Toxicology. 2001;41(3):274–281. <https://doi.org/10.1007/s002440010249>
- [21] APHA. Standard methods for the examination of water and wastewater. 22nd ed. Washington DC: American Public Health Association/American Water Works Association/Water Environment Federation; 2013.
- [22] Campbell CR, Plank CO. Handbook of reference method for plant analysis. Kalra YP, editor. Boca Raton: CRC Press; 1998.
- [23] Lichtenthaler HK. Chlorophylls and carotenoids: Pigments of photosynthetic biomembranes. Methods In Enzymology. 1987:350-382.
- [24] Oliveira M, Atalla AA, Frihling BEF, Cavalheri PS, Migliolo L, Filho FJCM. Ibuprofen and caffeine removal in vertical flow and free-floating macrophyte constructed wetlands with *Heliconia rostrata* and *Eichornia crassipes*. Chemical Engineering Journal. 2019;373:458-467. <https://doi.org/10.1016/j.cej.2019.05.064>