

Available online at [www.sciencedirect.com](http://www.sciencedirect.com)**ScienceDirect**

Energy Procedia 81 (2015) 1069 – 1076

Energy

**Procedia**

69th Conference of the Italian Thermal Engineering Association, ATI 2014

## RES (Renewable Energy Sources) availability assessments for Eco-fuels production at local scale: carbon avoidance costs associated to a hybrid biomass/H<sub>2</sub>NG-based energy scenario

Benedetto Nastasi<sup>a,\*</sup>, Livio de Santoli<sup>b</sup>, Angelo Albo<sup>a</sup>, Daniele Bruschi<sup>a</sup>, Gianluigi Lo Basso<sup>a</sup>

<sup>a</sup>Department of Astronautical, Electrical and Energy Engineering (DIAEE), Sapienza University of Rome, Via Eudossiana, 18, 00184 Rome, Italy

<sup>b</sup>Interdisciplinary Centre for Landscape, Building, Conservation, Environment (CITERA), Sapienza University of Rome, Via Antonio Gramsci, 53, 00197 Rome, Italy

---

### Abstract

Eco-fuels are a sustainable solution to face increasing global energy consumptions and GHG emissions. This work was firstly focused on available renewables assessment linked to a local dimension. Furthermore, identifying the potential Eco-fuels capability, it was discussed how the capital expenditure for infrastructures is associated with carbon avoidance costs.

A coastal municipality and an inland one, located in Central Italy, are selected as case studies.

In order to assess PV and agro-forestry residues availability, a GIS-based analysis was performed. In this framework, a new energy scenario, based on H<sub>2</sub>NG blends use and ligneous biomass conversion, was presented. Specifically, the hydrogen for NG enrichment was produced by renewable electricity, while biomass energy content was evaluated considering gasification process. Finally, the governmental incentive schemes incidence (in force for bioenergy and hypothesized for hydrogen) on investments economic sustainability and on infrastructure deployment was compared in terms of carbon avoidance costs.

© 2015 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license

(<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the Scientific Committee of ATI 2014

**Keywords:** Eco-fuels; RES; GIS analysis; Biomass residues; Renewable hydrogen; H<sub>2</sub>NG; Hydrogen-natural gas blends; Hybrid System; Carbon Avoidance; Smart Grid.

---

\* Corresponding author. Tel.: +39-06-4991-9172 ; fax: +39-06-4991-9171 .

E-mail address: [benedetto.nastasi@outlook.com](mailto:benedetto.nastasi@outlook.com)

## 1. Main text

The most critical issues of effective energy management deal with the necessary interconnection of still expensive energy storage systems (electrical and thermal) due to the integration of traditional thermal cycles with non-programmable renewable sources. Another approach, based on a recent achieved economic sustainability [1] (i.e. grid parity for PV array), consists of Eco-fuels production, such as Hydro-methane (H<sub>2</sub>NG), by direct renewable sources exploitation. In order to cope with increasing global energy consumption and GHG emissions as well [2], European Union has promoted several strategies in energy field [3]. One of them is to switch energy supply chain from fossil fuels to renewable energy sources such as solar, wind and biomass. This strategy is encouraged with EU 20-20-20 initiative, setting an EU-wide target of providing 20% of final energy consumption from renewables by 2020. The target is then broken down by member state: Italy, for instance, has agreed to increase its renewable energy mix from 5.9% in 2005 to 17% by 2020 [4]. In this framework, Eco-fuels play an important role to achieve sustainability goals [5], also in accordance with the Kyoto Protocol. Eco-fuels definition includes gaseous (biogas from anaerobic digestion, syngas from gasification and pyrolysis, hydrogen from reforming and hydrolysis) and liquid (vegetable oil, bio-diesel, ethanol from alcoholic fermentation) pure fuels and their mixtures with fossil ones as well. Adopted policy measures and incentive schemes aim to encourage only commercial deployment of bioenergy at large scale [6]. Nevertheless, several studies state that H<sub>2</sub>NG blend [7] with different H<sub>2</sub> fractions [8] is a promising solution to avoid carbon emissions [9]. This latter can be reduced directly due to higher H/C ratio of the fuel and also indirectly due to a lower energy consumption, having improved the engine thermal efficiency [10]. In this paper, we explore how local renewable sources availability linked to Eco-fuels production can feed the municipal energy supply in two case-studies towards the creation of sustainable communities [11].

### Nomenclature

CHP	Combined Heat and Power	GIS	Geographical Information System
CLC	Corine Land Cover	H <sub>2</sub> NG	Hydrogen and Natural Gas
EU	European Union	PR	Production rate
GHG	Greenhouse gas	PV	Photovoltaics
H <sub>2</sub>	Hydrogen	RES	Renewable Energy Sources

## 2. Methodology

Renewable energy resources are spatially distributed, and their potential to contribute to societal energy supplies is dependent on local geographic nuances [12]. Hence, spatial analysis represent the optimal tool for mapping and evaluating renewables potential. Then, it is possible to plan sustainable energy scenarios and design the most suitable strategies. Thus, as Figure 1 shows, the 1<sup>st</sup> step of the study is supported by GIS software use to estimate local biomass and solar sources availability.

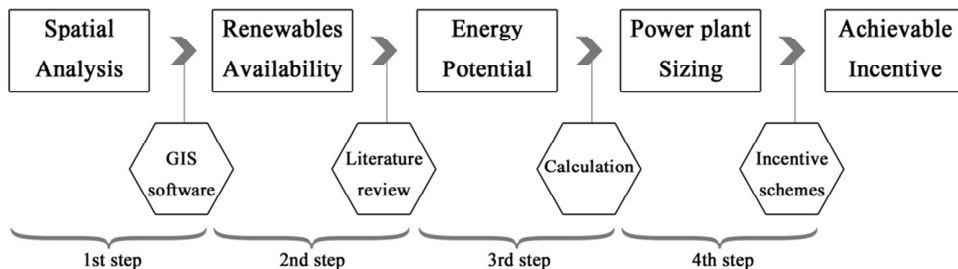


Fig. 1. Methodology flow chart.

These data have been multiplied for energy potential from scientific literature and the gross energy potential is obtained. Assuming the CHP plant operation time for 4,000 hours/year, its optimal size was identified. Finally, taking into account power plant features in terms of technology, size and efficiency, the amount of incomes from governmental incentives in force for bioenergy and hypothesized for renewable hydrogen (produced by PV installation) [8] has been calculated.

### 3. Data sources

Research project has analysed biomass resources and solar energy due to their tight link to the territory, in terms of availability dependence on territorial features such as morphology, climatic characteristics, accessibility level and infrastructures [13]. In details, the considered spatial analysis was previously carried out as shown below:

1. solar energy: having evaluated the specific solar radiation on the horizontal plan ( $\text{kWh/m}^2$ ) of the analysed areas, all suitable surfaces to install photovoltaic plants were assessed, considering preferentially the ones integrated in the top of the buildings, gathering for each roof the approximate angle of slope and solar exposure information. This calculation has not included shaded areas and surfaces on the top of the buildings characterized by particular constraints or conditions which make infeasible any photovoltaic cells installation (i.e. roofs of churches and other historical buildings);
2. biomass energy: having analysed the CLC (Corine Land Cover) map and the relative land use of each area, taking into account established agro-forestry ecosystems, the potential areas for biomass residues production were highlighted and their bioenergy availability was calculated without considering dedicated crops.

In particular, only following categories were considered:

- Herbaceous: crop residues generated by agricultural production (i.e. wheat, barley, maize, rye, rapeseed, sunflower, etc.);
- Arboreal: wood residues generated by management of perennial crop plantations such as pruning and replanting of trees (i.e. vineyards, olive groves, fruit trees, etc.);
- Forests: cutting or lopping trees purely for fuel wood, collecting deadwood.

All operations were performed and recorded using GIS software and elaborating satellite images. In order to estimate the local renewable resources distribution and availability, in the two case-studies, to build scenarios for biogas (derived from biomass gasification) and hydrogen production (derived from hydrolysis feed with PV), the SoURCE project outcomes [14-16] were used. This project was carried out by Sapienza University of Rome, jointly with KTH - Royal Institute of Technology of Stockholm and its main aim was to assess how local renewable sources can contribute to meet municipal energy needs. Table 1 reports data obtained by SoURCE project (spatial analysis outcomes), and relative elaborations concerning 2<sup>nd</sup> methodology step to quantify the available amount of biomass and solar sources.

Table 1. Biomass and solar sources availability in the case studies

Municipality	Biomass typology	Available Surface (ha)	Available Residue (t/ha)	Annual Availability (t)	Direct Normal Irradiation ( $\text{kWh/m}^2$ )	PV Available Surface ( $\text{m}^2$ )	Annual Gross Solar Radiation (kWh)
Trevignano	Herbaceous	416.64	2.51 [17]	1045.77	1,507 [19]	58,290	87,843,030
	Arboreal	702.52	1.97 [17]	1383.97			
	Forest	96.65	2.14 [18]	206.83			
Sabaudia	Herbaceous	3,859.44	2.51 [17]	9687.19	1,519 [19]	55,960	85,003,240
	Arboreal	553.16	1.97 [17]	1089.73			
	Forest	994.72	2.14 [18]	2128.70			

Furthermore, the total gross energy potential for each municipality has been calculated by multiplying renewables (solar and biomass) annual availability, suitably by a factor related to feasible energy deployment, for their gross energy content (2<sup>nd</sup> step). These data are reported in Table 2.

Table 2. Renewable gaseous sources (syngas and hydrogen) in the case studies

Municipality	Gross Energy from Biomass (kWh)	Bio Syngas Production Rate (Nm <sup>3</sup> /kWh)	Syngas Volume (Nm <sup>3</sup> )	Gross Energy from Solar (kWh)	PV Hydrogen Production Rate (Nm <sup>3</sup> /kWh)	Hydrogen Volume (Nm <sup>3</sup> )
Trevignano	9,746,200	0.45	4,331,640	12,534,679	0.024	300,832
Sabaudia	51,978,360		23,101,491	12,129,458		291,107

Within 3<sup>th</sup> methodology step (Energy potential) biomass and solar gross energy have been converted respectively in syngas by gasification process and hydrogen by hydrolysis. Syngas PR from biomass has been estimated considering biomass thermal pre-treatment and purification process, while hydrogen PR has been assessed taking into account PV electrical efficiency and hydrolysis process.

Finally, according to 4<sup>th</sup> methodology step, it is possible to identify power plant size based on previous resources availability analysis. Both bioenergy CHP plant configurations have an electrical efficiency equal to 0.2, whereas H<sub>2</sub>NG configurations have respectively 0.32 (4%H<sub>2</sub>) and 0.335 (20%H<sub>2</sub>).

Bioenergy optimal sizing is described in Equation 1:

$$P_B = \sum \frac{\dot{m} \times LHV \times \eta_g \times \eta_{CHP}}{t_o} \quad (1)$$

Where:

- P<sub>B</sub> is the electrical size of the bioenergy power plant;
- $\dot{m}$  is the available biomass amount;
- LHV is the biomass lower heating value;
- $\eta_G$  is the gasification process efficiency;
- $\eta_{CHP}$  is the cogeneration electrical efficiency;
- t<sub>o</sub> is the operation hours amount.

Bioenergy plant sizing is based on 4,000 operation hours. In Trevignano Romano, total energy potential of bioenergy CHP is 300 kW<sub>el</sub>, whereas in Sabaudia it is 1,500 kW<sub>el</sub>.

According to Distributed Generation model, a 300 kW<sub>el</sub> size was chosen: in Trevignano Romano with one CHP plant and in Sabaudia with five ones. This feature allows a comparison between the two CHP plant of the same size, in terms of economic analysis, owing to different primary energy mixes.

Then, optimal sizing of CHP fuelled with H<sub>2</sub>NG blend is identified by Equation 2.

$$P_{H_2NG} = \frac{1}{1 - f_{H_2}} \times \sum \frac{E_s \cdot \eta_{pv} \cdot \eta_{hy} \cdot \eta_{CHP}}{t_o} \quad (2)$$

Where:

- $P_{H_2NG}$  is the electrical size of the hydro-methane power plant;
- $f_{H_2}$  is the hydrogen volume fraction in  $H_2NG$  blend;
- $E_s$  is the available solar energy;
- $\eta_{pv}$  is the PV conversion efficiency considering operational time of 1,250 hours;
- $\eta_{hy}$  is the hydrolysis process efficiency;
- $\eta_{BCHP}$  is the cogeneration electrical efficiency of  $H_2NG$  blend;
- $t_o$  is the operation hours amount.

Having identified the optimal size for bioenergy supply chain, the suitable renewable hydrogen ratio for  $H_2NG$  blend in the two case studies was calculated. Thus, through the last methodology phase, it is possible to evaluate the most profitable solution, in terms of carbon avoidance cost, for a sustainable energy supply fuelled with local renewables.

#### 4. Results and Discussion

In this section, an economic analysis organized in two hybrid system scenarios is developed. As shown in Figure 2, two different local bioenergy mixes have been considered.

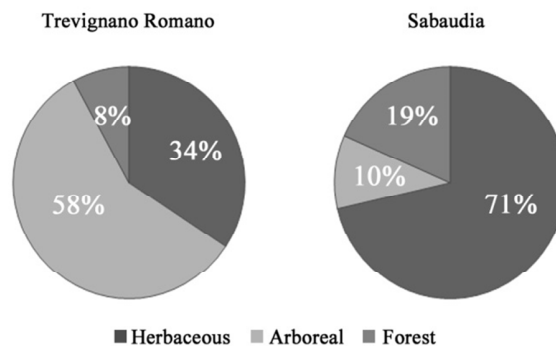


Fig. 2. Different biomass fractions in the two case studies.

In addition, two Renewable Hydrogen, from local PV, mixtures with Natural Gas have been elaborated: a  $H_2$  volume fraction of 20% in Trevignano Romano and another one of 4% in Sabaudia.

In details, PV surface dedicated to  $H_2$  production in  $H_2NG$  blend (20%  $H_2$ ) in the first case study is about 3,160  $m^2$  out of 58,290  $m^2$ . While it is about 475  $m^2$  out of 55,960  $m^2$  in the second one (4%  $H_2$ ). Excess electricity, derived from not  $H_2$ -dedicated PV panels was sold to the grid. Thus, power production costs are related to all technological appliances of the two CHP plant configurations. The costs related to the four energy supply chain are reported in Table 3 (bioenergy mixes) and in Table 4 ( $H_2NG$  blends).

Table 3. Power production costs in the Bioenergy scenarios

Municipality	Biomass supply chain (€) [20]			Gasification (€)	Purification (€)	CHP (€)	O & M (€)	Total Costs (€) (20 years)
	Herbaceous	Arboreal	Forest					
Trevignano (Biomass)	49,150	53,980	6,330	1,350,000	115,000	360,000	75,000	5,514,200
Sabaudia (Biomass)	91,050	8,500	13,050	1,350,000	95,000	360,000	75,000	5,557,000

Table 4. Power production costs in the H<sub>2</sub>NG scenarios

Municipality	PV panels (€)	Electrolyser (€)	Mixer (€)	CHP (€)	Natural Gas (€)	O & M (€)	Total Costs (€) (20years)
Trevignano (20% H <sub>2</sub> )	948,000	591,290	284,500	360,000	228,500	25,000	7,253,790
Sabaudia (4% H <sub>2</sub> )	142,500	100,300	45,000	360,000	231,910	25,000	5,786,000

Two hybrid scenarios consist of two 300 kW<sub>el</sub> CHP plants, one fuelled with bioenergy and one with H<sub>2</sub>NG. Furthermore, the difference between total costs in the operational period (20 years) and total incomes derived from governmental incentive schemes in force [21] (bioenergy) and hypothesized, derived from PV energy production [8] (H<sub>2</sub>NG), has been calculated, as reported in Table 5.

Table 5. Incentives and Net Value in the case studies

Municipality	Incentive (€/kWh <sub>el</sub> )	Annual Incentive (€)	Total Incentive (€) (20 years)	Total Net Value (€)
Trevignano (Biomass)	0.236	283,200	5,644,000	+129,800
Sabaudia (Biomass)	0.236	283,200	5,644,000	+87,000
Trevignano (20% H <sub>2</sub> )	0.105	126,554	2,531,080	-4,722,710
Sabaudia (4% H <sub>2</sub> )	0.018	21,408	428,160	-5,357,840
<b>Trevignano (Biomass+20%H<sub>2</sub>)</b>				<b>-4,592,910</b>
<b>Sabaudia (Biomass+4%H<sub>2</sub>)</b>				<b>-5,270,840</b>

CO<sub>2</sub> emissions associated to 1 kWh<sub>el</sub> are reported in Table 6, not accounting biogenic CO<sub>2</sub> for as a GHG emission [22]. Current Italian scenario is based on a CO<sub>2</sub> emission rate of 406 g/kWh<sub>el</sub> [23].

Table 6. Emissions and Associated Carbon Avoidance in the case studies

Municipality	Emission (g/kWh <sub>el</sub> )	Corrected Emission [24] (g/kWh <sub>el</sub> )	Annual Emission (t)	PV Annual Emission avoided (t)	Total Emission (t) (20 years)	Total Emission (t) BAU Italy	Carbon Avoidance (t) (20 years)
Trevignano (Biomass)	14.40		17.28	-	345.6		9,302.64
Sabaudia (Biomass)	21.60		25.92	-	518.4		9,129.60
Trevignano (20% H <sub>2</sub> )	549.29	109.29	131.148	-178.41	-945.24	9,648	10,593.24
Sabaudia (4% H <sub>2</sub> )	630.09	190.09	228.108	-30.18	3,958.56		5,689.44
<b>Trevignano (Biomass+20%H<sub>2</sub>)</b>							<b>19,895.88</b>
<b>Sabaudia (Biomass+4%H<sub>2</sub>)</b>							<b>14,819.04</b>

Finally, carbon avoidance cost has been used to compare the two hybrid solutions and to identify the most sustainable one. As reported in Table 7, the best scenario is Trevignano. Its carbon avoidance cost is 0.23085 €/kg<sub>CO<sub>2</sub></sub>.

Table 7. Carbon Avoidance cost in the case studies

Municipality	Carbon Avoidance Cost (€/kg <sub>CO2</sub> )
Trevignano (Biomass+20%H <sub>2</sub> )	0.23085
Saubadia (Biomass+4%H <sub>2</sub> )	0.35568

## 5. Conclusion

Based on the study results, it is clear that accounting Carbon biogenic emission as neutral is crucial to consider environmental-friendly the bioenergy production. Building a hybrid scenario allows to exploit different renewables at the same time to obtain the most convenient carbon avoidance cost. All the obtained results can be implemented in a GIS database to elaborate queried maps [25,26], pinpointing areas where renewables availability is suitable. In conclusion, Eco-fuels represent a sustainable energy pathway at local scale.

## Acknowledgements

This research was partially supported by “*Progetto Avvio alla Ricerca 2012*” a research grant funded by Sapienza University of Rome (n. 000328\_2012\_NASTASI), Principal Investigator: Benedetto Nastasi.

## References

- [1] Lund PD. Boosting new renewable technologies towards grid parity - Economic and policy aspects. *Renewable Energy* 2011; 36(11):2776-2784.
- [2] IEA. Key World Energy Statistics. 2013. Available at: <http://www.iea.org/>
- [3] Directive 2009/28/EC of the European Parliament and of the Council of 23 April 2009 on the promotion of the use of energy from renewable sources. European Union; 2009.
- [4] European Commission. Europe 2020 - Progress towards 2020 targets. Available at: [http://ec.europa.eu/europe2020/europe-2020-in-your-country/italia/progress-towards-2020-targets/index\\_en.htm](http://ec.europa.eu/europe2020/europe-2020-in-your-country/italia/progress-towards-2020-targets/index_en.htm)
- [5] de Santoli L, Mancini F, Nastasi B, Piergrossi V. Improving Sustainability of Energy Conversion from Biomass Resources: the case of Bari airport CHP (combined heat and power) fuelled with bioenergy from short chain. *Proceedings of the 1<sup>st</sup> Int. Electron. Conf. Energies*, 14-31 March 2014; Sciforum Electronic Conference Series, Vol. 1, c004; doi:10.3390/ece-1-c004; 2014.
- [6] European Industrial Bioenergy Initiative - EIBI. Boosting the contribution of bioenergy to the EU climate and energy ambitions: The EIBI Implementation Plan for 2013-2015. Available at: <http://www.biofuelstp.eu/eibi.html>
- [7] de Santoli L, Lo Basso G, Bruschi D. Energy characterization of CHP (combined heat and power) fuelled with hydrogen enriched natural gas blends. *Energy* 2013;60:13-22.
- [8] de Santoli L, Lo Basso G, Bruschi D. A small scale H<sub>2</sub>NG production plant in Italy: Techno-economic feasibility analysis and costs associated with carbon avoidance. *International Journal of Hydrogen Energy* 2014;39(12):6497-6517.
- [9] de Santoli L, Lo Basso G, Bruschi D. Preliminary experimental analysis of a CHP hydromethane system. *Journal of Energy and Power Engineering* 2013;7(9):1681-1690.
- [10] Faedo D. State of the art and environmental benefits using methane-hydrogen blends. *Rivista dei Combustibili* 2007;61(6):331-339.
- [11] Nastasi B. Planning and Management of Peri-Urban Agricultural Areas: the Bio-Energy Potential. *Journal of Agricultural Engineering*, supplement 1, Horizons in agricultural, forestry and biosystems engineering 2013; XLIV: 45-46.
- [12] Calvert K. Geomatics and bioenergy feasibility assessments: taking stock and looking forward. *Renewable and Sustainable Energy Reviews* 2011;15(2):1117-1124.
- [13] Nastasi B. Planning of Rural-Urban Continuum Towards a Sustainable Relationship between Agricultural and Energy Production. In: *Agricultural development within the rural-urban continuum*. Hamburg: Print & Mail (PRIMA); 2013. p. 118-118
- [14] Cumo F, Astiaso Garcia D, Calcagnini L, Rosa F, Sferra AS. Urban Policies and Sustainable Energy Management. *Sustainable Cities and Society* 2012;4(1):29-34.

- [15] Cumo F, Astiaso Garcia D, Gugliermetti F. Assessing the Potential Use of Solar Energy Source in Urban Areas Located in Natural Protected Sites. *Natural Resources* 2013;4:111-115.
- [16] Cumo F, editor. *SoURCE - Towards Smart City*. Rome: Ugo Quintily spa; 2012. p. 176.
- [17] Di Blasi C, Tanzi V, Lanzetta M. A study on the production of agricultural residues in Italy. *Biomass and Bioenergy* 1997;12(5):321-331.
- [18] Drigo R, Chirici G, Lasserre B, Marchetti M. Analisi su base geografica della domanda e dell'offerta di combustibili legnosi in Italia. *L'Italia forestale e montana* 2007;5/6:303-324.
- [19] ENEA. *SolarItaly - Atlante italiano della radiazione solare*. Available at: <http://www.solaritaly.enea.it>
- [20] Infascelli R, Faugno S, Pindozi S, Boccia L. Disponibilità di biomasse agro-forestali e residui di potature in Campania. In: IX Convegno Nazionale dell'Associazione Italiana di Ingegneria Agraria, Ischia Porto, Italy, 12-16 September. 2009. p. 12-16.
- [21] Decree of Ministry of Economic Development of Repubblica Italiana 6 July 2012, Incentive schemes for electrical renewable energy, excluding fotovoltaic.
- [22] Sustainable Energy Authority of Ireland - SEAI. Emissions data. Available at: <http://www.seai.ie/Renewables/Bioenergy/>
- [23] IEA. CO<sub>2</sub> Emissions from fuel combustion. 2013. Available at: <http://www.iea.org/>
- [24] de Santoli L, Lo Basso G, Bruschi D. Hybrid system with an integrated CHP plant fueled by H<sub>2</sub>NG blends: Theoretical energy-environmental analysis and foreseeable optimizations. *Energy and Buildings* 2014;71:88-94.
- [25] Astiaso Garcia D, Cumo F, Gugliermetti F, Rosa F. Hazardous and noxious substances (HNS) risk assessment along the Italian coastline. *Chemical Engineering Transactions* 2013;32:115-120.
- [26] de Santoli L, Albo A, Astiaso Garcia D, Bruschi D, Cumo F. A preliminary energy and environmental assessment of a micro wind turbine prototype in natural protected areas. *Sustainable Energy Technologies and Assessments* 2014;8:42-56.